





FINISH SCHEDULE FS9											
Department	NUMBER	NAME	FLOOR	BASE	WALLS				WAINSCOT	CEILING	NOTES
					NORTH	EAST	SOUTH	WEST			
FS9	901	DECONTAMINATION	ETR	ETR	PT	PT	PT	PT		ACP	FULL HEIGHT PORCELAIN TILE IN SHOWER, 7-2" PORCELAIN TILE WAINSCOT NOT IN SHOWER AREA
FS9	902	SHOWER ROOM	P-TILE	P-TILE	P-TILE	P-TILE	P-TILE	P-TILE	P-TILE	GB PT	


ADDENDUM 1

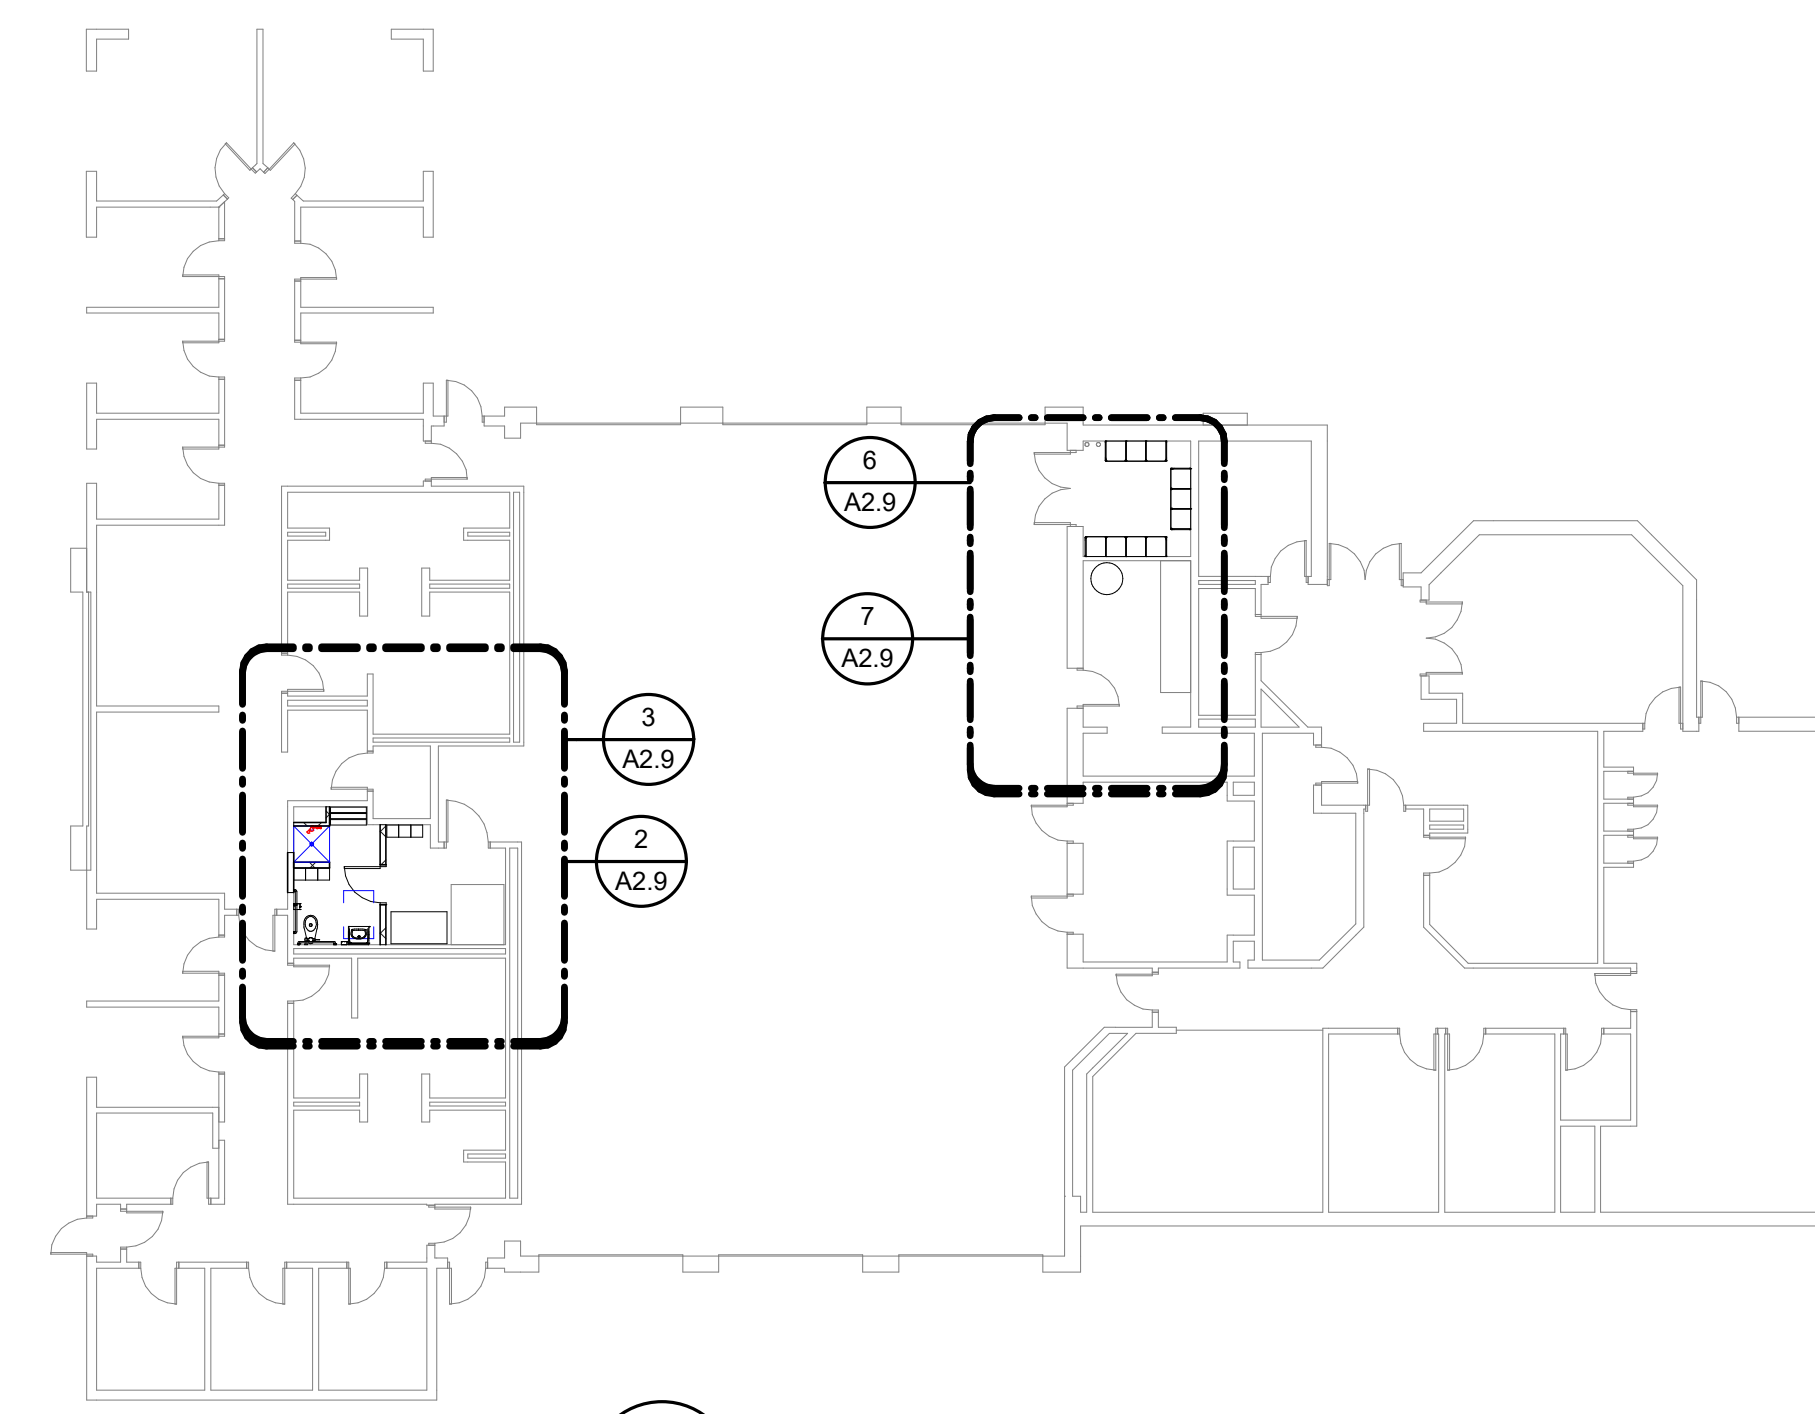


**1 FS 9 KEY PLAN**  
A2.9 1/16" = 1'-0"

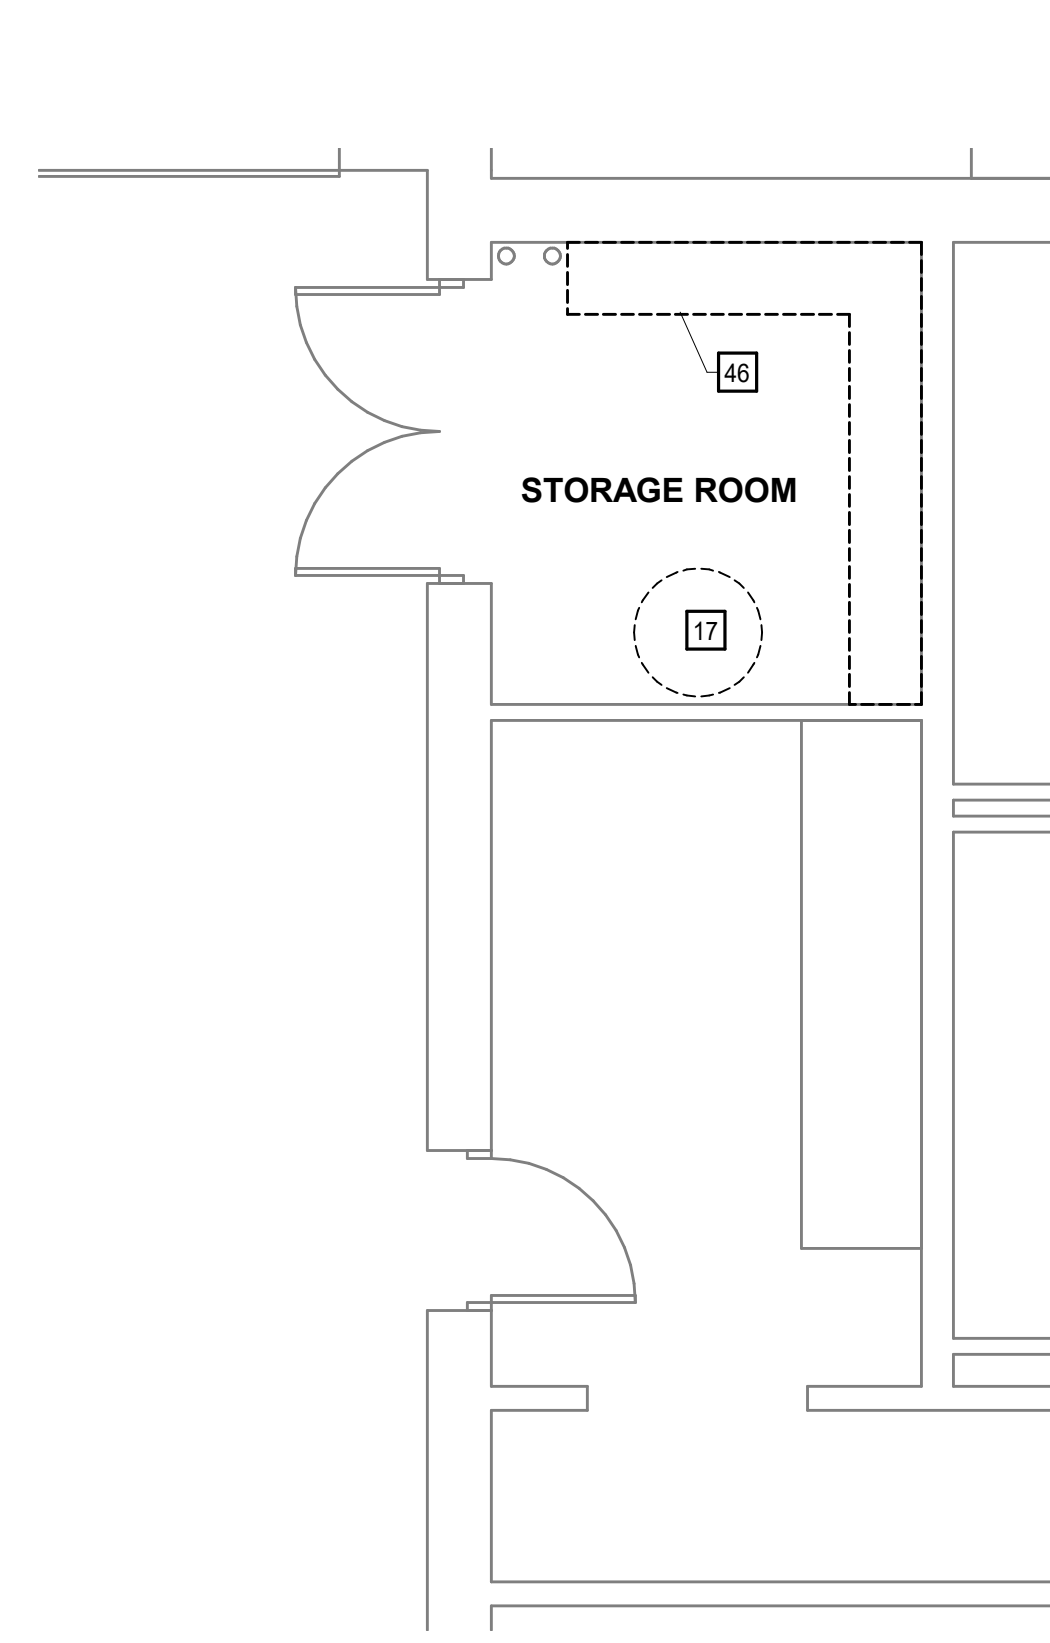


**7 WORK ROOM - DEMO**  
A2.9/A2.9 1/4" = 1'-0"

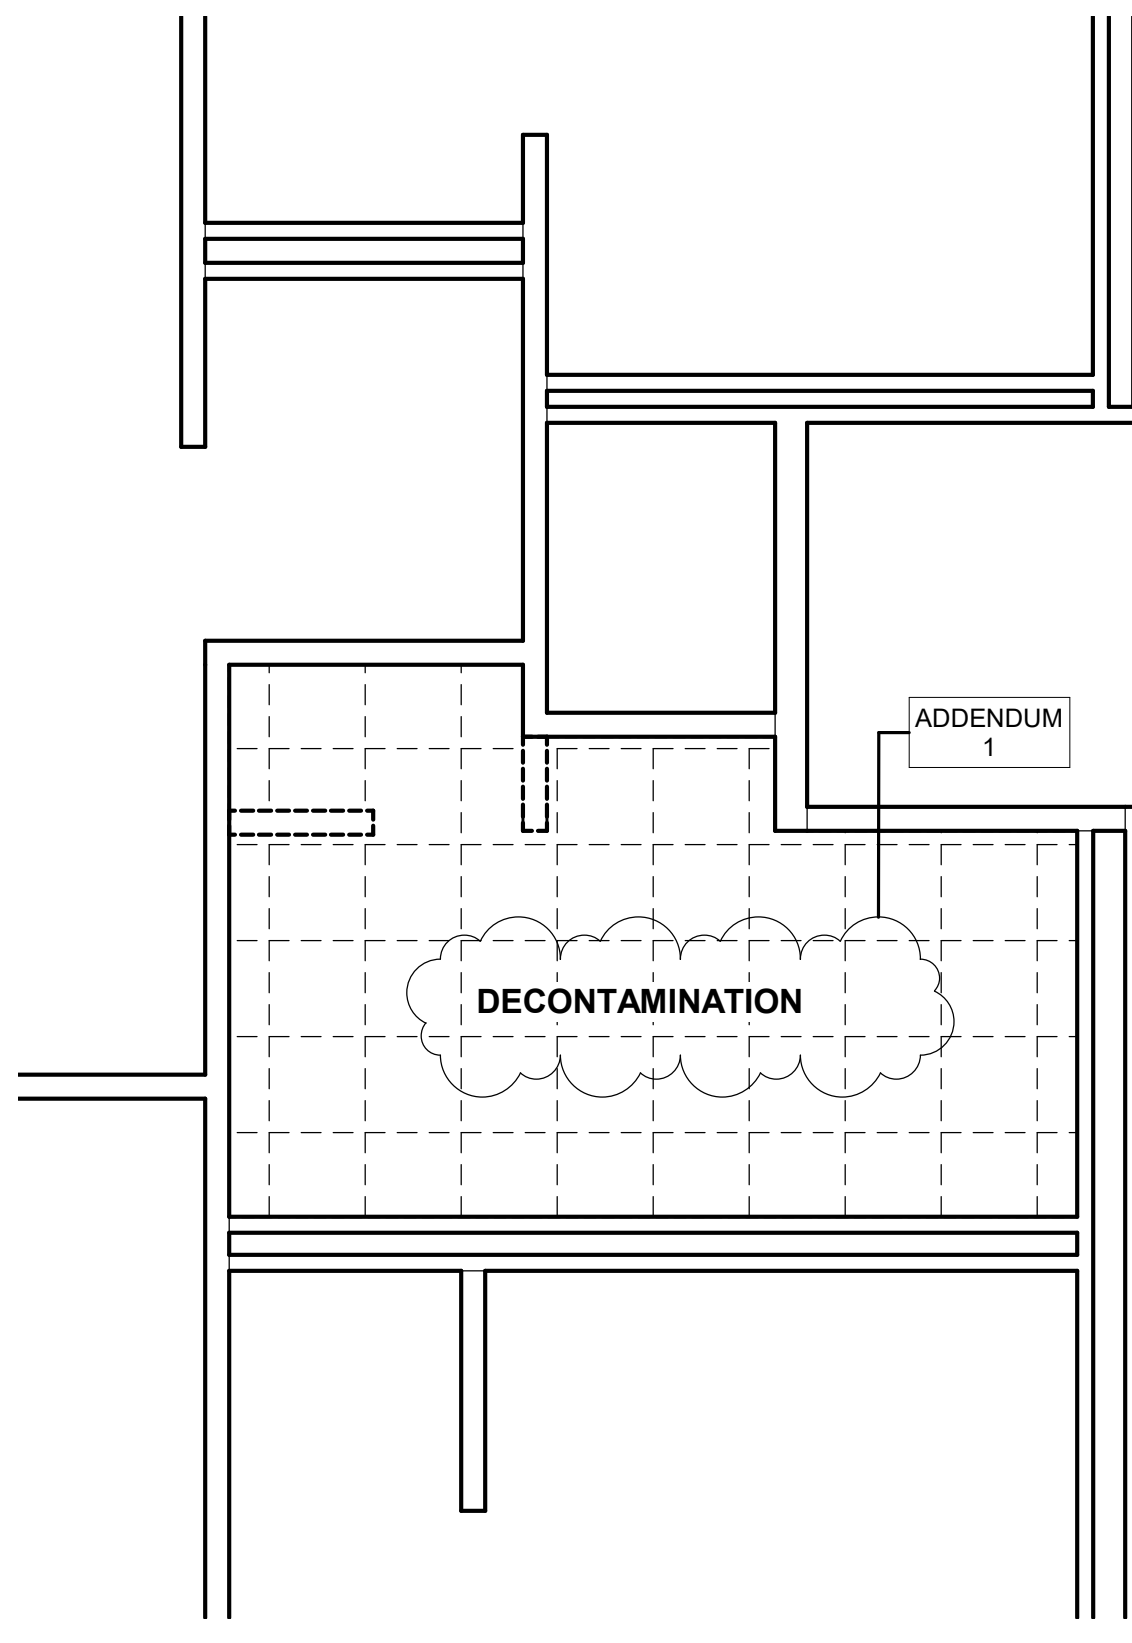


**4 FS 9 SHOWER RCP - DEMO**  
A2.9 1/4" = 1'-0"

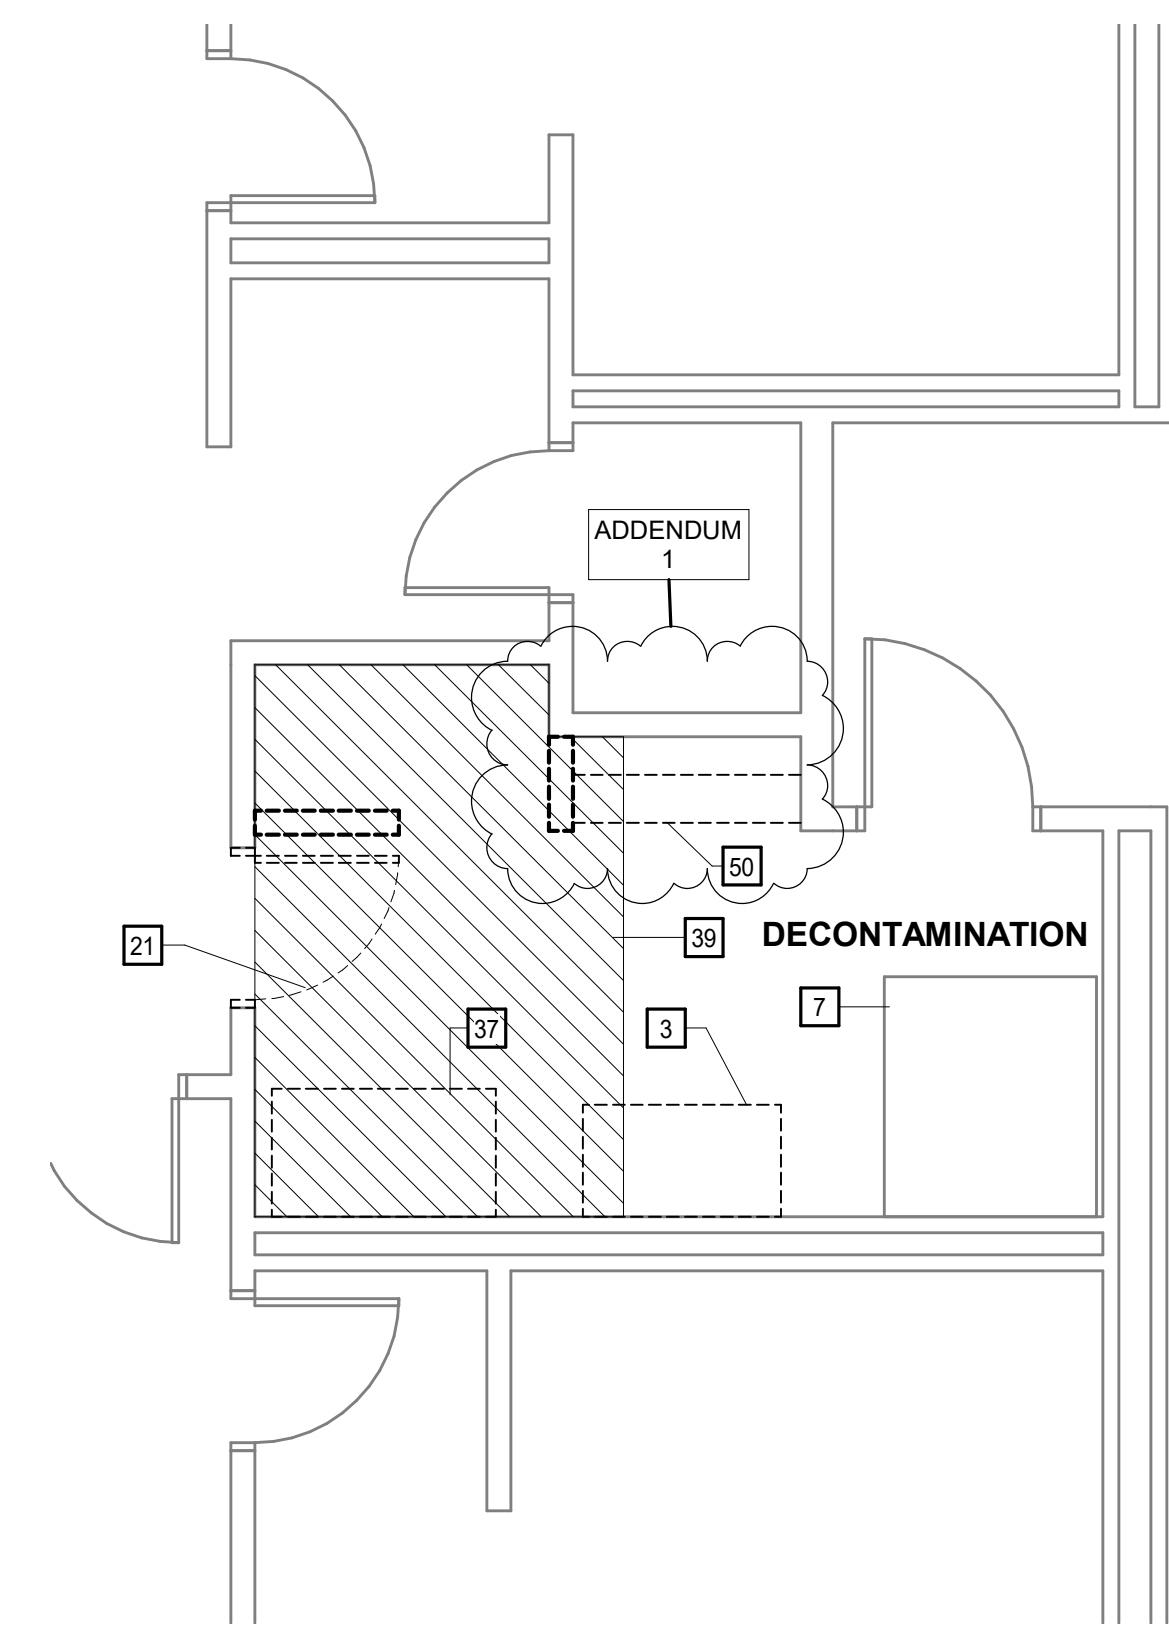


**3 FS 9 SHOWER PLAN - DEMO**  
A2.9/A2.9 1/4" = 1'-0"

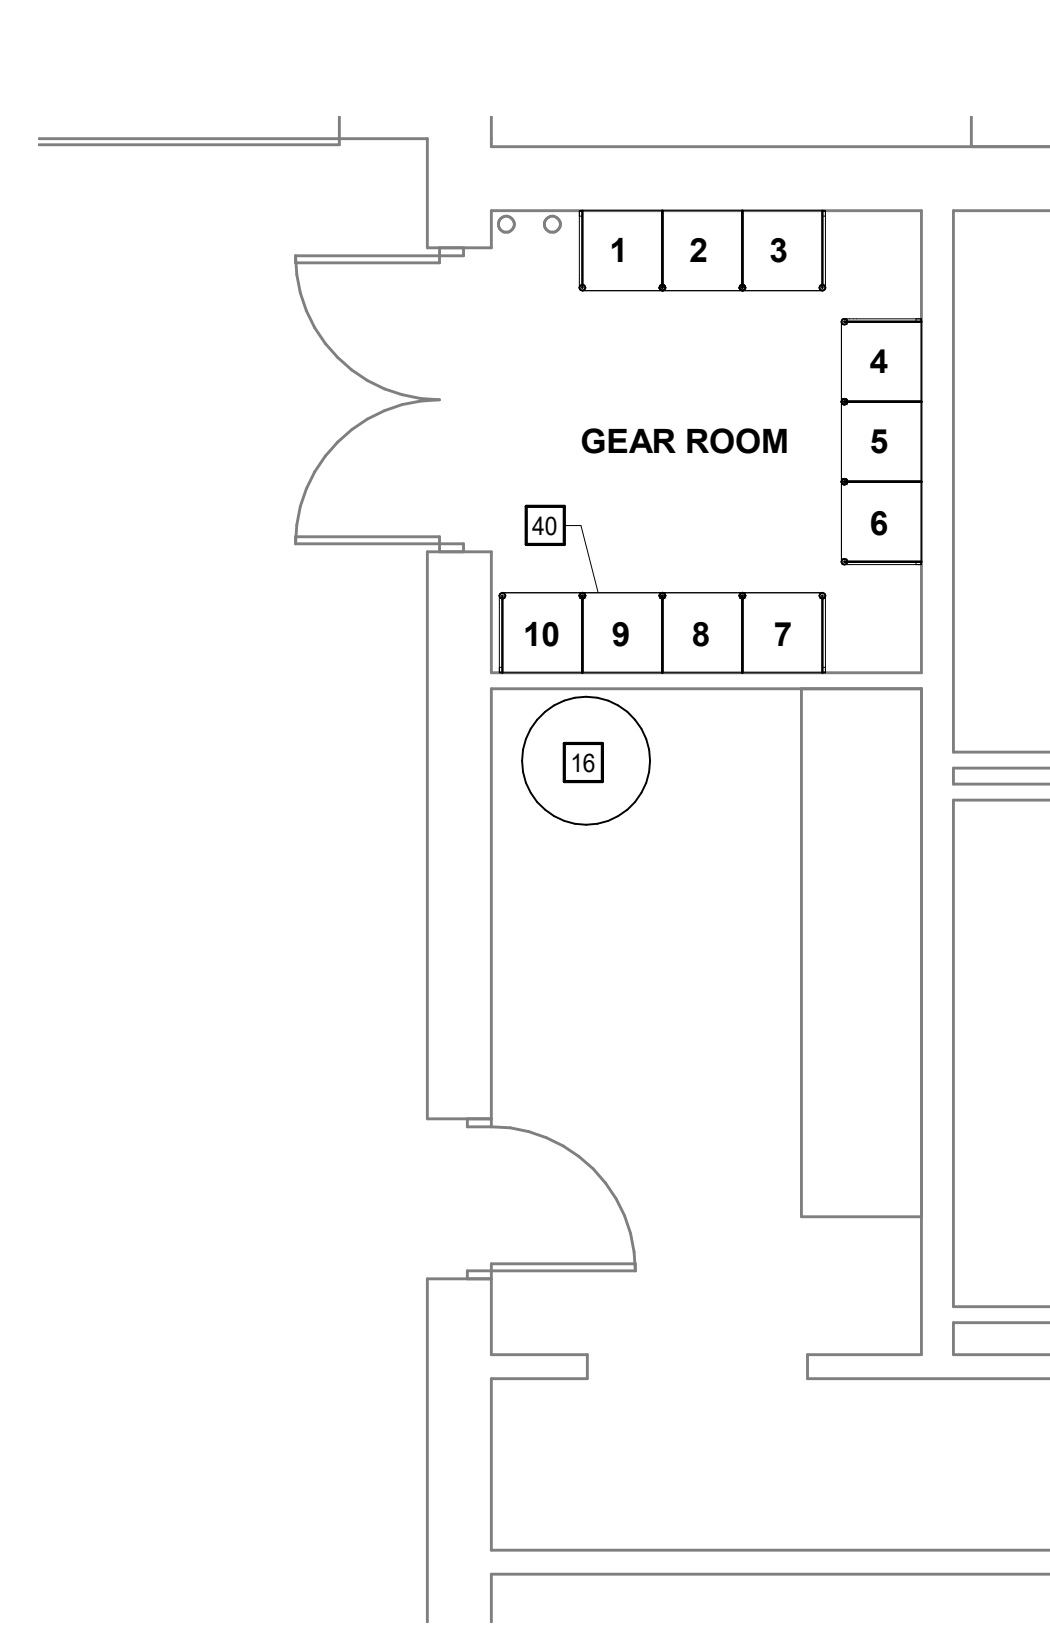

**6 WORK ROOM - NEW**  
A2.9/A2.9 1/4" = 1'-0"

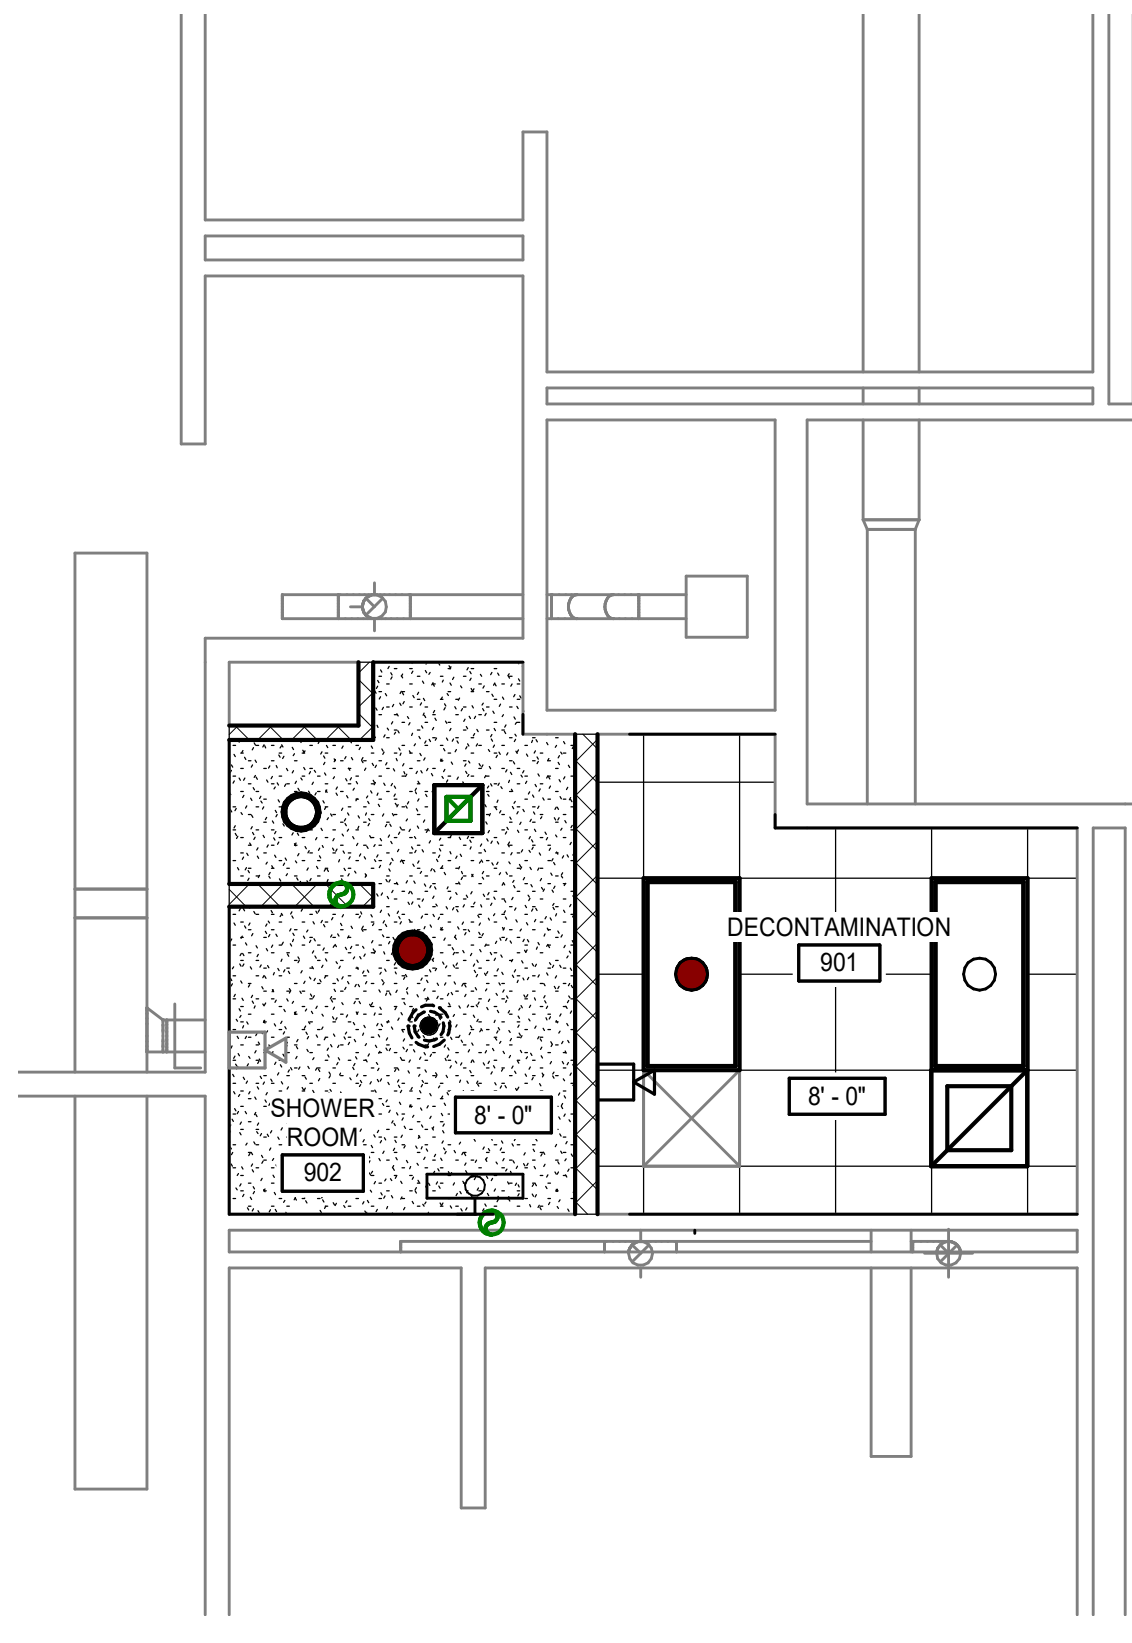

**5 FS 9 SHOWER RCP - NEW**  
A2.9 1/4" = 1'-0"

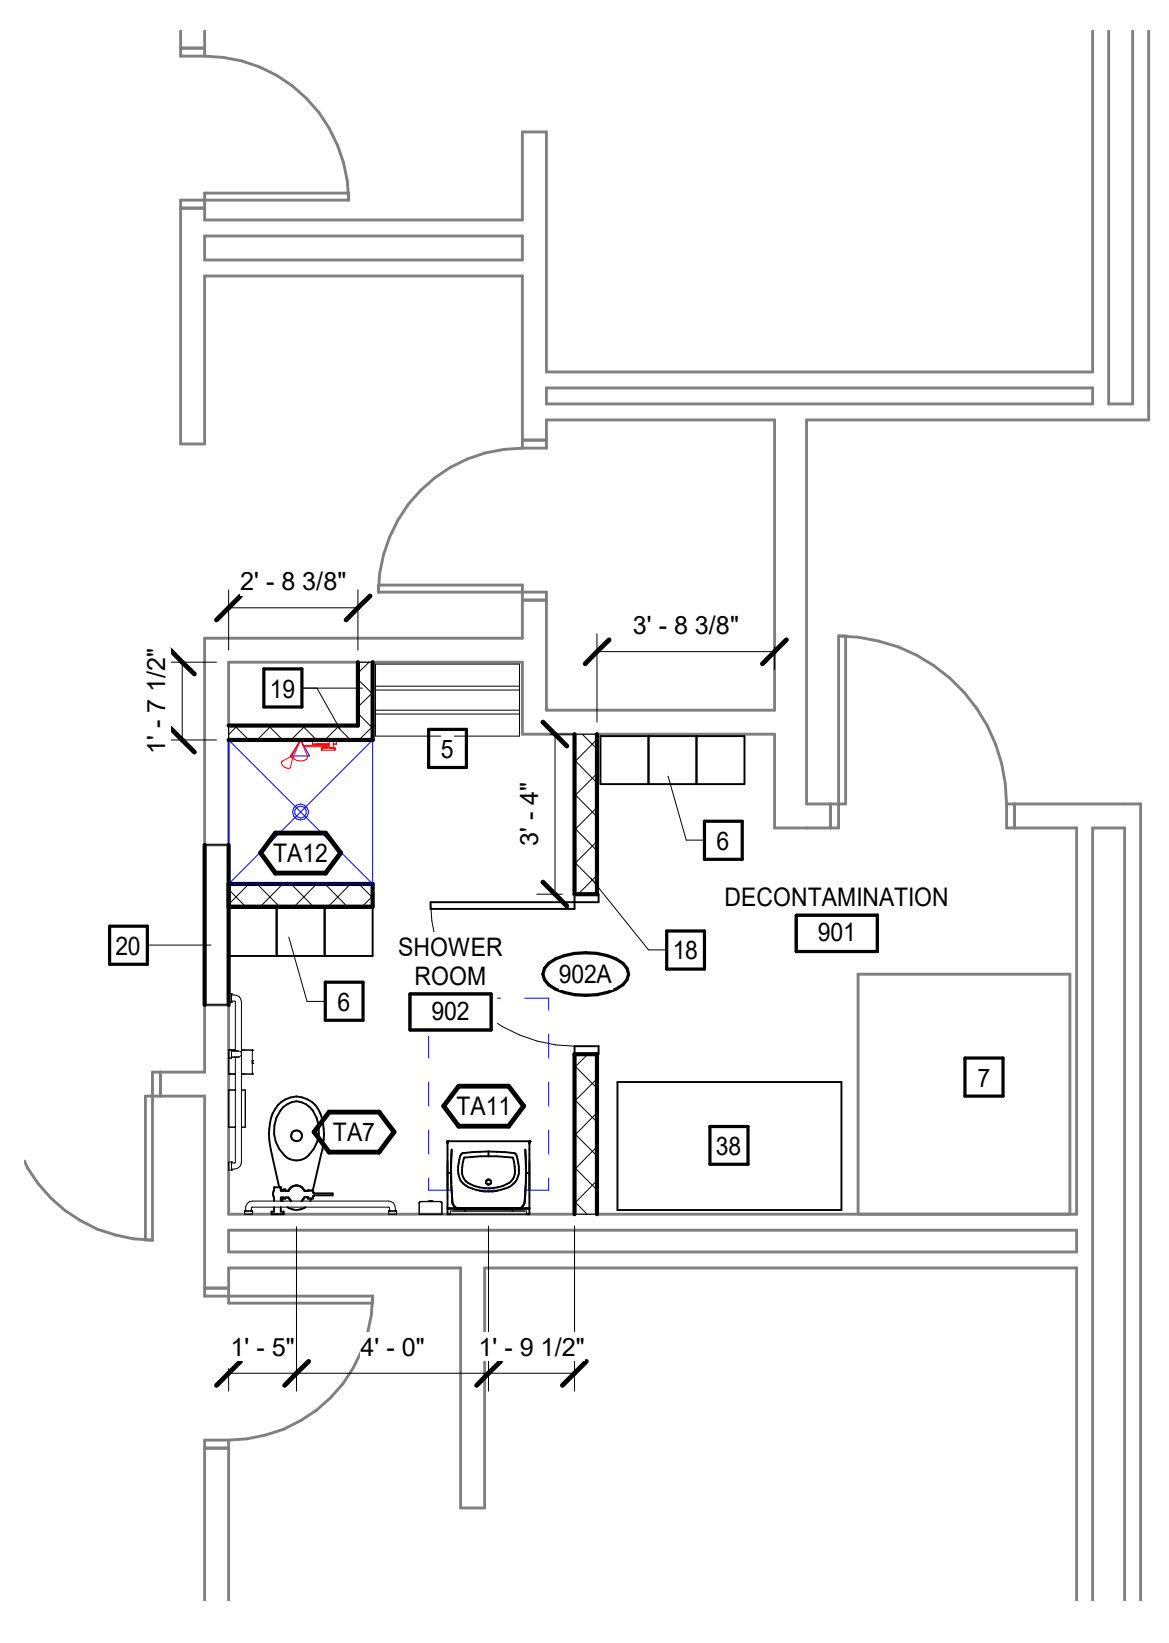

**2 FS 9 SHOWER PLAN - NEW**  
A2.9/A2.9 1/4" = 1'-0"

**FLOOR PLAN KEYNOTES**

REPRESENTED BY [A]  
APPLIES TO DRAWINGS A2.2 - A2.9

- SALVAGE WASHER AND DRYER. TURN OVER TO THE OWNER.
- REMOVE BENCH
- REMOVE SINK
- STACKED WASHER/DRYER UNIT. APPLIANCE FURNISHED BY THE OWNER. CONTRACTOR SHALL PROVIDE THE NECESSARY HOOKUPS AND INSTALL THE APPLIANCE.
- FURNITURE NIC.
- 12"x12"x72" METAL GYM LOCKER PROVIDED BY OWNER.
- EXISTING EXTRACTOR TO REMAIN
- EXISTING DRYING CABINET TO REMAIN.
- REMOVE CEILING AND ALL HOSTED ELEMENTS, INCLUDING LIGHT FIXTURES, MECHANICAL DIFFUSERS, FIRE ALARMS, SMOKE DETECTORS, ETC.
- MATCH HEIGHT OF ACOUSTIC CEILING WITH ADJACENT EXISTING CEILING.
- PROVIDE 3/4" THICK STAINED WOOD SILL. PROVIDE POLYURETHANE COAT.
- PROVIDE 3/4"x5" STAINED WOOD WALL BASE. PROVIDE POLYURETHANE COAT.
- 5/8" GYPSUM BOARD.
- 3 5/8" CFSF
- 8" NOMINAL CMU
- RELOCATED AIR COMPRESSOR.
- SALVAGE EXISTING AIR COMPRESSOR FOR RELOCATION. IF THERE ARE VIBRATION PADS AT THE FEET OF THE COMPRESSOR, REINSTALL THE PADS AT THE NEW LOCATION.
- 8" NOMINAL CMU
- 4" NOMINAL CMU
- INFILL OPENING. MATCH ADJACENT CONSTRUCTION AND FINISH UNO.
- SALVAGE DOOR AND FRAME.
- REMOVE RAILING AT THIS SIDE OF RAMP.
- REMOVE PORTION OF WALL AS NECESSARY TO PROVIDE OPENING.
- SS TOILET PARTITION
- 2'-6"x7'-0" SS TOILET STALL DOOR
- PROVIDE SHOWER ROD AND CURTAIN.
- SALVAGE DOOR. FRAME SHALL REMAIN. REMOVE STRIKE AND PROVIDE STEEL OR ALUMINUM CLOSURE PLATE. PAINT TO MATCH FRAME COLOR.
- EXISTING SHOWER CONTROLS TO REMAIN. TYPICAL THIS FIRE STATION.
- EXISTING LINEAR DRAIN TO REMAIN.
- EXISTING ACCESS PANEL AT CEILING
- PROVIDE GAP AT TOP AND BOTTOM OF PARTITION. DO NOT BLOCK AIRFLOW.
- REMOVE HALFWALL.
- EXISTING PIPING TO REMAIN.
- ALIGN CMU CHASE WITH EXISTING CONSTRUCTION.
- GROUTED COLLAR JOINT.
- ALIGN DOOR FRAME WITH EXISTING OPENING.
- SALVAGE EXISTING DRYING CABINET FOR RELOCATION. REMOVE RAISED CONCRETE PAD.
- INSTALL SALVAGED DRYING CABINET AT THIS LOCATION. POUR CONCRETE BASE FOR CABINET. MATCH EXISTING BASE DIMENSIONS.
- REMOVE FINISH FLOORING. REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL DEMOLITION SCOPE.
- GEAR GRID NIC. SHOWN FOR COORDINATION PURPOSES WITH THE OWNER.
- SALVAGE EXISTING HOSE REEL SOLENOID SWITCH ASSEMBLY.
- PROVIDE FROSTING FILM AT INTERIOR SIDE OF GLAZING.
- PROVIDE CONCRETE SILL AT BASE OF DOOR OPENING.
- PROVIDE METAL THRESHOLD TO STRADDLE THE FINISH FLOOR AND THE CONCRETE SILL.
- SALVAGE STORAGE HOOKS AND RELOCATE TO ADJACENT WALL. COORDINATE WITH OWNER TO DETERMINE PRECISE LOCATION.
- REMOVE EXISTING BENCH AND SHELF.
- INSTALL SALVAGED HOSE REEL SOLENOID SWITCH ASSEMBLY. ORIENT SWITCH ASSEMBLY VERTICALLY. EXTEND AND MODIFY CONDUIT AS REQUIRED AND TEST SWITCHES FOR PROPER OPERATION.
- 1 1/2" CIRCULAR GALVANIZED STEEL HANDRAIL.
- CONTINUE HANDRAIL TO FLOOR. EMBED IN CONCRETE. TYPICAL.
- REMOVE CASEWORK AND SHELF.
- PAINT CMU WITHIN RECESSED AREA.

**DEMOLITION PLAN LEGEND**

APPLIES TO DRAWINGS A2.2 - A2.9

- EXISTING PARTITION/WALL/ITEM TO REMAIN
- REMOVE EXISTING PARTITION/WALL/ITEM
- REMOVE EXISTING WINDOW ASSEMBLY AND FRAMING, INCLUDING ANCHORS
- SALVAGE EXISTING DOOR AND FRAME ASSEMBLY INCLUDING DOOR HARDWARE. IF FRAME DAMAGED DURING SALVAGING, DISCARD.
- REMOVE EXISTING PLUMBING FIXTURE. REFER TO PLUMBING DEMOLITION PLAN FOR ADDITIONAL INFORMATION.

**FLOOR PLAN GENERAL NOTES**

- UNLESS NOTED OTHERWISE, PAINT ALL NEW WALLS AND ALL EXISTING WALLS IN ROOMS INCLUDED IN THE WORK SCOPE.
- PAINT ALL EXISTING DOOR FRAMES WHERE THE DOOR HAS BEEN SALVAGED OR REMOVED.
- REFER TO STRUCTURAL DOCUMENTS FOR SLAB REMOVAL.

PROJECT ADDRESS: 1900 S Walter Reed Dr, Arlington, VA 22204



DATE	REVISIONS
12/15/21	ADDENDUM 1