

GENERAL NOTES

1. FLOORING CONTRACTOR TO COORDINATE AND SCHEDULE WORK WITH BUILDING CONTRACTOR.
 2. PROVIDE WRITTEN WARRANTY AT TIME OF PROJECT COMPLETION.
 3. CONTRACTOR TO PROVIDE ALL MATERIAL, EQUIPMENT, LABOR AND SUPERVISION REQUIRED FOR ALL FLOORING WORK SHOWN ON DRAWING.
 4. CONTRACTOR TO PROVIDE ALL THRESHOLDS AS REQUIRED.
- CONTRACTOR REQUIRED TO MAINTAIN SAFE WORK AREA AND CLEAN UP DAILY AS REQUIRED.


FLOORING SPECIFICATIONS



SMARTCORE Ultra 8-Piece 5.91 x 48.03-in Woodford Oak Luxury locking Vinyl Plank Flooring with Ultrasoft Underlayment
 Double coat UV acrylic finish, 12 mil wearing layer, 4.8 mm WPC, Glueless installation
 Enhanced Beveled Edges
 5 year warranty



Armstrong Flooring Imperial Texture 12-in x 12-in Field Grey Adhesive Chip Commercial VCT Tile, 1/8" thick with through - pattern construction with color
 matched shoe molding
 5 year warranty

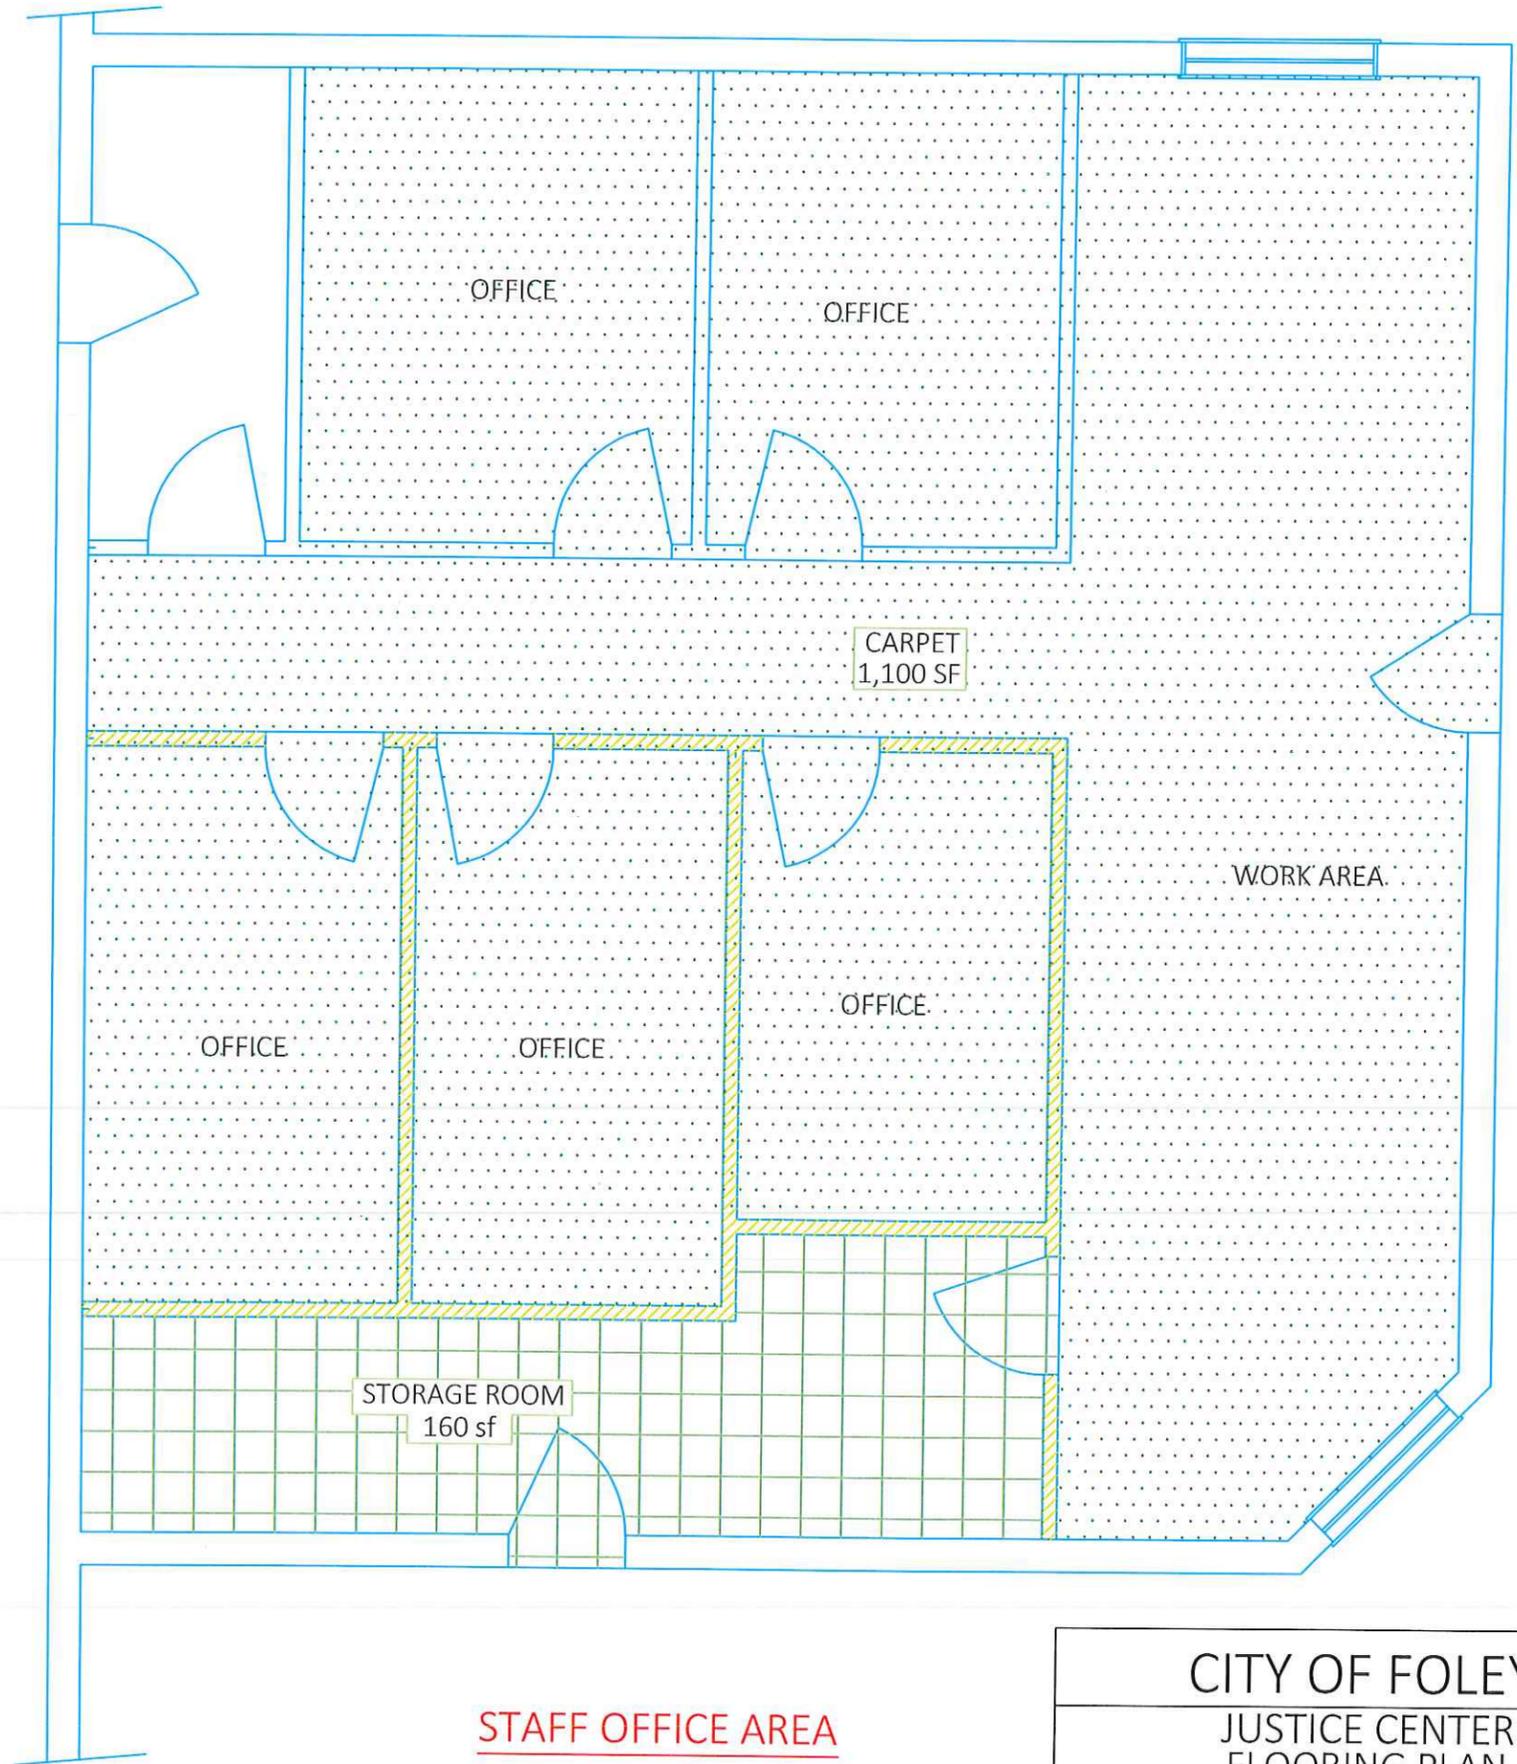

STAFF OFFICE AREA
PLAN VIEW

CITY OF FOLEY	
JUSTICE CENTER	
FLOORING PLAN	
SCALE: NONE	FEB 11, 2019
PLAN & NOTES	DWG-FLOORING-01