



SPORTSPLEX FENCING

INVITATION TO BID – REQUISITION NO. 2018-0832

ADDENDUM NO. ONE (1) – DATED AUGUST 24, 2018

The information given in this addendum is in addition to or supersedes conflicting information to the invitation to bid and is hereby made a part of the request.

Bid specifications are amended to include the attached eight (8) pages.

Please be sure to acknowledge receipt of this addendum on your bid form.

CHAINLINK FENCE SPECIFICATION

FABRIC: 96" 9 GA. GALV. (2" MESH) CHAIN LINK FABRIC.

TOP RAIL: 1 5/8" O.D. PLAIN FULL WEIGHT PIPE, 2.27 lbs. per foot. Top rail 21' in length, joined with 1 5/8" PRESSED STEEL 6" SLEEVE.

LINE POST: 2 3/8" O.D. PLAIN FULL WEIGHT PIPE, 3.65 lbs. per foot. Line posts set 10' on center maximum spacing. Concrete footing: 8" diameter, 36" depth.

TERMINAL POST: 2 7/8" O.D. PLAIN FULL WEIGHT PIPE, 5.79 lbs. per foot. Concrete footing: 10" diameter, 36" depth.

BRACING: 1 5/8" O.D. PLAIN FULL WEIGHT PIPE, 2.27 lbs. per foot, used for the bottom rail.

GATES: SINGLE SWING GATE: Framework of 1 5/8" FULL WEIGHT PIPE, 2.27 lbs. per foot.
DOUBLE SWING GATE: Framework of 1 5/8" FULL WEIGHT PIPE, 2.27 lbs. per foot.
Gates braced and trussed as necessary. Same fabric as fence.

GATE POST: SINGLE SWING GATE: 2 7/8" O.D. FULL WEIGHT PIPE, 5.79 lbs. per foot. Concrete footing: 10" diameter, 36" depth.
DOUBLE SWING GATE: 2 7/8" O.D. FULL WEIGHT PIPE, 5.79 lbs. per foot. Concrete footing: 10" diameter, 36" depth.

FITTINGS: REGULAR BRACE BAND & CARRIAGE BOLT, PRESSED STEEL OFFSET RAIL-END, LINE RAIL CLAMP, PRESSED STEEL LOOP CAP, PRESSED STEEL DOME CAP, 3/16" X 3/4" TENSION BAR, REGULAR TENSION BAND & CARRIAGE BOLT.

TIE WIRE: 8 1/4" ALUM. 9 GA. TIE WIRE spaced 15" on center for line posts & 24" on center for rails.

POST FOOTING: HAND MIXED CONCRETE.

CHAINLINK FENCE SPECIFICATION

FABRIC: 72" 9 GA. GALV. (2" MESH) CHAIN LINK FABRIC.

TOP RAIL: 1 5/8" O.D. PLAIN FULL WEIGHT PIPE, 2.27 lbs. per foot. Top rail 21' in length, joined with 1 5/8" PRESSED STEEL 6" SLEEVE.

LINE POST: 1 7/8" O.D. PLAIN FULL WEIGHT PIPE, 2.72 lbs. per foot. Line posts set 10' on center maximum spacing. Concrete footing: 8" diameter, 36" depth.

TERMINAL POST: 2 3/8" O.D. PLAIN FULL WEIGHT PIPE, 3.65 lbs. per foot. Concrete footing: 10" diameter, 36" depth.

BRACING: 1 5/8" O.D. PLAIN FULL WEIGHT PIPE, 2.27 lbs. per foot, used for the bottom rail.


GATES: SINGLE SWING GATE: Framework of 1 5/8" FULL WEIGHT PIPE, 2.27 lbs. per foot.
DOUBLE SWING GATE: Framework of 1 5/8" FULL WEIGHT PIPE, 2.27 lbs. per foot.
Gates braced and trussed as necessary. Same fabric as fence.

GATE POST: SINGLE SWING GATE: 2 7/8" O.D. FULL WEIGHT PIPE, 5.79 lbs. per foot. Concrete footing: 10" diameter, 36" depth.
DOUBLE SWING GATE: 2 7/8" O.D. FULL WEIGHT PIPE, 5.79 lbs. per foot. Concrete footing: 10" diameter, 36" depth.


FITTINGS: REGULAR BRACE BAND & CARRIAGE BOLT, PRESSED STEEL OFFSET RAIL-END, LINE RAIL CLAMP, PRESSED STEEL LOOP CAP, PRESSED STEEL DOME CAP, 3/16" X 3/4" TENSION BAR, REGULAR TENSION BAND & CARRIAGE BOLT.


TIE WIRE: 8 1/4" ALUM. 9 GA. TIE WIRE spaced 15" on center for line posts & 24" on center for rails.

POST FOOTING: HAND MIXED CONCRETE.

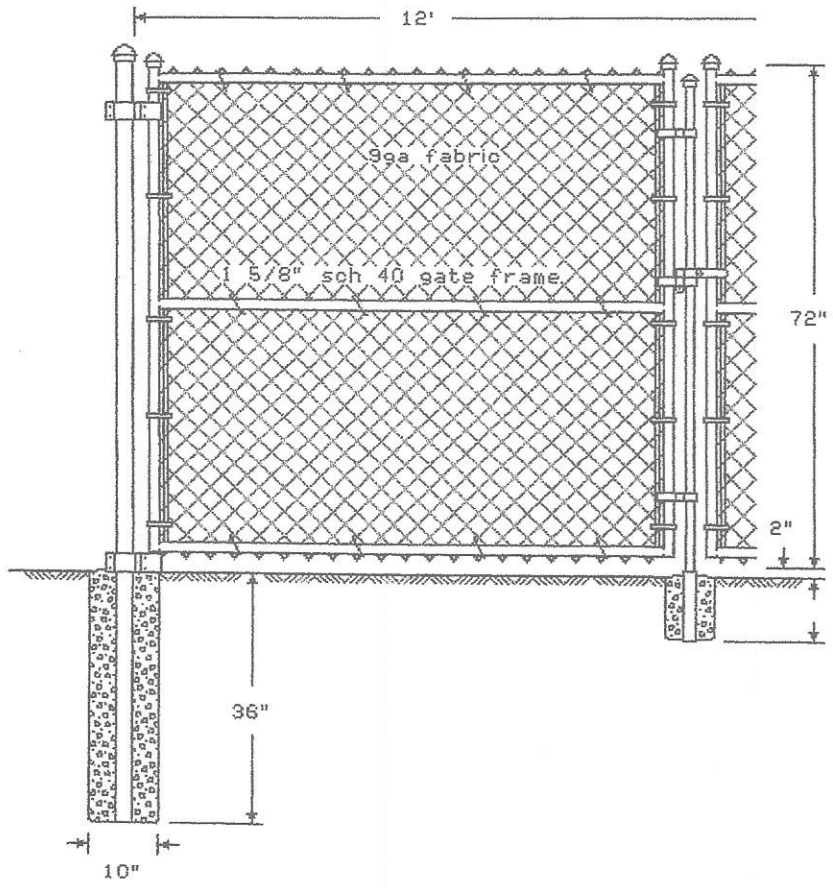


2 3/8" sch 40
gate post

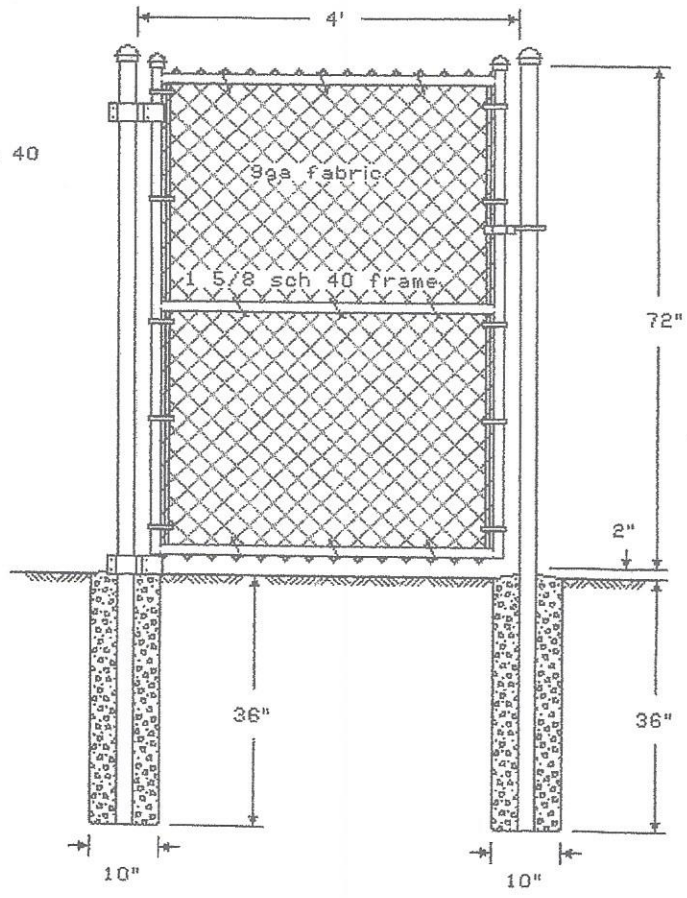

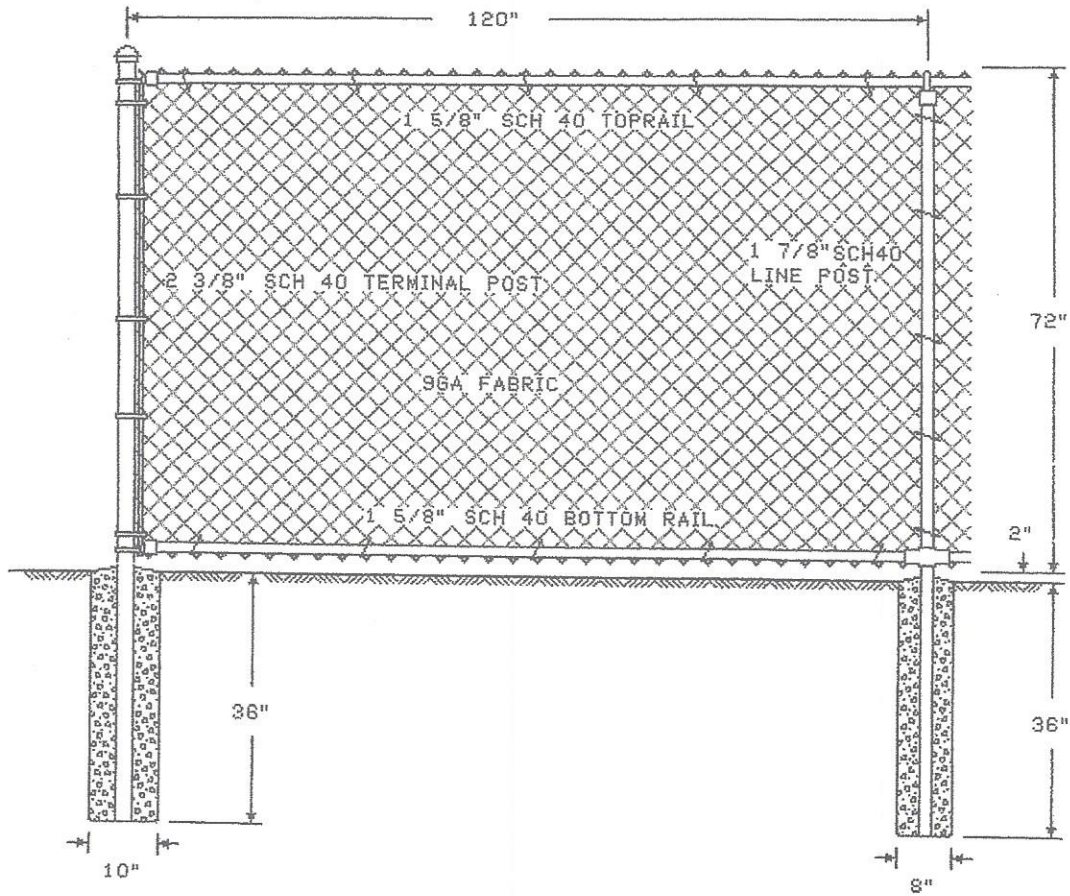

2 7/8" SCH 40
GATE POST

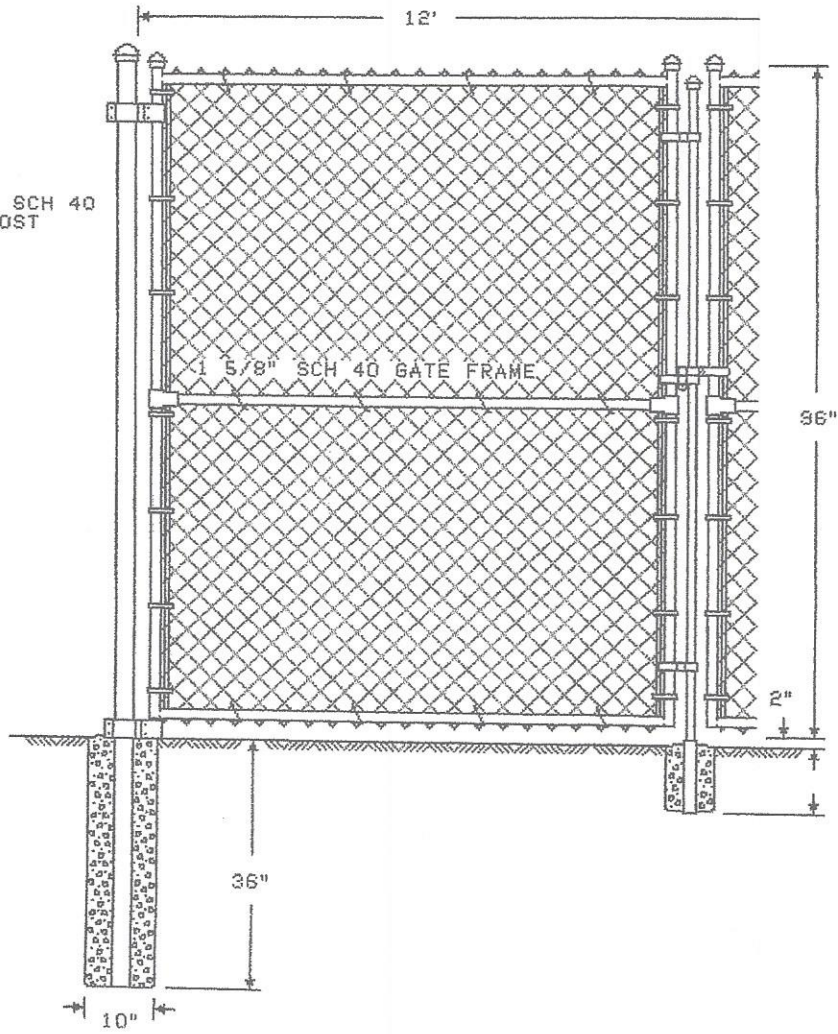

2 7/8" SCH 40
GATE POST

1 5/8" SCH 40
GATE FRAME

96A FABRIC

