



## Addendum No. 2

### Carver Site Upgrades McMillan Pazdan Smith Project No. 019087 November 27, 2019

The following clarifications, amendments, additions, deletions, revisions, and/or modifications are hereby made a part of the Contract Documents, and change the original documents only in the manner and to the extent stated below:

Item No. 1: **Project Manual Section 32 18 13 Synthetic Grass Surfacing – Part 2.3.C:**

Revise Part 2.3.C Seam Tape to say the following:

- C. Seam Tape: Synthetic grass manufacturer's recommended seam tape, 18 inches wide for inlaid game lines.

Item No. 2: **Civil Drawings - General:**

Contractor shall remove the existing goal posts as shown on the drawings and dispose of them. Do not reinstall the existing goal posts. Contractor shall provide and install two Draper goal posts per the attached drawings Ad2.1 and Ad2.2

End of Addendum No. 2

This addendum contains	<u>1</u>	Summary Page
	<u>2</u>	8.5x11 Drawings

# 5<sup>9</sup>/<sub>16</sub>" OD 8'

High School and Collegiate  
Goalposts and Accessories

by **DRAPER**

# Extension Football Goalposts

**Please Mark Appropriate Selections**

**Select Goalposts**




- ☒ 505127—5<sup>9</sup>/<sub>16</sub>" OD 8' extension Yellow High School  
☐ 505129—5<sup>9</sup>/<sub>16</sub>" OD 8' extension Yellow Collegiate

**Optional Goalpost Pads—5051xx**

- |   |   |  |
|---|---|--|
| <input type="checkbox"/> Marine Blue-02 | <input type="checkbox"/> Red-04             | <input type="checkbox"/> Beige-05            |
| <input type="checkbox"/> Orange-06      | <input type="checkbox"/> Yellow/Gold-07     | <input type="checkbox"/> Grey-08             |
| <input type="checkbox"/> Maroon-09      | <input type="checkbox"/> Blue/Royal Blue-10 | <input checked="" type="checkbox"/> Black-11 |
| <input type="checkbox"/> Purple-12      | <input type="checkbox"/> Forest Green-13    | <input type="checkbox"/> Kelly Green-14      |
| <input type="checkbox"/> Navy Blue-15   |   |  |

**Other Options**

- ☒ Optional Ground Sleeve 505101—5<sup>9</sup>/<sub>16</sub>" OD

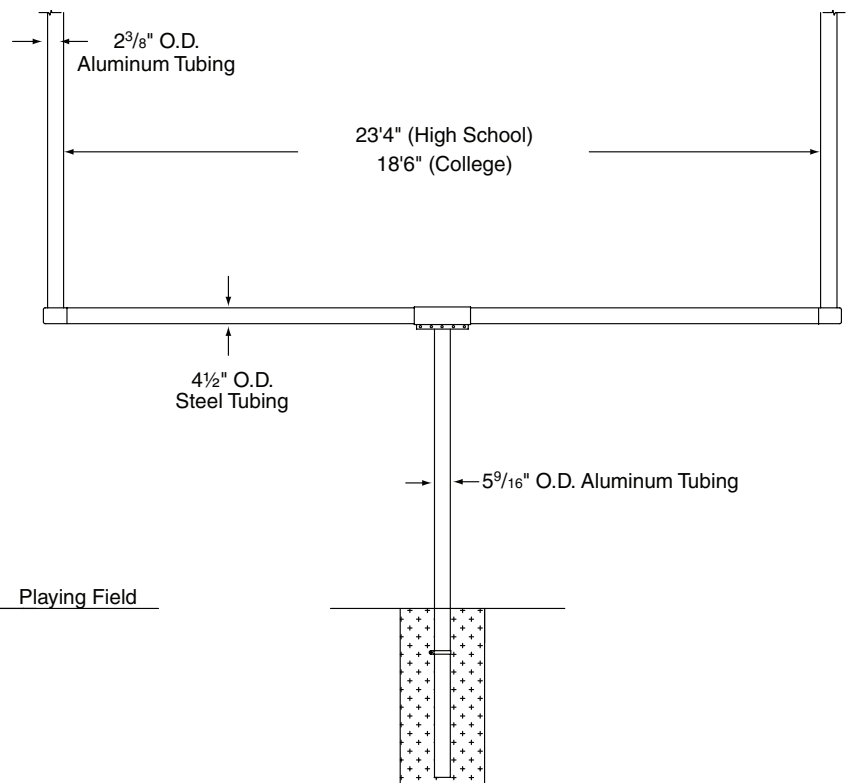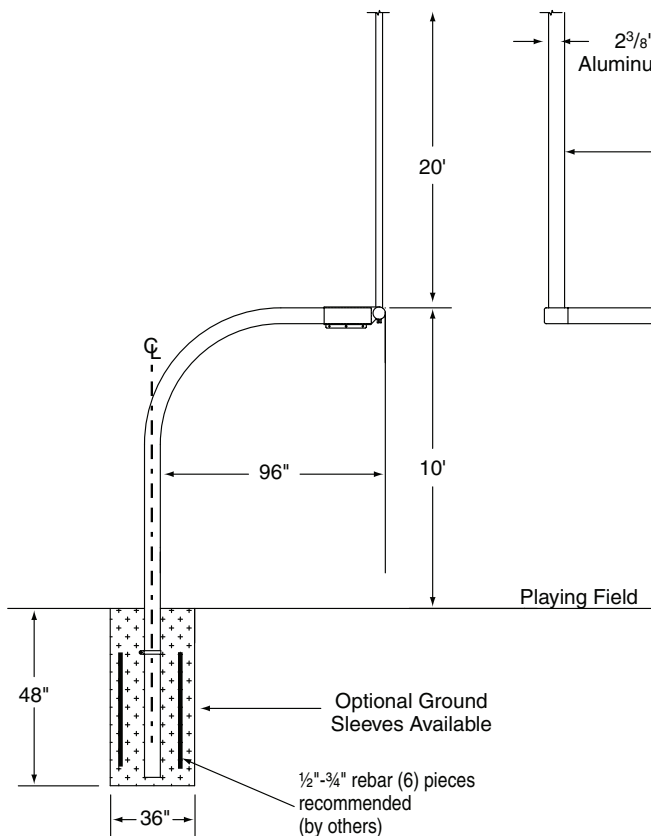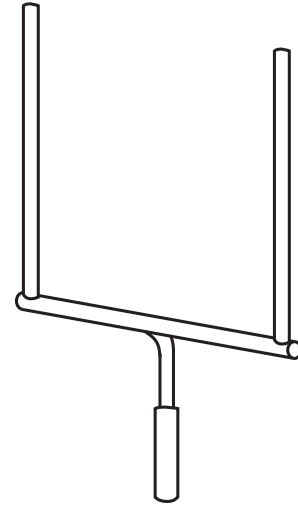

# DRAPER

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999  
www.draperinc.com ■ fax 765-987-7142

Copyright © 2015 Draper Inc. Form 505129\_505127\_Sub15

Printed in U.S.A.

PROJECT: Carver Middle School Site Upgrades

ARCHITECT: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

SUPPLIER: \_\_\_\_\_

DATE: \_\_\_\_\_ REVISED: \_\_\_\_\_

# Ad2.1

# 5<sup>9</sup>/<sub>16</sub>" OD 8'

High School and Collegiate  
Goalposts and Accessories

page 2 of 2

# Extension Football Goalposts

## Specifications – No. 505127 - 5<sup>9</sup>/<sub>16</sub>" Gooseneck 8' Extension High School Permanent/Semi-Permanent Goalposts

Gooseneck High School Goalposts are to be provided by Draper, Inc., of Spiceland, IN. Goalposts meet all National High School Federation rules. Goalposts are of the single bent post design and provide a minimum of 96" of setback from the front of the post to the front of the horizontal crossbar. The bent post is 5-9/16" outside diameter, ASTM A500, Grade C structural pipe with a minimum wall thickness of .25" and provides no less than 48" to bury into the ground.

Horizontal crossbars are made from 4 1/2" outside diameter zinc flow coated steel tube with a minimum wall thickness of .18" and are the correct length to allow uprights to extend upward with official NFHS 23'4" between the upright members. Crossbar attaches to the bent post by an adjustable "T" adapter that allows adjustment of the horizontal crossbar for ease and accuracy of installation.

Two vertical uprights extend a minimum of 20' above top of crossbar. Uprights are constructed of 2-3/8" diameter aluminum with a minimum .154" wall thickness. Uprights are connected to each end of the crossbar by an insert that allows the angle of the uprights to be adjusted at the time of installation. The insert design allows rain to escape through the insert from the top of the uprights.

All steel and aluminum members have a safety yellow powder coated finish. All hardware is zinc plated and grade 5 minimum. Optional features include ground sleeves and safety padding. Shipping weight is approximately 1,200 lbs. per pair.

## Specifications – No. 505129 - 5<sup>9</sup>/<sub>16</sub>" Gooseneck 8' Extension Collegiate Permanent/Semi-Permanent Goalposts

Gooseneck Collegiate Goalposts are to be provided by Draper, Inc., of Spiceland, IN. Goalposts meet all NCAA rules. Goalposts are of the single bent post design and provide a minimum of 96" of setback from the front of the post to the front of the horizontal crossbar. The bent post is 5-9/16" outside diameter, ASTM A500, Grade C structural pipe with a minimum wall thickness of .25" and provides no less than 48" to bury into the ground.

Horizontal crossbars are made from 4 1/2" outside diameter zinc flow coated steel tube with a minimum wall thickness of .18" and are the correct length to allow uprights to extend upward with official NCAA 18'6" between the upright members. Crossbar attaches to the bent post by an adjustable "T" adapter that allows adjustment of the horizontal crossbar for ease and accuracy of installation.

Two vertical uprights extend a minimum of 20' above top of crossbar. Uprights are constructed of 2-3/8" diameter aluminum with a minimum .154" wall thickness. Uprights are connected to each end of the crossbar by an insert that allows the angle of the uprights to be adjusted at the time of installation. The insert design allows rain to escape through the insert from the top of the uprights.

All steel and aluminum members have a white (model No 505124) or safety yellow (Model No 505125) powder coated finish. All hardware is zinc plated and grade 5 minimum. Optional features include ground sleeves and safety padding. Shipping weight is approximately 1,075 lbs. per pair.


## Specifications—505101 Deluxe Adjustable Height Goalpost Ground Sleeves

Sleeves are specifically designed to allow removable and adjustable installation of Draper gooseneck style football goalposts.

Sleeves consist of 8" square steel tubing, a minimum of 50" long with a formed pan welded at the top of the tube to allow for bury below the playing surface. Welded sleeve is hot dipped galvanized after welding.


Sleeve design allows for rotational goalpost crossbar height adjustment of up to 4" at installation by means of a 2 1/2" diameter threaded adjustable screw located in the bottom of the sleeve for exact 10' official crossbar height. Post is adjusted for plumb by four 3/4" adjusting screws.

An anti-rotation device holds the goalpost square to the field. An aluminum finish cap fills the sleeve pan both when the goal is installed and when it is removed. Shipping weight is approximately 120 lbs each.

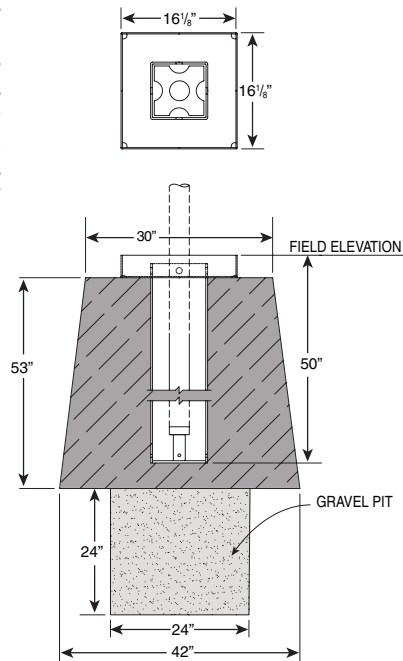

## Specifications—5051XX Optional Football Goalpost Padding

Padding meets all NCAA and National High School Federation rules. Foam is a minimum of 5" thick and is covered with sewn 14 oz. vinyl covering that is available in 13 school colors. Height measures 72" minimum and is attached to the post by a hook and loop style closure flap. Pad will fit any goalposts up to 5-9/16" diameter. Shipping weight is approximately 20 lbs. each.

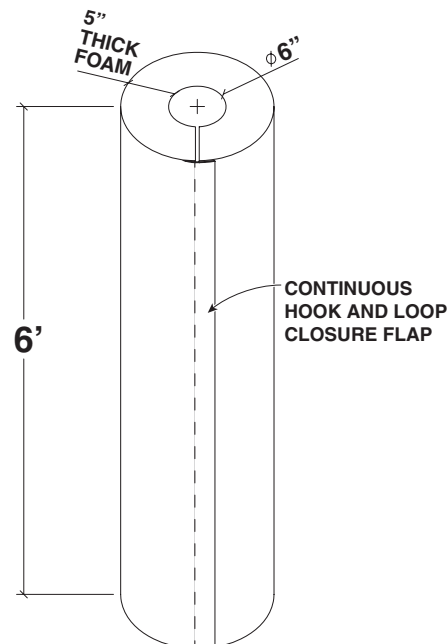

Downloadable 3-part specifications  
are available at [www.draperinc.com](http://www.draperinc.com).