

BID SET

revision date issued

1	06/14/19	ADDENDUM 1
---	----------	------------

seal



issue date  
06/04/19


project number  
c18514

sheet name  
SITE PAVEMENT  
DETAILS

sheet number


L801

NOTES:  
EXPANSION AND CONTROL JOINTS AS SHOWN ON PLAN. PROVIDE FINISH ON CONCRETE SURFACES AFTER EDGE TOOLING. PROVIDE 1/4" RADIUS ON ALL SLAB EDGES.

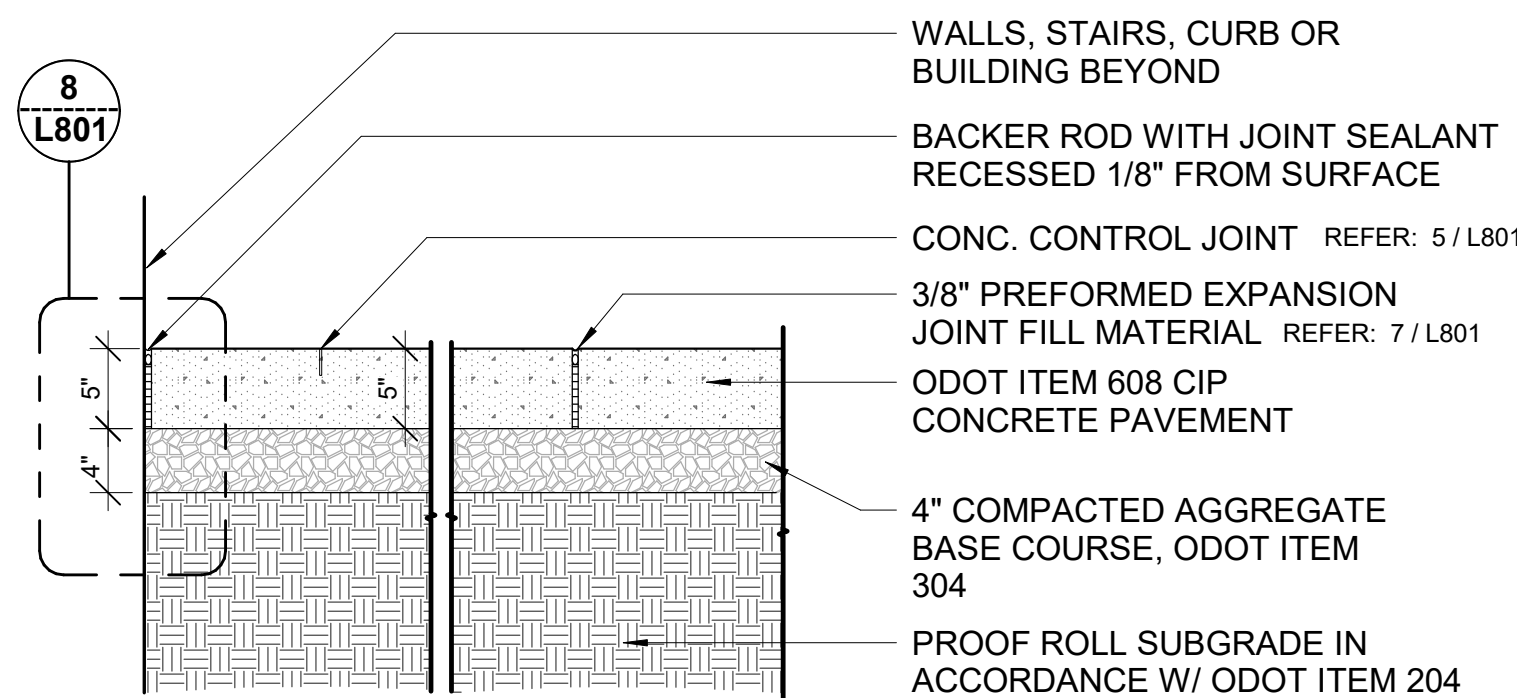


1 CONCRETE PAVEMENT  
1" = 1'-0"

NOTES:  
EXPANSION AND CONTROL JOINTS AS SHOWN ON PLAN. PROVIDE FINISH ON CONCRETE SURFACES AFTER EDGE TOOLING. PROVIDE 1/4" RADIUS ON ALL SLAB EDGES.

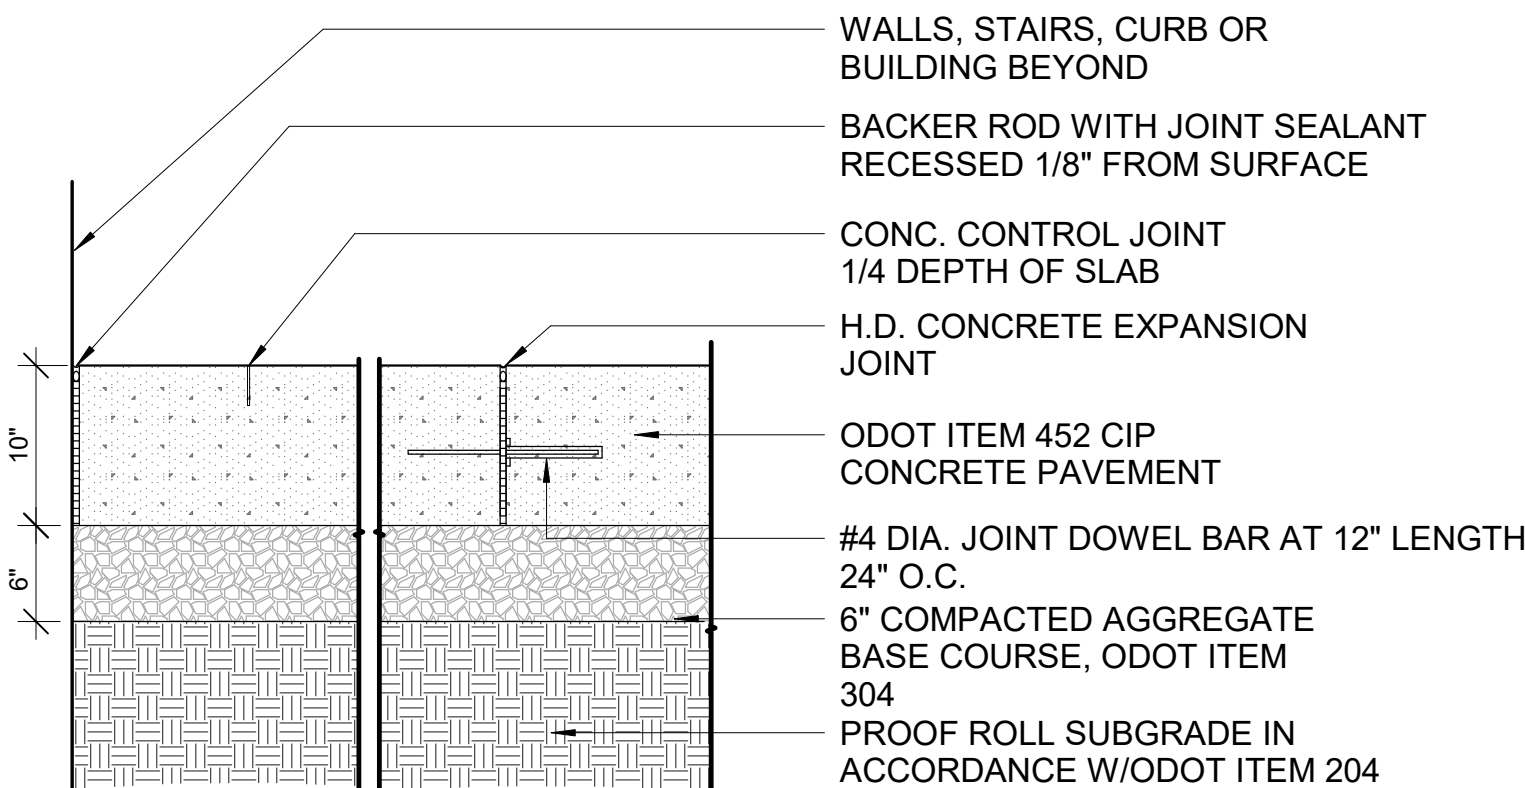


2 H.D. CONCRETE PAVEMENT  
1" = 1'-0"

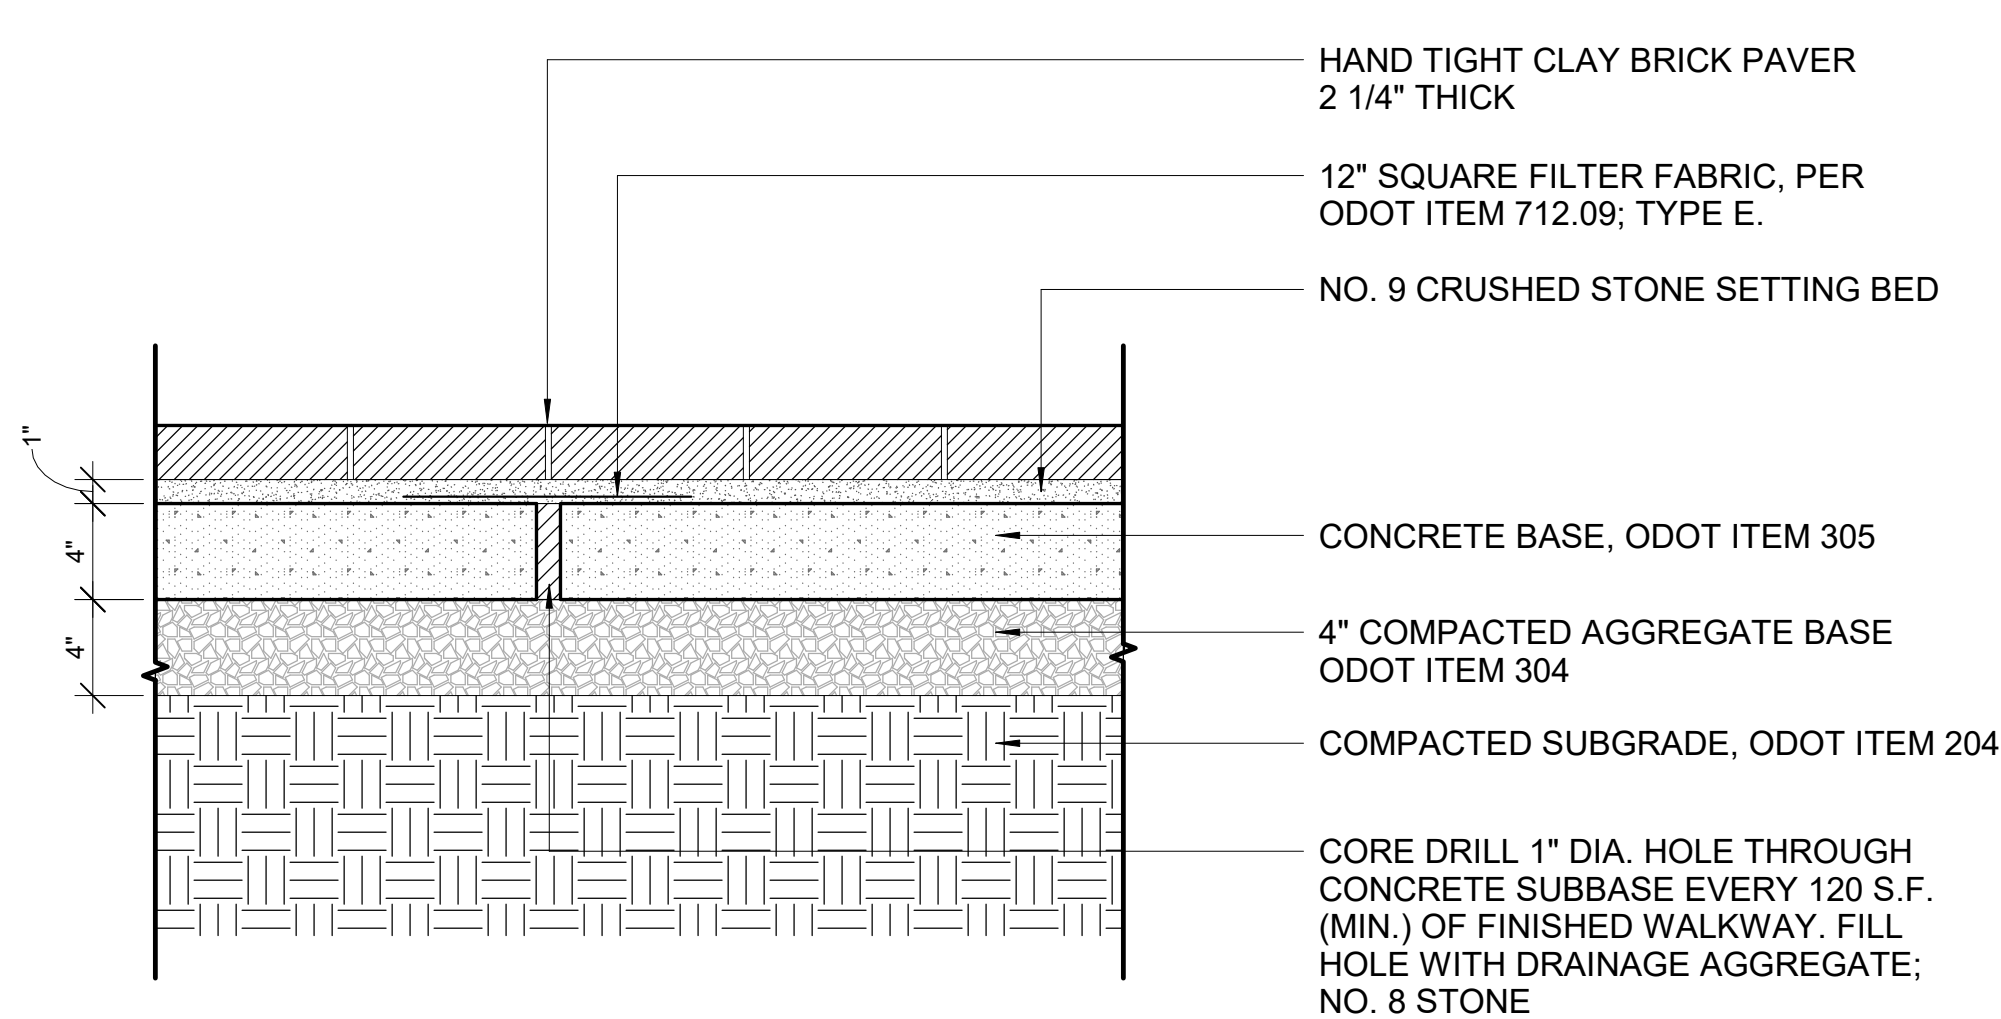


3 BRICK PAVEMENT - PLAZA  
1 1/2" = 1'-0"

NOTES:  
1. PROVIDE EDGE RESTRAINT ADJACENT TO ALL LANDSCAPE AND TURF ZONES.  
2. WHEN INSTALLING PAVER FIELDS, BIND ALL INCOMPLETE PAVER FIELD EDGES WITH A TEMPORARY 6" CONCRETE CURB (TO MAINTAIN THE INTEGRITY OF THE INSTALLED PAVING SYSTEM).


PATTERN: VARIES SEE PLAN

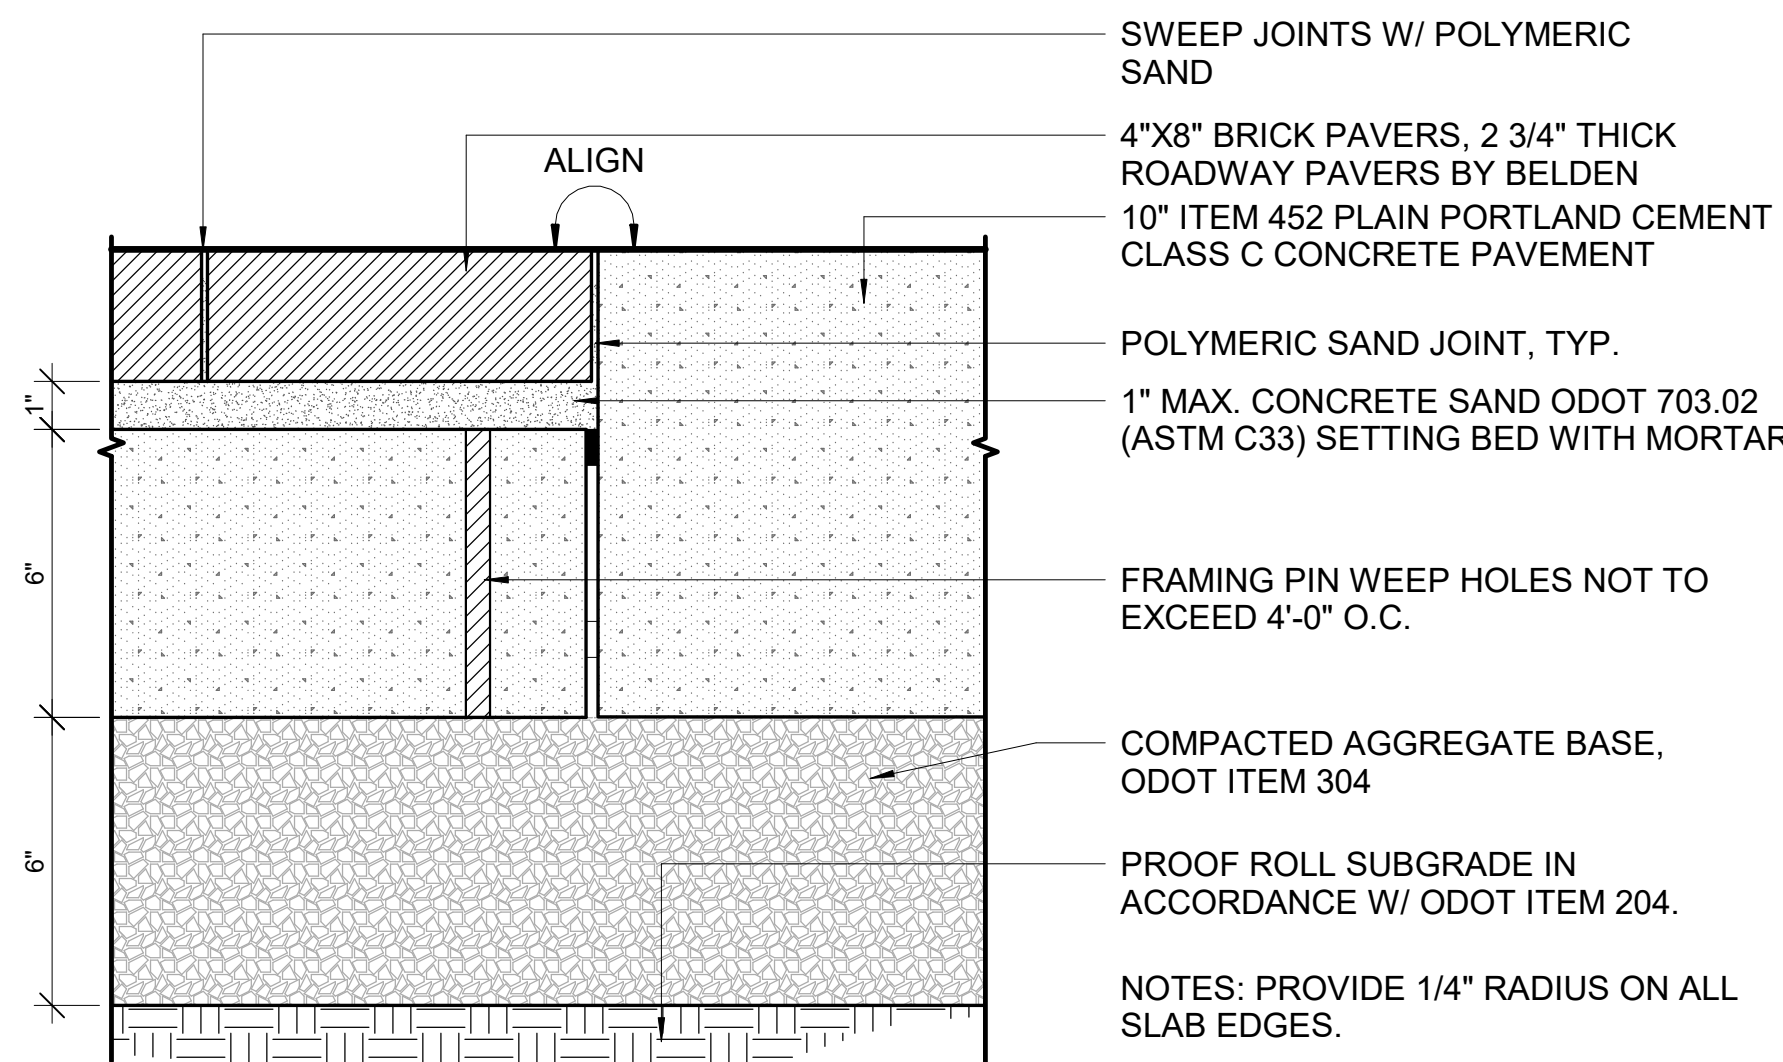

4 CONCRETE CROSSWALK PAVEMENT - (COC STD. DWG. NO. 41)  
3" = 1'-0"

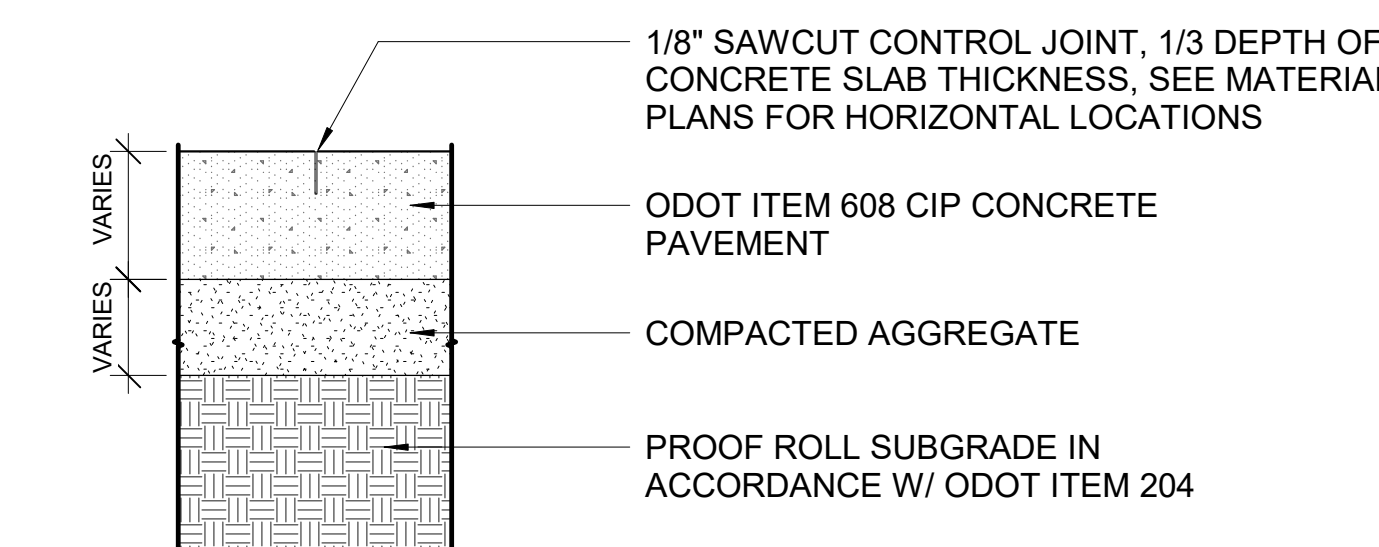


5 CONCRETE CONTROL JOINTS  
1" = 1'-0"

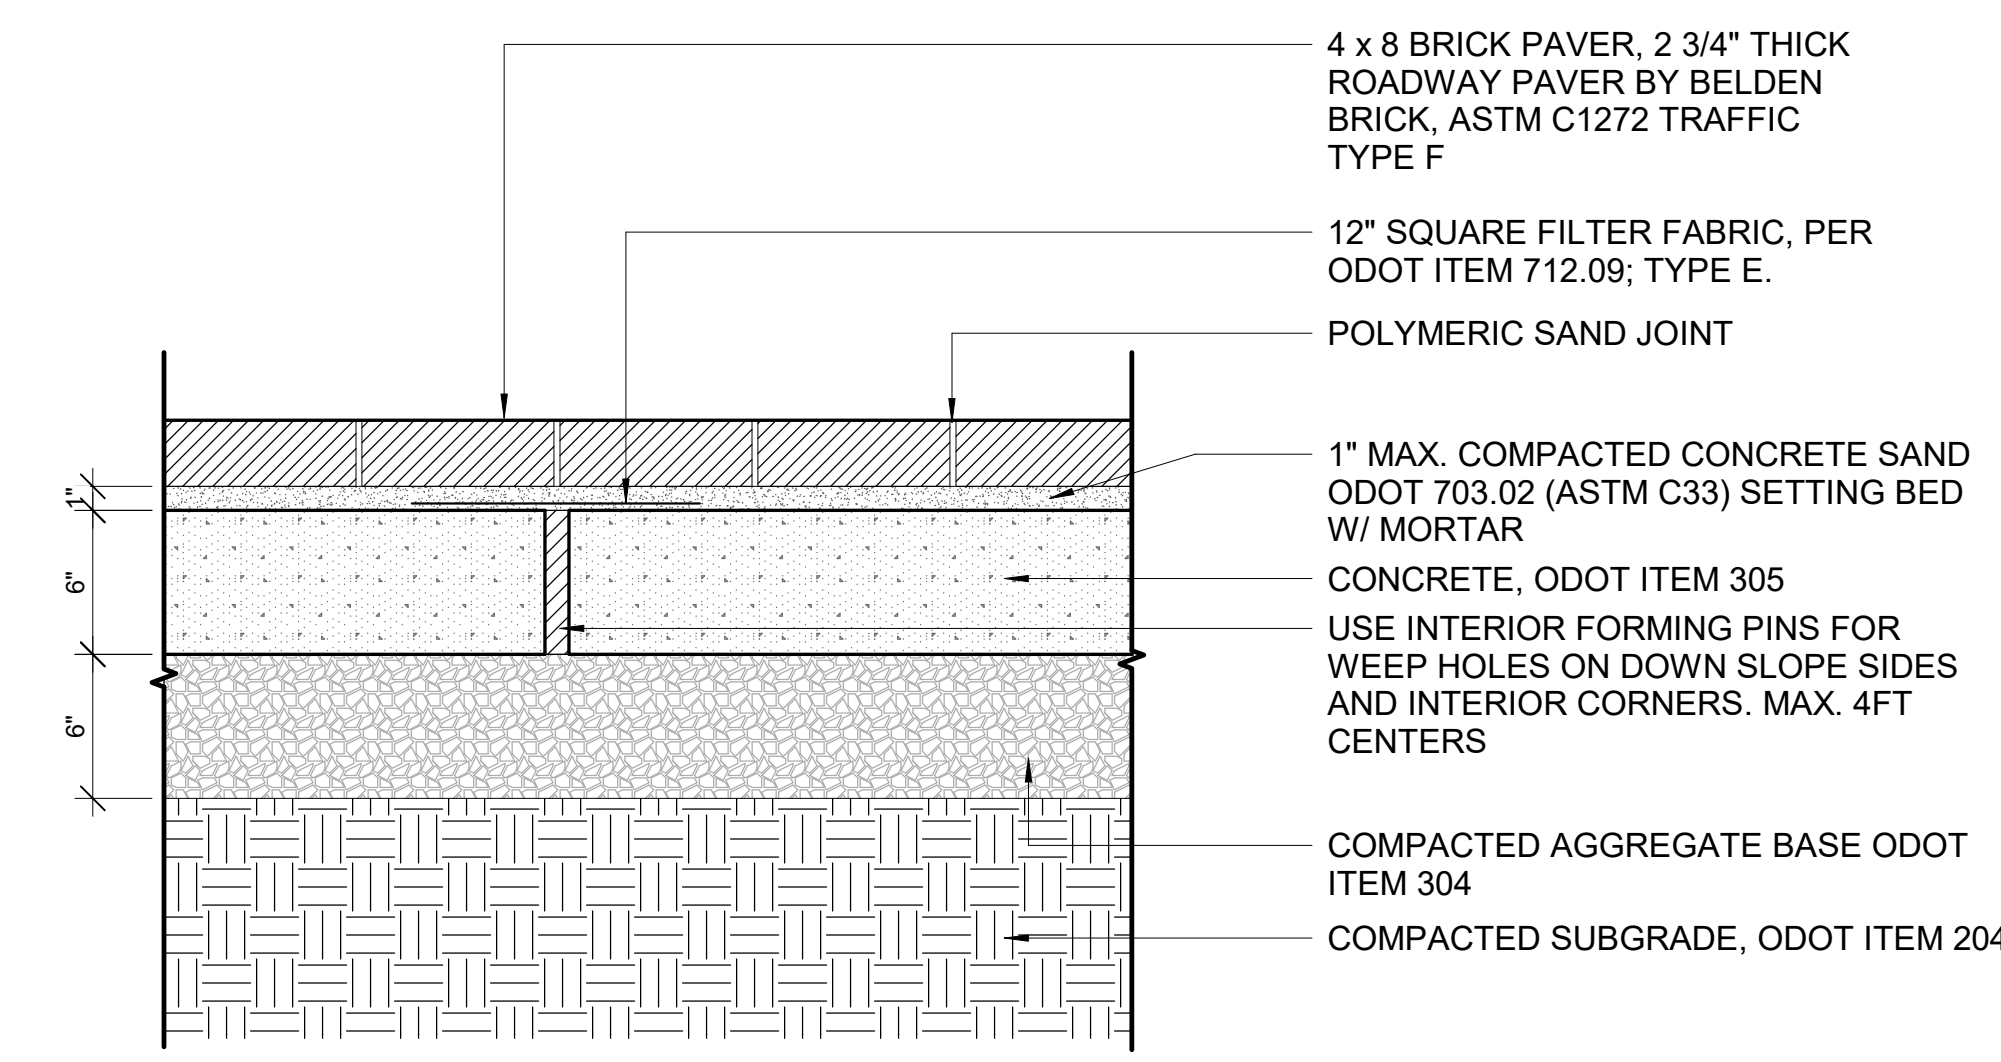


6 BRICK PAVEMENT - ROADWAY  
1 1/2" = 1'-0"

NOTES:  
1. SWEEP JOINTS WITH DRY MIXTURE OF POLYMERIC SAND (TECHNI-SEAL) OR APPROVED EQUAL.  
2. WHEN INSTALLING PAVER FIELDS, BIND ALL INCOMPLETE PAVER FIELD EDGES WITH A TEMPORARY 6" CONCRETE CURB (TO MAINTAIN THE INTEGRITY OF THE INSTALLED PAVING SYSTEM).


PATTERN: PERPENDICULAR HERRINGBONE

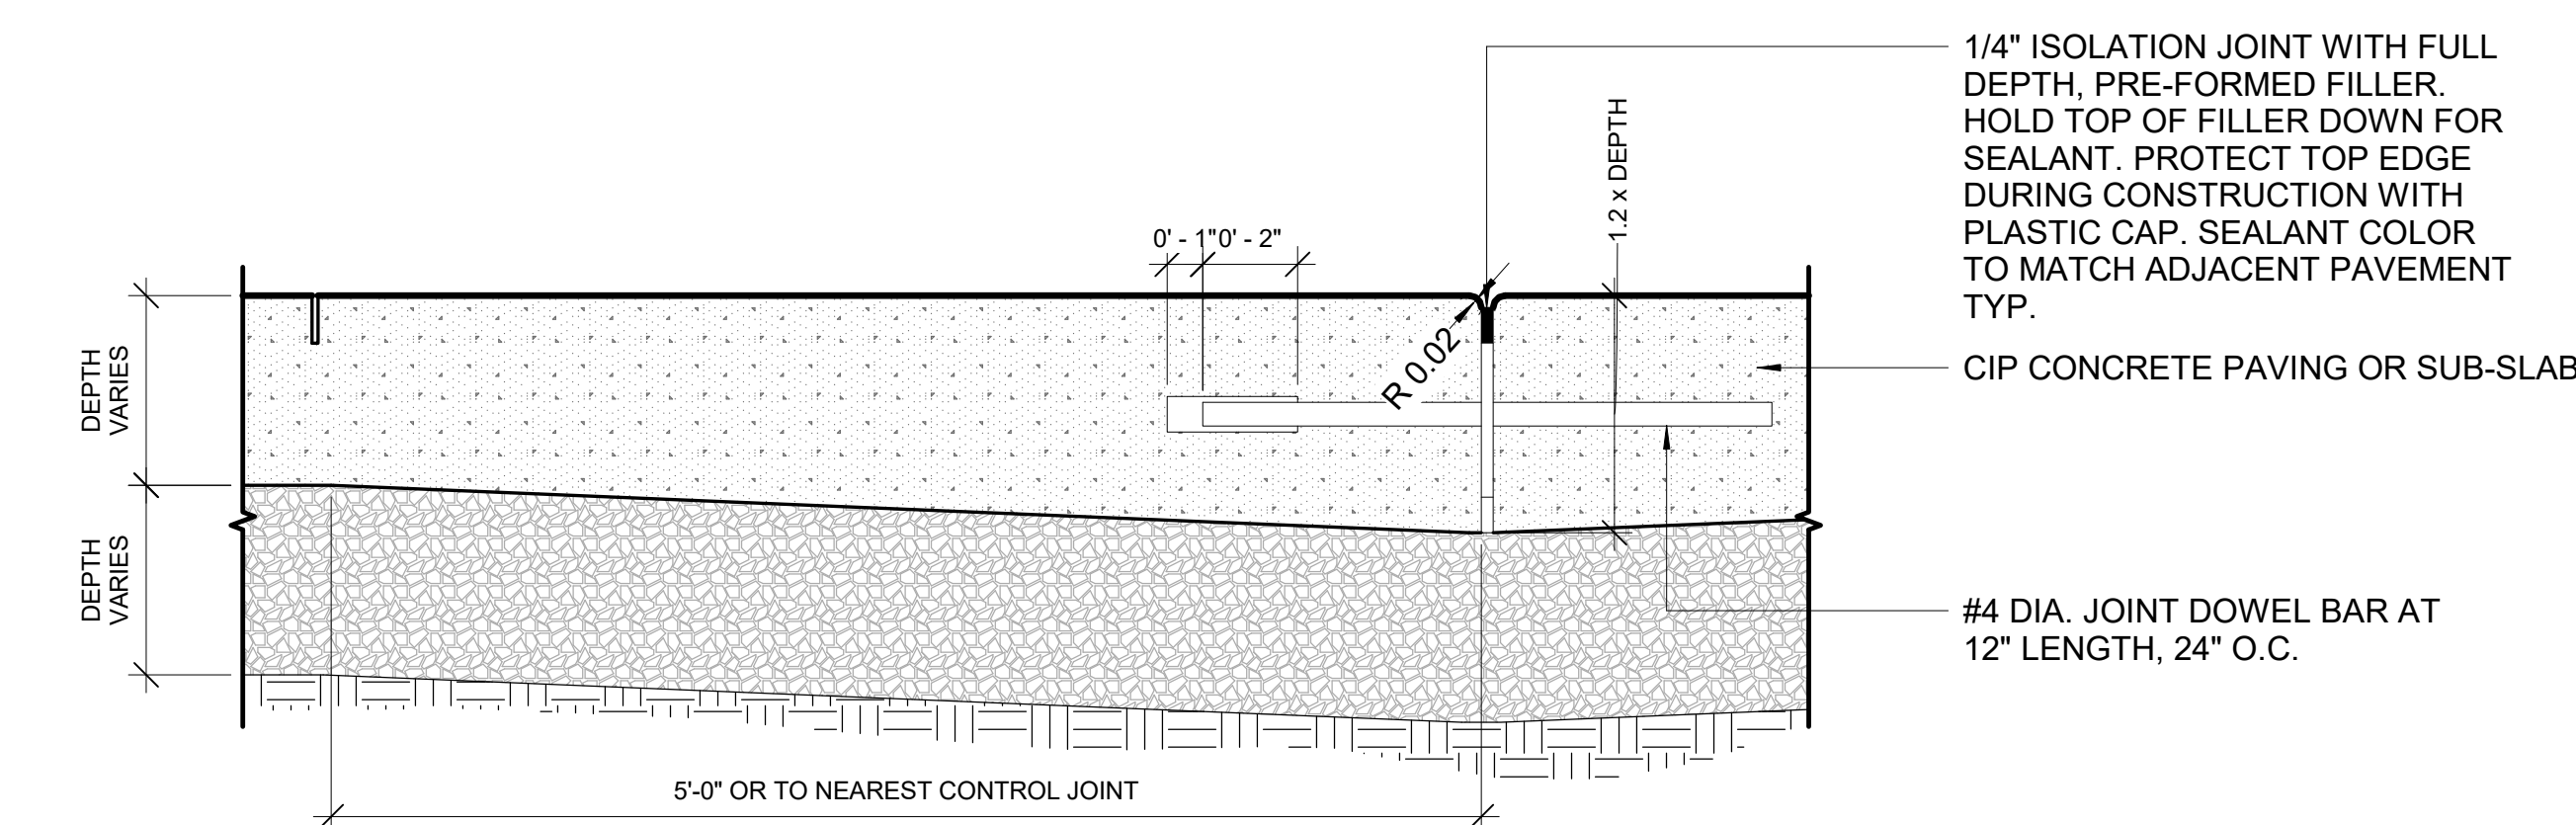

7 CONCRETE SLAB EXPANSION JOINT  
3" = 1'-0"

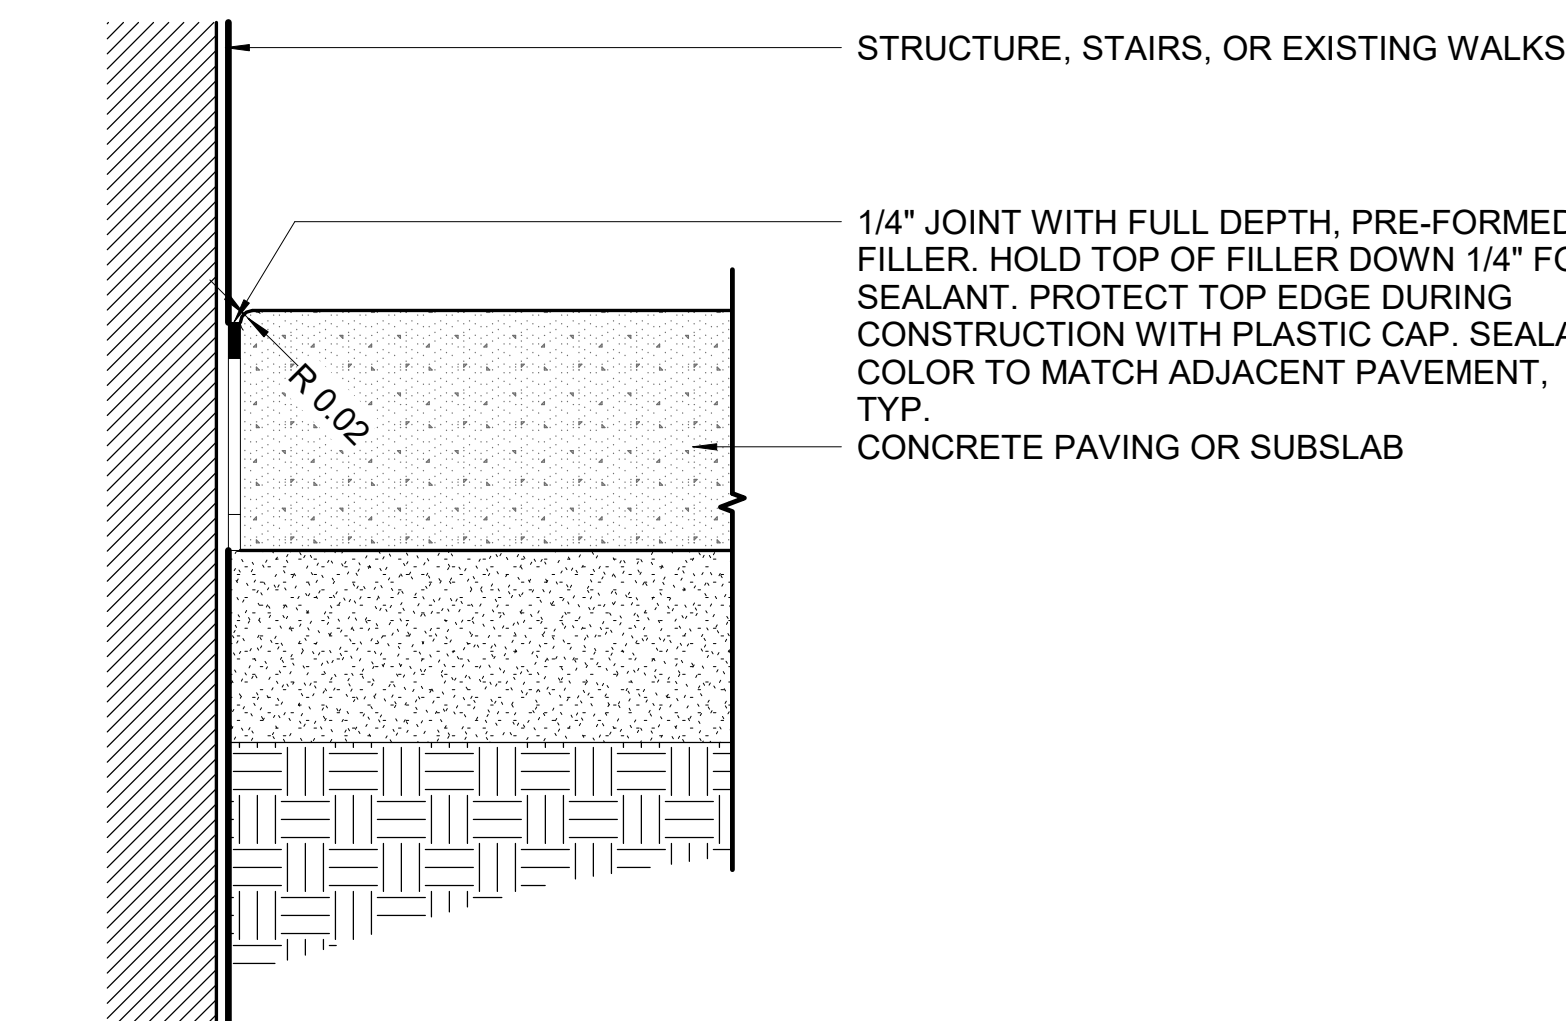

8 ISOLATION JOINT  
3" = 1'-0"

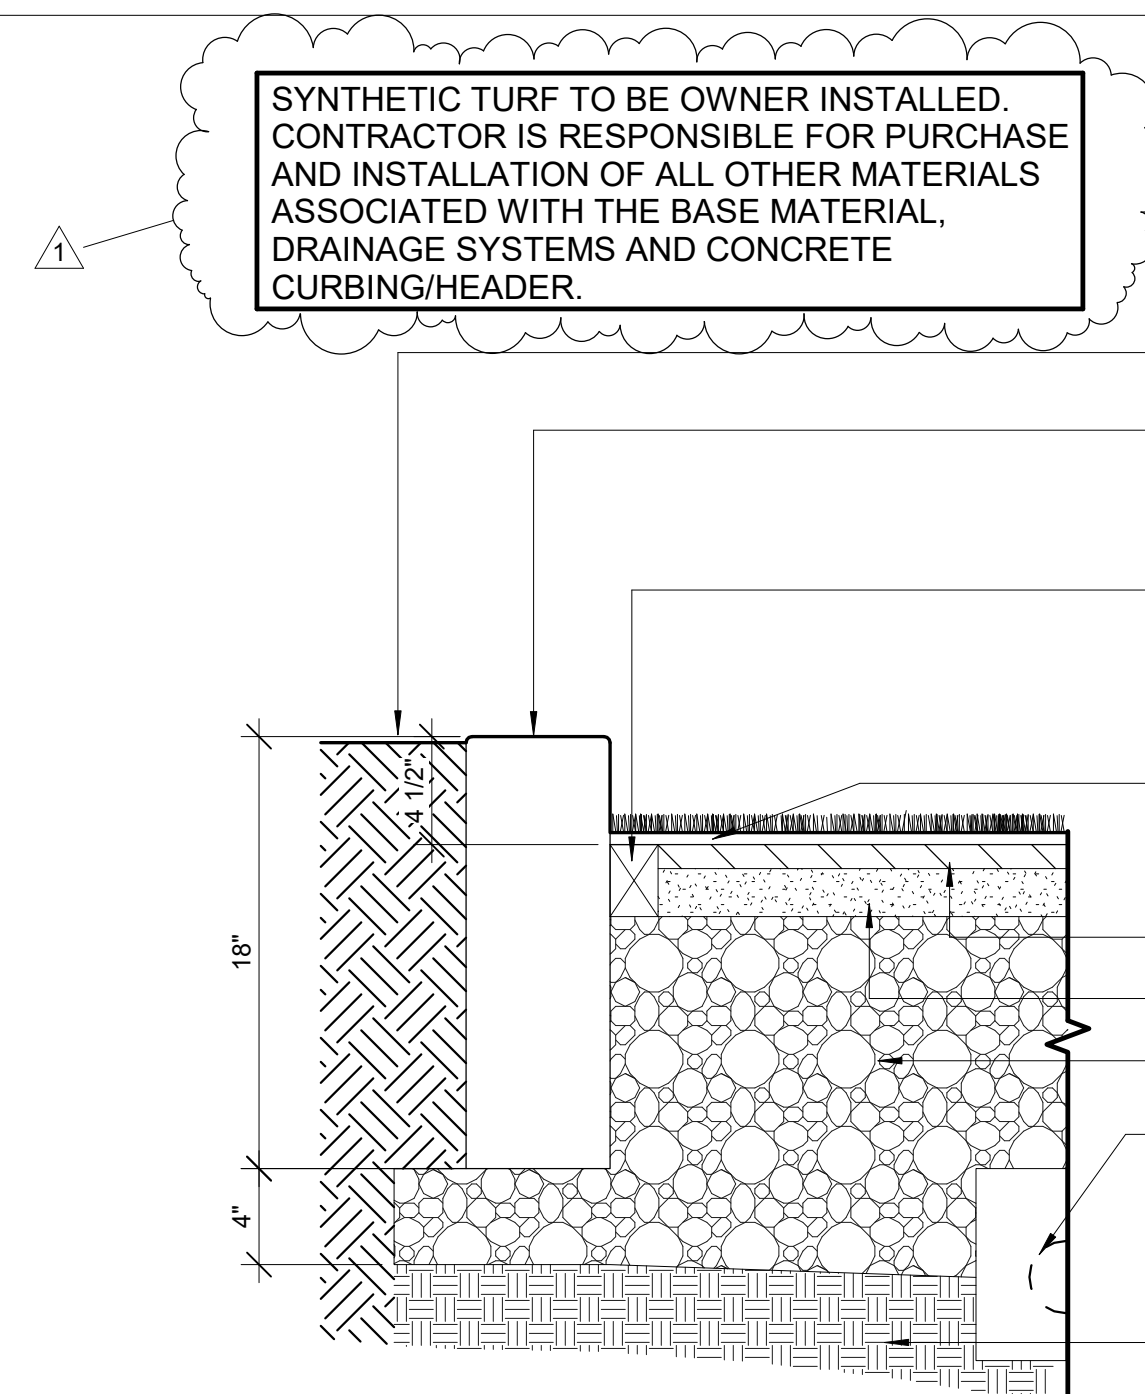

9 ARTIFICIAL TURF  
1 1/2" = 1'-0"

NOTES: TURF INSTALLATION TO BE COMPLETED IN ACCORDANCE W/ MANUFACTURER'S SPECIFICATIONS. ADJACENT CONCRETE MOUNTING SURFACES VARIES BETWEEN CONCRETE CURB, WALK, STAIRS AND/OR WALL.

PLANTING AREA, REFER PLANS

6" x 18" CONCRETE CURB. CONCRETE SURFACE FOR COMPOSITE NAILER ATTACHMENT VARIES, SEE PLAN.

2" x 3" (MIN.) PERIMETER COMPOSITE NAILER BOARD MOUNTED 4 1/2" BELOW TOP OF PLANTER CURB AND SECURED W/ CONCRETE FASTNERS AS PER MANUFACTURERS SPECIFICATION.

SYNTHETIC TURF SECURED W/ 1" LONG STAPLE EVERY 3" AS PER MANUFACTURER RECOMMENDATIONS.


1" THICK CLOSED CELL FOAM PAD

LEVELING COURSE OF FINISH DRAINAGE GRAVEL


CLEANED WASHED ODOT #57 DRAINAGE GRAVEL

4" PERFORATED UNDERDRAIN WRAPPED IN WOVEN GEOTEXTILE DRAINAGE FABRIC.


PROOF ROLL SUBGRADE IN ACCORDANCE W/ SPECIFICATIONS.

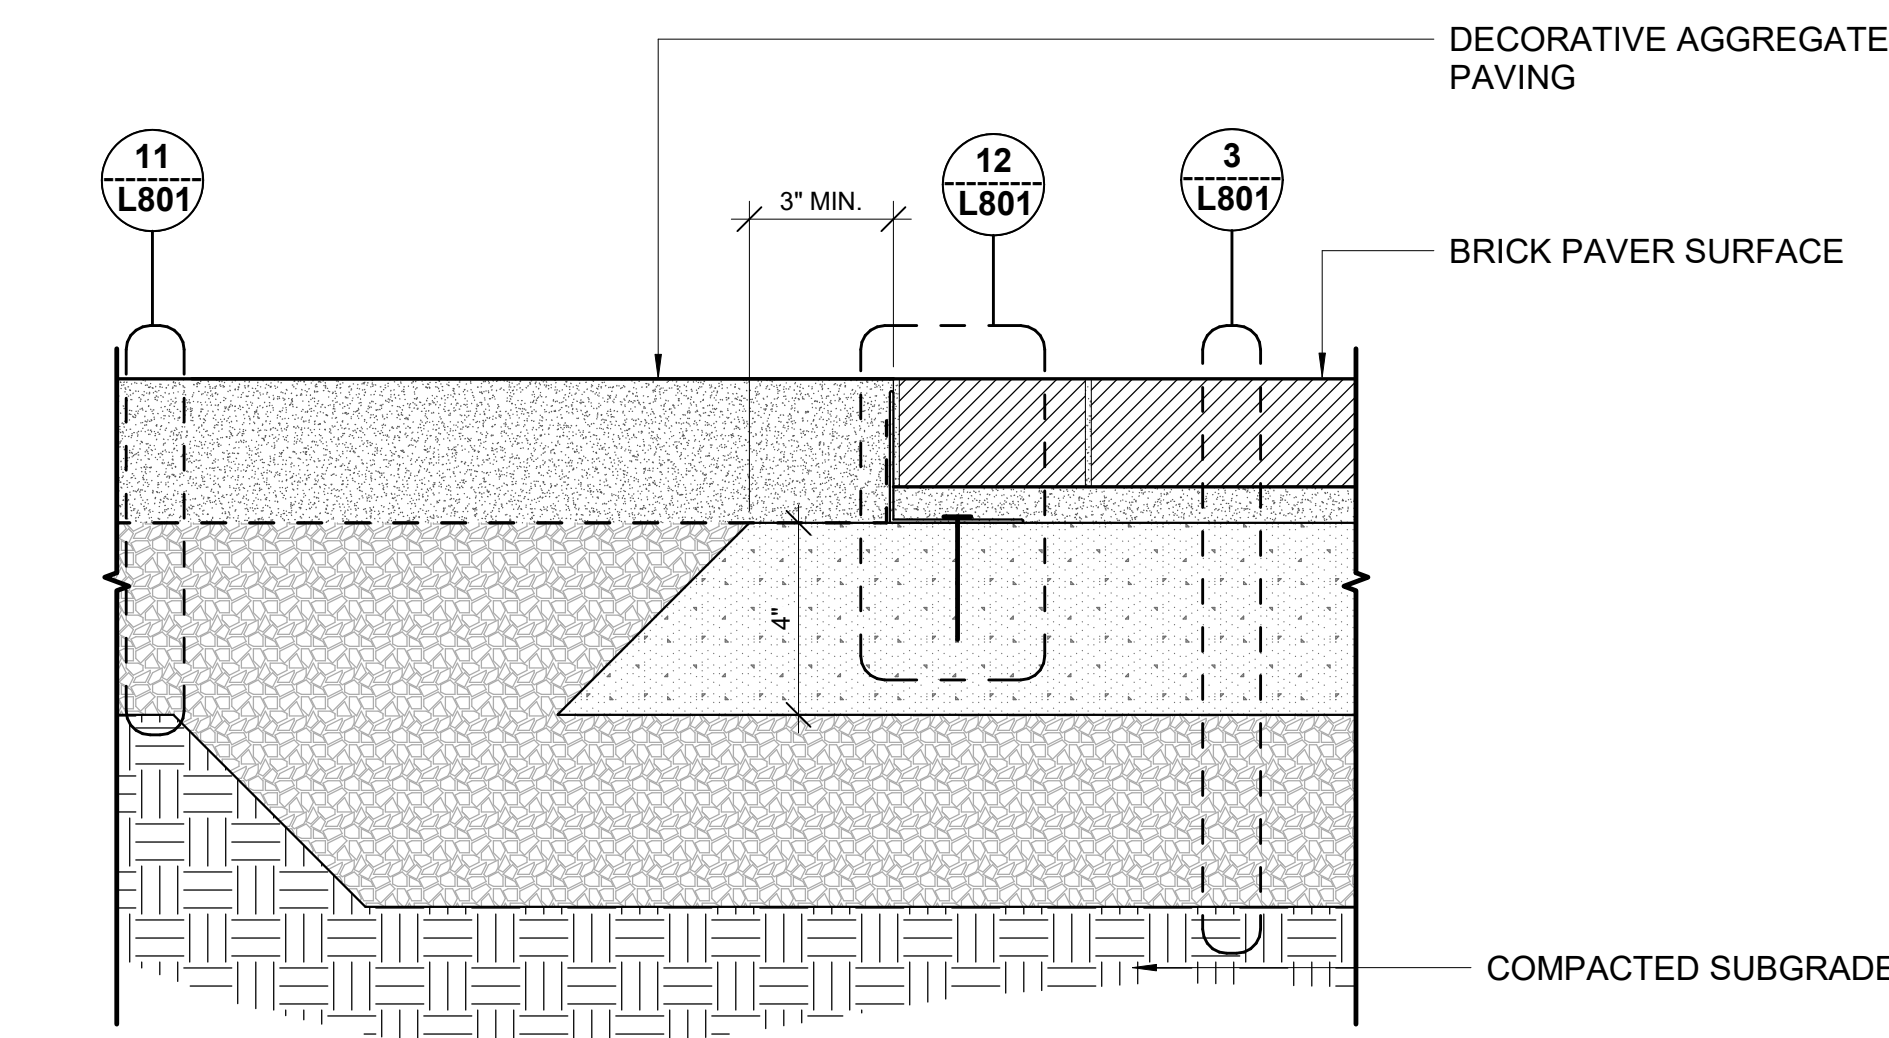

10 PAVER TO AGGREGATE PAVING TRANSITION  
3" = 1'-0"

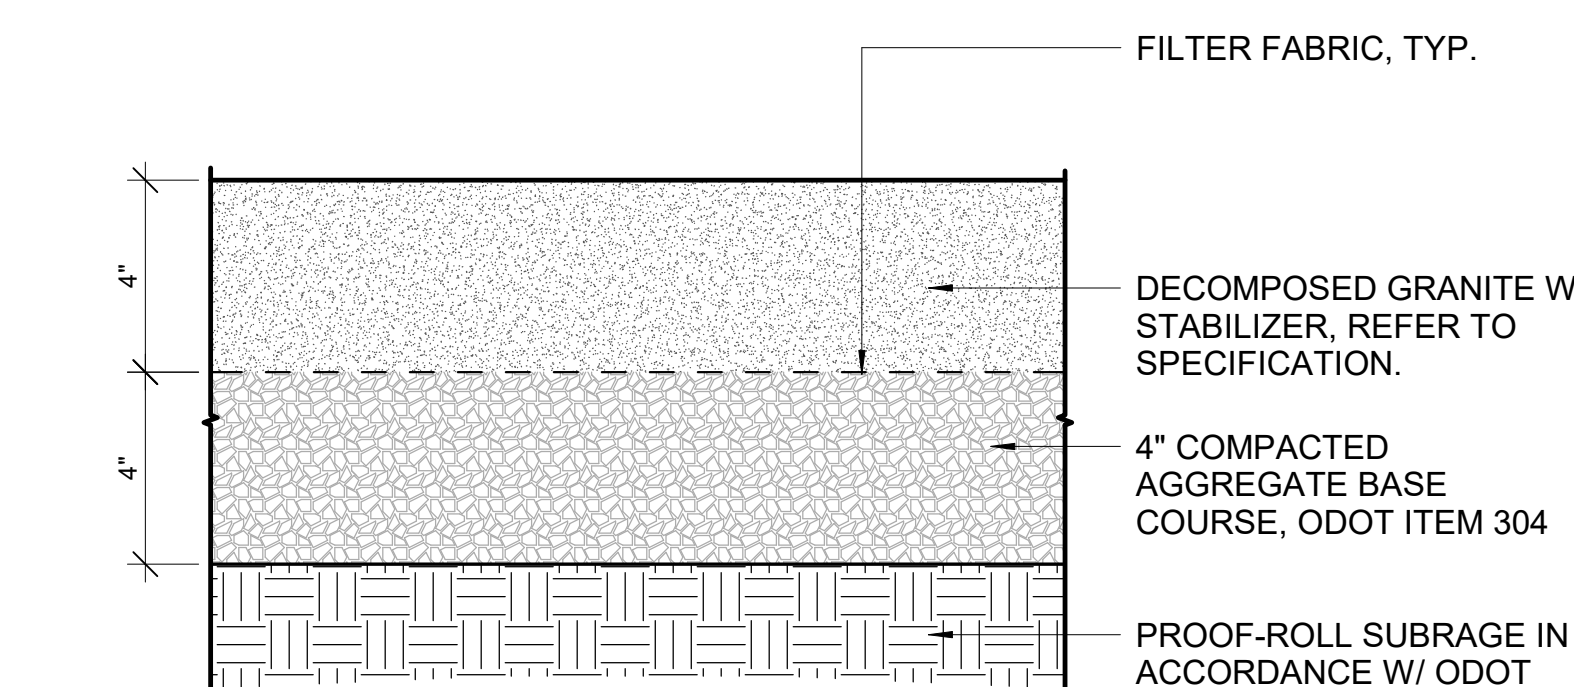

11 DECOMPOSED GRANITE PAVING  
3" = 1'-0"

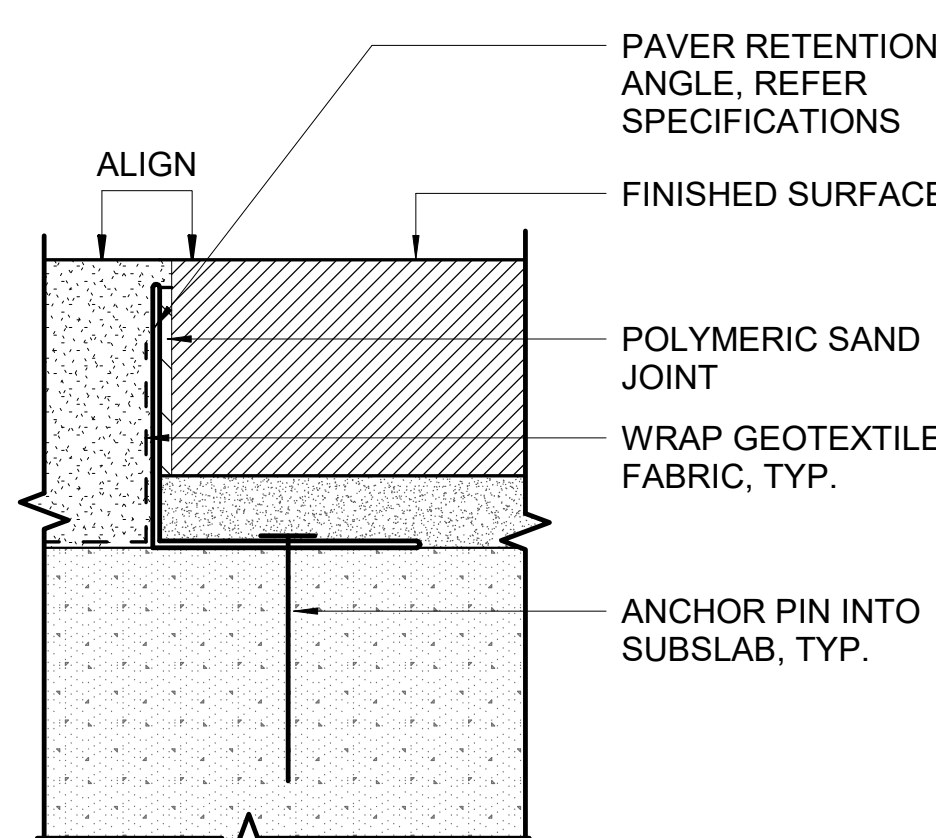

12 PAVER RETENTION ANGLE  
6" = 1'-0"