



NOTES:
EXPANSION AND CONTROL JOINTS AS SHOWN ON PLAN. PROVIDE FINISH ON CONCRETE SURFACES AFTER EDGE TOOLING. PROVIDE 1/4" RADIUS ON ALL SLAB EDGES.

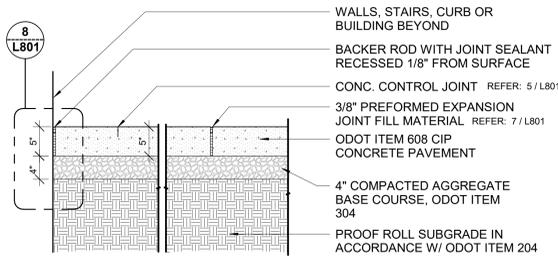


1 CONCRETE PAVEMENT
1" = 1'-0"

NOTES:
EXPANSION AND CONTROL JOINTS AS SHOWN ON PLAN. PROVIDE FINISH ON CONCRETE SURFACES AFTER EDGE TOOLING. PROVIDE 1/4" RADIUS ON ALL SLAB EDGES.

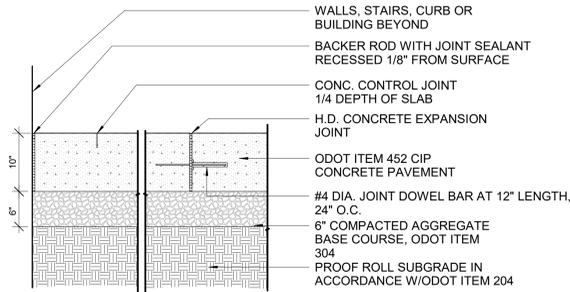


2 H.D. CONCRETE PAVEMENT
1" = 1'-0"

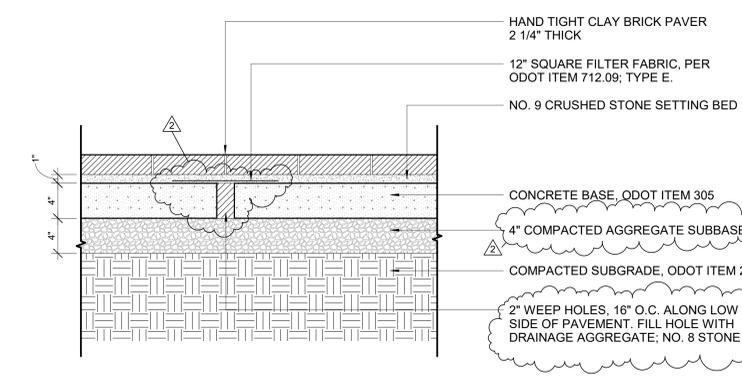


3 BRICK PAVEMENT - PLAZA
1 1/2" = 1'-0"


NOTES:
1. PROVIDE EDGE RESTRAINT ADJACENT TO ALL LANDSCAPE AND TURF ZONES.
2. WHEN INSTALLING PAVER FIELDS, BIND ALL INCOMPLETE PAVER FIELD EDGES WITH A TEMPORARY 6" CONCRETE CURB (TO MAINTAIN THE INTEGRITY OF THE INSTALLED PAVING SYSTEM).
3. SAND FILLED JOINTS 1/16" MIN. TO 3/16" MAX.
4. CROSS SLOPE OF PAVEMENT 2% TYPICAL, UNLESS NOTED OTHERWISE.
PATTERN: VARIES SEE PLAN

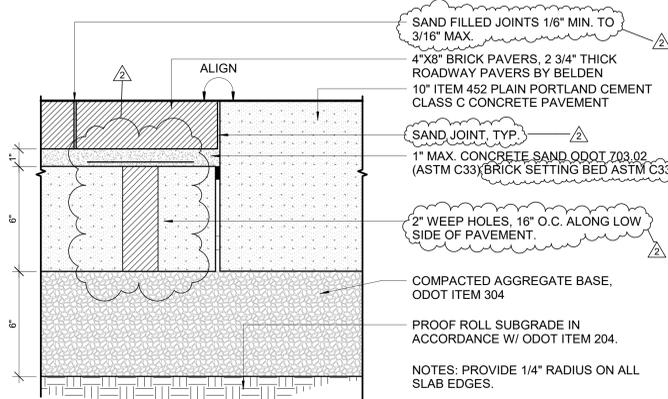

4 CONCRETE CROSSWALK PAVEMENT - (COC STD. DWG. NO. 41)
3" = 1'-0"

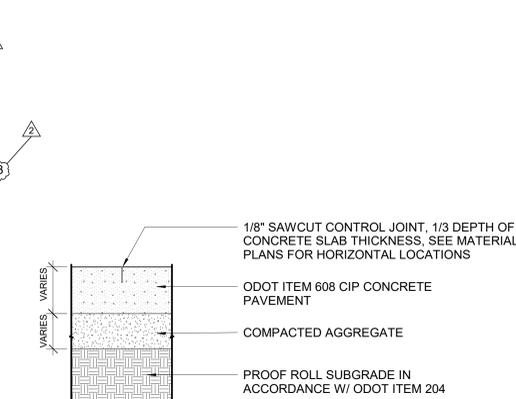


5 CONCRETE CONTROL JOINTS
1" = 1'-0"

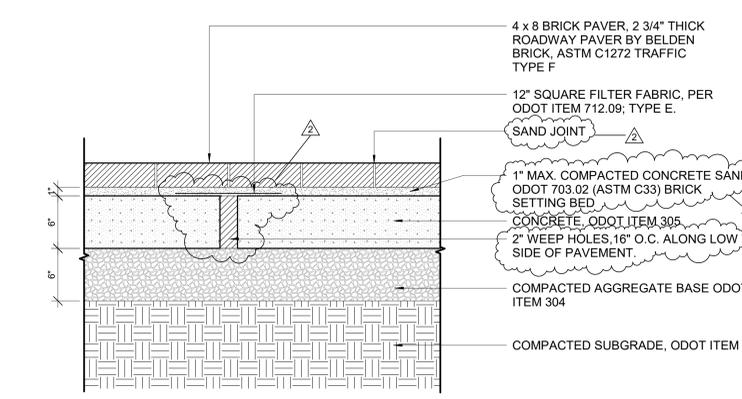


6 BRICK PAVEMENT - ROADWAY
1 1/2" = 1'-0"


NOTES:
1. SWEEP JOINTS WITH DRY MIXTURE OF POLYMERIC SAND (TECHNI-SEAL) OR APPROVED EQUAL.
2. WHEN INSTALLING PAVER FIELDS, BIND ALL INCOMPLETE PAVER FIELD EDGES WITH A TEMPORARY 6" CONCRETE CURB (TO MAINTAIN THE INTEGRITY OF THE INSTALLED PAVING SYSTEM).
3. SAND FILLED JOINTS 1/16" MIN. TO 3/16" MAX.
4. CROSS SLOPE OF PAVEMENT 2% TYPICAL, UNLESS NOTED OTHERWISE.
PATTERN: PERPENDICULAR HERRINGBONE

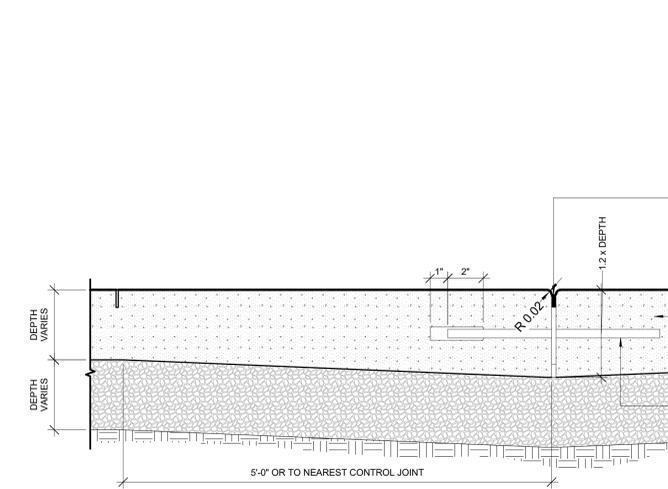

7 CONCRETE SLAB EXPANSION JOINT
3" = 1'-0"

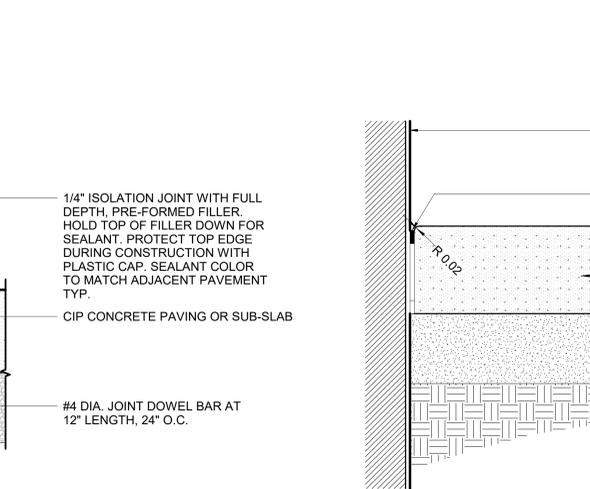


8 ISOLATION JOINT
3" = 1'-0"

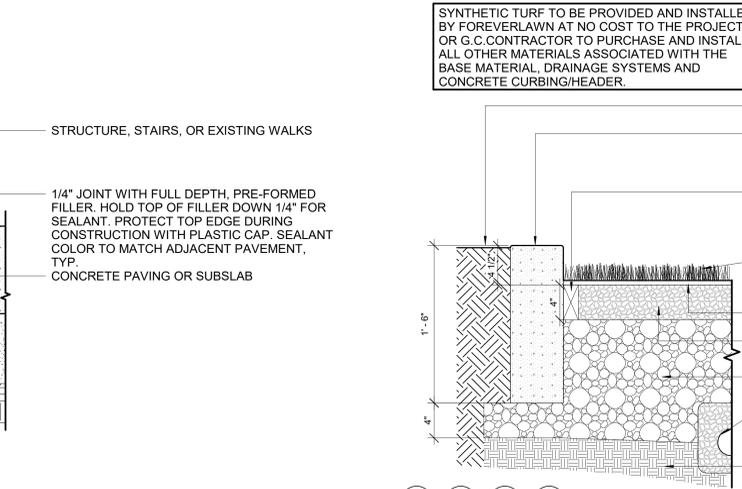


9 ARTIFICIAL TURF
1 1/2" = 1'-0"


NOTES: FOREVERLAWN TO PROVIDE ALL FASTENING MATERIALS AND PERFORM ALL NECESSARY SEAMING AND INSTALLATION OF SAND INFILL. FOREVERLAWN TO PROVIDE ALL SHIPPING AND TRANSPORTATION OF SUPPLIES AND MATERIAL TO THE SITE.
PLANTING AREA, REFER PLANS
CONTRACTOR TO INSTALL 6" x 18" CONCRETE CURB. VERTICAL CONCRETE SURFACE FOR NAILER ATTACHMENT VARIES. FROM CURB, WALLS, STAIR RISER, OR SIDEWALK.
CONTRACTOR TO PURCHASE AND INSTALL A 2" x 4" (MIN.) PERIMETER COMPOSITE NAILER BOARD MOUNTED 4 1/2" BELOW TOP OF PLANTER CURB AND SECURED W/ CONCRETE FASTENERS AS PER MANUFACTURERS SPECIFICATION.
SYNTHETIC TURF AND SAND INFILL. INSTALLATION TO BE PERFORMED BY FOREVERLAWN.
1" CAP OF CLEAN #9 LIMSTONE BY CONTRACTOR
4" OF CLEAN #8 LIMSTONE COMPACTED AND SET, LEVEL W/ TOP OF PERIMETER BOARD.
CLEANED WASHED ANGULAR ODOT #57 DRAINAGE GRAVEL BY CONTRACTOR
4" PERFORATED UNDERDRAIN WRAPPED IN WOVEN GEOTEXTILE DRAINAGE FABRIC BY CONTRACTOR.
PROOF ROLL SUBGRADE IN ACCORDANCE W/ SPECIFICATIONS BY CONTRACTOR.

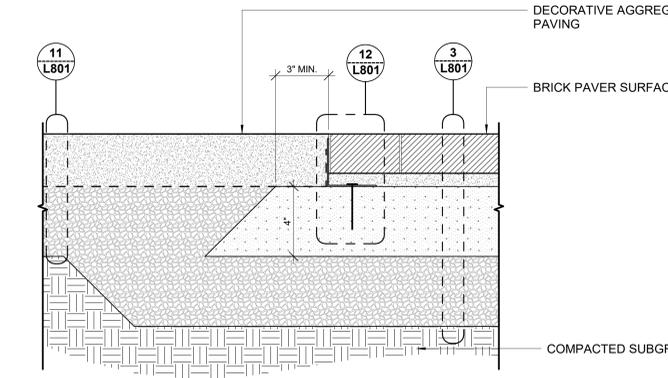

10 PAVER TO AGGREGATE PAVING TRANSITION
3" = 1'-0"

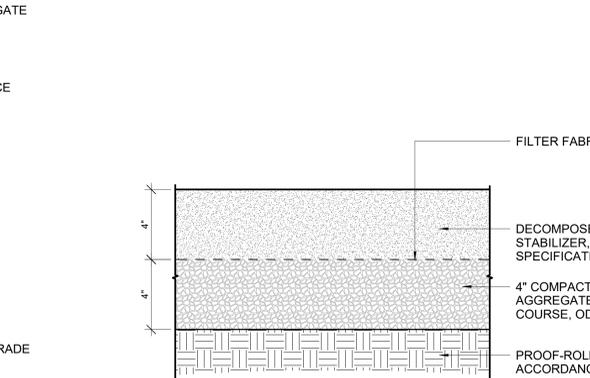


11 DECOMPOSED GRANITE PAVING
3" = 1'-0"

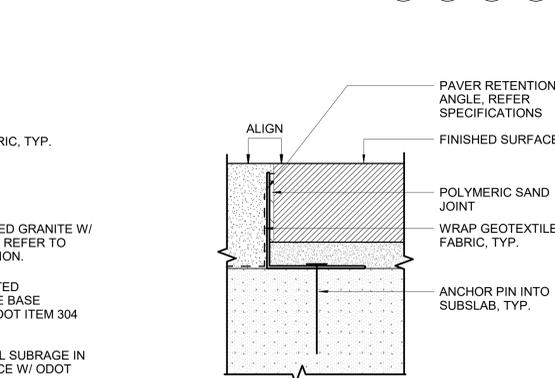

12 PAVER RETENTION ANGLE
6" = 1'-0"

BID SET

revision	date	issued
2	06/21/19	ADDENDUM 2



issue date
06/04/19
project number
c18514

sheet name
SITE PAVEMENT DETAILS
sheet number

L801

6/21/2019 2:08:22 PM