


1.5" (MIN.) ASPHALT SURFACE COURSE (TYPE C)
PER SCDOT SPECIFICATION SECTION 403

2" (MIN.) ASPHALT BINDER BASE COURSE (TYPE
C) PER SCDOT SPECIFICATION SECTION 402

ADD ALTERNATE:
RESILIENT BLACK
LATEX SURFACE
COURSE

BASE BID: LIQUID
APPLIED ACRYLIC
SURFACE SYSTEM
(2 COATS)

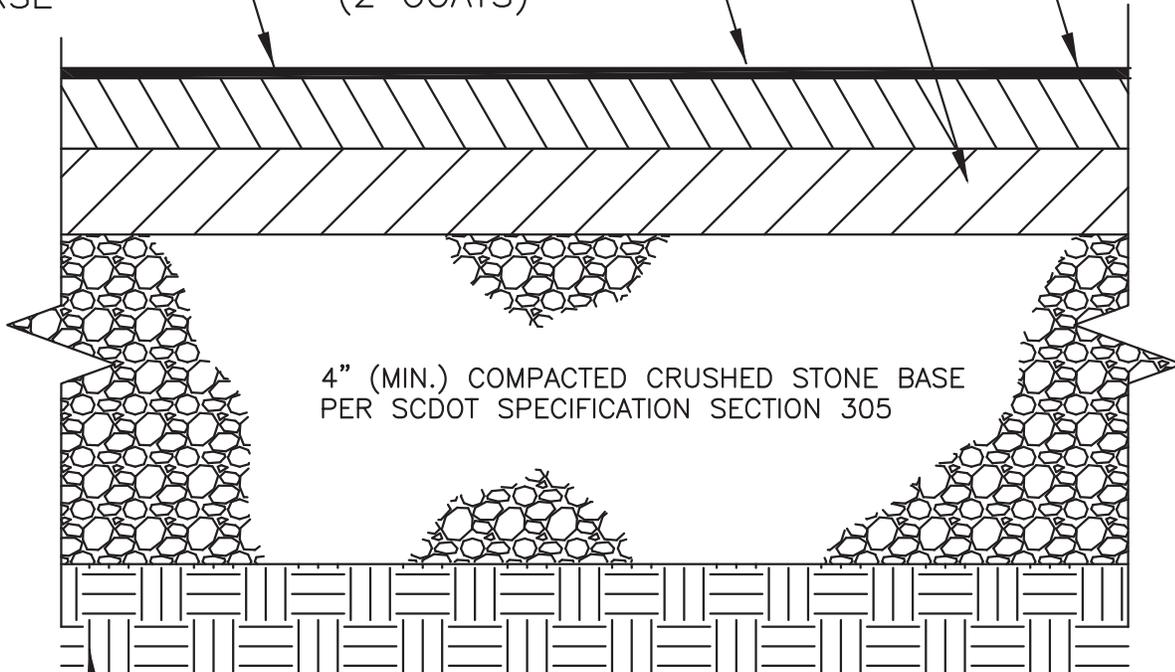

4" (MIN.) COMPACTED CRUSHED STONE BASE
PER SCDOT SPECIFICATION SECTION 305

98% COMPACTED SUBGRADE
(SEE SPECIFICATIONS AND SOIL REPORT)

NOTES:

- 1) COLORS: SURFACE – BLACK ASPHALT
LINES – TO BE DETERMINED BY ARCHITECT/OWNER
- 2) PRIMER – AS RECOMMENDED BY MANUFACTURER
- 3) LINES – AS RECOMMENDED BY MANUFACTURER

TRACK ASPHALT SURFACE

NOT TO SCALE