

Bent 33 Pile #3 -Remove
broken pile detached at bent-
Do not replace

Bent 33 Pile #1 - Remove Broken
Pile (broken in encasement).
Replace with new pile.
Provide new connection hardware
to exist. cross brace


Bent 33 photo 1



Bent 36 Pile 2-Replace
Missing Pile. Install new cross
bracing between Piles 1 & 2

Pile 1

Bent 36 Photo 1 of 2

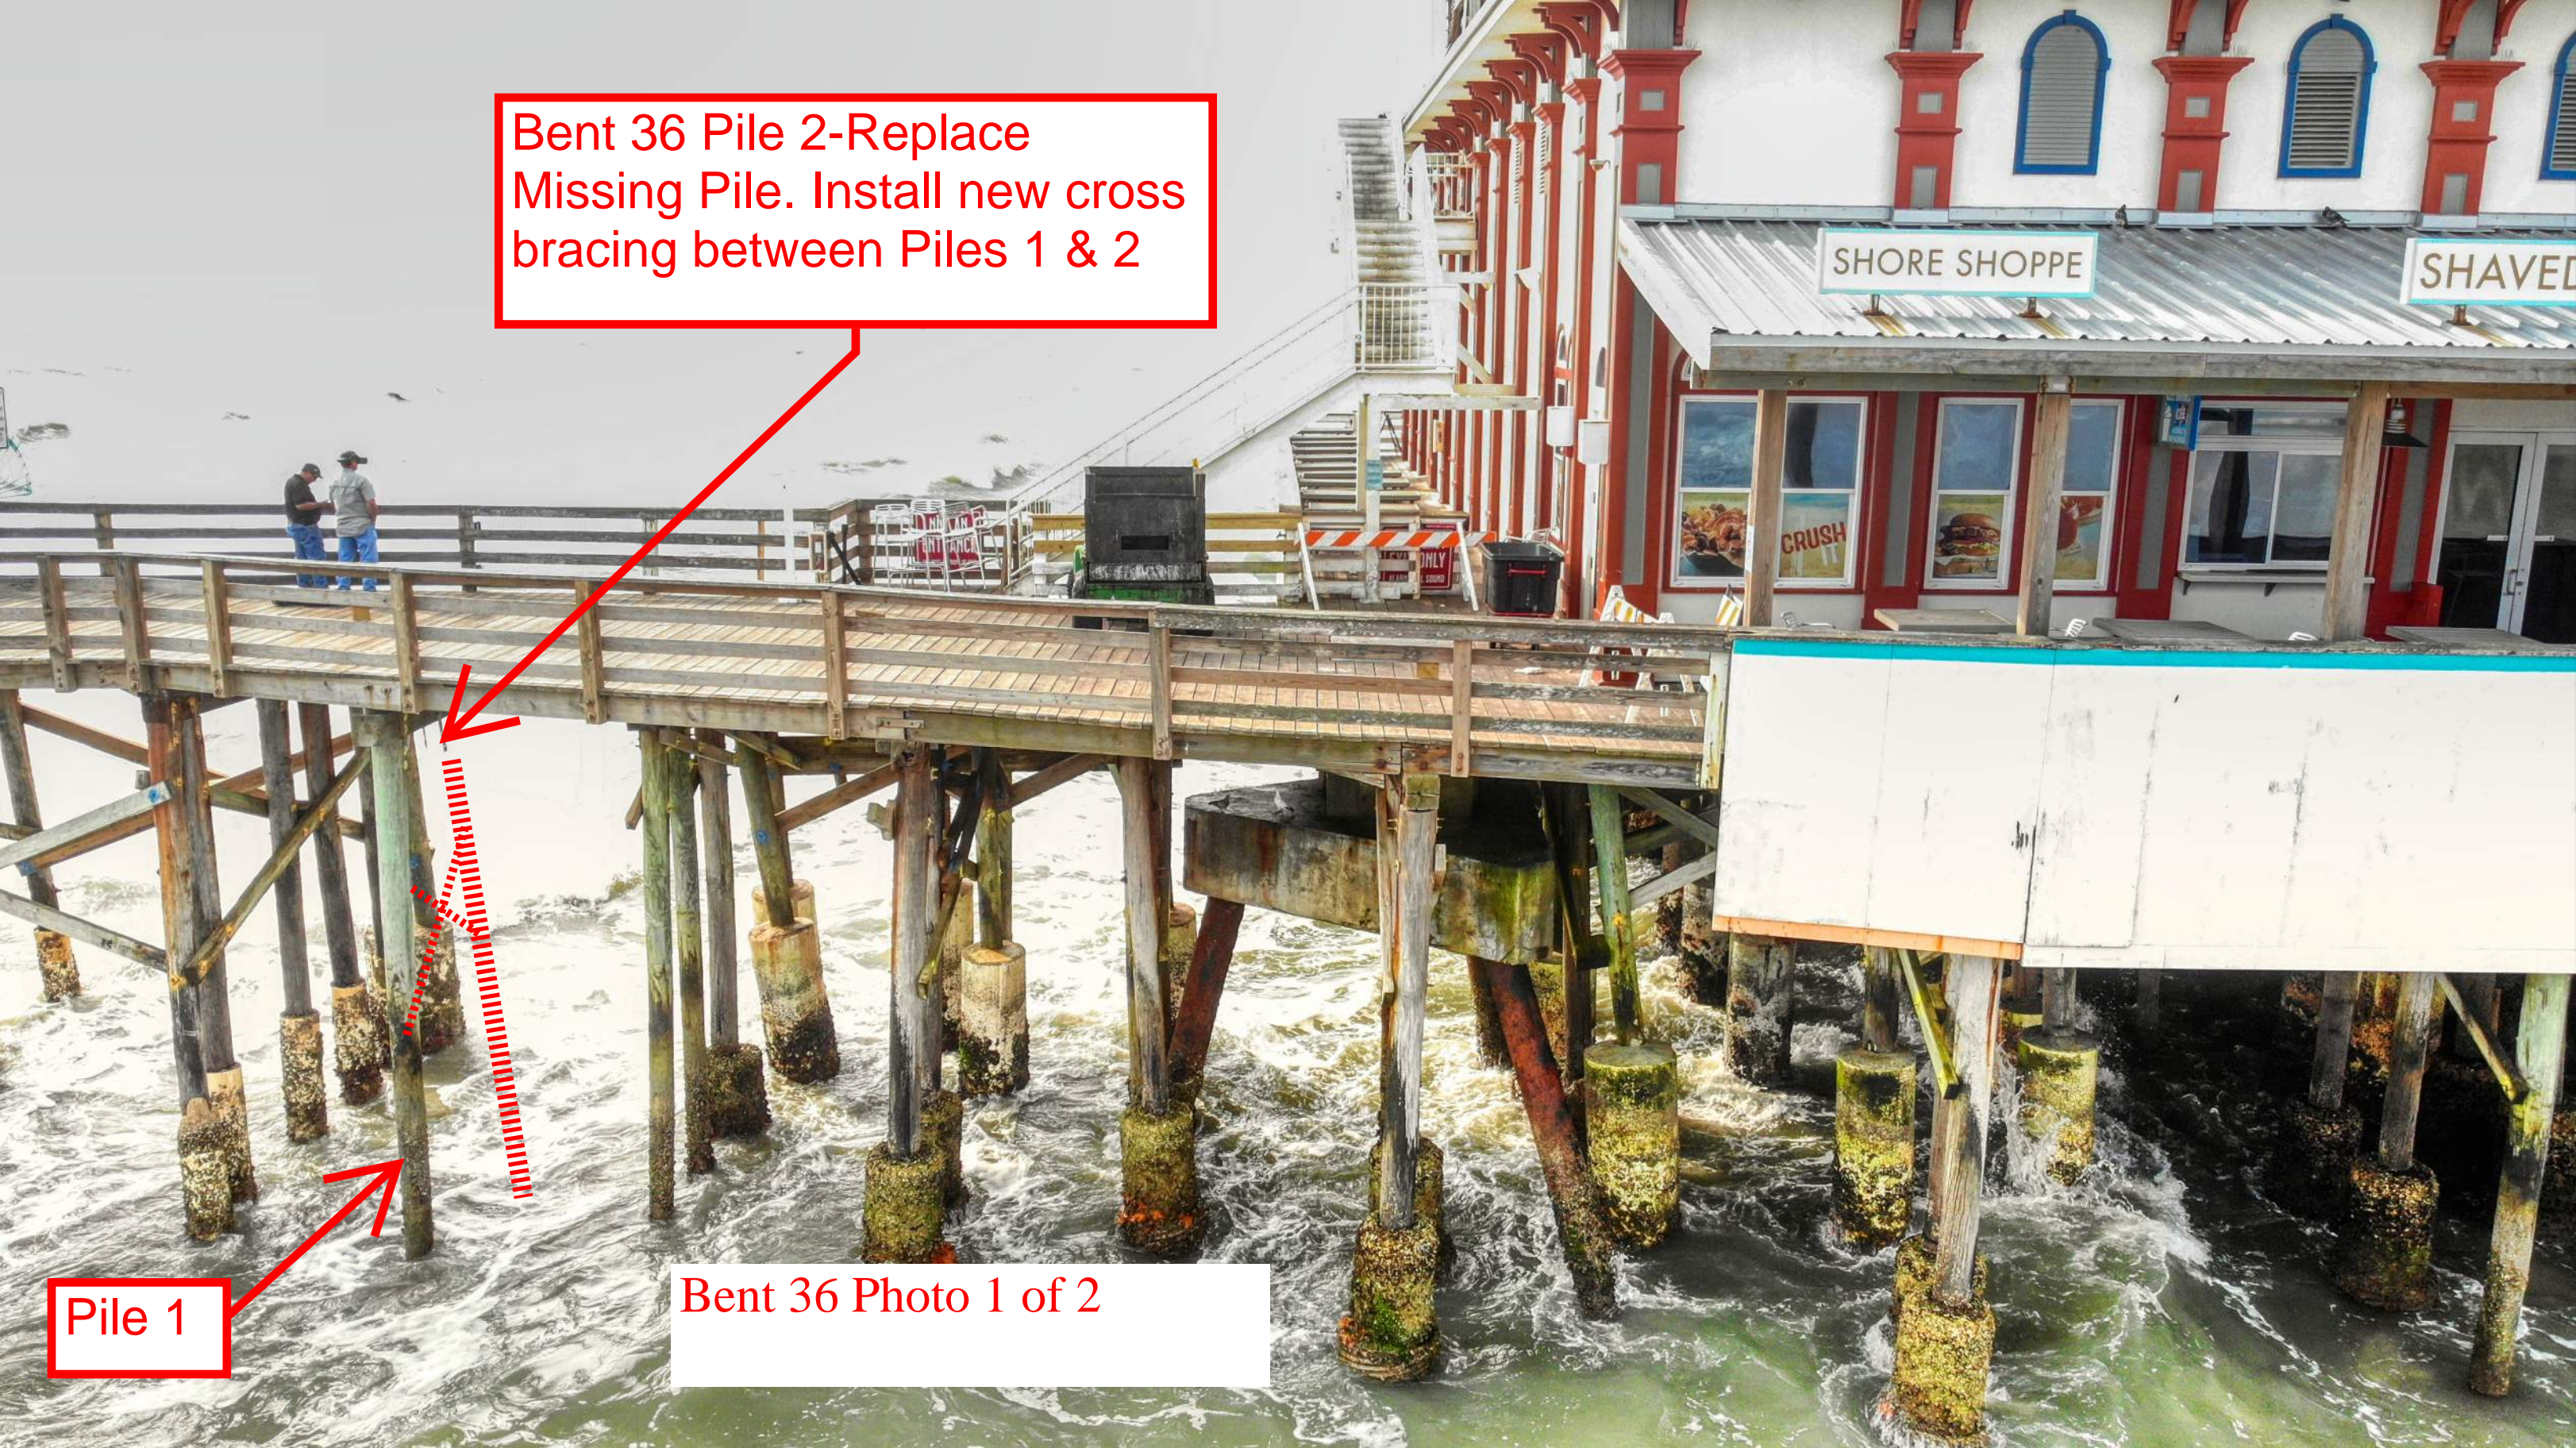

Pile stub
Bent 36
-pile #2
location




Bent 36 Photo 2/2

Bent 40 Pile
1-Replace missing
pile. Provide new
cross bracing (4).
Provide new bent
connection

Remove
and
Replace
cross
bracing
(2)

Provide
new cross
bracing
between
bent 39
and 40 (2)

Bent 40 Photo 1

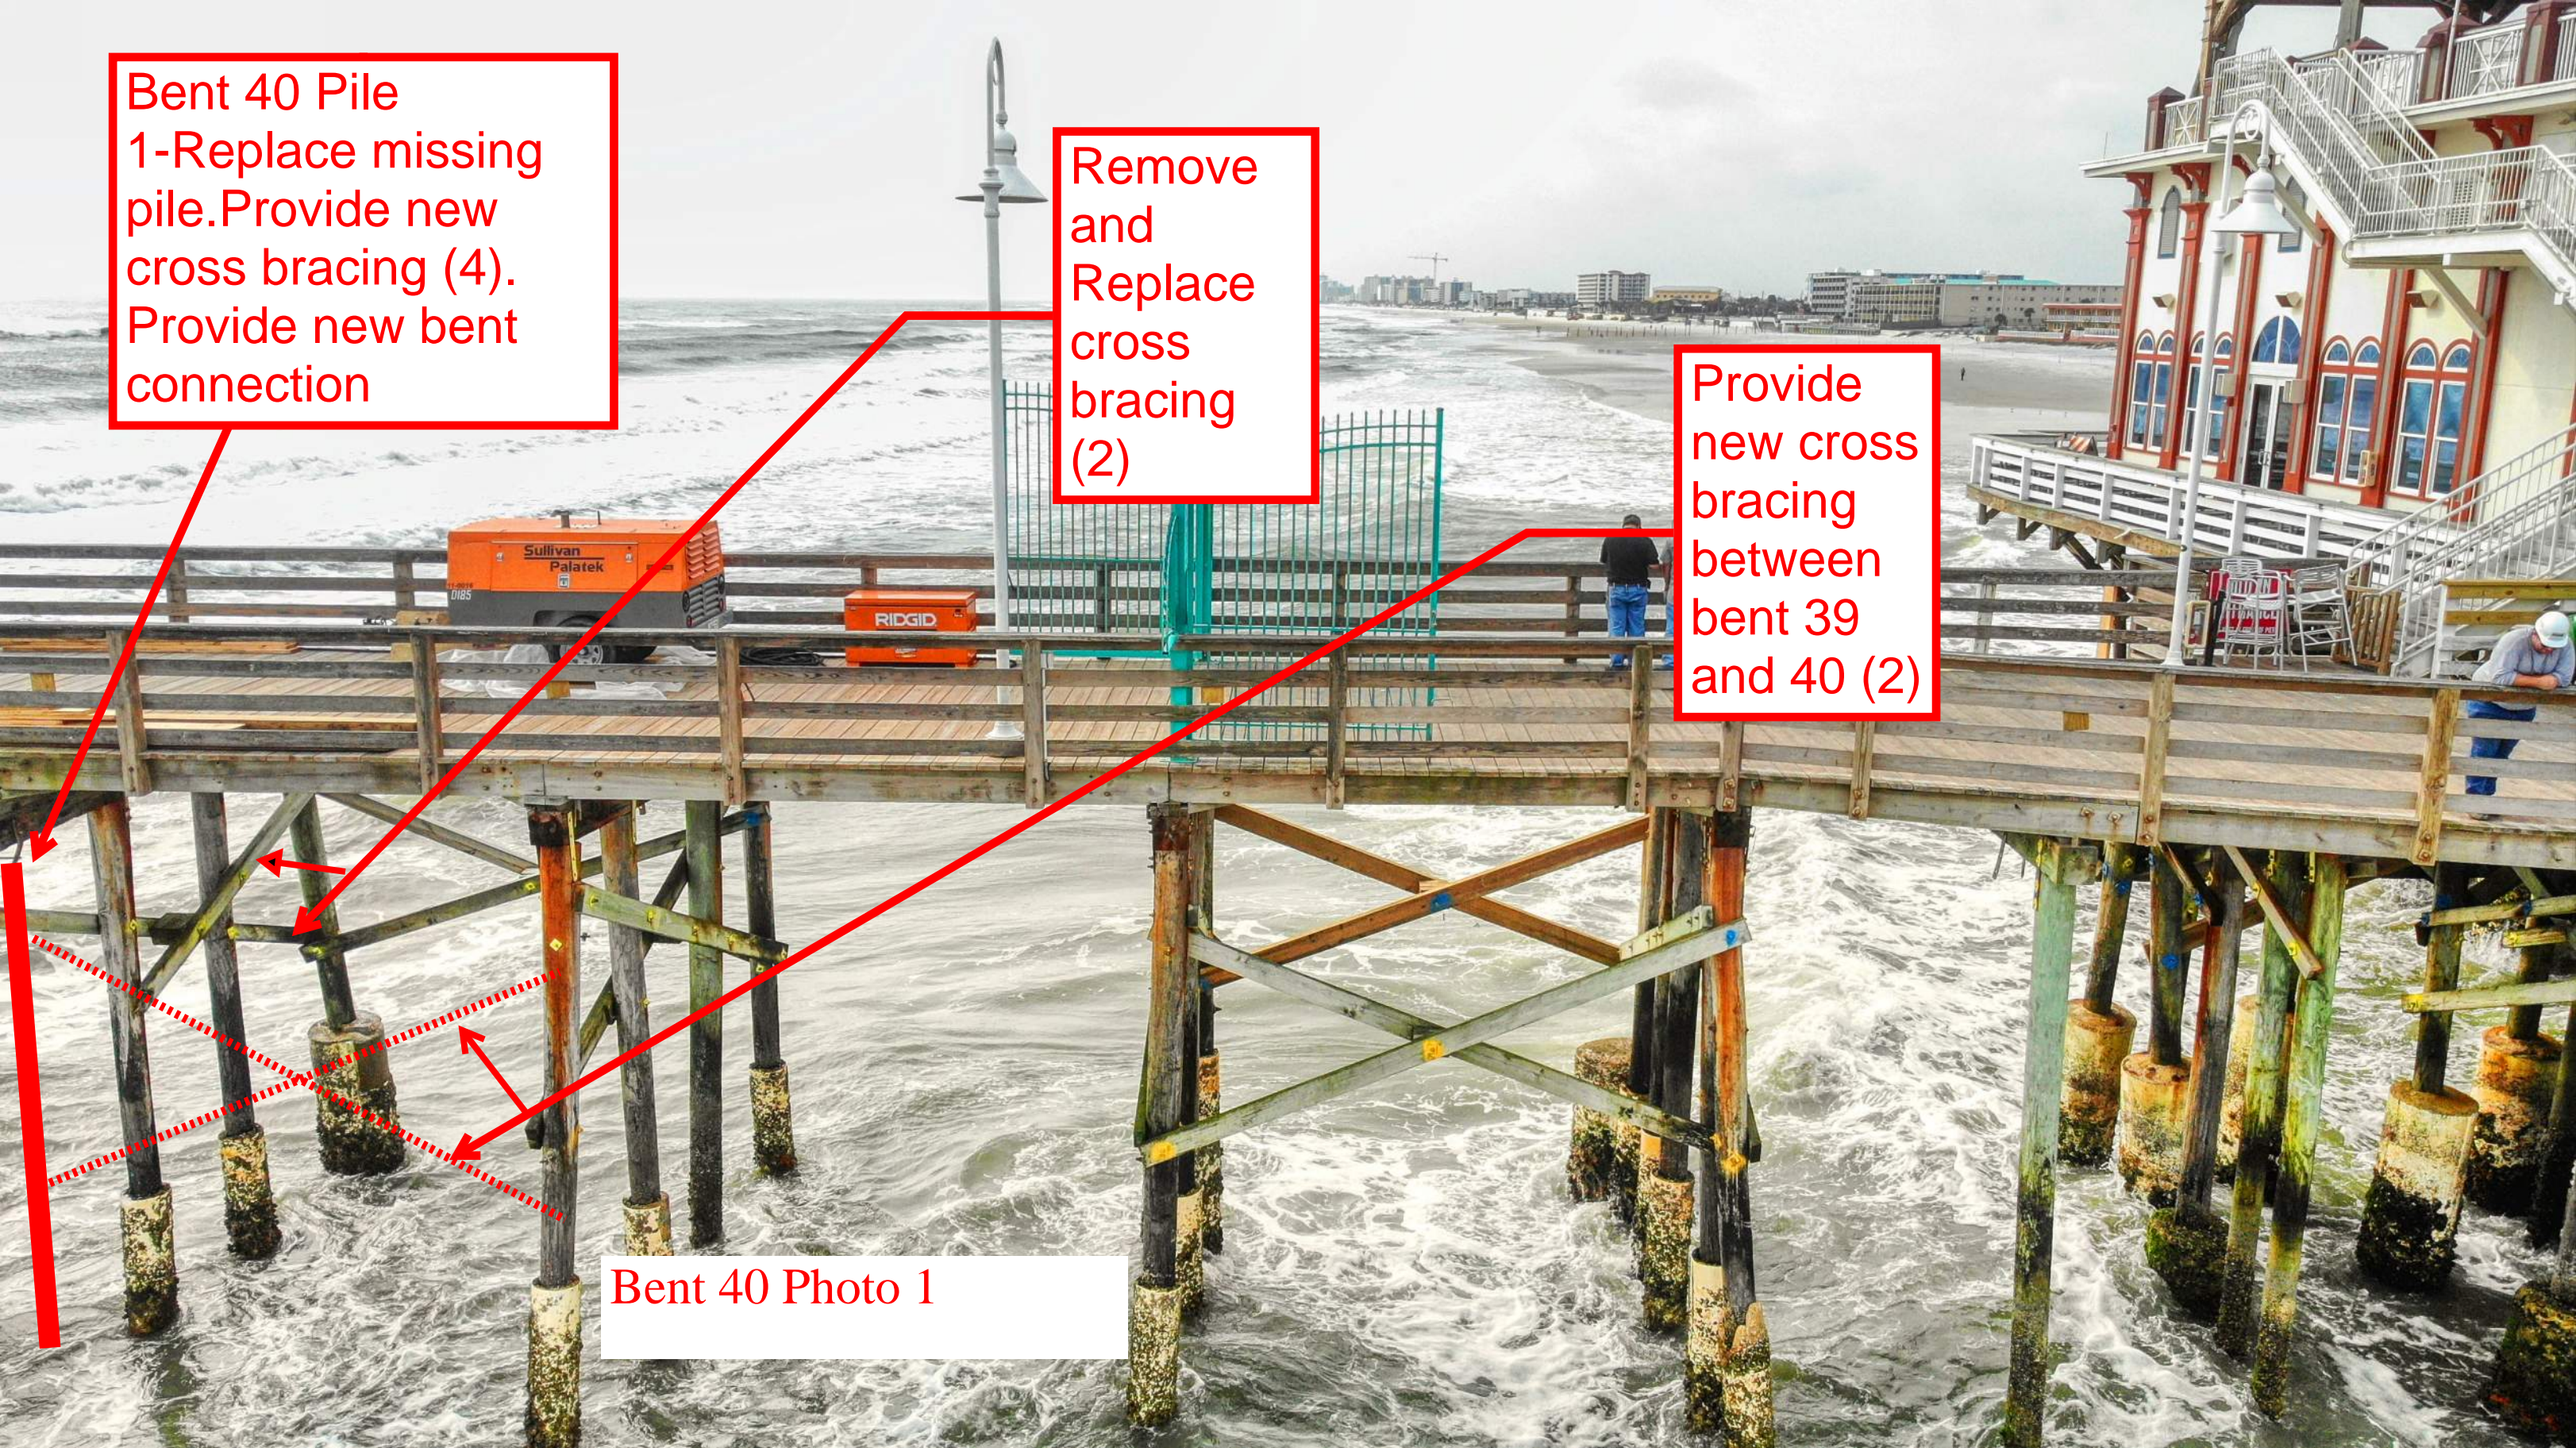

Bent 43- Replace Missing Pile #3 .
Provide new connection to existing cross
bracing and new Bent connection


Pile #1

Bent 43 - Pile #1 and #3
Photo 1/2




Bent 43 Pile
#1 - Remove
Broken Pile.
Replace with
new pile.
Provide new
connection to
existing cross
bracing and
new bent
connection

Bent 43
photo 2/2

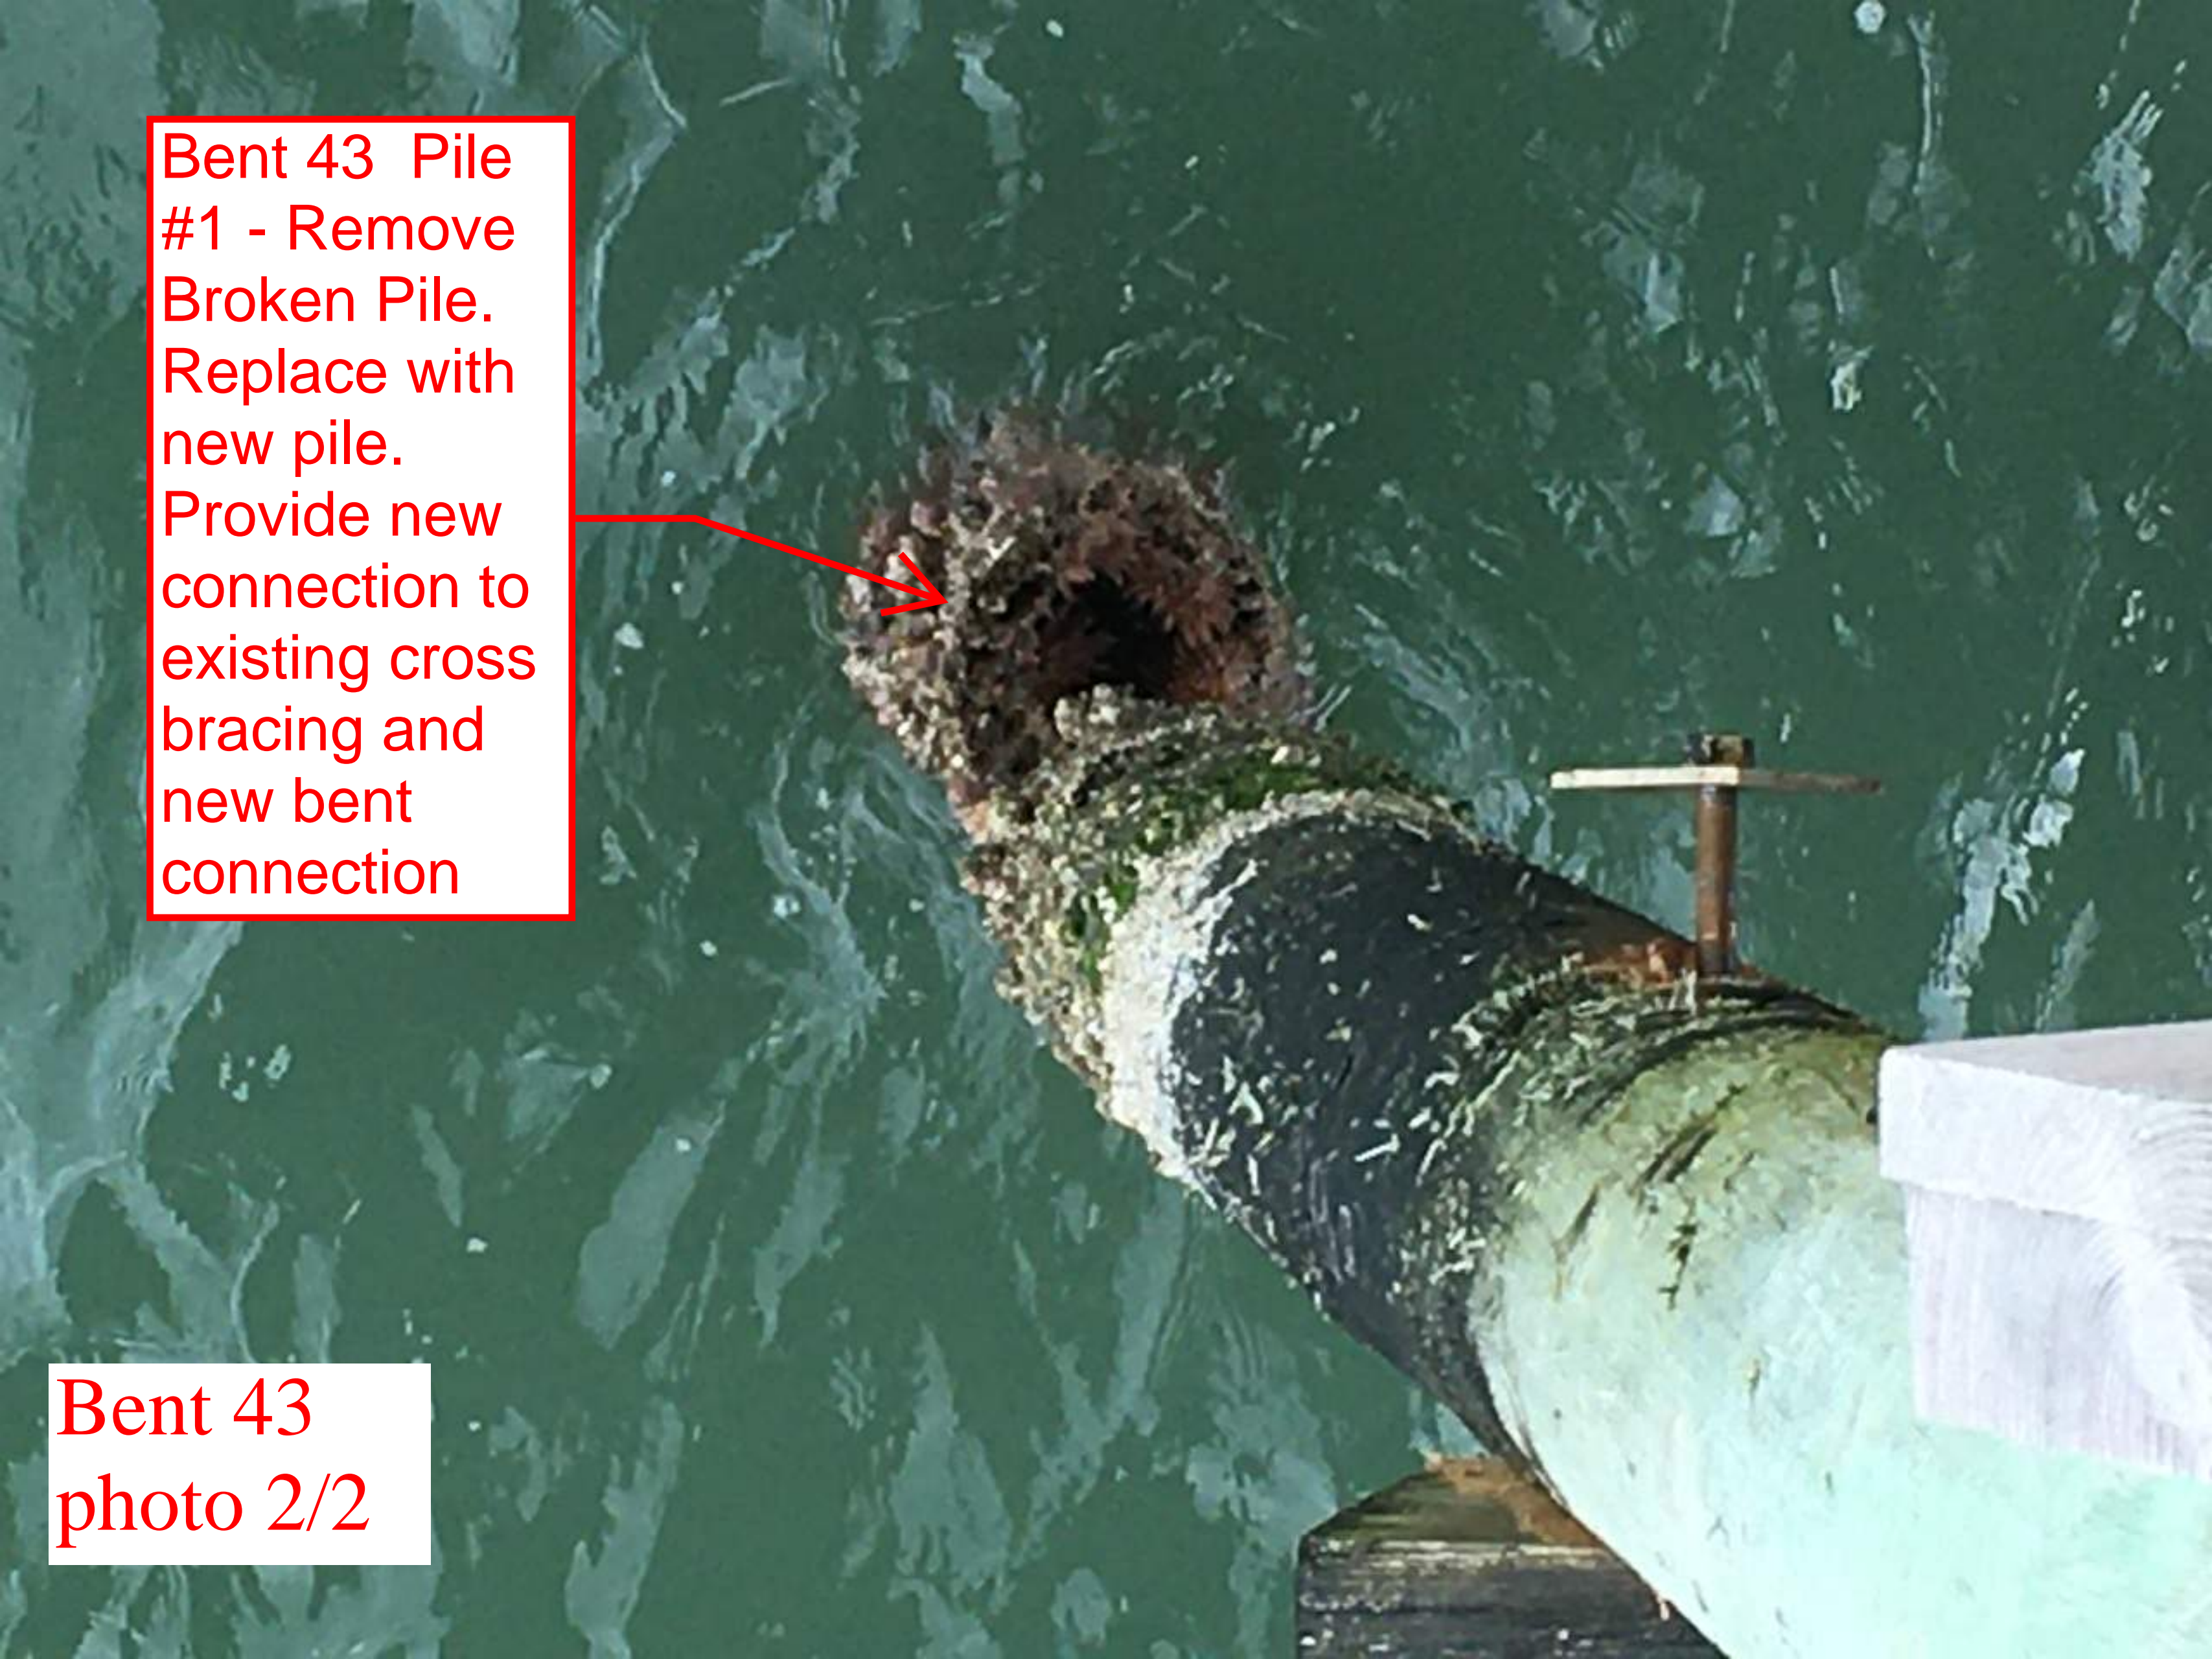

Bent 52 -Pile #2
-Remove damaged
Pile . Replace with
new pile with new
bent connection

Pile 52 Photo

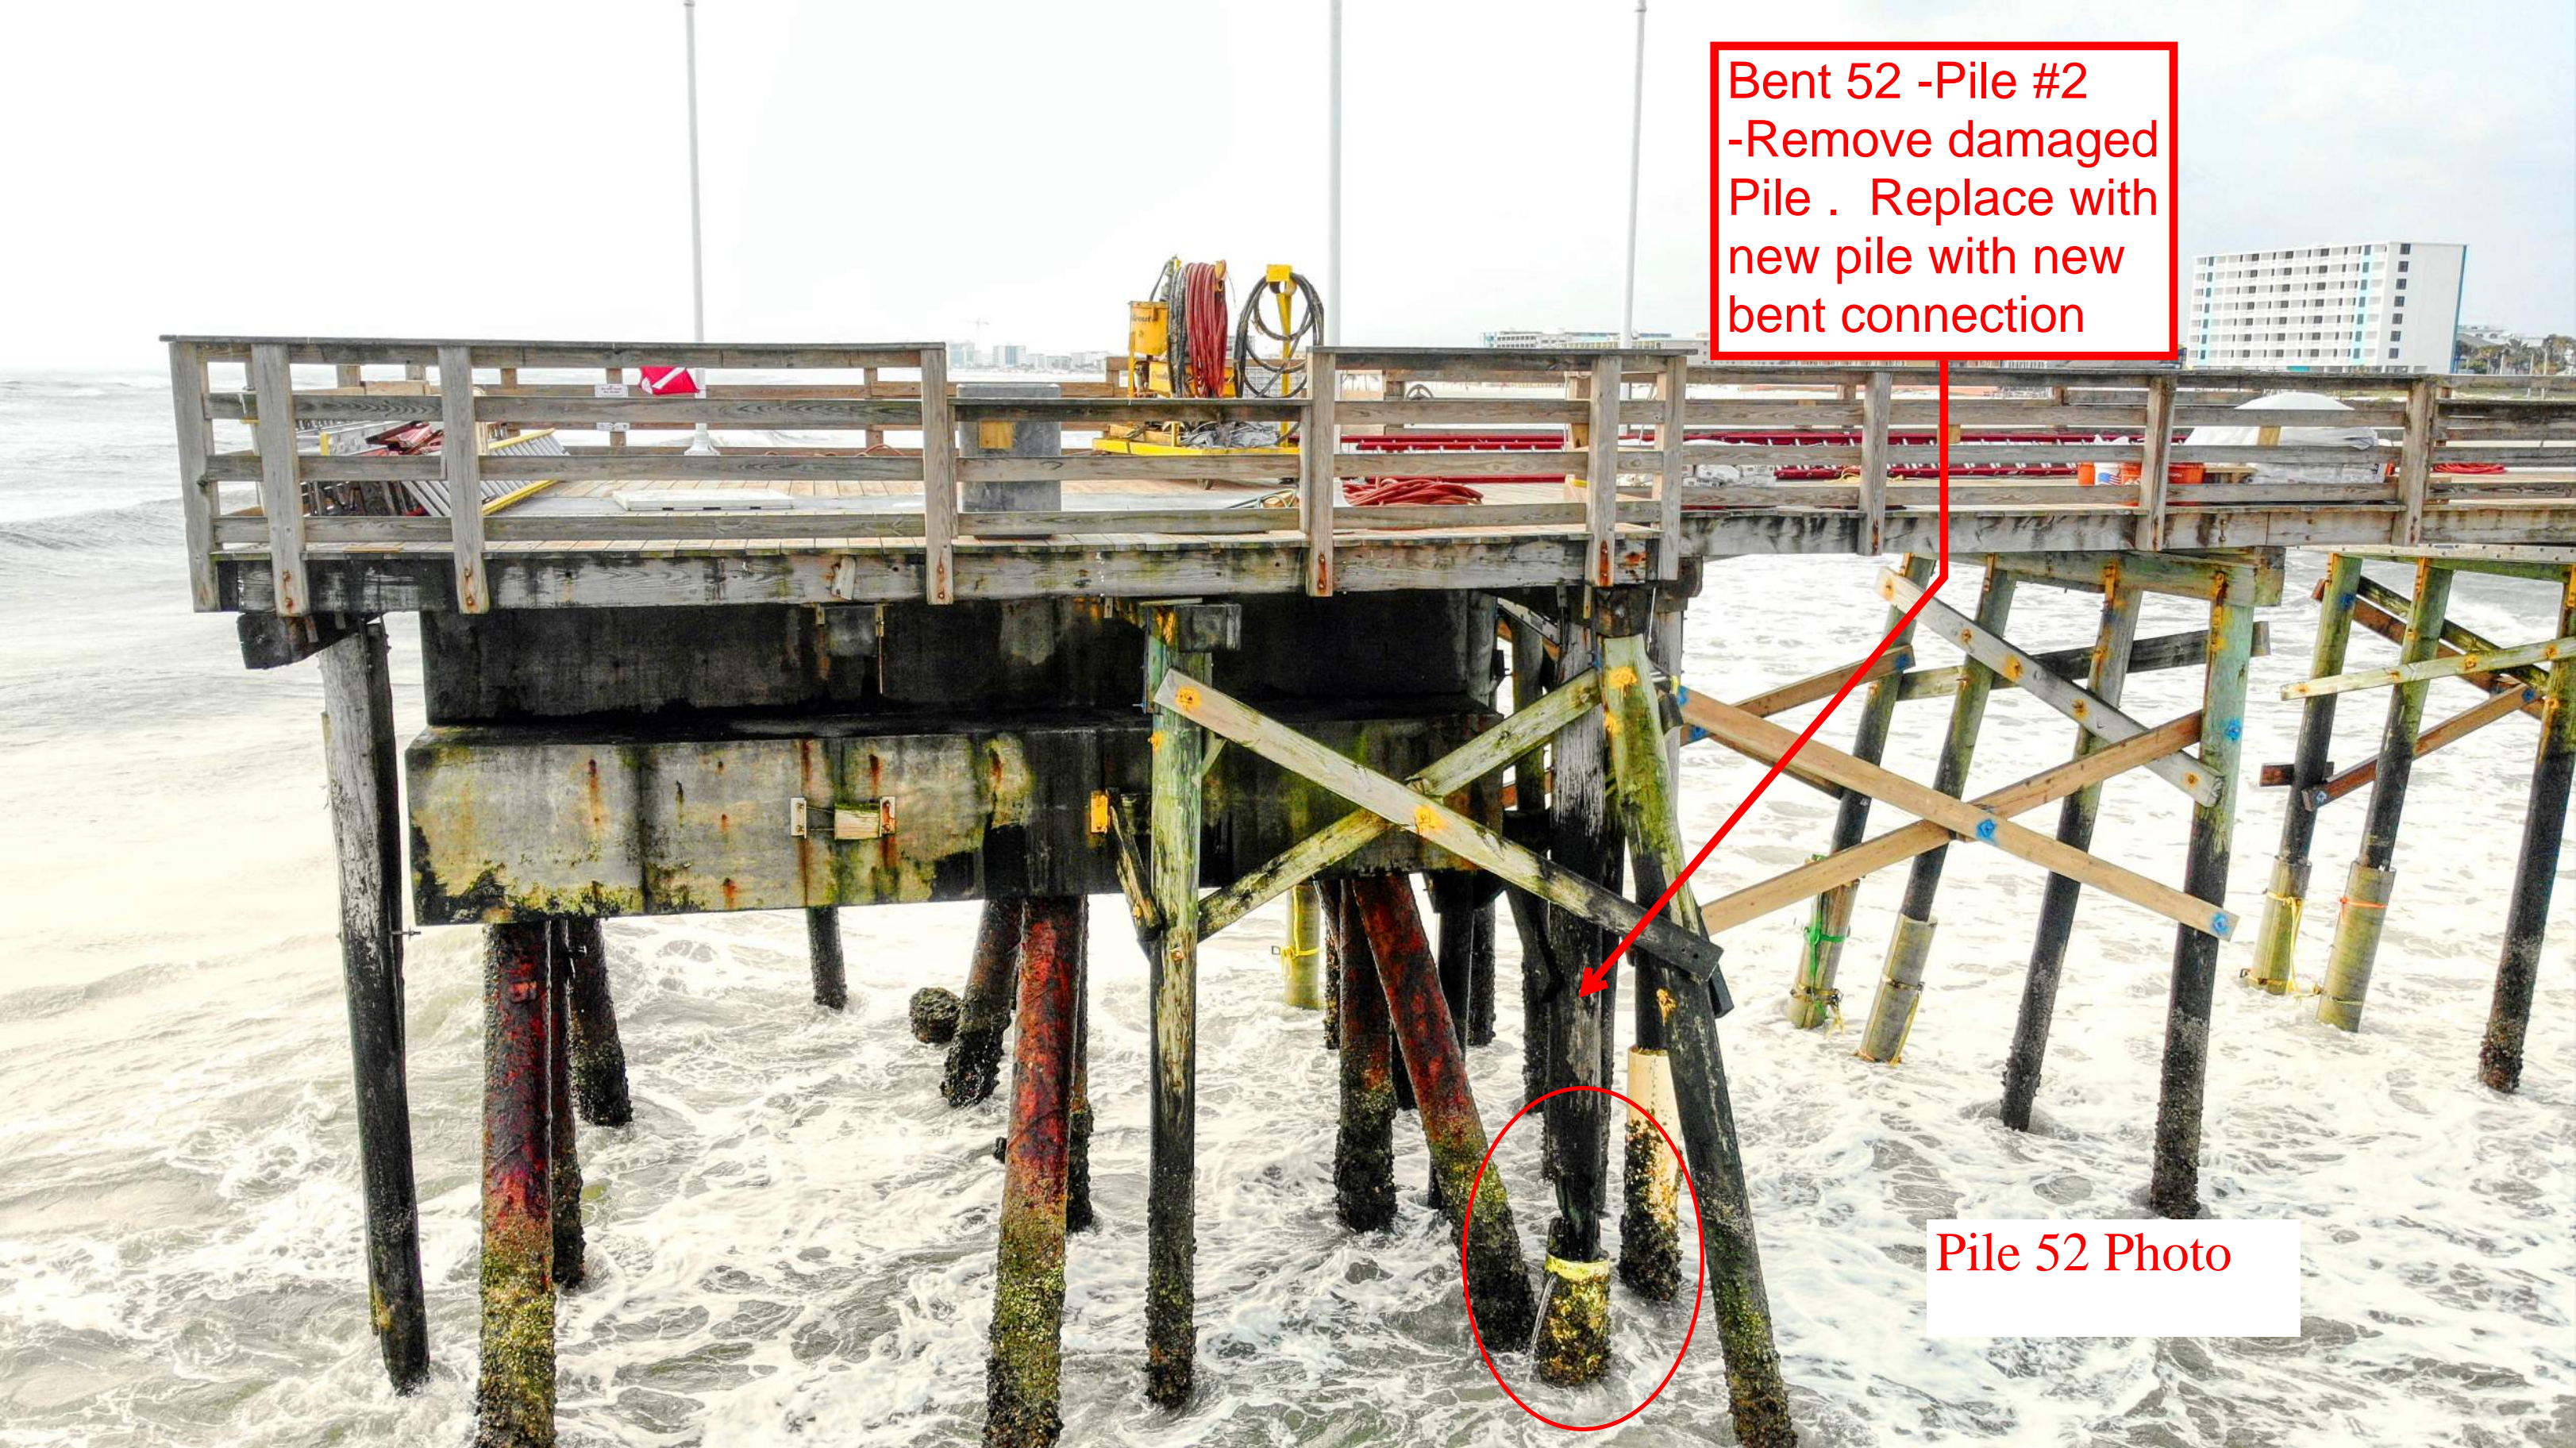



Bent 54 replace missing pile #1 and #4. Provide new bent connections

Provide new crossing bracing six locations (6) Between Piles 1 -3 , Piles 3 and 4-6