

ROANE COUNTY PURCHASING
200 EAST RACE STREET, SUITE #3
KINGSTON, TENNESSEE 37763
PHONE 865-376-4317 – FAX 865-376-4318

ADVERTISEMENT FOR BIDS

Sealed bids are invited for Painting at the Roane County Courthouse.

All bidders must be licensed Contractors as required by the Contractors Licensing Act of 1976, as currently amended if bid price exceeds \$25,000.

If bidding over \$25,000 a 5% bid bond will be required.

Performance and payment bonds for the full cost of the project may be required for bids over \$25,000.

Project: Painting at the Roane County Courthouse

Bids Received By: Lynn Farnham, Purchasing Agent
Roane County Courthouse
200 East Race Street, Suite #3
Kingston, Tennessee 37763

Bids Received Until: 2:00 p.m.(EDT) on Tuesday, August 18, 2015

Specifications: May be obtained in the Roane County Purchasing Department or electronically by contacting the Purchasing Department at 865-376-4317 or going to the County's website www.roanecountytn.gov.

ROANE COUNTY PURCHASING DEPARTMENT INVITATION TO BID

Roane County is inviting sealed bids for the service(s) listed below, subject to the terms and conditions of the Invitation to Bid, the accompanying specifications, and the Roane County Purchasing Manual.

At the appointed time bids will be publicly opened in the office of the Roane County Purchasing Agent at the above address. Bids arriving in the Purchasing Department past the appointed date and time will be considered late and will not be opened.

Deliver Bids To:

ROANE COUNTY PURCHASING DEPARTMENT
200 EAST RACE STREET, SUITE #3
KINGSTON, TENNESSEE 37763

**Bid Number: 2016-02/171
PAINTING COURTHOUSE – INTERIOR & EXTERIOR**

Open Date & Time: AUGUST 18, 2015 at 2:00 p.m. (Eastern Time Zone)

The Bid Envelope must show the Bid Number, Name & Opening Date.

PURCHASING CONTACT INFORMATION

**Lynn Farnham, CPPO, CPPB
Purchasing Agent
Phone: 865-376-4317
Fax: 865-376-4318
Email: lynn.farnham@roanecountytn.gov**

GENERAL TERMS & CONDITIONS

Attached are instructions and conditions for submitting a bid for Roane County Government. The objective of this bid is to select suppliers in such a manner as to provide for open and free competition and comparability.

BID PREPARATION & SUBMISSION

1. Bidders are expected to examine specifications, terms and conditions, general or special conditions, schedules and all instructions for the purpose of this bid. Failure to do so will be at the bidder's risk.
2. All bids shall be in accordance with the instructions to bidders and specifications included in this ITB. Specifications are intended to be open and non-restrictive.
3. All pricing submitted in the bid document must be completed in ink or typewritten. The bottom line total must also be printed in ink or typewritten on the proposal form. No erasures shall be permitted. Errors may be crossed out and corrections printed in ink or typewritten and must be initialed in ink by the person signing the bid.
4. All bids must meet or exceed the enclosed specifications.
5. It shall be the sole responsibility of the bidder to make certain that all bids in proper form are submitted to the Purchasing Department as described below.
6. All original forms must be signed by a person with authority to bind the bid. The bid must be sealed in an envelope that is labeled according to the directions stated below.
7. On the outside of the envelope/package mark the bid as follows:
 - Vendor Name & Address
 - Bid Number
 - Bid Date & Time
8. The bid must then be in a sealed envelope/package mailed or delivered to the following address:

Roane County Purchasing Department
200 East Race Street, Suite #3
Kingston, Tennessee 37763

Please note that Roane County does not receive a guaranteed delivery time for express mail and/or packages. Please mail accordingly.

12. Sealed written bids will be received at the time and place specified on the Invitation to Bid. Postmark on the Bid by this date will not suffice. Bid must be received on or before the date and time stated. Faxed bid documents will not be accepted.

LATE RECEIPT OF THE BID

1. The bid and modifications or withdrawals thereof received after the time set for opening will not be considered, unless they are received before the award is made and it is determined by Roane County that failure to arrive on time was due solely to a delay in delivery for which the bidder has no responsibility. Roane County does not receive a guaranteed delivery time for express mail and/or packages. Please mail accordingly.
2. Bids must be in the Purchasing Department prior to 2:00 p.m. on the appointed date. Time will be determined by the clock in the Roane County Purchasing Department and once Purchasing Agent/or their designee determines the time is 2:00 p.m., no other bids will be accepted.

RESTRICTIVE OR AMBIGUOUS SPECIFICATIONS

1. It is the responsibility of the bidder to review the entire Invitation to Bid document and to notify the Purchasing Agent if the Invitation to Bid is formulated in a manner that would unnecessarily restrict competition or if it is ambiguous in what is being requested.
2. Pursuant to TCA §12-4-126, questions regarding the specifications or bid procedures must be received by the Purchasing Agent and/or designer no less than ninety-six (96) hours before the bid opening date. No addenda will be issued within less than forty-eight (48) hours of the bid opening day, excluding weekends and legal holidays designated in §15-1-101 unless the bid opening is extended for a reasonable time as determined by the purchasing agent, which shall not be less than forty-eight (48) hours excluding weekends and legal holidays designated in §15-1-101, to allow for any necessary changes to the Invitation to Bid documents and to allow responders to resubmit their responses accordingly.
3. Any questions concerning this Invitation to Bid are to be faxed to the Purchasing Department. Questions will be answered via addenda. Information obtained from any office other than the Purchasing Office is not to be considered binding.

BID OPENING & AWARD

1. Only the bottom line figure will be read at the bid opening. Bids will also be examined for compliance with specification and conditions outlined in the bid document.
2. Consideration will be given to all bids properly submitted. Bids will receive appropriate confidentiality before awarding. Upon award, bid documents and tabulations will be available for review. Errors discovered after public opening may not be corrected, and the bidder may be bound to honor bid as submitted. After investigation of the nature of the mistake, the Purchasing Agent may allow the bid to be withdrawn.
3. The contract will be awarded in writing to the most responsive bidder whose bid conforms best to the Invitation to Bid will be most advantageous to Roane County. It is the intent of Roane County to involve and utilize the best product/services at the best prices and provide small and minority firms, women's business enterprises and labor surplus area firms with increased opportunity to do business with the county. However, currently there are no set asides for small or minority firms.
4. Roane County reserves the right to accept or reject any or all bids and to waive informalities and minor irregularities in the bids received.
5. Roane County reserves the right to award the bid in its entirety or to divide the award in any way that will be more advantageous to the county.
6. Bid results will be posted on the County's website along with the bid tabulation.

PROTEST PROCEDURE

1. If a prospective vendor does not agree with the bid award, they have the right to protest. Disputes arising from the award of this bid must be submitted in writing to the Roane County Purchasing Department no later than seven (7) days from date of bid award. The steps for dispute resolution may include:
 - A meeting with the Purchasing Agent, the requisitioning department's manager and representatives from the disputing party to discuss and resolve the complaint.
 - Information from the aforementioned meeting will be forwarded to the County Attorney for review.
 - A written decision letter stating the reasons for the decision will be prepared by the Purchasing Agent and submitted in writing to the protestor and all parties involved.
 - Purchases will not be allowed under this procurement until a final decision is rendered.
 - In the event that purchases must be made before a final decision is rendered, the emergency purchase procedures will be used.

APPROPRIATION

1. In the event no funds are appropriated by Roane County for the goods or services in any fiscal year or insufficient funds exist to purchase the goods or services, then the contract shall expire upon the expenditure of previously appropriated funds or the end of the current fiscal year, whichever occurs first, with no further obligations owed to or by either party.

INSURANCE

1. The contractor will maintain, at their expense adequate insurance coverage to protect them from claims arising under the Worker's Compensation Act, from claims for damages resulting from bodily injuries and damage to their property, for Bodily Injury and Property Damage Liability in the amount of no less than \$1,000,000, for Products and Completed Operations Liability of no less than \$1,000,000 and from claims for damage to any Roane County property. Additional insurance requirements may be listed any Special Terms & Conditions or in the Bid Specifications. This insurance company shall have a Best's rating of A or better. Any deviations from the above requirements must be disclosed in the bid submission.
2. The successful bidder shall furnish a Certificate of Insurance issued by their insurance company showing that Roane County as an additional insured. Carrier will assume full common liability of all shipments.

COMPLIANCE WITH ALL LAWS

1. Contractor is assumed to be familiar with and agrees to observe and comply with all federal, state, and local laws, statutes, ordinances, and regulations in any manner affecting the provision of goods and/or services, and all instructions and prohibitive orders issued regarding this work and shall obtain all necessary permits.

GOVERNING LAW

1. This contract shall be governed by the laws of the State of Tennessee, and all obligations of the parties are performable in Roane County, Tennessee. The Courts in Roane County shall have exclusive and concurrent jurisdiction of any disputes which arise hereunder.

BUSINESS LICENSES

1. Bidders located in Tennessee are required to have a current business license issued by the State of Tennessee at the time the bids are submitted. Vendors located outside Tennessee are required to obtain a business license issued by the State of Tennessee.
2. A Roane County Business License is required if a contractor is doing more than \$50,000 in business in the county.
3. A Business Tax & License Affidavit is required to be submitted with the bid.

INDEMNIFICATION/HOLD HARMLESS

1. Contractor shall indemnify, defend, save and hold harmless all departments of Roane County Government and/or the Roane County Board of Education, its officers, agents and employees from all suits, claims, actions or damages of any nature brought because of, arising out of, or due to breach of the agreement by Contractor, its subcontractors, supplier, agents or employees or due to any negligent act or occurrence or any omission or commission of the contractor, its subcontractors, suppliers, agents or employees until the contract terminates.

VENDOR PERFORMANCE

1. If the contractor fails in full or part to perform or comply with any provision of this Contract or the terms or conditions of any documents referenced and made a part hereof, Roane County may terminate this contract, in whole or in part, and may consider such failure or noncompliance a Breach of Contract. Contractors with poor performance will be notified at the time of such performance and be given opportunity to correct the problems. Documentation will be kept on file. Any contractor with continued poor performance will be removed from the potential vendor list for one year.
2. Roane County expressly retains all its rights and remedies provided by law in case of such breach, and no action by Roane County shall constitute a waiver of any such rights or remedies. In the event of termination for default, Roane County reserves the right to purchase its requirements elsewhere, with or without competitive bid.
3. Failure to deliver within the time specified or within a reasonable amount of time, or failure to make replacements of a rejected item immediately will constitute authority to purchase on the open market so as to replace the item(s) rejected and/or not received. On all such purchases, the Vendor agrees to promptly reimburse the county for excess costs incurred by such a purchase.

BREACH OF CONTRACT

1. A party shall be deemed to have breached the contract if any of the following occurs:
 - Failure to provide the services that conform to contract requirements.
 - Failure to maintain/submit any report required hereunder.
 - Failure to perform in full or in part any of the other conditions of the contract.

CONTRACT TERMINATION FOR CAUSE

1. If the contractor fails to properly perform its obligations under this contract in a timely or proper manner, or if the contractor violates any terms of this contract, the county shall have the right to terminate the contract and withhold payments in excess of fair compensation for completed services.
2. In the event the contract is terminated for due cause by the county, the county shall have the option of awarding the contact to the next lowest bidder or bidding again.

CONTRACT TERMINATION FOR CONVENIENCE

1. The county may, by written notice to the contractor, terminate this contract without cause for any reason. Said termination shall not be deemed a Breach of Contract by the county. The county must give notice of termination to the vendor at least thirty (30) days prior to the effective date of termination. The contractor shall be entitled to receive compensation for satisfactory, authorized service completed as of the termination date, but in no event shall the county be liable to the contractor for compensation for any service which has not been rendered. Upon such termination, the vendor shall have no right to any actual general, special, incidental, consequential, or any other damages whatsoever of any description or amount.

BOOKS AND RECORDS

1. The contractor shall maintain all books, documents, accounting records and other evidence pertaining to the goods and services provided under this contract and make such materials available at its offices at all reasonable times during the contract period and for three (3) years from the date of the final payment under this agreement for inspection by county or by any other governmental entity or agency participating in the funding of this agreement, or any authorized agents thereof; copies of said records to be furnished if requested.

INVOICES AND PAYMENTS

1. Payment will be made within 30 days after receipt of invoice and/or delivery of items included in this Invitation to Bid, whichever is later.
2. Roane County Government is not subject to taxation. A tax exemption certificate will be provided upon request.

NONDISCRIMINATION AND NON-CONFLICT STATEMENT

1. Contractor agrees that no person on the grounds of handicap, age, race, color, religion, sex or national origin, shall be excluded from participation in, or be denied benefits of, or be otherwise subjected to discrimination in the performance of this agreement, or in the employment practices of vendor. Contractor shall upon request show proof of such nondiscrimination, and shall post in conspicuous places available to all employees and applicants notices of non-discrimination. Contractor covenants that it complies with the Fair Wage and Hour Laws, the National Labor Relations Act, and other federal and state employment laws as applicable. Contractor covenants that it does not engage in any illegal employment practices.
2. Contractor covenants that it has no public or private interest, and shall not acquire directly or indirectly any interest; that would conflict in any manner with the provision of its goods or performance of its services. The contractor warrants that no part of the total contract amount provided herein shall be paid directly or indirectly to any officer or employee of Roane County as wages, compensation, or gifts in exchange for acting as officer, agent, employee, subcontractor or consultant to contractor in connection with any goods provided or work contemplated or performed relative to the agreement.
3. No employee or member of the Roane County's governing bodies shall participate in the selection or award of a contract if a conflict of interest, real or apparent, would be involved.
4. Officers, employees or officials of the Roane County Government shall neither solicit nor accept gratuities, favors or anything of more than nominal monetary value from vendors or parties to subcontracts.

**2016-02/171 – PAINTING COURTHOUSE – INTERIOR & EXTERIOR
VENDOR INFORMATION SHEET**

(Please fill out completely)

By completing and signing this form you certify that you are an authorized representative of the company for which you are submitting a bid/proposal and that you have the authority to legally bind your company. Further, by completing and signing this form you certify that you agree to all the terms and conditions of this bid/proposal.

1. Vendor Name _____

2. Address _____

City _____ State _____ Zip Code _____

3. Contact Person (Please Print) _____

4. Telephone Number _____ Fax Number _____

5. Vendor's e-mail address _____

6. Authorizing Signature _____

7. Title of Person Signing Bid _____

8. If addenda were issued, please acknowledge the receipt of: (please write "yes" if you received one)
Addendum 1 _____ Addendum 2 _____ Addendum 3 _____ Addendum 4 _____

9. If applicable, please indicate below if discounts will be allowed for prompt payment or if there is not discount offered:
_____ % Net 10 Days; _____ % Net 20 Days; _____ % Net 30 Days; _____ No Discount

COOPERATIVE PURCHASING - Vendors are to indicate if it is permissible for other governmental agencies in the State of Tennessee to purchase these items or services at the same price. Freight charges may be adjusted to reflect differences in delivery costs to other locations. Please indicate the approval of Cooperative Purchasing.

_____ Yes _____ No

SCHOOL CONTRACTS ONLY

CRIMINAL HISTORY RECORDS CHECK – Do you agree to comply with Public Chapter 587 of 2007 which requires all contractors to facilitate a criminal history check, including fingerprinting, conducted by the Tennessee Bureau of Investigation and the Federal Bureau of Investigation for each employee or subcontractor personnel before permitting the employee or subcontractor personnel to have contact with students or enter school grounds?

_____ Yes _____ No

**2016-02/171 – PAINTING COURTHOUSE – INTERIOR & EXTERIOR
NON –COLLUSION, INDEPENDENT PRICE DETERMINATION,
NON-DISCRIMINATION, NON-DEBARMENT & LOBBYING AFFIDAVIT**

I do hereby certify that this bid is made without prior understanding, agreement, or connection with any corporation, firm, or person submitting a bid for the same materials, supplies, or equipment, and is in all respects fair and without collusion or fraud.

I understand that collusive pricing is a violation of State and Federal law and can result in fines, prison sentences, and civil damage awards and that no collusion with another firm was used in preparation of this bid.

I also certify that this firm does not discriminate against any employee or applicant for employment on the grounds of race, color, national origin or sex; and does not and will not maintain or provide for his employees any segregated facilities at any of its establishments, and further, that the firm does not and will not permit their employees to perform their services at any location under this contract where segregated facilities are maintained.

By submission of this bid, the bidder certifies that neither it or its principals is presently debarred, suspended, proposed for debarment, declared ineligible or voluntarily excluded from participation in this transaction by any Federal or State department or agency.

I further certify that during the Invitation to Bid solicitation and/or during the performance of this contract that neither it nor its principals will participate in lobbying activities in conjunction with this project.

I agree to abide by all terms and conditions of this Invitation to Bid and certify that I am authorized to sign this affidavit for the vendor.

Please indicate which of the following apply to your company. This information is requested for information purposes only. Roane County currently has no policy that allows for set asides or preferences for woman owned or minority owned businesses.

African American Owned
 Caucasian Owned
 Native American Owned
 Other Owned

Asian Owned
 Hispanic Owned
 Woman Owned

Signature

Title

**2016-02/171 – PAINTING COURTHOUSE – INTERIOR & EXTERIOR
DRUG-FREE WORKPLACE AFFIDAVIT**

STATE OF _____

COUNTY OF _____

The undersigned, principal officer of _____, an employer of five (5) or more employees contracting with Roane County Government to provide construction services, hereby states under oath as follows:

1. The undersigned is a principal officer of _____ (hereinafter referred to as the "Company"), and is duly authorized to execute this Affidavit on behalf of the Company.
2. The Company submits this Affidavit pursuant to T.C.A. § 50-9-113, which requires each employer with no less than five (5) employees receiving pay who contracts with the state or any local government to provide construction services to submit an affidavit stating that such employer has a drug-free workplace program that complies with Title 50, Chapter 9, of the *Tennessee Code Annotated*.
3. The Company is in compliance with T.C.A. § 50-9-113.

Further affiant saith not.

Principal Officer

STATE OF _____

COUNTY OF _____

Before me personally appeared _____, with whom I am personally acquainted (or proved to me on the basis of satisfactory evidence), and who acknowledged that such person executed the foregoing affidavit for the purposes therein contained.

Witness my hand and seal at office this _____ day of _____, 20____.

Notary Public

My commission expires _____.

**2016-02/171 – PAINTING COURTHOUSE – INTERIOR & EXTERIOR
BUSINESS TAX & LICENSE AFFIDAVIT**

The undersigned, ("Affiant"), states that he/she has legal authority to swear this on behalf of _____ ("Contractor"); that Contractor is not in any manner in violation of *Tennessee Code Annotated, §5-14-108(l)* which provides that "no purchase shall be made or purchase order or contract of purchase issued for tangible personal property or services by county officials or employees, acting in their official capacity, from any firm or individual whose business tax or license is delinquent".

Affiant affirms and warrants that Contractor's licenses are currently valid and all business taxes have been paid and are current as of the date of this affidavit. Contractor is licensed and pays business taxes in _____ County, Tennessee.

AFFIANT

By: _____

Title: _____

Date: _____

Witness: _____

Date: _____

**2016-02/171 – PAINTING COURTHOUSE – INTERIOR & EXTERIOR
INVITATION TO BID
SPECIFICATIONS**

Roane County is inviting bids to Paint the Roane County Courthouse exterior and three (3) Courtrooms inside the building as per the enclosed specifications.

Vendors are to provide one original and one copy of the bid being submitted. Any costs associated with the preparation or delivery of the bid is at the Vendor's cost with no cost to Roane County.

REQUIRED DOCUMENTS

Bidders must use the envelope cover sheet included herein.

The following documents must be returned in the bid envelope:

- Vendor Information Sheet
- Non-Collusion, Independent Price Determination, Non-Discrimination, Non-Debarment & Lobbying Affidavit
- Drug-Free Workplace Affidavit
- Statement of Compliance Certificate of Illegal Immigrants
- Business Tax & License Affidavit
- Certificate of Insurance issued by the Contractor's Insurance Company.

CONTRACT

The attached contract, Roane County's Purchase Order, and the Terms & Conditions and the Specifications of this Invitation to Bid will serve as the construction contract.

QUESTIONS

Questions received after 2:00 p.m. on Wednesday, August 12, 2015 will not be answered.

PAINT SPECIFICATION

The paint specification enclosed is that of Sherwin Williams paint. Paint that meets or exceeds these specifications will be considered. If bidding something other than Sherwin Williams, complete specifications must be submitted with your bid.

BID SUBMITTAL

Bidders are not required to bid on all projects. Bids may be awarded separately either interior or exterior. Interior contract will not be divided.

Roane County Courthouse Exterior Paint

Contractor to provide material, labor and equipment to:

Clean, scrap, scale, sand, caulk and repaint all wooden surfaces on the exterior of the Roane County Courthouse including but not limited to; all fascia, soffits, cornices, moldings, dormers, windows, doors and jambs (including hollow-metal unless prefinished).

Base Bid - The entire courthouse building as described excluding the cupola.

Alternate #1 - The entire courthouse building as described including the cupola.

Conditions:

1. Coordinate a preconstruction meeting with the Roane County Purchasing Dept. prior to commencing the work.
2. Coordinate working times with the Roane County Purchasing & Maintenance Departments
3. The contractor to have an employee present at all times that is familiar with these conditions and has the authority to respond to any owner concerns.
4. All ladders scaffoldings, pick boards, powered lifts, pressure washers, shot or sand blasters are to be in safe and workable condition and operated in compliance with all state and federal regulations.
5. Provide a safe, clear, unencumbered and clearly identified pathway to Courthouse main entrance at all times.
6. Remove and dispose of all construction debris and containers at the end of each day.
7. Repair or replace any damages by the contractor to walls, roofs, windows, doors, sidewalks, pavement, lawns, landscaping or vehicles.
8. Surfaces to receive paint are to be cleaned, prepared and caulked as recommended by the manufacturer.
9. Any portions of the material to be refinished that are to be reported to the owner immediately so that repairs/replacement can be initiated.
10. Finishes are to be applied strictly as recommended by the manufacturer.
11. Provide a small test sample in each area or item being refinished.
12. Provide the owner with at least ½ gallon, including the mix formula, of each paint used in the project.
13. Provide the Purchasing Agent with paint swatches prior to purchasing paint.

Pricing

Lump Sum Price for Base Bid \$ _____

Lump Sum Price for Alternate Bid \$ _____

Roane County Courthouse Interior Paint

Contractor to provide material, labor and equipment to:

Paint or stain or repaint walls, ceiling doors and molding inside the Roane Courthouse.

Conditions:

1. Coordinate working times with the Roane County Purchasing & Maintenance Departments
2. Remove and dispose of all construction debris and containers at the end of each day.
3. Repair or replace any walls, floorcoverings, fixtures or furnishings damaged by the contractor. This includes damage resulting from the removal of wall coverings.
4. Finishes are to be applied strictly as recommended by the manufacturer.
5. Use only odorless material.
6. Provide a small test sample in each area or item being refinished.
7. Provide the Purchasing Agent with paint swatches prior to purchasing paint.

Pricing

Lump Sum Price for Chancery Courtroom \$ _____

Lump Sum Price for Circuit/Criminal Courtroom \$ _____

Lump Sum Price for Sessions Courtroom \$ _____

BID ENVELOPE COVER SHEET

Bid #2016-02/171

Project: PAINTING COURTHOUSE – INTERIOR & EXTERIOR

**ROANE COUNTY COURTHOUSE
200 EAST RACE STREET
KINGSTON, TN 37763**

Bid Date & Time: **Tuesday, August 11, 2015
2:00 p.m. (Eastern Time Zone)**

Bids must be delivered prior to the aforementioned date and time to:
Roane County Purchasing
200 East Race Street
Suite #3
Kingston, Tennessee 37763

Bidder Name & Address: _____	

TN License Number: _____	Limit: _____
Expiration Date: _____	Classification: _____



ROANE COUNTY GOVERNMENT CONSTRUCTION CONTRACT INDEPENDENT CONTRACTOR

This AGREEMENT is made between Roane County Government, a political subdivision of the State of Tennessee, herein "ENTITY" and _____ herein "CONTRACTOR".

THE PARTIES AGREE AS FOLLOWS:

1. CONTRACT: The ENTITY hereby employees the CONTRACTOR as an independent contractor to complete and perform the following project and work:
2. TIME OF PERFORMANCE AND TERMINATION: The PARTIES agree that:
 - a. The CONTRACTOR shall commence work on the project by:
 - b. The CONTRACTOR shall have the project complete by:
3. COMPENSATION: The ENTITY agrees to pay CONTRACTOR as compensation:

The sum of \$ _____ payable upon completion of the project and acceptance by the ENTITY.
4. INDEPENDENT CONTRACTOR: The PARTIES agree that the CONTRACTOR is an independent contractor of the ENTITIY and in no way an employee or agent of the ENTITY and is not entitled to workers compensation or any benefit of employment of the ENTITY. The ENTITY shall have no control over the performance of this agreement by the CONTRACTOR or its employees, except to specify the time and place of performance, and the results to be achieved. The ENTITY shall have no responsibility for security or protection of the CONTRACTOR'S supplies or equipment. The CONTRACTOR agrees to pay and be responsible for all taxes due from the compensation received under this contract.
5. WARRANTY: The CONTRACTOR warrants that all materials and goods supplied under this agreement shall be of good merchantable quality and that all services will be performed in a good workmanlike manner. The CONTRACTOR acknowledges that it will be liable for any breach of this warranty.

6. INDEMNIFICATION: The CONTRACTOR agrees to indemnify, defend and hold harmless the ENTITY, and its officers, agents and employees, from and against any and all claims, losses, actions or judgments for damages or injury to persons or property arising out of or in connection with the acts and/or any performances or activities of the CONTRACTOR, the CONTRACTOR'S agents, employees or representatives under this agreement.
7. INSURANCE: The CONTRACTOR agrees to obtain and keep in force during its acts under this agreement a comprehensive general liability insurance policy, which shall name and protect the CONTRACTOR, all CONTRACTOR'S employees, the ENTITY, and its officers, agents and employees, from and against all claims, losses, actions and judgments for damages or injury to persons or property arising out of or in connection with the CONTRACTOR'S acts. The CONTRACTOR shall provide proof of liability coverage as set forth above to the ENTITY prior to commencing its performance as herein provided, and require insurer to notify the ENTITY ten (10) days prior to cancellation of said policy.
8. WORKER'S COMPENSATION: The CONTRACTOR shall maintain in full force and effect worker's compensation insurance for the CONTRACTOR, any agents, employees and staff that the CONTRACTOR may employ as is required by law, and provide proof to the ENTITY of such coverage or that such worker's compensation is not required under the circumstances.
9. COMPLIANCE WITH LAWS: The CONTRACTOR agrees to comply with all federal, state and local laws, rules and regulations. Any claim, breach or dispute arising under this contract shall be heard in the courts of Roane County, Tennessee.
10. ENTIRE AGREEMENT: This document and the Invitation to Bid or Request for Proposal documents comprise the entire agreement and can only be modified or amended in writing by the PARTIES.
11. PERFORMANCE & PAYMENT BONDS: The CONTRACTOR (if bonding is required) is required to provide a performance and payment bond in the amount of the project cost prior to beginning work.

ENTITY:

Roane County Government

By _____

Title _____

DATE _____

WITNESS _____

TITLE _____

CONTRACTOR:

COMPANY NAME

By _____

Title _____

DATE _____

WITNESS _____

TITLE _____

ROANE COUNTY GOVERNMENT
200 East Race Street • Suite #3 • Kingston, Tennessee 37763
Phone 865-376-4317 • Fax 865-376-4318



SHERWIN-WILLIAMS
228 S ROANE ST
HARRIMAN, TN 37748 7435
(865) 882-3875

07/20/2015

ROANE BOARD OF EDUCATION
PO BOX 643
KINGSTON TN 377630643

Re: Submittal for Roane County Courthouse

Dear Lee Maines:

Thank you for considering Sherwin-Williams products for the Roane County Courthouse project. Included in this package is the Sherwin-Williams submittal for the above referenced project.

Should you require assistance or have any questions or concerns, please contact me at (865) 617-8957 or e-mail me at swrep5690@sherwin.com.

Sincerely,

JOEY S PAYNE
Sherwin-Williams
Sales Representative



Roane County Courthouse

200 East Race Street
Kingston, TN 37763

ROANE BOARD OF EDUCATION

PO BOX 643
KINGSTON, TN 377630643

Prepared By:

JOEY S PAYNE
Sales Representative
swrep5690@sherwin.com
(919) 796-2927



SCHEDULE

Exterior Finishes

Windows,Soffit,Trim

Spot Prime: B51T00600 - Prime Rx Peel Bonding Primer Clear

Spot prime any marginal surfaces

2 Coats: K43W00051 - Resilience® Exterior Acrylic Latex Satin Extra White

Resistance to dirt pickup. Good for area that are close to road traffic

Columns

Repair: 00WL08613 - Wood Filler - Carpenters Wood Filler Natural Color

Spot Prime: B51W00620 - PrepRite® ProBlock® Interior/Exterior Latex Primer/Sealer White

All area where cracks , seams are present

Caulk: WL9990024 - Caulk - MaxFlex 11 Oz. White

All exterior Areas

2 Coats: K43W00051 - Resilience® Exterior Acrylic Latex Satin Extra White

END OF SECTION



SURFACE PREPARATION

1) Previously Coated Surfaces

Maintenance painting will frequently not permit or require complete removal of all old coatings prior to repainting. However, all surface contamination such as oil, grease, loose paint, mill scale, dirt, foreign matter, rust, mold, mildew, mortar, efflorescence, and sealers must be removed to assure sound bonding to the tightly adhering old paint. Glossy surfaces of old paint films must be clean and dull before repainting. Thorough washing with an abrasive cleanser will clean and dull in one operation, or, wash thoroughly and dull by sanding. Spot prime any bare areas with an appropriate primer. Recognize that any surface preparation short of total removal of the old coating may compromise the service length of the system. Check for compatibility by applying a test patch of the recommended coating system, covering at least 2 to 3 square feet. Allow to dry one week before testing adhesion per ASTM D3359. If the coating system is incompatible, complete removal is required.

2) Stucco

Must be clean and free of any loose stucco. If recommended procedures for applying stucco are followed, and normal drying conditions prevail, the surface may be painted in 30 days. The pH of the surface should be between 6 and 9, unless the products to be used are designed to be used in high pH environments such as Loxon.

3) Wood (Exterior)

Must be clean and dry. Prime and paint as soon as possible. Knots and pitch streaks must be scraped, sanded, and spot primed before a full priming coat is applied. Patch all nail holes and imperfections with a wood filler or putty and sand smooth.

END OF SPECIFICATION

Data Pages



**SHERWIN
WILLIAMS.**

108.50

PRIMER_x™
Interior/Exterior Acrylic
Peel Bonding Primer
B51T00600

As of 12/01/2012, Complies with:			
OTC	Yes	LEED® 09CI	Yes
SCAQMD	Yes	LEED® 09NC	Yes
CARB	Yes	LEED® 09CS	Yes
CARB SCM 2007	Yes	LEED® H	Yes
MPI #	No	NGBS	Yes

CHARACTERISTICS

Primer_x Peel Bonding Primer is a high build, interior/exterior, waterborne, coating designed to improve the adhesion of topcoats to various surfaces.

- **Dependable Bonding** — Formulated to bond tightly, making it ideal for application to marginally prepared, alligatored or peeling siding and trim.
- **Smoother Finish** — Compared to applying a traditional primer over less-than-perfect surfaces, Primer_x Peel Bonding Primer's filling characteristics result in a more even finish after topcoating.
- **Saves Time** — Less sanding and scraping of old paint. Primer_x Peel Bonding Primer lets contractors finish the job in much less time without sacrificing good adhesion and appearance.
- Fast drying
- Penetrating
- Use on smooth or textured surfaces
- Stays flexible
- Can be applied down to 35°F

Use on:

- Interior and exterior surfaces
- Masonry
- Wood
- Drywall
- Plywood, T1-11 Siding
- Previously Painted Surfaces

Provides good adhesion over a variety of properly prepared miscellaneous substrates like aluminum, galvanized metal, and PVC.

SPECIFICATIONS

Colors: Clear
(Applies milky white but dries clear)
Coverage: 200-250 sq ft/gal
@ 8.0 mils wet; 3.6 mils dry

Can be applied up to:
50 sq ft/gal; 30 mils wet; 13.5 mils dry
Drying Time, @ 50% RH @ 8 mils wet:
@ 35-45°F @ 45°F+
Touch: 6 hour 4 hours
Recoat:
with water based topcoats:
24 hours 4 hours
with solvent based topcoats:
24-48 hours 24 hours

Drying and recoat times are temperature, humidity, and film thickness dependent.

Flash Point: N/A
Finish: Flat
Vehicle Type: Acrylic

B51T00600
VOC (less exempt solvents):
<50 g/L; <0.42 lb/gal
As per 40 CFR 59.406 and SOR/2009-264, s.12

Volume Solids: 45 ± 2%
Weight Solids: 58 ± 2%
Weight per Gallon: 10.8 lb

For best topcoat color development, use the recommended "P"-shade primer. If desired, up to 4 oz per gallon of Color-Cast Ecotoners can be used to approximate the topcoat color. Check color before use.

When spot priming on some surfaces, a non-uniform appearance of the final coat may result, due to differences in holdout between primed and unprimed areas. To avoid this, prime the entire surface rather than spot priming.

For optimal performance, this primer must be topcoated with a latex, alkyd/oil, water based epoxy, or solvent based epoxy coating on architectural applications.

For exterior exposure, this primer must be topcoated within 14 days with architectural latex or oil finishes.

For better performance when priming an entire house, use Exterior Latex or Oil-Based Primers.

SURFACE PREPARATION

WARNING! Removal of old paint by sanding, scraping or other means may generate dust or fumes that contain lead. Exposure to lead dust or fumes may cause brain damage or other adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (NIOSH approved) and proper containment and cleanup. For more information, call the National Lead Information Center at 1-800-424-LEAD (in US) or contact your local health authority.

Primer_x Peel Bonding Primer is not designed to penetrate through old paint and reattach loose or peeling paint. It will not repair any substrate. Any deteriorated or damaged wood, masonry, or other substrate must be repaired first.

Remove all surface contamination by washing with an appropriate cleaner, rinse thoroughly and allow to dry. Existing loose, peeled or checked paint must be scraped and sanded to a sound surface. Feather the rough edges from peeling paint to improve the final appearance. Always test a small area first for adhesion and compatibility with the topcoat.



**SHERWIN
WILLIAMS.**

PRIMER_x™
Interior/Exterior Acrylic
Peel Bonding Primer
B51T00600

<u>SURFACE PREPARATION</u>	<u>APPLICATION</u>	<u>CAUTIONS</u>
<p>Mildew Remove before painting by washing with a solution of 1 part liquid bleach and 3 parts water. Apply the solution and scrub the mildewed area. Allow the solution to remain on the surface for 10 minutes. Rinse thoroughly with water and allow the surface to dry before painting. Wear protective eyewear, waterproof gloves, and protective clothing. Quickly wash off any of the mixture that comes in contact with your skin. Do not add detergents or ammonia to the bleach/water solution.</p> <p>Caulking Gaps between walls, ceilings, crown moldings, and other interior trim can be filled with the appropriate caulk after priming the surface.</p>	<p>Apply at temperatures above 35°F. No reduction needed.</p> <p>Brush Use a nylon/polyester brush.</p> <p>Roller Use a 1/4" - 1/2" nap synthetic cover.</p> <p>Spray—Airless Pressure..... 2000 psi Tip..... .015"-.021" Back-brushing or back-rolling can improve the overall performance of the primer when spraying</p> <p><u>CLEANUP INFORMATION</u> Clean spills, spatters, hands and tools with soap and warm water. After cleaning, flush spray equipment with mineral spirits to prevent rusting of the equipment. Follow manufacturer's safety recommendations when using mineral spirits.</p>	<p>Non-photochemically reactive. Protect from freezing.</p> <p>LABEL CAUTION CAUTION contains CRYSTALLINE SILICA. Use only with adequate ventilation. To avoid overexposure, open windows and doors or use other means to ensure fresh air entry during application and drying. If you experience eye watering, headaches, or dizziness, increase fresh air, or wear respiratory protection (NIOSH approved) or leave the area. Adequate ventilation required when sanding or abrading the dried film. If adequate ventilation cannot be provided wear an approved particulate respirator (NIOSH approved). Follow respirator manufacturer's directions for respirator use. Avoid contact with eyes and skin. Wash hands after using. Keep container closed when not in use. Do not transfer contents to other containers for storage. FIRST AID: In case of eye contact, flush thoroughly with large amounts of water. Get medical attention if irritation persists. If swallowed, call Poison Control Center, hospital emergency room, or physician immediately. DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Abrading or sanding of the dry film may release crystalline silica which has been shown to cause lung damage and cancer under long term exposure. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. DO NOT TAKE INTERNALLY. KEEP OUT OF THE REACH OF CHILDREN. HOTW 12/01/2012 B51T00600 12 00</p> <p>The information and recommendations set forth in this Product Data Sheet are based upon tests conducted by or on behalf of The Sherwin-Williams Company. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your Sherwin-Williams representative to obtain the most recent Product Data Sheet.</p>



**SHERWIN
WILLIAMS.**

102.18

RESILIENCE[®]
Exterior Latex
Satin
K43 Series

As of 12/01/2012, Complies with:			
OTC	Yes	LEED [®] 09 CI	N/A
SCAQMD	Yes	LEED [®] 09 NC	N/A
CARB	Yes	LEED [®] 09 CS	N/A
CARB SCM 2007	Yes	LEED [®] H	N/A
MPI #	15	NGBS	N/A

CHARACTERISTICS

Resilience Exterior Latex is a high quality exterior finish with Moisture Guard™ for excellent early moisture resistance. This product is recommended for use on aluminum and vinyl siding, wood siding, clapboard, shakes, shingles, plywood, masonry, and metal down to a surface and air temperature of 35°F.

VinylSafe™ Color Technology allows the use of many darker colors on vinyl siding that cannot be made in most other coatings.

Color: Most colors
To optimize hide and color development, always use the recommended P-Shade primer

Coverage: 350 - 400 sq ft/gal
@ 4 mils wet; 1.52 mils dry

Drying Time, @ 50% RH:
@ 35-45°F @ 45°F +
Touch: 2 hour 2 hours
Recoat: 24-48 hours 4 hours

Drying and recoat times are temperature, humidity, and film thickness dependent

Flash Point: N/A

Finish: 10-20 units @ 60°

Tinting with CCE:

Base	oz/gal	Strength
Extra White	0-6	125%
Deep Base	4-12	100%
Ultra-deep	4-12	100%
Light Yellow	4-12	100%
Primary Red	4-12	100%
Vivid Yellow	4-12	100%

Vehicle Type: 100% Acrylic

K43W00051

VOC (less exempt solvents):
<50 g/L; <0.42 lb/gal

As per 40 CFR 59.406 and SOR/2009-264, s.12

Volume Solids: 40 ± 2%

Weight Solids: 53 ± 2%

Weight per Gallon: 10.7 lb

WVP Perms (US) 22.0
grains/(hr ft² in Hg)

Mildew Resistant

This coating contains agents which inhibit the growth of mildew on the surface of this coating film.

SPECIFICATIONS

Aluminum & Aluminum Siding¹
2 cts. Resilience Exterior Latex
Concrete Block, CMU, Split face Block

1 ct. Loxon Block Surfacers
2 cts. Resilience Exterior Latex
Brick

1 ct. Loxon Conditioner²
2 cts. Resilience Exterior Latex

Cement Composition Siding/Panels

1 ct. Loxon Concrete & Masonry Primer/Sealer²

or Loxon Conditioner²
2 cts. Resilience Exterior Latex

Galvanized Steel¹

2 cts. Resilience Exterior Latex
Stucco, Cement, Concrete

1 ct. Loxon Concrete & Masonry Primer/Sealer²

2 cts. Resilience Exterior Latex
Plywood

1 ct. Exterior Latex Wood Primer

2 cts. Resilience Exterior Latex
Steel¹

1 ct. All Surface Enamel Primer²

2 cts. Resilience Exterior Latex

Vinyl Siding

2 cts. Resilience Exterior Latex

Wood, Composition Board

1 ct. Exterior Oil-Based Wood Primer

2 cts. Resilience Exterior Latex

¹ On large expanses of metal siding, the air, surface, and material temperatures must be 50°F or higher.

² Not for use at temperatures under 50°F. See specific primer label for that product's application conditions.

Other primers may be appropriate.

When repainting involves a drastic color change, a coat of primer will improve the hiding performance of the topcoat color.

SURFACE PREPARATION

WARNING! Removal of old paint by sanding, scraping or other means may generate dust or fumes that contain lead. Exposure to lead dust or fumes may cause brain damage or other adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (NIOSH approved) and proper containment and cleanup. For more information, call the National Lead Information Center at 1-800-424-LEAD (in US) or contact your local health authority.

Remove all surface contamination by washing with an appropriate cleaner, rinse thoroughly and allow to dry. Scrape and sand peeled or checked paint to a sound surface. Sand glossy surfaces dull. Seal stains from water, smoke, ink, pencil, grease, etc. with the appropriate primer/sealer.

Aluminum and Galvanized Steel

Wash to remove any oil, grease, or other surface contamination. All corrosion must be removed with sandpaper, steel wool, or other abrading method.

Cement Composition Siding/Panels

Remove all dirt, dust, grease, oil, loose particles, laitance, foreign material, and peeling or defective coatings. Allow the surface to dry thoroughly. If the surface is new, test it for pH, if the pH is higher than 8, prime with Loxon Concrete & Masonry Primer/Sealer.



RESILIENCE[®]

Exterior Latex Satin K43 Series

<u>SURFACE PREPARATION</u>	<u>SURFACE PREPARATION</u>	<u>CAUTIONS</u>
<p>Masonry, Concrete, Cement, Block All new surfaces must be cured according to the supplier's recommendations—usually about 30 days. Remove all form release and curing agents. Rough surfaces can be filled to provide a smooth surface. If painting cannot wait 30 days, allow the surface to cure 7 days and prime the surface with Loxon Concrete & Masonry Primer/Sealer. Cracks, voids, and other holes should be repaired with an elastomeric patch or sealant.</p> <p>Steel Rust and mill scale must be removed using sandpaper, steel wool, or other abrading method. Bare steel must be primed the same day as cleaned.</p> <p>Stucco Remove any loose stucco, efflorescence, or laitance. Allow new stucco to cure at least 30 days before painting. If painting cannot wait 30 days, allow the surface to dry 5-7 days and prime with Loxon Concrete & Masonry Primer/Sealer. Repair cracks, voids, and other holes with an elastomeric patch or sealant.</p> <p>Vinyl Clean the surface thoroughly by scrubbing with warm, soapy water. Rinse thoroughly.</p> <p>Wood, Plywood, Composition Board Sand any exposed wood to a fresh surface. Patch all holes and imperfections with a wood filler or putty and sand smooth. All patched areas must be primed.</p> <p>Caulking Gaps between windows, doors, trim, and other through-wall openings can be filled with the appropriate caulk after priming the surface.</p>	<p>Mildew Remove before painting by washing with a solution of 1 part liquid bleach and 3 parts water. Apply the solution and scrub the mildewed area. Allow the solution to remain on the surface for 10 minutes. Rinse thoroughly with water and allow the surface to dry before painting. Wear protective eyewear, waterproof gloves, and protective clothing. Quickly wash off any of the mixture that comes in contact with your skin. Do not add detergents or ammonia to the bleach/water solution.</p> <p style="text-align: center;"><u>APPLICATION</u></p> <p>When the air temperature is at 35°F, substrates may be colder; prior to painting, check to be sure the air, surface, and material temperature are above 35°F and at least 5°F above the dew point. Avoid using if rain or snow is expected within 1-1½ hours. Do not apply at air or surface temperatures below 35°F or when air or surface temperatures may drop below 35°F within 48 hours. No reduction necessary. Brush - Use a Contractor Series nylon/polyester or Purdy XL-Pro Extra brush. Roller - Use a 50/50 Poly-Wool or Purdy Golden Eagle 3/8" - 3/4" nap synthetic cover. Spray—Airless Pressure..... 2000 psi Tip..... .015"-.019"</p> <p style="text-align: center;"><u>CLEANUP INFORMATION</u></p> <p>Clean spills, spatters, hands and tools immediately after use with soap and warm water. After cleaning, flush spray equipment with mineral spirits to prevent rusting of the equipment. Follow manufacturer's safety recommendations when using mineral spirits.</p>	<p>For exterior use only. Protect from freezing. Non-photochemically reactive.</p> <p>CAUTION contains CRYSTALLINE SILICA, ZINC. Use only with adequate ventilation. To avoid overexposure, open windows and doors or use other means to ensure fresh air entry during application and drying. If you experience eye watering, headaches, or dizziness, increase fresh air, or wear respiratory protection (NIOSH approved) or leave the area. Adequate ventilation required when sanding or abrading the dried film. If adequate ventilation cannot be provided wear an approved particulate respirator (NIOSH approved). Follow respirator manufacturer's directions for respirator use. Avoid contact with eyes and skin. Wash hands after using. Keep container closed when not in use. Do not transfer contents to other containers for storage. FIRST AID: In case of eye contact, flush thoroughly with large amounts of water. Get medical attention if irritation persists. If swallowed, call Poison Control Center, hospital emergency room, or physician immediately. DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Abrading or sanding of the dry film may release crystalline silica which has been shown to cause lung damage and cancer under long term exposure. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. DO NOT TAKE INTERNALLY. KEEP OUT OF THE REACH OF CHILDREN. HOTW 03/25/2013 K43W00051 17 47</p> <p>The information and recommendations set forth in this Product Data Sheet are based upon tests conducted by or on behalf of The Sherwin-Williams Company. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your Sherwin-Williams representative to obtain the most recent Product Data Sheet.</p>

112.23

SHERWIN-WILLIAMS® C-86 CARPENTERS WOOD FILLER



PRODUCT DESCRIPTION

Use to fill cracks and holes in wood for a smoother finish to your job! When dry, the product can be stained or painted. Carpenter's Wood Filler is latex-based, non-flammable and non-toxic.

- Paintable or stainable finish
- Shrink resistant
- Indoor use
- Water clean-up

PRODUCT AVAILABILITY

Color	SMIS Number	Size
Beige	151 -7150	1/4 pt
Beige	178-7176	Pint

Properties

Color:	Beige
Volatile:	Water
Weight/Gallon:	15 lb. ± 5 lb.
Weight Solids:	81 ± 2%
Viscosity:	Mastic
Flash Point:	None
Storage:	Store between 75°F and 90°F

112.23

SHERWIN-WILLIAMS®
C-86
CARPENTERS WOOD FILLER



PREPARATION & USE

Surface must be clean, dry, free of oil, grease, and loose particles. Use directly from container at 40°F or above. Remove excess with putty knife, leaving enough to sand flush with surface.

Shallow repairs: apply once, let stand 15 minutes, then sand.

Deep repairs: apply two or more times, letting dry before next layer is applied - total drying time 1-8 hours.

Staining: For best results, sand with medium or coarse grain paper. **FOR TRUE STAIN MATCH**, do a test area on a scrap piece of wood with filler to see stain color for both filler and wood. Due to porosity of some wood, the filled area may need to be blended in to match surrounding wood grain.

PRIMING: For best results, it is always recommended to prime C-86 Filler prior to topcoating with paint. For professional results and to prevent flashing, prime entire surface (ceiling, walls, door, etc.) with a stain blocking primer prior to finishing coat. Spot priming (patched area only) or no priming at all can result in flashing or reverse flashing (shiners).

PAINTING: When dry, C-86 can be topcoated with most commonly used paint systems.

CLEAN UP: Replace lid tightly after use. Wash tools and hands with water before filler dries.

LIMITATIONS

Sherwin-Williams Carpenter's Wood Filler C-86 is recommended for interior use only. Avoid high speed machine sanding, use the on/off method.

Protect from freezing.

SHELF LIFE: Sherwin-Williams C-86 Carpenter's Wood Filler exhibits a 12 month shelf life from date of manufacture when stored at room temperature.

PRECAUTIONS

Do not take internally; keep out of the reach of children.



108.04A

PREPRITE® PROBLOCK®

Interior/Exterior Latex Primer/Sealer B51-600 Series

As of 08/01/2013, Complies with:			
OTC	Yes	LEED® 09 CI	Yes
SCAQMD	Yes	LEED® 09 NC	Yes
CARB	Yes	LEED® 09 CS	Yes
CARB SCM 2007	Yes	LEED® H	Yes
MPI #	3,6,17,39	NGBC	Yes

CHARACTERISTICS

- Assures uniform appearance of topcoats
- Fast dry
- Apply at temperatures down to 35°F
- Assures adhesion of the topcoat to slick, glossy surfaces
- Seals out solvent sensitive stains - tar, solvent based markers, etc.
- Seals minor dried water stains and tannin
- Provides easy "slip" for positioning of wallpaper
- **Anti-microbial** - This product contains agents which inhibit the growth of microbes on the surface of this paint film.

Use on interior:

- Ceiling Tiles
- Paneling
- Wall Laminate
- Cured Plaster
- Drywall
- Varnished Woodwork
- Kitchen Cabinets
- Ceramic Wall Tile
- Under wallcovering

Use on interior & exterior:

- Wood
- Aluminum
- Galvanized Metal
- Previously Painted Surfaces
- PVC Piping
- Concrete and Masonry
- Many Plastics
- Glossy Surfaces
- Fiberglass
- Copper
- Glazed Block

CHARACTERISTICS

Color: White & Deep Base
Coverage: 400 sq ft/gal @ 4 mils wet; 1.4 mils dry

Drying Time, @ 77°F, 50% RH:

Touch: 30 minutes
 Recoat as a primer: 1 hour
 Recoat as a stain sealer: 4 hours
 To apply wallcovering: 3 hours

Drying and recoat times are temperature, humidity and film thickness dependent.

Flash Point: N/A

Finish: 3-13 units @ 85°

Tinting: requires ColorCast Ecotoners

Base	oz/gal	Strength
White	0 - 4	100%
Deep Base	4-12	100%

Vehicle Type: Styrenated Acrylic Latex B51W00620

VOC (less exempt solvents): <50 g/L; <0.42 lb/gal
 As per 40 CFR 59.406 and SOR/2009-264, s.12

Volume Solids: 35 ± 2%

Weight Solids: 52 ± 2%

Weight per Gallon: 10.9 lb

For best topcoat color development, use the recommended "P"-shade primer. If desired, up to 4 oz per gallon of Color-Cast Ecotoners can be used to approximate the topcoat color. Check color before use.

When spot priming on some surfaces, a non-uniform appearance of the final coat may result, due to differences in holdout between primed and unprimed areas. To avoid this, prime the entire surface rather than spot priming.

For optimal performance, this primer must be topcoated with a latex, alkyd/oil, water based epoxy, or solvent based epoxy coating on architectural applications.

For exterior exposure, this primer must be topcoated within 14 days with architectural latex or oil finishes.

For better performance when priming an entire house, use Exterior Latex or Oil-Based Primers

SURFACE PREPARATION

WARNING! Removal of old paint by sanding, scraping or other means may generate dust or fumes that contain lead. Exposure to lead dust or fumes may cause brain damage or other adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (NIOSH approved) and proper containment and cleanup. For more information, call the National Lead Information Center at 1-800-424-LEAD (in US) or contact your local health authority.

Remove all surface contamination by washing with an appropriate cleaner, rinse thoroughly and allow to dry. Existing peeled or checked paint should be scraped and sanded to a sound surface. Glossy surfaces should be sanded dull.

Special recommendations - After priming stained areas, allow to dry 4 hours, test a small area for bleeding by applying the topcoat before painting the entire project. If the stain bleeds through, apply a second coat of primer and allow to dry overnight and retest before topcoating.

Fire restoration work - Thoroughly clean the surface before applying to smoke stained areas. Apply one or two coats of PrepRite ProBlock Latex Primer/Sealer and test a small area for bleeding before painting the entire surface.

Always check for compatibility and adhesion to the surface by applying a test patch of 2 - 3 square feet. Allow to dry thoroughly for 1 week before checking adhesion.



**SHERWIN
WILLIAMS.**

PREPRITE[®] PROBLOCK[®]

Interior/Exterior Latex Primer/Sealer B51-600 Series

SURFACE PREPARATION

General Priming - PrepRite ProBlock Latex Primer/Sealer can be topcoated in 1 hour in non-stain blocking applications.

Plaster - Must be cured, usually 30 days, and hard. If painting cannot wait, allow the surface to dry 7 days and prime with Loxon Concrete and Masonry Primer. Soft, porous, or powdery plaster should be treated with a solution of 1 pint household vinegar to 1 gallon of water. Repeat until the surface is hard, rinse with water and allow to dry before painting.

Wood - Sand any exposed wood to a fresh surface. Patch all holes and imperfections with a wood filler or putty and sand smooth.

Tile, laminate, ceramic and plastic tiles, and similar glossy surfaces, must be free of all oil, grease, and soap residue. Do not use this product in areas subject to excessive water, e.g.: in showers, around sinks, on counter tops.

Testing - On hard, slick, glossy, or otherwise hard to paint surfaces, after preparing the surface, apply a test area of this primer, allow to dry properly and test for adhesion.

Caulking - Fill gaps between walls, ceilings, crown moldings, and other trim with the appropriate caulk after priming the surface.

SURFACE PREPARATION

Mildew - Remove before painting by washing with a solution of 1 part liquid bleach and 3 parts water. Apply the solution and scrub the mildewed area. Allow the solution to remain on the surface for 10 minutes. Rinse thoroughly with water and allow the surface to dry before painting. Wear protective eyewear, waterproof gloves, and protective clothing. Quickly wash off any of the mixture that comes in contact with your skin. **DO NOT ADD DETERGENTS OR AMMONIA TO THE BLEACH/WATER SOLUTION.**

APPLICATION

When the air temperature is at 35°F, substrates may be colder; prior to painting, check to be sure the air, surface, and material temperature are above 35°F and at least 5°F above the dew point. Avoid using if rain or snow is expected within 2-3 hours. Air and surface temperatures must not drop below 35°F for 48 hours after application.

Do not reduce for stain blocking.

No reduction necessary.

Brush - Use a nylon/polyester brush.

Roller - Use a 3/8" nap soft woven roller cover.

Spray—Airless

Pressure..... 2000 psi

Tip..... .015"-.021"

CLEANUP INFORMATION

Clean spills, spatters, hands and tools with soap and warm water. After cleaning, flush spray equipment with mineral spirits to prevent rusting of the equipment. Follow manufacturer's safety recommendations when using mineral spirits.

CAUTIONS

Protect from freezing.

LABEL CAUTIONS

Use only with adequate ventilation. To avoid overexposure, open windows and doors or use other means to ensure fresh air entry during application and drying. If you experience eye watering, headaches, or dizziness, increase fresh air, or wear respiratory protection (NIOSH approved) or leave the area. Avoid contact with eyes and skin. Wash hands after using. Keep container closed when not in use. Do not transfer contents to other containers for storage. **FIRST AID:** In case of eye contact, flush thoroughly with large amounts of water. Get medical attention if irritation persists. If swallowed, call Poison Control Center, hospital emergency room, or physician immediately. **WARNING:** This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. **DO NOT TAKE INTERNALLY. KEEP OUT OF THE REACH OF CHILDREN.**

HOTW 04/01/2013 B51W00620 09 00

The information and recommendations set forth in this Product Data Sheet are based upon tests conducted by or on behalf of The Sherwin-Williams Company. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your Sherwin-Williams representative to obtain the most recent Product Data Sheet.

MAXFLEX™

Acrylic Urethane Elastomeric Sealant

PRODUCT DESCRIPTION

MAXFLEX™ Acrylic Urethane Elastomeric Sealant is a premium quality, multi-purpose sealant specifically formulated to provide maximum durability and adhesion. It performs like a silicone rubber sealant, able to withstand extreme joint movement without adhesive or cohesive failure. It also has the toolability and workability of a waterborne acrylic. It can be used on a wide variety of interior or exterior surfaces to provide a mildew resistant, permanently flexible seal that resists yellowing. It is ideal for sealing seams, joints and gaps around areas such as crown moldings, wood trim, doors, windows and hardboard siding. NOT recommended for joints in horizontal pedestrian or vehicular traffic areas.

BASIC USES

- Withstands extreme joint movement with no adhesive or cohesive failure
- Mildew resistant
- Excellent adhesion
- Paintable with premium latex or elastomeric coatings

SPECIFICATION COMPLIANCE

When tested on glass, aluminum and concrete, this sealant passes the Aymar Durability (ASTM-C-719) Cyclic Movement Test necessary to meet the requirements of Fed. Spec. TT-S-00230C, Type II, Class B and ASTM C-920, Grade NS, Class 25

PRODUCT AVAILABILITY

Color	Rex	SMIS Number	Size
White	WL9990024	101-0586	10.1 fl oz


Properties

Vehicle:	Acrylic Urethane
Extrudability:	Excellent
Exterior Weather:	Will not crack, discolor or lose adhesion
Freeze-thaw:	Passes 5 cycles
Mildew resistance:	Resists mildew growth
VOC	23 g/L, 0.19 lb/gal
Odor	Very Low - slight ammonia odor
Slump	Zero (ASTM-D-2202)
Durometer Hardness, Shore A:	30 ± 5 (ASTM-D-2240)
Temperature Range: (In Service)	-30°F to 180°F; -34°C to 82°C
SHELF LIFE:	2 Years Minimum
Drying Time:	To Touch: 1 hour Tack Free: 2 hours To Paint: 4-6 hours
Note:	Drying time may be extended with variations in temperature and/or humidity.
Flash Point:	N/A

MAXFLEX™ Acrylic Urethane Elastomeric Sealant

PREPARATION & USE

JOINT DESIGN: Joints should not be more than 1/2" in width or depth. Joints deeper than 1/2" should be filled to within 1/2" of the surface with polyethylene foam filler/backer rod.

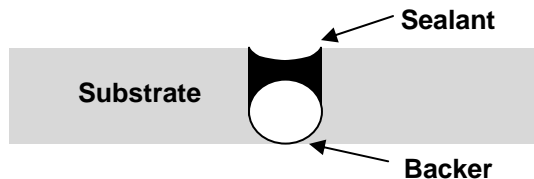

PREPARATION: Surfaces to be caulked/sealed must be clean, dry and free from oils, loose mortar, laitance, form release agents, old caulking, old paint or other contaminants. Allow new concrete to cure for 30 days before caulking.

MASKING: Mask areas that are not to be caulked/sealed. Remove masking immediately after tooling BEFORE a skin has formed on the caulk/sealant.

APPLICATION: Cut nozzle at 45° angle to the desired size. Load cartridge into a caulk gun and puncture the inner seal. Squeeze trigger to start flow of material. Keep nozzle pressed against the surface and slowly draw along seam. Apply a uniform, continuous bead.

TOOLING: Tool caulk with appropriate tool to ensure firm, full contact with the surface or the joint. If necessary, smooth the surface with wet finger or spatula and wipe off the excess with a water-dampened rag.

PRIMING: For best results, priming is recommended prior to caulking. Determine the primer based on the substrate, any topcoat, and any required performance.

PAINTING: (temperature and humidity dependent) For best results, a minimum of 4 hours dry time is required before painting. Allow extra dry time during periods of high humidity and/or cool temperatures. Can be topcoated with latex and alkyd paints. DO NOT topcoat with aromatic solvent based systems such as epoxy and chlorinated rubber paints.

Always use a shellac sealer before applying lacquer.

CLEAN-UP: Clean tools and excess sealant with soap and water or a damp cloth while still wet.

LIMITATIONS

Not for use below grade, on aquariums, or for marine use below the water line.

Never use in architectural joints, joints subject to heavy abrasion, wear or joints frequently under water. Apply at temperatures above 50°F.

For indoor and exterior use.

Do not apply when rain or moisture is expected.

Do not apply to frozen or frost covered surfaces.

Protect from freezing.

SHELF LIFE

This sealant has a shelf life of 24 months from the date of manufacture when stored at room temperature.

PRECAUTIONS

Use only with adequate ventilation. Avoid contact with eyes and skin. Wash hands after using. Do not transfer contents to other containers for storage. In case of eye contact, flush with water. Get medical attention if irritation persists. If swallowed, get medical attention immediately. **DO NOT TAKE INTERNALLY. KEEP OUT OF THE REACH OF CHILDREN.**

Coverage in Lineal Feet One cartridge (10, 10.1, 10.3 fl. oz.)					
		Depth in Inches			
		1/8"	1/4"	3/8"	1/2"
Width in inches	1/8"	99			
	1/4"	49	24		
	3/8"	33	20	11	
	1/2"	24	12	8	6
	5/8"	20	10	7	5
	3/4"	16	8	6	4
	7/8"	14	7	5	4
	1"	12	6	4	3

When using this reference chart, you **MUST** consider the physical limitations of the product you are using. Not all products can be used in the gap sizes shown.

SAFETY DATA SHEET

B51T600

Section 1. Identification

Product name : PrimeRx™ Peel Bonding Primer (Interior/Exterior Latex)
Clear

Product code : B51T600

Other means of identification : Not available.

Product type : Liquid.

Relevant identified uses of the substance or mixture and uses advised against
Not applicable.

Manufacturer : THE SHERWIN-WILLIAMS COMPANY
101 Prospect Avenue N.W.
Cleveland, OH 44115

Emergency telephone number of the company : (216) 566-2917

Product Information Telephone Number : Not available.

Regulatory Information Telephone Number : (216) 566-2902

Transportation Emergency Telephone Number : (800) 424-9300

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : CARCINOGENICITY - Category 1A

Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 34.1%

GHS label elements

Hazard pictograms :



Signal word : Danger

Hazard statements : May cause cancer.

Precautionary statements

General : Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required.

Response : IF exposed or concerned: Get medical attention.

Storage : Store locked up.

Disposal : Dispose of contents and container in accordance with all local, regional, national and international regulations.

Date of issue/Date of revision

: 6/20/2015.

Date of previous issue

: 4/7/2015.

Version : 1.01

1/10

Section 2. Hazards identification

Supplemental label elements

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Adequate ventilation required when sanding or abrading the dried film. If Adequate ventilation cannot be provided wear an approved particulate respirator (NIOSH approved). Follow respirator manufacturer's directions for respirator use. DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Abrading or sanding of the dry film may release Crystalline Silica which has been shown to cause lung damage and cancer under long term exposure. Please refer to the SDS for additional information. Do not transfer contents to other containers for storage.

Hazards not otherwise classified

: None known.

Section 3. Composition/information on ingredients

Substance/mixture

: Mixture

Other means of identification

: Not available.

CAS number/other identifiers

Ingredient name	% by weight	CAS number
Cristobalite	0.1	14464-46-1

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact

: Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.

Inhalation

: Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Skin contact

: Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.

Ingestion

: Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact

: No known significant effects or critical hazards.

Date of issue/Date of revision

: 6/20/2015.

Date of previous issue

: 4/7/2015.

Version : 1.01

2/10

Section 4. First aid measures

- Inhalation** : No known significant effects or critical hazards.
Skin contact : No known significant effects or critical hazards.
Ingestion : No known significant effects or critical hazards.

Over-exposure signs/symptoms

- Eye contact** : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : In a fire or if heated, a pressure increase will occur and the container may burst.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

For emergency responders : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions :

Section 6. Accidental release measures

Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapor or mist. If during normal use the material presents a respiratory hazard, use only with adequate ventilation or wear appropriate respirator. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Cristobalite	OSHA PEL Z3 (United States, 2/2013). TWA: 250 MPPCF / 2 x (%SiO ₂ +5) 8 hours. Form: Respirable TWA: 10 MG/M ³ / 2 x (%SiO ₂ +2) 8 hours. Form: Respirable TWA: 30 MG/M ³ / 2 x (%SiO ₂ +2) 8 hours. Form: Total dust

Section 8. Exposure controls/personal protection

- Appropriate engineering controls** : If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.
- Individual protection measures**
- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 9.2
- Melting point** : Not available.
- Boiling point** : 100°C (212°F)
- Flash point** : Closed cup: >93.3°C (>199.9°F)
- Evaporation rate** : 0.09 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Not available.
- Vapor pressure** : 0.31 kPa (2.333 mm Hg) [at 20°C]

Section 9. Physical and chemical properties

Vapor density : 1 [Air = 1]
Relative density : 1.3
Solubility : Not available.
Partition coefficient: n-octanol/water : Not available.
Auto-ignition temperature : Not available.
Decomposition temperature : Not available.
Viscosity : Kinematic (room temperature): >0.205 cm²/s (>20.5 cSt)
Kinematic (40°C (104°F)): >0.205 cm²/s (>20.5 cSt)

Aerosol product

Heat of combustion : 0.000001526 kJ/g

Section 10. Stability and reactivity

Reactivity : No specific test data related to reactivity available for this product or its ingredients.

Chemical stability : The product is stable.

Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.

Conditions to avoid : No specific data.

Incompatible materials : No specific data.

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Not available.

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

Product/ingredient name	OSHA	IARC	NTP
Cristobalite	-	1	Known to be a human carcinogen.

Reproductive toxicity

Not available.

Teratogenicity

Section 11. Toxicological information

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : No known significant effects or critical hazards.
Inhalation : No known significant effects or critical hazards.
Skin contact : No known significant effects or critical hazards.
Ingestion : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.
Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.
Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.
Carcinogenicity : May cause cancer. Risk of cancer depends on duration and level of exposure.
Mutagenicity : No known significant effects or critical hazards.
Teratogenicity : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Route	ATE value
Oral	140974.5 mg/kg

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

Not available.

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

	DOT Classification	TDG Classification	Mexico Classification	IATA	IMDG
UN number	Not regulated.	Not regulated.	Not regulated.	Not regulated.	Not regulated.
UN proper shipping name	-	-	-	-	-
Transport hazard class(es)	-	-	-	-	-
Packing group	-	-	-	-	-
Environmental hazards	No.	No.	No.	No.	No.
Additional information	Special provisions Not Applicable	Special provisions Not Applicable	Special provisions Not Applicable	Special provisions Not Applicable	Emergency schedules (EmS) Not Applicable

Section 14. Transport information

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations :

State regulations

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

Health	*	1
Flammability		0
Physical hazards		0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

Notice to reader

Section 16. Other information

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

SAFETY DATA SHEET

K43W51

Section 1. Identification

Product name : RESILIENCE® Exterior Acrylic Latex Satin
Extra White

Product code : K43W51

Other means of identification : Not available.

Product type : Liquid.

Relevant identified uses of the substance or mixture and uses advised against
Not applicable.

Manufacturer : THE SHERWIN-WILLIAMS COMPANY
101 Prospect Avenue N.W.
Cleveland, OH 44115

Emergency telephone number of the company : (216) 566-2917

Product Information Telephone Number : Not available.

Regulatory Information Telephone Number : (216) 566-2902

Transportation Emergency Telephone Number : (800) 424-9300

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : CARCINOGENICITY - Category 1A

Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 26.2%

GHS label elements

Hazard pictograms :



Signal word : Danger

Hazard statements : May cause cancer.

Precautionary statements

General : Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required.

Response : IF exposed or concerned: Get medical attention.

Storage : Store locked up.

Disposal : Dispose of contents and container in accordance with all local, regional, national and international regulations.

Date of issue/Date of revision

: 6/21/2015.

Date of previous issue

: 6/3/2015.

Version : 1.02

1/11

Section 2. Hazards identification

Supplemental label elements

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Adequate ventilation required when sanding or abrading the dried film. If Adequate ventilation cannot be provided wear an approved particulate respirator (NIOSH approved). Follow respirator manufacturer's directions for respirator use. DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Abrading or sanding of the dry film may release Crystalline Silica which has been shown to cause lung damage and cancer under long term exposure. Please refer to the SDS for additional information. Do not transfer contents to other containers for storage.

Hazards not otherwise classified

: None known.

Section 3. Composition/information on ingredients

Substance/mixture

: Mixture

Other means of identification

: Not available.

CAS number/other identifiers

Ingredient name	% by weight	CAS number
Titanium Dioxide	18.2	13463-67-7
zinc oxide	2.3	1314-13-2
Cristobalite	0.1	14464-46-1

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact

: Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.

Inhalation

: Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Skin contact

: Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.

Ingestion

: Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Date of issue/Date of revision

: 6/21/2015.

Date of previous issue

: 6/3/2015.

Version : 1.02

2/11

Section 4. First aid measures

- Eye contact** : No known significant effects or critical hazards.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : No known significant effects or critical hazards.

Over-exposure signs/symptoms

- Eye contact** : No specific data.
- Inhalation** : No specific data.
- Skin contact** : No specific data.
- Ingestion** : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : In a fire or if heated, a pressure increase will occur and the container may burst.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
metal oxide/oxides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Section 6. Accidental release measures

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapor or mist. If during normal use the material presents a respiratory hazard, use only with adequate ventilation or wear appropriate respirator. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Titanium Dioxide	ACGIH TLV (United States, 4/2014). TWA: 10 mg/m ³ 8 hours.
zinc oxide	OSHA PEL (United States, 2/2013). TWA: 15 mg/m ³ 8 hours. Form: Total dust NIOSH REL (United States, 10/2013). CEIL: 15 mg/m ³ Form: Dust TWA: 5 mg/m ³ 10 hours. Form: Dust and fumes STEL: 10 mg/m ³ 15 minutes. Form: Fume OSHA PEL (United States, 2/2013).

Section 8. Exposure controls/personal protection

Cristobalite

TWA: 5 mg/m³ 8 hours. Form: Fume
 TWA: 5 mg/m³ 8 hours. Form: Respirable fraction
 TWA: 15 mg/m³ 8 hours. Form: Total dust
ACGIH TLV (United States, 4/2014).
 TWA: 2 mg/m³ 8 hours. Form: Respirable fraction
 STEL: 10 mg/m³ 15 minutes. Form: Respirable fraction
OSHA PEL Z3 (United States, 2/2013).
 TWA: 250 MPPCF / 2 x (%SiO₂+5) 8 hours. Form: Respirable
 TWA: 10 MG/M3 / 2 x (%SiO₂+2) 8 hours. Form: Respirable
 TWA: 30 MG/M3 / 2 x (%SiO₂+2) 8 hours. Form: Total dust

Appropriate engineering controls

: If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.

Environmental exposure controls

: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures

: Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection

: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Hand protection

: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection

: Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Other skin protection

: Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection

: Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

Physical state	: Liquid.
Color	: Not available.
Odor	: Not available.
Odor threshold	: Not available.
pH	: 9
Melting point	: Not available.
Boiling point	: 100°C (212°F)
Flash point	: Closed cup: >93.3°C (>199.9°F)
Evaporation rate	: 0.09 (butyl acetate = 1)
Flammability (solid, gas)	: Not available.
Lower and upper explosive (flammable) limits	: Not available.
Vapor pressure	: 0.31 kPa (2.333 mm Hg) [at 20°C]
Vapor density	: 1 [Air = 1]
Relative density	: 1.28
Solubility	: Not available.
Partition coefficient: n-octanol/water	: Not available.
Auto-ignition temperature	: Not available.
Decomposition temperature	: Not available.
Viscosity	: Kinematic (room temperature): >0.205 cm ² /s (>20.5 cSt) Kinematic (40°C (104°F)): >0.205 cm ² /s (>20.5 cSt)

Aerosol product

Heat of combustion	: 0.000001605 kJ/g
---------------------------	--------------------

Section 10. Stability and reactivity

Reactivity	: No specific test data related to reactivity available for this product or its ingredients.
Chemical stability	: The product is stable.
Possibility of hazardous reactions	: Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid	: No specific data.
Incompatible materials	: No specific data.
Hazardous decomposition products	: Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Not available.

Irritation/Corrosion

Section 11. Toxicological information

Product/ingredient name	Result	Species	Score	Exposure	Observation
Titanium Dioxide	Skin - Mild irritant	Human	-	72 hours 300 Micrograms Intermittent	-
zinc oxide	Eyes - Mild irritant	Rabbit	-	24 hours 500 milligrams	-
	Skin - Mild irritant	Rabbit	-	24 hours 500 milligrams	-

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

Product/ingredient name	OSHA	IARC	NTP
Titanium Dioxide	-	2B	-
Cristobalite	-	1	Known to be a human carcinogen.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : No known significant effects or critical hazards.
Inhalation : No known significant effects or critical hazards.
Skin contact : No known significant effects or critical hazards.
Ingestion : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.

Carcinogenicity : May cause cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Product/ingredient name	Result	Species	Exposure
Titanium Dioxide zinc oxide	Acute LC50 >1000000 µg/l Marine water	Fish - Fundulus heteroclitus	96 hours
	Acute IC50 1.85 mg/l Marine water	Algae - Skeletonema costatum	96 hours
	Acute IC50 46 µg/l Fresh water	Algae - Pseudokirchneriella subcapitata - Exponential growth phase	72 hours
	Acute LC50 98 µg/l Fresh water	Daphnia - Daphnia magna - Neonate	48 hours
	Acute LC50 1.1 ppm Fresh water	Fish - Oncorhynchus mykiss	96 hours

Persistence and degradability

Not available.

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
Titanium Dioxide	-	352	low
zinc oxide	-	60960	high

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

	DOT Classification	TDG Classification	Mexico Classification	IATA	IMDG
UN number	Not regulated.	Not regulated.	Not regulated.	Not regulated.	Not regulated.
UN proper shipping name	-	-	-	-	-
Transport hazard class(es)	-	-	-	-	-
Packing group	-	-	-	-	-
Environmental hazards	No.	No.	No.	No.	No.
Additional information	<u>Special provisions</u> Not Applicable	<u>Special provisions</u> Not Applicable	<u>Special provisions</u> Not Applicable	<u>Special provisions</u> Not Applicable	<u>Emergency schedules (EmS)</u> Not Applicable

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations :

State regulations

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

Health	*	1
Flammability		0
Physical hazards		0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

SAFETY DATA SHEET

C-86

Section 1. Identification

Product name : Carpenter's Wood Filler
Product code : C-86
Other means of identification : Not available.
Product type : Liquid.
Relevant identified uses of the substance or mixture and uses advised against
Not applicable.

Manufacturer : THE SHERWIN-WILLIAMS COMPANY
101 Prospect Avenue N.W.
Cleveland, OH 44115

Emergency telephone number of the company : (216) 566-2917

Product Information Telephone Number : Not available.

Regulatory Information Telephone Number : (216) 566-2902

Transportation Emergency Telephone Number : (800) 424-9300

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : SKIN CORROSION/IRRITATION - Category 2
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
CARCINOGENICITY - Category 1A
Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 31.4%

GHS label elements

Hazard pictograms :



Signal word : Danger
Hazard statements : Causes serious eye irritation.
Causes skin irritation.
May cause cancer.

Precautionary statements

General : Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required. Wear protective gloves. Wear eye or face protection. Wash hands thoroughly after handling.

Section 2. Hazards identification

- Response** : IF exposed or concerned: Get medical attention. IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing. Wash contaminated clothing before reuse. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.
- Storage** : Store locked up.
- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations.
- Supplemental label elements** : Adequate ventilation required when sanding or abrading the dried film. If Adequate ventilation cannot be provided wear an approved particulate respirator (NIOSH approved). Follow respirator manufacturer's directions for respirator use. DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Abrading or sanding of the dry film may release crystalline silica which has been shown to cause lung damage and cancer under long term exposure. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.
- Please refer to the SDS for additional information. Do not transfer contents to other containers for storage.
- Hazards not otherwise classified** : None known.

Section 3. Composition/information on ingredients

- Substance/mixture** : Mixture
- Other means of identification** : Not available.

CAS number/other identifiers

Ingredient name	% by weight	CAS number
Calcium Carbonate	42.5	471-34-1
Bentonite	1.5	12174-11-7
Quartz	0.2	14808-60-7

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.

Section 4. First aid measures

- Ingestion** : Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : Causes skin irritation.
- Ingestion** : Irritating to mouth, throat and stomach.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : In a fire or if heated, a pressure increase will occur and the container may burst.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
metal oxide/oxides

Section 5. Fire-fighting measures

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapor or mist. If during normal use the material presents a respiratory hazard, use only with adequate ventilation or wear appropriate respirator. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Section 7. Handling and storage

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Calcium Carbonate	OSHA PEL (United States, 2/2013). TWA: 5 mg/m ³ 8 hours. Form: Respirable fraction
Quartz	TWA: 15 mg/m ³ 8 hours. Form: Total dust OSHA PEL Z3 (United States, 2/2013). TWA: 250 MPPCF / (%SiO ₂ +5) 8 hours. Form: Respirable TWA: 10 MG/M3 / (%SiO ₂ +2) 8 hours. Form: Respirable ACGIH TLV (United States, 4/2014). TWA: 0.025 mg/m ³ 8 hours. Form: Respirable fraction NIOSH REL (United States, 10/2013). TWA: 0.05 mg/m ³ 10 hours. Form: respirable dust

Appropriate engineering controls : If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Section 8. Exposure controls/personal protection

- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 8.3
- Melting point** : Not available.
- Boiling point** : 100°C (212°F)
- Flash point** : Closed cup: >93.3°C (>199.9°F) [Pensky-Martens Closed Cup]
- Evaporation rate** : 0.09 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Not available.
- Vapor pressure** : 0.27 kPa (2 mm Hg) [at 20°C]
- Vapor density** : 1 [Air = 1]
- Relative density** : 1.86
- Solubility** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Kinematic (room temperature): >0.205 cm²/s (>20.5 cSt)
Kinematic (40°C (104°F)): >0.205 cm²/s (>20.5 cSt)

Aerosol product

- Heat of combustion** : 0.433 kJ/g

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.
- Conditions to avoid** : No specific data.
- Incompatible materials** : No specific data.
- Hazardous decomposition products** : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Calcium Carbonate	LD50 Oral	Rat	6450 mg/kg	-

Irritation/Corrosion

Product/ingredient name	Result	Species	Score	Exposure	Observation
Calcium Carbonate	Eyes - Severe irritant	Rabbit	-	24 hours 750 Micrograms	-
	Skin - Moderate irritant	Rabbit	-	24 hours 500 milligrams	-

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

Product/ingredient name	OSHA	IARC	NTP
Bentonite	-	2B	-
Quartz	-	1	Known to be a human carcinogen.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
Inhalation : No known significant effects or critical hazards.
Skin contact : Causes skin irritation.
Ingestion : Irritating to mouth, throat and stomach.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness

- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

- Potential immediate effects** : Not available.
- Potential delayed effects** : Not available.

Long term exposure

- Potential immediate effects** : Not available.
- Potential delayed effects** : Not available.

Potential chronic health effects

Not available.

- General** : No known significant effects or critical hazards.
- Carcinogenicity** : May cause cancer. Risk of cancer depends on duration and level of exposure.
- Mutagenicity** : No known significant effects or critical hazards.
- Teratogenicity** : No known significant effects or critical hazards.
- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Product/ingredient name	Result	Species	Exposure
Calcium Carbonate	Acute LC50 >56000 ppm Fresh water Chronic NOEC 61 mg/g Fresh water	Fish - Gambusia affinis - Adult Fish - Oncorhynchus mykiss - Juvenile (Fledgling, Hatchling, Weanling)	96 hours 28 days

Persistence and degradability

Not available.

Bioaccumulative potential

Not available.

Mobility in soil

- Soil/water partition coefficient (K_{oc})** : Not available.

- Other adverse effects** : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods

: The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

	DOT Classification	TDG Classification	Mexico Classification	IATA	IMDG
UN number	Not regulated.	Not regulated.	Not regulated.	Not regulated.	Not regulated.
UN proper shipping name	-	-	-	-	-
Transport hazard class(es)	-	-	-	-	-
Packing group	-	-	-	-	-
Environmental hazards	No.	No.	No.	No.	No.
Additional information	<u>Special provisions</u> Not Applicable	<u>Special provisions</u> Not Applicable	<u>Special provisions</u> Not Applicable	<u>Special provisions</u> Not Applicable	<u>Emergency schedules (EmS)</u> Not Applicable

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations :

[State regulations](#)

[California Prop. 65](#)

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Section 16. Other information

[Hazardous Material Information System \(U.S.A.\)](#)

Health	*	1
Flammability		0
Physical hazards		0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

[Notice to reader](#)

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

SAFETY DATA SHEET

B51W620

Section 1. Identification

Product name : PrepRite® ProBlock® Interior/Exterior Latex Primer/Sealer
White

Product code : B51W620

Other means of identification : Not available.

Product type : Liquid.

Relevant identified uses of the substance or mixture and uses advised against
Not applicable.

Manufacturer : THE SHERWIN-WILLIAMS COMPANY
101 Prospect Avenue N.W.
Cleveland, OH 44115

Emergency telephone number of the company : (216) 566-2917

Product Information Telephone Number : Not available.

Regulatory Information Telephone Number : (216) 566-2902

Transportation Emergency Telephone Number : (800) 424-9300

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : SKIN SENSITIZATION - Category 1
CARCINOGENICITY - Category 2
Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 32.8%

GHS label elements

Hazard pictograms :



Signal word : Warning

Hazard statements : May cause an allergic skin reaction.
Suspected of causing cancer.

Precautionary statements

General : Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required. Wear protective gloves. Avoid breathing vapor. Contaminated work clothing should not be allowed out of the workplace.

Section 2. Hazards identification

- Response** : IF exposed or concerned: Get medical attention. IF ON SKIN: Wash with plenty of soap and water. Wash contaminated clothing before reuse. If skin irritation or rash occurs: Get medical attention.
- Storage** : Store locked up.
- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations.
- Supplemental label elements** : WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.
Please refer to the SDS for additional information. Do not transfer contents to other containers for storage.
- Hazards not otherwise classified** : None known.

Section 3. Composition/information on ingredients

- Substance/mixture** : Mixture
- Other means of identification** : Not available.

CAS number/other identifiers

Ingredient name	% by weight	CAS number
Titanium Dioxide	14.5	13463-67-7
Epichlorohydrin-mercaptoethanol Alcohol	0.3	928768-73-4

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Wash with plenty of soap and water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. In the event of any complaints or symptoms, avoid further exposure. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Section 4. First aid measures

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : No known significant effects or critical hazards.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : May cause an allergic skin reaction.
- Ingestion** : No known significant effects or critical hazards.

Over-exposure signs/symptoms

- Eye contact** : No specific data.
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:
 - irritation
 - redness
- Ingestion** : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : In a fire or if heated, a pressure increase will occur and the container may burst.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
 - metal oxide/oxides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

Section 6. Accidental release measures

For emergency responders : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Large spill : Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8). Persons with a history of skin sensitization problems should not be employed in any process in which this product is used. Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapor or mist. If during normal use the material presents a respiratory hazard, use only with adequate ventilation or wear appropriate respirator. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Titanium Dioxide	ACGIH TLV (United States, 4/2014). TWA: 10 mg/m ³ 8 hours. OSHA PEL (United States, 2/2013). TWA: 15 mg/m ³ 8 hours. Form: Total dust

Section 8. Exposure controls/personal protection

- Appropriate engineering controls** : If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Contaminated work clothing should not be allowed out of the workplace. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 8.8
- Melting point** : Not available.
- Boiling point** : 100°C (212°F)
- Flash point** : Closed cup: >93.3°C (>199.9°F)
- Evaporation rate** : 0.09 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.

Section 9. Physical and chemical properties

Lower and upper explosive (flammable) limits	: Not available.
Vapor pressure	: 0.31 kPa (2.333 mm Hg) [at 20°C]
Vapor density	: 1 [Air = 1]
Relative density	: 1.31
Solubility	: Not available.
Partition coefficient: n-octanol/water	: Not available.
Auto-ignition temperature	: Not available.
Decomposition temperature	: Not available.
Viscosity	: Kinematic (room temperature): >0.205 cm ² /s (>20.5 cSt) Kinematic (40°C (104°F)): >0.205 cm ² /s (>20.5 cSt)
Aerosol product	
Heat of combustion	: 0.00000067 kJ/g

Section 10. Stability and reactivity

Reactivity	: No specific test data related to reactivity available for this product or its ingredients.
Chemical stability	: The product is stable.
Possibility of hazardous reactions	: Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid	: No specific data.
Incompatible materials	: No specific data.
Hazardous decomposition products	: Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Not available.

Irritation/Corrosion

Product/ingredient name	Result	Species	Score	Exposure	Observation
Titanium Dioxide	Skin - Mild irritant	Human	-	72 hours 300 Micrograms Intermittent	-

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

Section 11. Toxicological information

Product/ingredient name	OSHA	IARC	NTP
Titanium Dioxide	-	2B	-

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : No known significant effects or critical hazards.

Inhalation : No known significant effects or critical hazards.

Skin contact : May cause an allergic skin reaction.

Ingestion : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No specific data.

Inhalation : No specific data.

Skin contact : Adverse symptoms may include the following:
irritation
redness

Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : Once sensitized, a severe allergic reaction may occur when subsequently exposed to very low levels.

Carcinogenicity : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Product/ingredient name	Result	Species	Exposure
Titanium Dioxide	Acute LC50 >1000000 µg/l Marine water	Fish - Fundulus heteroclitus	96 hours

Persistence and degradability

Not available.

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
Titanium Dioxide	-	352	low

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

Section 14. Transport information

	DOT Classification	TDG Classification	Mexico Classification	IATA	IMDG
UN number	Not regulated.	Not regulated.	Not regulated.	Not regulated.	Not regulated.
UN proper shipping name	-	-	-	-	-
Transport hazard class(es)	-	-	-	-	-
Packing group	-	-	-	-	-
Environmental hazards	No.	No.	No.	No.	No.
Additional information	<u>Special provisions</u> Not Applicable	<u>Special provisions</u> Not Applicable	<u>Special provisions</u> Not Applicable	<u>Special provisions</u> Not Applicable	<u>Emergency schedules (EmS)</u> Not Applicable

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations :

State regulations

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

Health	*	1
Flammability		0
Physical hazards		0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

Section 16. Other information

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

SAFETY DATA SHEET

WL9990024

Section 1. Identification

Product name : MAXFLEX™ Acrylic Elastomeric Sealant
Product code : WL9990024
Other means of identification : Not available.
Product type : Liquid.
Relevant identified uses of the substance or mixture and uses advised against
Not applicable.

Manufacturer : THE SHERWIN-WILLIAMS COMPANY
101 Prospect Avenue N.W.
Cleveland, OH 44115

Emergency telephone number of the company : (216) 566-2917

Product Information Telephone Number : Not available.

Regulatory Information Telephone Number : (216) 566-2902

Transportation Emergency Telephone Number : (800) 424-9300

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : CARCINOGENICITY - Category 2

Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 40.5%

GHS label elements

Hazard pictograms :



Signal word : Warning

Hazard statements : Suspected of causing cancer.

Precautionary statements

General : Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required.

Response : IF exposed or concerned: Get medical attention.

Storage : Store locked up.

Disposal : Dispose of contents and container in accordance with all local, regional, national and international regulations.

Section 2. Hazards identification

Supplemental label elements

Adequate ventilation required when sanding or abrading the dried film. If Adequate ventilation cannot be provided wear an approved particulate respirator (NIOSH approved). Follow respirator manufacturer's directions for respirator use. DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Abrading or sanding of the dry film may release crystalline silica which has been shown to cause lung damage and cancer under long term exposure. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Please refer to the SDS for additional information. Do not transfer contents to other containers for storage.

Hazards not otherwise classified

: None known.

Section 3. Composition/information on ingredients

Substance/mixture

: Mixture

Other means of identification

: Not available.

CAS number/other identifiers

Ingredient name	% by weight	CAS number
Diethylene Glycol Dibenzoate	3.2	120-55-8
Titanium Dioxide	2.8	13463-67-7

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact

: Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.

Inhalation

: Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Skin contact

: Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.

Ingestion

: Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact

: No known significant effects or critical hazards.

Date of issue/Date of revision

: 5/1/2015.

Date of previous issue

: No previous validation.

Version : 1

2/10

Section 4. First aid measures

- Inhalation** : No known significant effects or critical hazards.
Skin contact : No known significant effects or critical hazards.
Ingestion : No known significant effects or critical hazards.

Over-exposure signs/symptoms

- Eye contact** : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
Specific treatments : No specific treatment.
Protection of first-aiders : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
Unsuitable extinguishing media : None known.

Specific hazards arising from the chemical : In a fire or if heated, a pressure increase will occur and the container may burst.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
metal oxide/oxides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

For emergency responders : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions :

Section 6. Accidental release measures

Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapor or mist. If during normal use the material presents a respiratory hazard, use only with adequate ventilation or wear appropriate respirator. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Titanium Dioxide	ACGIH TLV (United States, 4/2014). TWA: 10 mg/m ³ 8 hours. OSHA PEL (United States, 2/2013). TWA: 15 mg/m ³ 8 hours. Form: Total dust

- Appropriate engineering controls** : If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.

Section 8. Exposure controls/personal protection

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Other skin protection : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

Physical state : Liquid.

Color : Not available.

Odor : Not available.

Odor threshold : Not available.

pH : 8.7

Melting point : Not available.

Boiling point : 100°C (212°F)

Flash point : Closed cup: >93.3°C (>199.9°F)

Evaporation rate : 0.09 (butyl acetate = 1)

Flammability (solid, gas) : Not available.

Lower and upper explosive (flammable) limits : Not available.

Vapor pressure : 0.31 kPa (2.333 mm Hg) [at 20°C]

Vapor density : 1 [Air = 1]

Relative density : 1.39

Solubility : Not available.

Section 9. Physical and chemical properties

Partition coefficient: n-octanol/water	: Not available.
Auto-ignition temperature	: Not available.
Decomposition temperature	: Not available.
Viscosity	: Kinematic (room temperature): >0.205 cm ² /s (>20.5 cSt) Kinematic (40°C (104°F)): >0.205 cm ² /s (>20.5 cSt)
Aerosol product	
Heat of combustion	: 0.000002251 kJ/g

Section 10. Stability and reactivity

Reactivity	: No specific test data related to reactivity available for this product or its ingredients.
Chemical stability	: The product is stable.
Possibility of hazardous reactions	: Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid	: No specific data.
Incompatible materials	: No specific data.
Hazardous decomposition products	: Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Diethylene Glycol Dibenzoate	LD50 Oral	Rat	2830 mg/kg	-

Irritation/Corrosion

Product/ingredient name	Result	Species	Score	Exposure	Observation
Diethylene Glycol Dibenzoate	Eyes - Mild irritant	Rabbit	-	24 hours 500 milligrams	-
	Skin - Mild irritant	Rabbit	-	24 hours 500 milligrams	-
Titanium Dioxide	Skin - Mild irritant	Human	-	72 hours 300 Micrograms Intermittent	-

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

Section 11. Toxicological information

Product/ingredient name	OSHA	IARC	NTP
Titanium Dioxide	-	2B	-

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : No known significant effects or critical hazards.
Inhalation : No known significant effects or critical hazards.
Skin contact : No known significant effects or critical hazards.
Ingestion : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.

Carcinogenicity : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Route	ATE value
Oral	40533.5 mg/kg

Section 12. Ecological information

Toxicity

Product/ingredient name	Result	Species	Exposure
Titanium Dioxide	Acute LC50 >1000000 µg/l Marine water	Fish - Fundulus heteroclitus	96 hours

Persistence and degradability

Not available.

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
Titanium Dioxide	-	352	low

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

	DOT Classification	TDG Classification	Mexico Classification	IATA	IMDG
UN number	Not regulated.	Not regulated.	Not regulated.	Not regulated.	Not regulated.
UN proper shipping name	-	-	-	-	-

Date of issue/Date of revision : 5/1/2015. Date of previous issue : No previous validation. Version : 1 8/10

Section 14. Transport information

Transport hazard class(es)	-	-	-	-	-
Packing group	-	-	-	-	-
Environmental hazards	No.	No.	No.	No.	No.
Additional information	<u>Special provisions</u> Not Applicable	<u>Special provisions</u> Not Applicable	<u>Special provisions</u> Not Applicable	<u>Special provisions</u> Not Applicable	<u>Emergency schedules (EmS)</u> Not Applicable

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations :
State regulations

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

Health	*	1
Flammability		0
Physical hazards		0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

Section 16. Other information

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.