

March 25, 2019

ADDENDUM TO ADVERTISED CONTRACT

PROJECT NAME: CITY OF HOLLY SPRINGS 2019 LMIG
RESURFACING PROJECT

PROJECT NUMBER: 2019-02

CITY: CITY OF HOLLY SPRINGS

AMENDMENT NUMBER: 1


LETTING DATE: APRIL 26, 2019

THE FOLLOWING CHANGES ARE HEREBY MADE TO THIS CONTRACT. THE BIDDER IS RESPONSIBLE FOR MAKING ANY NECESSARY CHANGES IN INK IN THE PROPOSAL. BIDDER SHALL ACKNOWLEDGE THIS AMENDMENT BY CHECKING THE APPROPRIATE SPACE ON THE AMENDMENT CERTIFICATION PAGE.

.....

QUESTIONS/CLARIFICATIONS

1. Add Springs Way Square and associated quantities to the scope of work. See attached revised bid schedule, typical section, and summary of quantities.

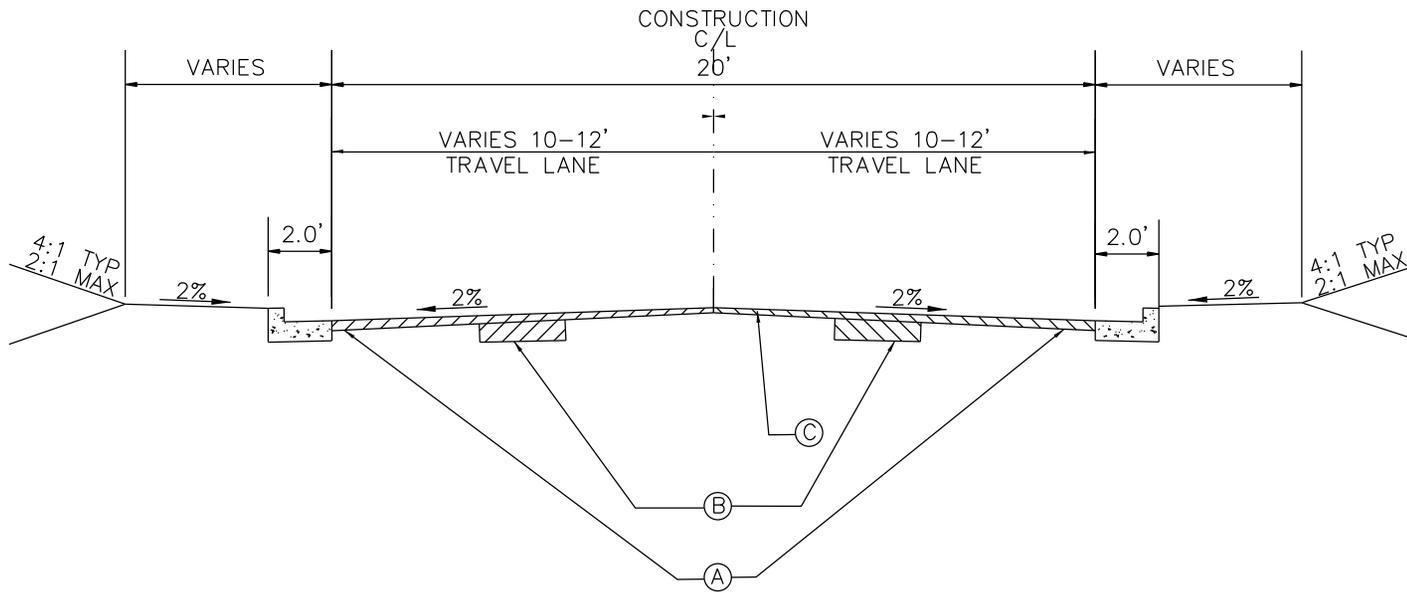

TYPICAL SECTION
SPRING WAY SQUARE

- A. REQUIRED MILLING ASPHALT CONCRETE PVMT, VARIABLE DEPTH
- B. RECYCLED ASPHALT CONCRETE PATCHING INCLUDING BITUM MATL @ 440 LBS/SY LOCATION (LENGTHS AND WIDTHS) AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ROTOMILLING ALL PAVEMENT FAILURES (4 INCHES) LEAVING THE SIDES OF THE CUTS VERTICAL AND THE BOTTOMS FLAT. THE DEEP PATCHING SHALL BE DIRECTED (LENGTH AND WIDTHS) BY THE ENGINEER. THE COST OF THE PATCHING SHALL INCLUDE DISPOSAL OF REMOVED MATERIALS OFF OF THE RIGHT OF WAY. (ROTOMILLING TO BE INCLUDED IN THE PRICE BID FOR THE PATCHING.)
- C. 135 LB/SY RECYCLED ASPHALT CONCRETE 9.5 MM SUPERPAVE

ALL BY E.S.
DRAWN BY: 3/20/17
CHECKED BY: 3/22/17
DATE: 3/22/17

BMK & C
CONSTRUCTION
& ENGINEERING

REVISIONS

No.	DATE	DESCRIPTION

TYPICAL SECTIONS

FOR:
SPRING WAY SQ
INDUSTRIAL BLVD
- LOCATED IN -
CITY OF HOLLY SPRINGS
CHEROKEE COUNTY, GEORGIA

SHEET NUMBER

C1 01

SCALE N/A

DATE 3/25/19

PROJECT NO.

Bid Schedule FY 2019 LMIG & Asphalt Resurfacing Project

Line No.	Item Number	Description	Unit	Quantity	Unit Price	Amount
5	150-1000	TRAFFIC CONTROL -2019-01	LS	1		
10	402-1802	RECYCLED ASPH CONC PATCHING, INCL BITUM MATL & H-LIME (330LB/SY)	TN	712		
15	402-1802	RECYCLED ASPH CONC PATCHING, INCL BITUM MATL & H-LIME (440LB/SY)	TN	2996		
20	402-3121	RECYCLED APSH CONC 25 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & HLIME	TN	1038		
25	402-3190	RECYCLED ASPH CONC 19 MM SUPERPAVE, INCL BITUM MATL & H-LIME	TN	738		
30	402-1812	ASPHALTIC CONC LEVELING, INCL BITUM MATL & H-LIME	TN	1494		
35	402-3102	RECYCLE ASPH CONC 9.5 MM SUPERPAVE, TP 2, BLEND 1, INCL BITUM MATL & H-LIME	TN	1740		
40	402-3130	RECYCLE ASPH CONC 12.5 MM SUPERPAVE, TP 2, BLEND 1, INCL BITUM MATL & H-LIME	TN	3633		
45	413-1000	BITUM TACK COAT	GL	2500		
50	432-5010	MILL ASPH CONC PVMT, VARIABLE DEPTH	SY	4284		
55	432-0216	MILL ASPH CONC PVMT, 4"	SY	6238		
60	653-0230	THERMOPLASTIC PVMT MARKING, WORD, TP 3A	EA	2		
65	653-0120	THERMOPLASTIC MARKING, ARROW, TP 2	EA	15		
70	653-1502	THERMOPLASTIC SOLID TRAFFIC STRIPE, 5 IN, YELLOW	LF	42000		
75	653-1501	THERMOPLASTIC SOLID TRAFFIC STRIPE, 5 IN, WHITE	LF	33500		
80	653-1704	THERMOPLASTIC MINI SKIP TRAFFIC STRIPE, 5 IN, WHITE	GLF	770		

Line No.	Item Number	Description	Unit	Quantity	Unit Price	Amount
85	653-1804	THERMOPLASTIC SOLID TRAFFIC STRIPE, 8 IN, WHITE	LF	2200		
90	653-3501	THERMOPLASTIC SKIP TRAFFIC STRIPE, 5 IN, WHITE	GLF	2		
95	653-6004	THERMOPLASTIC TRAF STRIPING, WHITE	SY	122		
100	653-6006	THERMOPLASTIC TRAF STRIPING, YELLOW	SY	1722		
105	654-1001	RAISED PVMT MARKERS TP 1	EA	220		
TOTAL						

Summary Report Milling, Patching & Topping, Striping

Road Name	Length	Width	SY	Deep Patching, 3" Depth w/ 19 MM MIX(TN)	Deep Patching, 4" Depth w/ 19 MM MIX(TN)	Profile Mill Asph Conc Pvmt, Variable Depth (SY)	Asph Conc Milling, 4" Depth (SY)	Asphaltic Concrete Leveling 50 LB/SY	330 LB/SY 25 MM SP (TN)	220 LB/SY 19 MM SP (TN)	135 LB/SY 9.5 MM SP (TN)	165 LB/SY 12.5 MM SP (TN)
Hickory Road	12144	26	35083		2315			877				2894
Hickory Road Decel & Turn Lanes	4085	12	5447			3098						449
Palm Street	4224	22	10325	647		180		258			697	
Rabbit Hill Road												
Section 1 - I-575 to Holly Glen Subdivision	1690	22	4131		273			103			279	
Section 2 - Holly Glen Subdivision to Marble Quarry	2320	22	5671				5671	142	936	624	383	
Spring Way Square	1400	20	3111		86	678					242	
As Directed				65	322	328	567	114	102	114	139	289
Totals	25863		63768	712	2996	4284	6238	1494	1038	738	1740	3633

Summary Report Stripping

Road Name	Length	Required Striping:	Thermo Solid 5" Yellow (LF)	Thermo Solid 5" White (LF)	Thermo Word, Type 3A (EA)	Thermo Mini Skip 5" White (GLF)	Thermo Solid 8" White (LF)	Thermo Solid 24" White (LF)	Thermo White Hatching (SY)	Thermo Yellow Hatching (SY)	Thermo Pvmt Marking Arrow, TP 2 (EA)	RPM's TP 1 (EA)
Hickory Road	12144	Center, Edge, Stop Bars, Words, Arrows	25000	25000	2	700	2000	312	111	1565	14	152
Palm Street	4224	Center, Stop Bars	8500					72				
Rabbit Hill Road	4224	Center, Ege, Stop Bars	8500	8500				24				53
Spring Way Square	1400	Stop bar						10				
As Directed by Engineer						70	200	31	11	157	1	15
Totals			42000	33500	2	770	2200	449	122	1722	15	220