

ADDITIONAL BIDDERS QUESTIONS

1- Please confirm that the project will take place off hours.

Answer: Please read carefully all notes on the ‘Special Conditions’ document and the ‘Additional Special Conditions’ document. These documents clearly indicate when the renovation work on the 3rd and 4th floors should occur.

2- We believe that the color codes indicated in the finish schedule for CPT-2 and CPT-3 are incorrect. Could you please confirm that the products are correct as we have indicated below?

CPT-2	CARPET TILE	INTERFACE	ANGLE UP	107206	107188 SELENIUM	25cm X 1m
CPT-3	CARPET TILE	INTERFACE	ANGLE UP	107209	107191 CARBON	25cm X 1m


Answer: Yes, what you have noted is correct.

3- The CT-3 is mentioned in the keynotes on page A501. However, this tag is not in the finish schedule. Please specify which product CT-3 corresponds to.

09.19	CT-3, SEE FINISH SCHEDULE
-------	---------------------------


Answer: That should be CPT-2, in lieu of CT-3, in the Judge’s Corridor 4205. At the ramp it should be CPT-1, as noted on the finish floor plan, 1/A7.22.

4- The 4000A Data area seems to be out of scope, but according to the room schedule, this area will receive SC and RB-1. Please confirm that we should proceed according to the room schedule for this area.

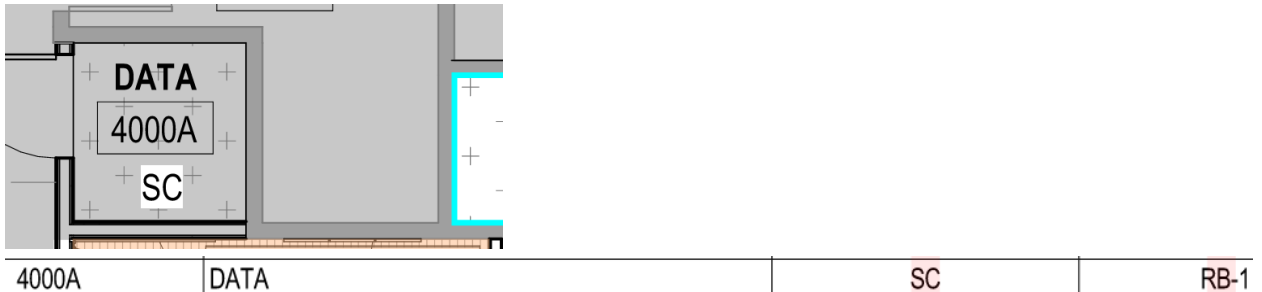

Answer: Yes, proceed as noted on the room schedule.


- 5- The 4010 Secure Corridor area is labeled as CPT-3 in the finish plan. However, this area will receive SC according to the room schedule. Please clarify which flooring material should be used.

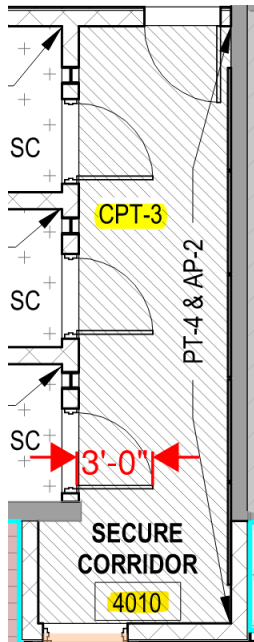

4010	SECURE CORRIDOR	SC	X
------	-----------------	----	---

Answer: Provide CPT-3, as shown on the finish floor plan.


- 6- The 4304A Closet area will receive RT-1 according to the room schedule, but the hatch specified in the finish plan is CPT-2. Please clarify which flooring material should be used.

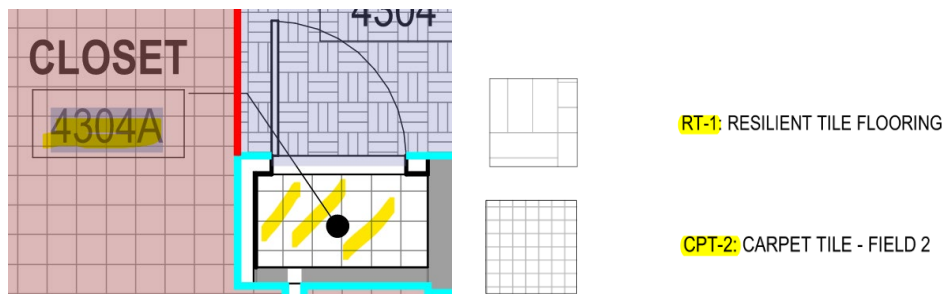

4304A	CLOSET	RT-1
-------	--------	------

Answer: Provide RT-1, as shown on the room schedule.

7- In detail A711/S2, CT to carpet transition is written, but CPT-1 to CPT-2 transition is specified. Could you please confirm that "CPT-2" is misspelled and should be "CT"?

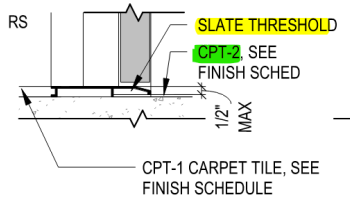

S2

INTERIOR:
CT TO CARPET

Answer: Correct, the transition is from CT-1 to CPT-2.