

## **ADDENDUM NUMBER 2**

### **PARTICULARS**

**1.01 DATE: 04.25.2022**

**1.02 PROJECT: FOLEY PRIDE POCKET PARK**

**1.03 OWNER'S PROJECT NUMBER: ENGR-042622B**

**1.04 OWNER: CITY OF FOLEY**

**1.05 LANDSCAPE ARCHITECT: WAS DESIGN, INC.**

**TO: PROSPECTIVE BIDDERS:**

**2.01 THIS ADDENDUM FORMS A PART OF THE CONTRACT DOCUMENTS AND MODIFIES THE ORIGINAL PROCUREMENT DOCUMENTS DATED 04.08.2022, AND ADDENDUM NUMBER 1 ISSUED 04.25.22, WITH AMENDMENTS AND ADDITIONS NOTED BELOW.**

**2.02 ACKNOWLEDGE RECEIPT OF THIS ADDENDUM IN THE SPACE PROVIDED IN THE BID FORM. FAILURE TO DO SO MAY DISQUALIFY THE BIDDER.**

**2.03 THIS ADDENDUM CONSISTS OF 10 PAGES AND THE FOLLOWING DRAWINGS:  
CHANGES TO THE PROJECT MANUAL - INTRODUCTORY REQUIREMENTS, PROCUREMENT REQUIREMENTS AND CONTRACTING REQUIREMENTS:**

**3.01 SECTION 004322 - UNIT PRICES FORM**

A. Multiple item descriptions have been updated to reflect plan changes.

B. A 6" concrete item has been added.

**3.02 SECTION 004323 - ALTERNATES FORM**

A. Multiple item descriptions have been updated.

**CHANGES TO DRAWINGS:**

**4.01 THIS ADDENDUM INCLUDES CHANGES TO THE FOLLOWING SHEETS:**

A. LH100 - Hardscape Plan, dated 04.25.22, (reissued).

**END OF SECTION**

This page intentionally left blank



<b>MOBILIZATION</b>					
<b>CODE</b>	<b>DESCRIPTION</b>		<b>UNIT</b>	<b>UNIT COST</b>	<b>TOTAL</b>
	MOBILIZATION		LS	\$	\$

**MOBILIZATION SUB-TOTAL** \$ \_\_\_\_\_

<b>DEMOLITION</b>					
<b>CODE</b>	<b>DESCRIPTION</b>	<b>QTY</b>	<b>UNIT</b>	<b>UNIT COST</b>	<b>TOTAL</b>
D-101	REMOVE EXISTING CONCRETE AND BASE MATERIAL, SAW CUT AT EDGE TO ENSURE CLEAN TRANSITION. DISPOSE OF MATERIALS APPROPRIATELY.	8	CY	\$	\$
D-102	REMOVE EXISTING TREE & GRIND STUMP. DISPOSE OF MATERIALS APPROPRIATELY	6	EA	\$	\$
D-103	REMOVE EXISTING BENCH & ALL ASSOCIATED MATERIALS. DISPOSE OF MATERIALS APPROPRIATELY.	4	EA	\$	\$
D-104	REMOVE EXISTING VEGETATION AND SOD. DISPOSE OF MATERIALS APPROPRIATELY.	143	CY	\$	\$
D-105	REMOVE EXISTING UNITED METHODIST CHURCH SIGN & RETURN TO CHURCH. COORDINATE WITH CHURCH STAFF.	1	EA	\$	\$
D-106	LIGHT POLE TO BE REMOVED BY RIVIERA UTILITIES. POWER TO BE RUN UNDERGROUND. CONTRACTOR TO COORDINATE THROUGH THE CITY PROJECT MANAGER.	1	LS	TO BE COMPLETED BY RIVIERA UTILITIES	
F-101	TREE PROTECTION FENCE. ALL DEMO ITEMS WITHIN FENCING TO BE REMOVED PRIOR TO FENCE INSTALLATION. EFFORT SHALL BE TAKEN TO MINIMIZE GROUND DISTURBANCE IN THIS AREA.	73	LF	\$	\$

**DEMOLITION SUB-TOTAL** \$ \_\_\_\_\_

<b>GRADING &amp; DRAINAGE</b>					
<b>CODE</b>	<b>DESCRIPTION</b>	<b>QTY</b>	<b>UNIT</b>	<b>UNIT COST</b>	<b>TOTAL</b>
32-09	TRENCH DRAIN, DURA SLOPE TRENCH DRAIN BY NDS. GRATE: LIGHT GRAY PLASTIC PERFORATED CHANNEL GRATE. GRATE PART NO. DS-670	10	LF	\$	\$
32-10	CATCH BASIN, 12" FLAT GRATE BY NDS. GRATE COLOR: GREEN	2	EA	\$	\$
32-11	FRENCH DRAIN, 4" EZFLOW FRENCH DRAIN BY NDS	169	LF	\$	\$
	FILL & FINE GRADING	± 750	CY	\$	\$

**GRADING & DRAINAGE SUB-TOTAL** \$ \_\_\_\_\_

**HARDSCAPE****03 CONCRETE**

CODE	DESCRIPTION	QTY	UNIT	UNIT COST	TOTAL
03-01	CONCRETE PAVING, 3,500 PSI CONCRETE, 5" THICK, MEDIUM BROOM FINISH	1,066	SF	\$	\$
03-02	CONCRETE STEP, 36" TREAD X 6" RISER, 4,000 PSI CONCRETE, MEDIUM BROOM FINISH WITH RIBBED SAFETY NOSING. QUANTITY NOTED INDICATES TOTAL TREAD LENGTH AT 36" WIDTH.	138	LF	\$	\$
03-03	CONCRETE STEP, 14" DEEP X 6" RISER, +/-10.5` WIDE TREAD, 4,000 PSI CONCRETE, MEDIUM BROOM FINISH WITH RIBBED SAFETY NOSING	13	EA	\$	\$
03-04	CONCRETE, BENCH UNDERSLAB	72	SF	\$	\$
03-05	CONCRETE PAVING, 3,500 PSI CONCRETE, 6" THICK, MEDIUM BROOM FINISH	308	SF	\$	\$

**05 METALS**

CODE	DESCRIPTION	QTY	UNIT	UNIT COST	TOTAL
05-01	HANDRAIL, STAINLESS STEEL, ROUND TUBING, 1.5" DIA.	123	LF	\$	\$

**13 SPECIAL CONSTRUCTION**

CODE	DESCRIPTION	QTY	UNIT	UNIT COST	TOTAL
13-01	ENTRANCE SIGN. BRICK MONUMENT SIGN WALL BY CONTRACTOR. SIGNFACE & LIGHTING TO BE PROVIDED & INSTALLED BY OWNER.	1	EA	\$	\$

**32 EXTERIOR IMPROVEMENTS**

CODE	DESCRIPTION	QTY	UNIT	UNIT COST	TOTAL
32-01	UNIT PAVER FIELD, 4"X16" PLANK PAVERS BY TREMRON, COLOR: TAN, PATTERN: RUNNING BOND AS SHOWN	2,402	SF	\$	\$
32-02	UNIT PAVER FIELD, 8"X8" PARK PLAZA PAVERS BY TREMRON, COLOR: TAUPE, PATTERN: 45 DEGREE AS SHOWN	817	SF	\$	\$
32-03	UNIT PAVER BAND, 4"X16" PLANK PAVERS BY TREMRON, COLOR: TAN, PATTERN: SAILOR COURSE	595	LF	\$	\$
32-04	UNIT PAVER BAND, 8"X8" PARK PLAZA PAVERS BY TREMRON, COLOR: TAUPE, PATTERN: SAILOR COURSE	339	LF	\$	\$
32-05	RETAINING WALL, PIP CONCRETE, 4,000 PSI, 8" WIDE, MEDIUM BROOM FINISH, HT. VARIES	170	LF	\$	\$
32-06	RETAINING WALL, PIP CONCRETE, 4,000 PSI, 18" WIDE, MEDIUM BROOM FINISH, HT. VARIES	167	LF	\$	\$
32-07	RETAINING WALL, PIP CONCRETE, 4,000 PSI, 12" WIDE, , MEDIUM BROOM FINISH, HT. VARIES	45	LF	\$	\$
32-08	EXPANSION JOINT, GRAPHICALLY DEMONSTRATED ON PLAN AS LIGHT BLUE LINE	113	LF	\$	\$

**HARDSCAPE SUB-TOTAL** \$ \_\_\_\_\_

**LANDSCAPE****TREES & PALMS**

CODE	DESCRIPTION	QTY	UNIT	UNIT COST	TOTAL
LN	`NATCHEZ` CRAPE MYRTLE / LAGERSTROEMIA INDICA `NATCHEZ`	7	EA	\$	\$

**SHRUBS**

CODE	DESCRIPTION	QTY	UNIT	UNIT COST	TOTAL
DT	CINNAMON GIRL DISTYLIUM / DISTYLIUM X `PIIDIST-V` TM	55	EA	\$	\$
PT	MOJO JAPANESE PITTOSPORUM / PITTOSPORUM TOBIRA `MOJO`	25	EA	\$	\$
PM	PODOCARPUS / PODOCARPUS MACROPHYLLUS	17	EA	\$	\$
SB	SWEET VIBURNUM / VIBURNUM ODORATISSIMUM	25	EA	\$	\$
LB	BREEZE GRASS / LOMANDRA LONGIFOLIA `BREEZE`	149	EA	\$	\$
MS	ADAGIO MAIDEN GRASS / MISCANTHUS SINENSIS `ADAGIO`	22	EA	\$	\$

**GROUND COVERS**

CODE	DESCRIPTION	QTY	UNIT	UNIT COST	TOTAL
LM	PURPLE TRAILING LANTANA / LANTANA MONTEVIDENSIS	111	EA	\$	\$
RM	PEACH DRIFT ROSE / ROSA X `MEIGALPIO`	112	EA	\$	\$

**SOD**

CODE	DESCRIPTION	QTY	UNIT	UNIT COST	TOTAL
SOD	TIFWAY 419 BERMUDA GRASS / CYNODON DACTYLON `TIFWAY 419`	5,700	SF	\$	\$

**LANDSCAPE SUB-TOTAL** \$ \_\_\_\_\_

**IRRIGATION**

<b>MANUFACTURER / MODEL</b>	<b>QTY</b>	<b>UNIT</b>	<b>UNIT COST</b>	<b>TOTAL</b>
RAIN BIRD 1806-SAM-PRS 5 SERIES MPR	8	EA	\$	\$
RAIN BIRD 1806-SAM-PRS 8 SERIES MPR	24	EA	\$	\$
RAIN BIRD 1806-SAM-PRS 10 SERIES MPR	15	EA	\$	\$
RAIN BIRD 1806-SAM-PRS 12 SERIES MPR	28	EA	\$	\$
RAIN BIRD 1806-SAM-PRS 15 SERIES MPR	23	EA	\$	\$
RAIN BIRD 1812-SAM-PRS 5 SERIES MPR	17	EA	\$	\$
RAIN BIRD 1812-SAM-PRS 8 SERIES MPR	44	EA	\$	\$
RAIN BIRD 1812-SAM-PRS 10 SERIES MPR	5	EA	\$	\$
RAIN BIRD 1812-SAM-PRS 12 SERIES MPR	9	EA	\$	\$
RAIN BIRD 1812-SAM-PRS 15 SERIES MPR	19	EA	\$	\$

<b>MANUFACTURER / MODEL</b>	<b>QTY</b>	<b>UNIT</b>	<b>UNIT COST</b>	<b>TOTAL</b>
RAIN BIRD PGA 1-1/2"	2	EA	\$	\$
RAIN BIRD PGA 1"	9	SF	\$	\$
APOLLO VALVES 4A104A4F 3/4"	1	EA	\$	\$
RAIN BIRD ESP12LXMEF-LXMMSS	1	EA	\$	\$
RAIN BIRD WR2-RFS	1	EA	\$	\$
IRRIGATION LATERAL LINE: PVC CLASS 200 SDR 21 1"	1880	LF	\$	\$
IRRIGATION LATERAL LINE: PVC CLASS 200 SDR 21 1 1/2"	23.8	LF	\$	\$
IRRIGATION MAINLINE: PVC CLASS 200 SDR 21 1 1/2"	270.1	LF	\$	\$
PIPE SLEEVE: PVC SCHEDULE 40	57.5	LF	\$	\$

**IRRIGATION SUB-TOTAL** \$ \_\_\_\_\_

**LIGHTING**

<b>MANUFACTURER / MODEL</b>	<b>QTY</b>	<b>UNIT</b>	<b>UNIT COST</b>	<b>TOTAL</b>
RECEPTACLE, 4-SOCKET, GFI	7	EA	\$	\$
CAMERA CONTRACTOR TO PROVIDE CONDUIT WITH PULL STRING FROM EXISTING POWER POLE NOTED ON PLANS. CITY TO PROVIDE & INSTALL CAMERA & WIRING.	1	EA	\$	\$
FX LUMINAIRE FC-GW-90 LARGE SCALE IN GRADE FIXTURE. 4" DIA X 5.7" H.	12	EA	\$	\$
FX LUMINAIRE LM BEST UTILIZED IN WALLS AND ADJACENT TO STAIRWAYS. 9" W X 3.5" H X 2.375" D.	33	EA	\$	\$
FX LUMINAIRE FB FITS WELL INTO TIGHT SPACES. 7.5" H X 2.0" DIA.	17	EA	\$	\$
POLE LIGHT MODEL #AUCL2 UTILITY ARLINGTON SERIES LUMINAIRE FULL CUTOFF LED2 BY HOLOPHANE, POLE:12` ARLEN 17 MODIFIED STRUCTURAL STRAIGHT FLUTED ALUMINUM POLE BY HAPCO. COLOR: BLACK. FOUNDATION TO BE 18" DIA X 30" CONCRETE FOUNDATION W/ 3" ABOVE FINISHED GRADE. TOP EDGE TO RECEIVE 3/4" X 45 DEG RADIUS. PROVIDE FOUNDATION WITH ANCHOR BOLTS SUPPLIED WITH LAMP POST AND ENCASED CONDUIT AS REQUIRED.	2	EA	\$	\$
FX LUMINAIRE DE TREE MOONLIGHT. DOWN LIGHT IDEAL FOR LARGE APPLICATIONS. 9.7" H X 3.0" DIA.	3	EA	\$	\$
SIGN POWER POWER SUPPLY FOR INTERIOR ILLUMINATED ENTRY SIGN, RE: SIGN DETAIL. COORDINATE WITH SIGNAGE CONTRACTOR.	1	EA	\$	\$
POLE SECURITY CAMERA POLE, 16` H ROUND TAPERED ALUMINUM POLE BY VALMONT STRUCTURES. 4-BOLT ANCHOR BASE. POLE TO HAVE FESTOON TO ACCEPT GFI OUTLET	1	EA	\$	\$
ELECTRICAL PANEL, 120 VAC MOUNTED ON SHORT WOOD FRAME	1	EA	\$	\$
FX LUMINAIRE LUXOR 300	2	EA	\$	\$

**LIGHTING SUB-TOTAL** \$ \_\_\_\_\_

**FURNITURE**

CODE	DESCRIPTION	QTY	UNIT	UNIT COST	TOTAL
12-01	CONTRABASS CHIMES, BY FREENOTES HARMONY PARK, SURFACE MOUNTED PER MANUFACTURER'S RECOMMENDATION. CONTRACTOR TO PURCHASE & INSTALL	1	EA	\$	\$
12-02	TUNED DRUMS, BY FREENOTES HARMONY PARK, SURFACE MOUNTED PER MANUFACTURER'S RECOMMENDATION. CONTRACTOR TO PURCHASE & INSTALL	1	EA	\$	\$
12-03	IMBARIMBA, BY FREENOTES HARMONY PARK, SURFACE MOUNTED PER MANUFACTURER'S RECOMMENDATION. CONTRACTOR TO PURCHASE & INSTALL	1	EA	\$	\$
12-04	PEGASUS, BY FREENOTES HARMONY PARK, SURFACE MOUNTED PER MANUFACTURER'S RECOMMENDATION. CONTRACTOR TO PURCHASE & INSTALL	1	EA	\$	\$
12-05	SWIRL, BY FREENOTES HARMONY PARK, SURFACE MOUNTED PER MANUFACTURER'S RECOMMENDATION. CONTRACTOR TO PURCHASE & INSTALL	1	EA	\$	\$
12-06	BENCH, LAMPLIGHTER WITH BACK BY KEYSTONE RIDGE DESIGNS, MODEL #L26, COLOR: GLOSS BLACK. CAST ON NAME PLATE: CITY OF FOLEY.	3	EA	\$	\$
12-07	PICNIC TABLE, DUMOR TABLE SET 475-601-1 72" STEEL ADA PICNIC TABLE. FRAME: TEXTURED STEEL, SILVER. TABLETOP AND SEATS IN IPE. SURFACE MOUNT INSTALL PER MANUFACTURER`S INSTRUCTIONS.	1	EA	\$	\$
12-17	TRASH RECEPTACLE, DUMOR 474-32-BT 32GAL STEEL RECEPTACLE WITH SLATS. TEXTURED SILVER COLOR TO MATCH PICNIC TABLE. IPE SLATS. COVERED TOP DEPOSIT WITH 10" OPENING. INSTALL PER MANUFACTURER`S INSTRUCTIONS ON 4" CONCRETE BASE THAT IS SAME RADIUS AS BOTTOM OF UNIT. FINISH ELEVATION OF BASE SHOULD BE 1" ABOVE ADJACENT GRADE.	4	EA	\$	\$

**FURNITURE SUB-TOTAL** \$ \_\_\_\_\_

**PROJECT SUB-TOTAL** \$ \_\_\_\_\_

NOTE: Any discrepancies b/t plans & bid forms shall be reported to Landscape Architect upon discovery.

**FOLEY PRIDE POCKET PARK BID ALTERNATE #1**

**SECTION 004323 ALTERNATES FORM**

Prepared by WAS Design, Inc.

4/25/2022




<b>FURNITURE</b>					
<b>CODE</b>	<b>DESCRIPTION</b>	<b>QTY</b>	<b>UNIT</b>	<b>UNIT COST</b>	<b>TOTAL</b>
12-01	CONTRABASS CHIMES, BY FREENOTES HARMONY PARK. OWNER TO PURCHASE & PROVIDE. CONTRACTOR TO INSTALL. INSTRUMENTS TO BE SURFACE MOUNTED PER MANUFACTURER'S RECOMMENDATIONS.	1	EA	\$	\$
12-02	TUNED DRUMS, BY FREENOTES HARMONY PARK. OWNER TO PURCHASE & PROVIDE. CONTRACTOR TO INSTALL. INSTRUMENTS TO BE SURFACE MOUNTED PER MANUFACTURER'S RECOMMENDATIONS.	1	EA	\$	\$
12-03	IMBARIMBA, BY FREENOTES HARMONY PARK. OWNER TO PURCHASE & PROVIDE. CONTRACTOR TO INSTALL. INSTRUMENTS TO BE SURFACE MOUNTED PER MANUFACTURER'S RECOMMENDATIONS.	1	EA	\$	\$
12-04	PEGASUS, BY FREENOTES HARMONY PARK. OWNER TO PURCHASE & PROVIDE. CONTRACTOR TO INSTALL. INSTRUMENTS TO BE SURFACE MOUNTED PER MANUFACTURER'S RECOMMENDATIONS.	1	EA	\$	\$
12-05	SWIRL, BY FREENOTES HARMONY PARK. OWNER TO PURCHASE & PROVIDE. CONTRACTOR TO INSTALL. INSTRUMENTS TO BE SURFACE MOUNTED PER MANUFACTURER'S RECOMMENDATIONS.	1	EA	\$	\$

**BID ALTERNATE SUB-TOTAL** \$

NOTE: Any discrepancies b/t plans & bid forms shall be reported to Landscape Architect upon discovery.

**NOT**  
FOR CONSTRUCTION  
THESE PLANS HAVE NOT BEEN  
APPROVED AND ARE SUBJECT  
TO CHANGE.

A Landscape Development Plan for  
**Foley Pride Pocket Park**  
Foley, Alabama

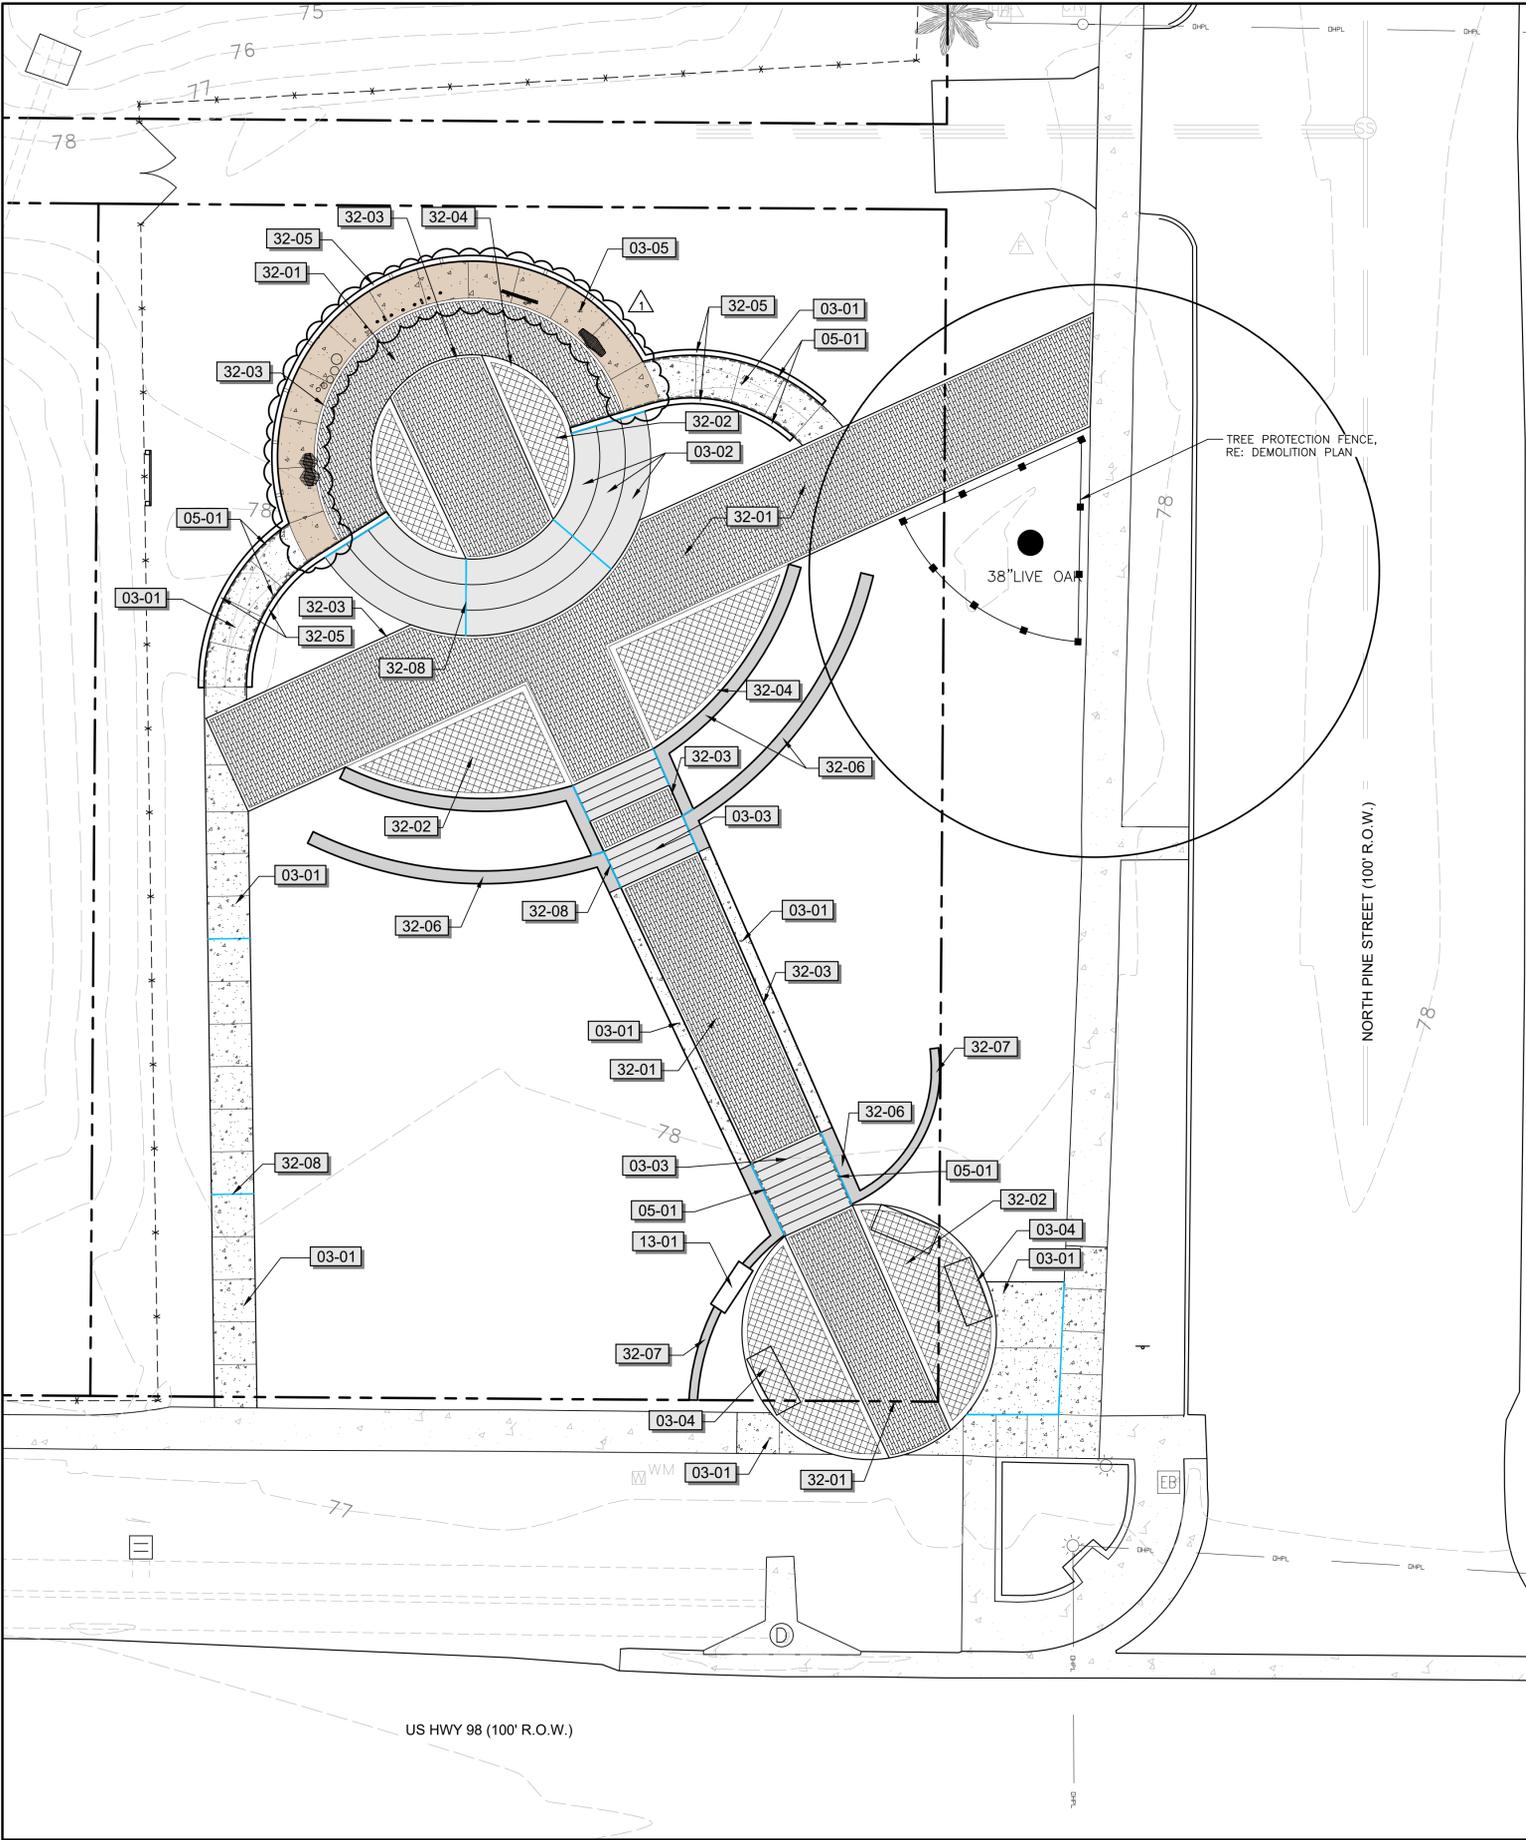

**REFERENCE NOTES SCHEDULE**

SYMBOL	03 CONCRETE DESCRIPTION	QTY	DETAIL
03-01	CONCRETE PAVING, 3,500 PSI CONCRETE, 5" THICK, MEDIUM BROOM FINISH	1,066 SF	2/LH500
03-02	CONCRETE STEP, 36" TREAD X 6" RISER, 4,000 PSI CONCRETE, MEDIUM BROOM FINISH WITH RIBBED SAFETY NOSING. QUANTITY NOTED INDICATES TOTAL TREAD LENGTH AT 36" WIDTH.	138 LF	3/LH501
03-03	CONCRETE STEP, 14" DEEP X 6" RISER, +/-10.5" WIDE TREAD, 4,000 PSI CONCRETE, MEDIUM BROOM FINISH WITH RIBBED SAFETY NOSING	13	4/LH501
03-04	CONCRETE, BENCH UNDERSLAB	72 SF	5/LH501
03-05	CONCRETE PAVING, 3,500 PSI CONCRETE, 6" THICK, MEDIUM BROOM FINISH	308 SF	1
SYMBOL	05 METALS DESCRIPTION	QTY	DETAIL
05-01	HANDRAIL, STAINLESS STEEL, ROUND TUBING, 1.5" DIA.	123 LF	6/LH501
SYMBOL	13 SPECIAL CONSTRUCTION DESCRIPTION	QTY	DETAIL
13-01	ENTRANCE SIGN, BRICK MONUMENT SIGN WALL BY CONTRACTOR. SIGNFACE & LIGHTING TO BE PROVIDED & INSTALLED BY OWNER.	1	1/LH502
SYMBOL	32 EXTERIOR IMPROVEMENTS DESCRIPTION	QTY	DETAIL
32-01	UNIT PAVER FIELD, 4"x16" PLANK PAVERS BY TREMRON, COLOR: TAN, PATTERN: RUNNING BOND AS SHOWN	2,402 SF	1/LH500
32-02	UNIT PAVER FIELD, 8"x8" PARK PLAZA PAVERS BY TREMRON, COLOR: TAUPE, PATTERN: 45 DEGREE AS SHOWN	817 SF	1/LH500
32-03	UNIT PAVER BAND, 4"x16" PLANK PAVERS BY TREMRON, COLOR: TAN, PATTERN: SAILOR COURSE	595 LF	1/LH500
32-04	UNIT PAVER BAND, 8"x8" PARK PLAZA PAVERS BY TREMRON, COLOR: TAUPE, PATTERN: SAILOR COURSE	339 LF	1/LH500
32-05	RETAINING WALL, PIP CONCRETE, 4,000 PSI, 8" WIDE, MEDIUM BROOM FINISH, HT. VARIES	170 LF	7/LH501
32-06	RETAINING WALL, PIP CONCRETE, 4,000 PSI, 18" WIDE, MEDIUM BROOM FINISH, HT. VARIES	167 LF	2/LH501
32-07	RETAINING WALL, PIP CONCRETE, 4,000 PSI, 12" WIDE, MEDIUM BROOM FINISH, HT. VARIES	45 LF	2/LH502
32-08	EXPANSION JOINT, GRAPHICALLY DEMONSTRATED ON PLAN AS LIGHT BLUE LINE	113 LF	2/LH500

Revisions

No.	Date	Revisions / Submissions
11.22.21		FOR OWNER REVIEW
11.24.21		FOR OWNER REVIEW
12.15.21		FOR OWNER REVIEW
01.17.22		FOR OWNER REVIEW
02.10.22		FOR OWNER REVIEW
04.08.22		CD100 - BID SET
04.25.22		ADDENDUM 01
04.25.22		ADDENDUM 02

© Copyright 2022 WAS Design Inc. These documents and their contents are the property of WAS Design. Any reproductions, revisions, modifications or use of these documents without the express written consent of WAS Design is prohibited by law.

YJ \_\_\_\_\_ Registration  
 Drawn \_\_\_\_\_  
 DM \_\_\_\_\_  
 Project Manager  
 CW \_\_\_\_\_  
 Principal  
 216003-016  
 Project No.  
 04.06.21  
 Date

Sheet Title

**HARDSCAPE PLAN**

Sheet No.  
**LH100**