


DOG HOUSE

W/TWO DOORS
GROUND LOADED, SIDE LOADING, CLOSED TOP

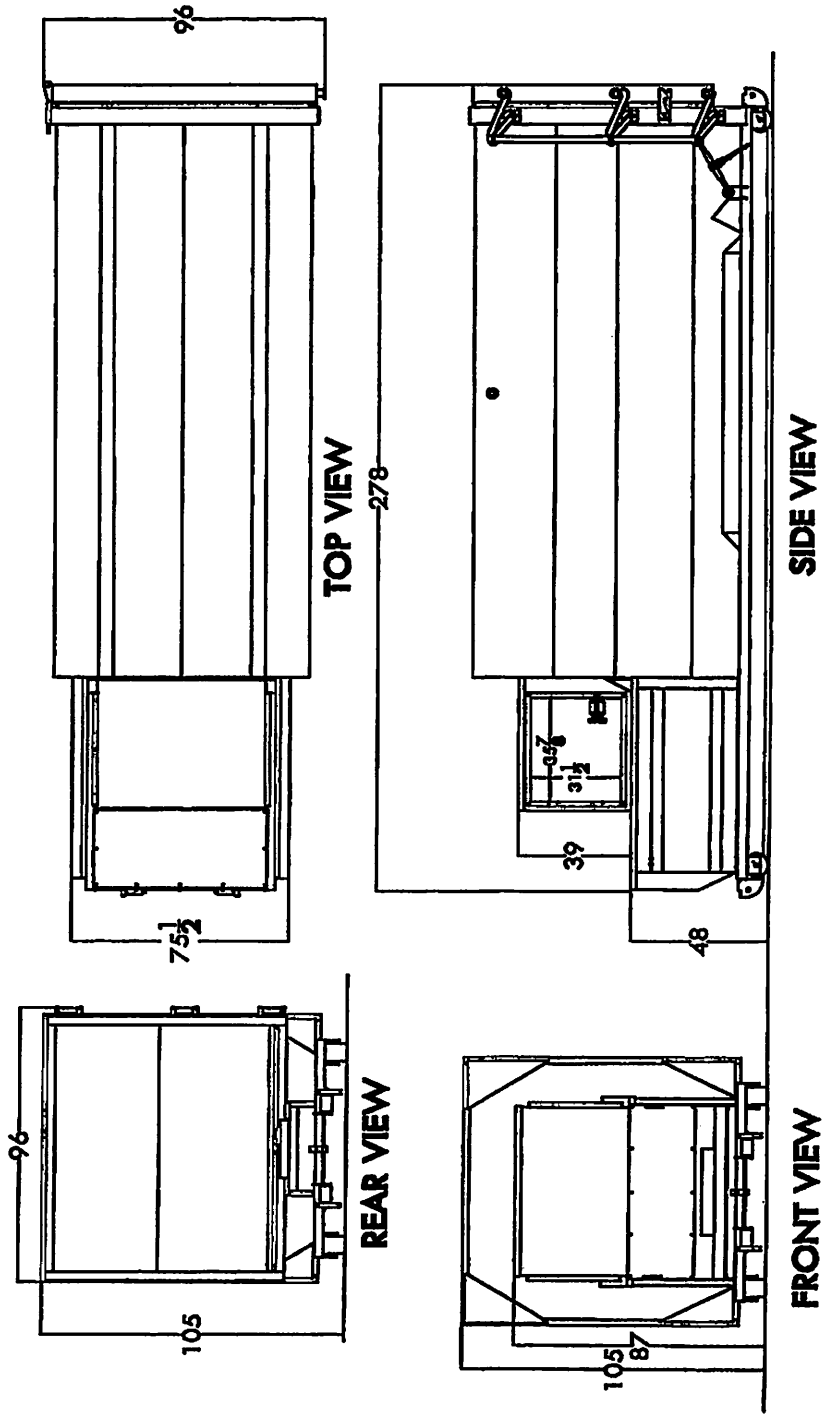

NOTE: DIMENSIONS ARE NOMINAL. THEY ARE A CLOSE REPRESENTATION OF ACTUAL WELDED ASSEMBLIES AND MAY CHANGE WITHOUT NOTICE.

Self Contained Compactor Specifications

Size / Capacity Specifications:

MFG Rating	2 cy
Water Rating	1.51 cy

Overall Dimensions

Measurements	<i>Dimensions Attached, 35 cy Hopper Capacity</i>	
Clear Top Opening	41" x 60"	
Load Height	48"	(Low Pro = 42")
Discharge Opening	30" x 60"	
Weight		

Performance Specifications

Ram Penetration	6"
Normal Packing Force	55,300 lbs
Maximum Packing Force	62,800 lbs
Cycle Time	30 sec

Electrical Specifications

Motor	15 HP - 3ph Tri Volt
Standard Controls	Key Start Switch, Emergency Stop, Reverse (120V)
Optional Remote Pendant Control	<i>30ft</i> Sealtite
UL Labeled Panel / Power Unit	Nema 13 Box - All Circuits Fused

Hydraulic Specifications

Pump Capacity	12 gpm
Normal Operating Pressure	2200 psi
Maximum Operating Pressure	2500 psi
Cylinders (2)	4" Bore x 35" Stroke x 2" Rod

Construction Specifications

Body Sides	3/16" plate
Side Ribs / Legs	1/4" plate - formed channel
Top Rails	2 x 4 x 1/4"
Body Floor	1/2" plate
Floor X Members	4" channel
Ram Face	(29" x 60") 1/2" plate
Ram Sides	1/4" plate
Ram Bottom	1/2" plate
Ram Top	1/4" plate
Breaker Bar w/ Fixed teeth	4 x 6 x 3/4"
Container	7ga / 10ga
Sealed Door	7ga "bubble" door
Primer Coat - 2mil + Industrial Enamel Paint Coat - 2mil	

Certified in Compliance with ANSI Z245.2 Regulations

Std Warranty - 12 months Parts and Labor / 36 months Structural

List Extended WARRANTY Options