



11 INTERIOR ELEVATION - TYPICAL BATHROOM - NEW

10 INTERIOR ELEVATION - TYPICAL BATHROOM - NEW



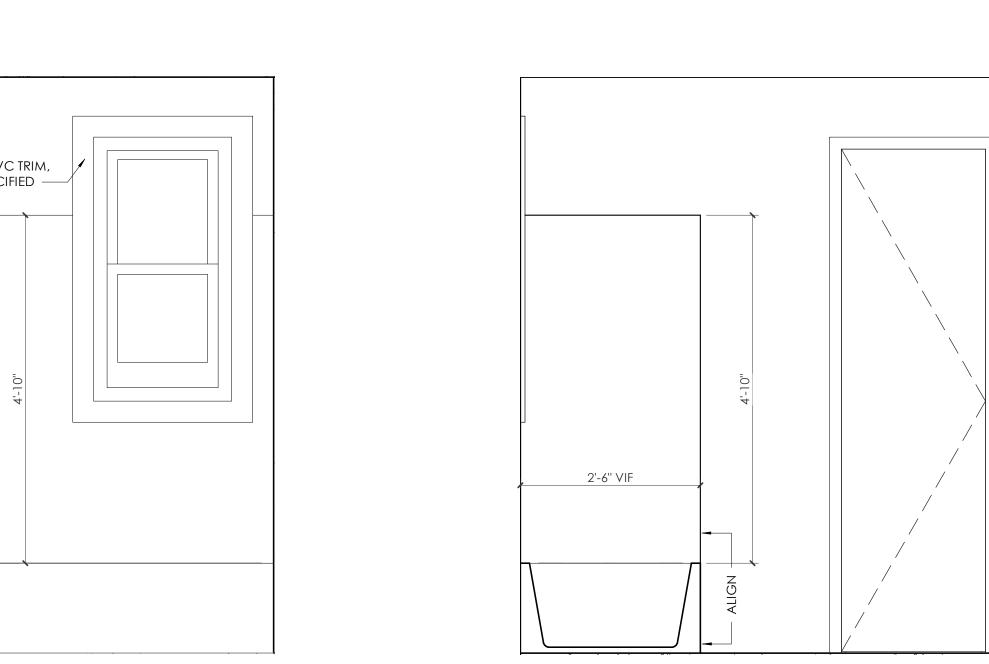

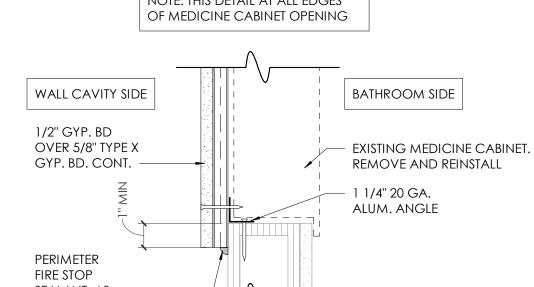

حاك ـ ـ ـ ـ ـ ـ ـ ـ ال*ـ* _____

+/- 2'-9" VIF

4.1 CAREFULLY REMOVE APPLIANCES, BASE AND WALL CABINETS, COUNTERTOP AND SINK, AND ELECTRICAL Outlets, as required; and store in dwelling unit for future reinstallation. See interior

4.2 REMOVE GYPSUM WALLBOARD AND EXISTING METAL STUD FRAMING, AS REQUIRED; AND REPLACE WITH MOISTURE RESISTANT TYPE 'X' GYPSUM WALLBOARD AND METAL STUD FRAMING, AS SPECIFIED. SEE

4.3 REMOVE EXISTING MASONRY PARTITION AS REQUIRED FOR ACCESS TO WALL CAVITY. SEE INTERIOR

4.4 REMOVE EXISTING MASONRY PARTITION AND REPLACE WITH METAL STUD FRAMING AND TYPE 'X' GYPSUM WALLBOARD. SEE INTERIOR DETAILS & INTERIOR ELEVATIONS.

IN DWELLING UNIT FOR FUTURE REINSTALLATION. REMOVE AND REPLACE SHOWER VALVE, HEAD AND EXTENTION PIPE, TUB FILLER AND OVERFLOW. SEE INTERIOR ELEVATIONS, ELECTRICAL & PLUMBING 4.6 CAREFULLY REMOVE EXISTING COUNTERTOP AND FACE PANEL WHERE APPLICABLE. PROVIDE NEW

DOMESTIC WATER PIPING TO EXISTING HOT WATER HEATER. SEE INTERIOR ELEVATIONS AND PLUMBING

4.9 REMOVE EXISTING TUB, AND STORE IN DWELLING UNIT FOR FUTURE REINSTALLATION.

5.1 REMOVE ALL EXISTING DOMESTIC WATER PIPING, AND REPLACE WITH NEW PIPING. SEE INTERIOR

6.1 REMOVE EXISTING INTEGRAL WASHER PAN/VALVE BOX UNIT REPLACE WITH NEW WASHING MACHINE VALVE BOX, HOT & COLD WATER AND DRAIN CONNECTION. REMOVE AND REPLACE EXISTING

- 1 REMOVE EXISTING MATERIALS INCLUDING WALLS, FLOORING AND CELINGS AS INDICATED AND
- 2 WHERE DEMOLITION ABUTS EXISTING MATERIALS TO REMAIN, CONTRACTOR SHALL PATCH ANY DAMAGES
- REPRESENTATIVE, (FOR EXAMPLE, DOORS, HARDWARE, LIGHT FIXTURES AND DIFFUSERS) TO DETERMINE THE
- 4 PATCH CONCRETE SLABS TO MATCH EXISTING FLOOR LEVEL, WHERE FIXTURES AND EQUIPMENT ARE
- 5 DEMOLITION REQUIRED FOR NEW CONSTRUCTION SHALL BE HELD TO A MINIMUM, TO THE GREATEST EXTENT
- REPAIRED. FINISHES AND COLORS SHALL MATCH EXISTING WHERE POSSIBLE.

6 REMOVE EXISTING APPLIANCES, AND STORE IN UNIT FOR FUTURE REINSTALLATION.

- 1 LEAD-BASED PAINT ABATEMENT & DISPOSAL: WORK SHALL BE PERFORMED IN ACCORDANCE WITH SPECIFICATION 02 8319.13 LEAD-CONTAINING AND LEAD-BASED PAINT REMOVAL AND DISPOSAL. 2 MOLD ABATEMENT: WORK SHALL BE PERFORMED IN ACCORDANCE WITH SPECIFICATION 02 8500 MOLD
- ABATEMENT. 3 IF ASBESTOS IS SUSPECTED TO BE PRESENT DURING DEMOLITION, GENERAL CONTRACTOR SHALL NOTIFY THE
- OWNER AND ARCHITECT IMMEDIATELY.
- 4 ASSEMBLY PENETRATIONS INCLUDE WALLS, FLOOR/CEILING AND CEILING/ROOF ELEMENTS BETWEEN RESIDENTIAL UNITS SHALL BE SEALED WITH APPROVED FIRE RATED SEALANT. SEE PLUMBING DRAWINGS. 5 PROVIDE BLOCKING AT NEW MTL. STUD FRAMED WALLS FOR ALL KITCHEN CABINETS AND PLUMBING
- FIXTURES. 6 RAILING ANCHORS: RAILINGS AND ANCHORS SHALL RESIST A MINIMUM CONCENTRATED FORCE OF 200

INTERIOR ELEVATION LEGEND

AREA OF GYP. BD. TO BE DEMOLISHED OR REMOVED. SEE NOTES.

POUNDS APPLIED TO ANY POINT OF THE ASSEMBLY.

EXISTING ITEM(S) TO BE DEMOLISHED OR REMOVED FOR FUTURE REINSTALLATION (SEE FLOOR PLAN KEYED NOTES)

McCARTY **HOLSAPLE** McCARTY ARCHITECTS & INTERIOR DESIGNERS

550 W. MAIN STREET, SUITE 30 KNOXVILLE, TENNESSEE 37


DOUG McCAF DMcCarty@mhminc.d PROJECT INFORMATION

Western Heights

KNOXVILLE, TENNESSEE 00000-000 **ACTIVE DESIGN PHASE**

CONSTRUCTION DOCUMENTS

ONSTRUCTION ADMINISTRATION



ARCHITECT. Contractor shall check and verify all dimensions and conditions at job site.

CONSULTANT INFORMATION

CODES OFFICIAL REVIEW

REVISION INFORMATION

DRAWING INFORMATION

CALE GUIDE: DWG ISSUED: OCTOBER 5, 20 PRJ MGR: K. WHITE / G. TAYLO DRAWN BY: HECKED BY: RAWING TITLE:

INTERIOR ELEVATIONS & DETAILS