

**Project Addendum 1  
(1 page, 2 Attachment)**

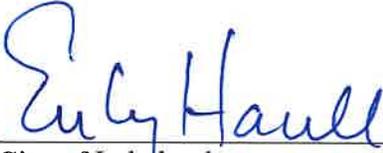
Project: FY21 Street Paving Project


Date: February 1, 2021

The listed corrections should be incorporated into the plans/specifications. All bidders are required to indicate on the outside of their proposal envelope the receipt of this information by giving the date and the addenda number.

Description:

1. Bid Schedule, Schedule A, Add Line Item #14 "F&I Asphalt Binder (307-C)"
2. Section 01650 Measurement and Payment Procedures, Part 3 Execution, 3.01 Measurement and Payment of Bid Items, Add "N Furnish and Install Asphalt Binder (307-C)"

  
\_\_\_\_\_  
City of Lakeland  
Emily Harrell, P.E., City Engineer

  
\_\_\_\_\_  
Date

**BID SCHEDULE  
FY2021 STREET PAVING**

BID DATE: \_\_\_\_\_

COMPANY NAME: \_\_\_\_\_

ADDRESS: \_\_\_\_\_

Contractor shall furnish and install items as shown on the Drawings or called for in the Specifications. All costs not included in the schedule that are necessary to provide a complete, functional project as depicted in the Drawings and Specifications are to be considered incidental and merged with costs of other related bid items.

LS = Lump Sum    R&R = Remove and Replace    LF = Linear Feet    F&I = Furnish and Install  
SY = Square Yard    CY = Cubic Yard    EA = Each    Ton = Ton    LB = Pounds

**Schedule A**

ITEM	DESCRIPTION	UNIT	QUANTITY	UNIT COST	TOTAL COST
1	Cold Planning of Asphalt Pavement	SY	69,808		
2	F&I Select Backfill (Sand)	CY	5,045		
3	F&I Granular Base (LA610)	CY	2,525		
4	F&I Asphalt Patch	CY	420		
5	F&I Geotextile	SY	7,567		
6	F&I Tack Coat	Ton	33		
7	F&I Asphaltic Concrete Pavement (411-E)	Ton	8,135		
8	F&I Temporary Traffic Control	LS	1		
9	Material/Density Testing	LS	1	\$2,000	\$2,000
10	Full Depth Reclamation	SY	5,854		
11	Painted Pavement Marking (4" Solid White Line)	LF	78,900		
12	Painted Pavement Marking (4" Double Yellow Line)	LF	51,746		
13	Painted Pavement Marking (24" White Stop Bar )	LF	150		
14	F&I Asphalt Binder (307-C)	Tons	650		
<b>Total Bid Schedule A</b>					

**Total Base Bid :** \_\_\_\_\_

\_\_\_\_\_ Dollars (\$ \_\_\_\_\_).

This item shall include equipment, materials and labor to perform full depth reclamation of asphalt pavement. Payment shall be made by the contract unit price per Square Yard (SY).

K. Furnish and Install 4" Solid White Line

1. Measurement of this item shall be paid by the linear feet (LF) of 4" solid white line pavement marking furnished and installed. Measurements shall be made on the surface of the new pavement marking to the end. The item shall include thermoplastic material, glass beads, equipment, and any other material needed to perform the work.

L. Furnish and Install 4" Double Yellow Line

1. Measurement of this item shall be paid by the linear feet (LF) of 4" double yellow line pavement marking furnished and installed. Measurements shall be made on the surface of the new pavement marking to the end. The item shall include thermoplastic material, glass beads, equipment, and any other material needed to perform the work.

M. Furnish and Install 24" White Stop Bar

1. Measurement of this item shall be paid by the linear feet (LF) of 24" white stop bar pavement marking furnished and installed. Measurements shall be made on the surface of the new pavement marking to the end. The item shall include thermoplastic material, glass beads, equipment, and any other material needed to perform the work.

N. Furnish and Install Asphalt Binder (307-C)

1. Measurement of this item shall be by the tons (Ton) of asphalt binder furnished and installed in place and approved. Measurements shall be made from the lines formed by the junction of new asphalt and old asphalt. Quantities shall be verified and paid by haul ticket. This item shall include furnishing and placement of new hot mix asphalt and compaction. New asphalt binder shall have a compacted thickness of no less than two inches (2.0") on asphalt pavement after compaction. Payment shall be by the contract unit price per Ton (Ton) in place.

**END OF SECTION**