

1139 CAPITOL BLVD  
439



STATE OF FLORIDA  
DEPARTMENT OF HEALTH  
ONSITE SEWAGE TREATMENT AND DISPOSAL  
SYSTEM

PERMIT #: 17-S2-2564347  
APPLICATION #: AP1878426  
DATE PAID: 9/23/2022  
FEE PAID: 1350.00  
RECEIPT #: 17-PID-5817268  
DOCUMENT #: PR1830037

CONSTRUCTION PERMIT FOR: OSTDS Repair  
APPLICANT: Betty Fountain  
PROPERTY ADDRESS: 1139 Capitol Blvd Pensacola, FL 32505  
LOT: 000 BLOCK: 053 SUBDIVISION: Metes & Bounds  
PROPERTY ID #: 261S302101000053 [SECTION, TOWNSHIP, RANGE, PARCEL NUMBER]  
[OR TAX ID NUMBER]

SYSTEM MUST BE CONSTRUCTED IN ACCORDANCE WITH SPECIFICATIONS AND STANDARDS OF SECTION 381.0065, F.S., AND CHAPTER 64E-6, F.A.C. DEPARTMENT APPROVAL OF SYSTEM DOES NOT GUARANTEE SATISFACTORY PERFORMANCE FOR ANY SPECIFIC PERIOD OF TIME. ANY CHANGE IN MATERIAL FACTS, WHICH SERVED AS A BASIS FOR ISSUANCE OF THIS PERMIT, REQUIRE THE APPLICANT TO MODIFY THE PERMIT APPLICATION. SUCH MODIFICATIONS MAY RESULT IN THIS PERMIT BEING MADE NULL AND VOID. ISSUANCE OF THIS PERMIT DOES NOT EXEMPT THE APPLICANT FROM COMPLIANCE WITH OTHER FEDERAL, STATE, OR LOCAL PERMITTING REQUIRED FOR DEVELOPMENT OF THIS PROPERTY.

SYSTEM DESIGN AND SPECIFICATIONS

T [ 900 ] GALLONS / GPD Septic CAPACITY  
A [ 0 ] GALLONS / GPD CAPACITY  
N [ 0 ] GALLONS GREASE INTERCEPTOR CAPACITY [MAXIMUM CAPACITY SINGLE TANK:1250 GALLONS]  
K [ ] GALLONS DOSING TANK CAPACITY [ ] GALLONS @ [ ] DOSES PER 24 HRS #Pumps [ ]  
D [ 375 ] SQUARE FEET SYSTEM  
R [ 0 ] SQUARE FEET SYSTEM  
A TYPE SYSTEM: [x] STANDARD [ ] FILLED [ ] MOUND [ ]  
I CONFIGURATION: [x] TRENCH [ ] BED [ ]  
N  
F LOCATION OF BENCHMARK: Blue disc in small tree in back yard.  
I ELEVATION OF PROPOSED SYSTEM SITE [ 24.00 ] [ INCHES / FT ] [ ABOVE / BELOW ] BENCHMARK/REFERENCE POINT  
E BOTTOM OF DRAINFIELD TO BE [ 60.00 ] [ INCHES / FT ] [ ABOVE / BELOW ] BENCHMARK/REFERENCE POINT  
L  
D FILL REQUIRED: [ 0.00 ] INCHES EXCAVATION REQUIRED: [ ] INCHES

Approved for the above described repair/replacement system and abandonment of the existing uncertified system as per code. Install a new certified 900 gallon septic tank and a minimum of 375 sq. ft. of new drain field. Properly dispose of any spoil material. Sleeve or utilize schedule 40 pipe for potable water lines within 10 feet of the drain field. Potable water lines may not be within 2 feet of the drain field. A re-inspection will be charged for additional inspections. If benchmark is removed a \$50 re-inspection fee will be charged to reset the benchmark. Above must be completed prior to Final Inspection & Approval. (Comments Continued on Page 2.)

SPECIFICATIONS BY: Michael P Volk TITLE: OPS Environmental Specialist II  
APPROVED BY: M Volk TITLE: OPS Environmental Specialist II Escambia CHD  
DATE ISSUED: 09/28/2022 EXPIRATION DATE: 12/28/2022

DH 4016, 08/09 (Obsoletes all previous editions which may not be used)  
Incorporated: 64E-6.003, FAC

Page 1 of 3  
*[Handwritten signature]*


Maintain all setbacks in accordance with FAC 64-6. The system is sized for 3 bedrooms with a maximum occupancy of 6 persons (2 per bedroom), for a total estimated flow of 300 gpd.

house septic

Install new 900 gallon  
septic tank AND 375  
sq ft of drain field.

231

house  
septic

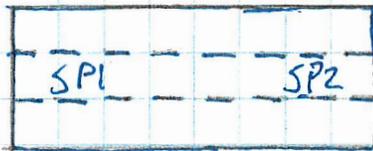

BM

house  
septic



WM

90

1139 Capitol BLVD