

ROBERT G. CAMPBELL & ASSOCIATES, L.P.

7523 Taggart Lane  
Knoxville, TN 37938  
(865) 947-5996  
Fax (865) 947-7556

621 Wall Street  
Sevierville, TN 37862  
(865) 429-4683  
Fax (865) 947-7556


ADDENDUM #1  
ISSUED MARCH 12, 2024 FOR BID OPENING ON MARCH 15, 2024

ANDERSON COUNTY WATER AUTHORITY  
HALLSDALE POWELL UTILITY DISTRICT  
2020 CDBG WATER LINE EXTENSION  
FOR  
BUCHANAN ROAD, SAVAGE GARDEN ROAD, FOUST LANE,  
HINDS CREEK ROAD, AND JUDSON ROAD  
RGC PROJECT NUMBER 18706

The purpose of the subject Addendum No. 1 is to make certain changes and clarifications in the Contract Documents and Specifications for the above referenced project.

Contract Documents:

- Replace bid schedule with attached bid schedule.

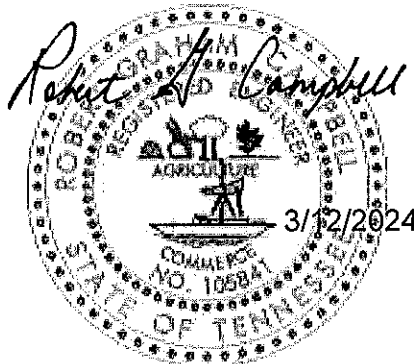

END OF ADDENDUM

**BID FORM**  
**2020 WATER LINE EXTENSION**  
**BUCHANAN RD., SAVAGE GARDEN RD., FOUST LN., HINDS CREEK RD., AND JUDSON RD.**  
**ANDERSON COUNTY, TENNESSEE**  
**RGC&A PROJ. #: 18706**

<u>ITEM NO.</u>	<u>DESCRIPTION</u>	<u>QUANTITY</u>	<u>UNIT</u>	<u>UNIT PRICE</u>	<u>TOTAL</u>
1.	Install 6-Inch Class 250 PVC Water Line	16,348	LF	_____	_____
2.	Install 6-Inch Pressure Class 350 Ductile Iron Water Line	1,000	LF	_____	_____
3.	Install 4-Inch Class 250 PVC Water Line	2,268	LF	_____	_____
4.	Install 2-Inch Class 250 PVC Water Line	920	LF	_____	_____
5.	Install 2-Inch Class 250 PVC Water Line - Materials Only	2,142	LF	_____	_____
6.	Free Bore Under Driveway with 6-inch Class 250 PVC Water Line	30	LF	_____	_____
7.	Free Bore Under Driveway with 6-inch Class 250 PVC Water Line - Materials Only	18	LF	_____	_____
8.	Bore and Jack 6-inch DIP Carrier in a 12-inch Steel Casing	130	LF	_____	_____
9.	Directional Bore 4-inch DIP Carrier in an 8-inch HDPE Casing	68	LF	_____	_____
10.	Directional Bore 2-inch Class 250 PVC Carrier in a 6-inch HDPE Casing	24	LF	_____	_____
11.	Connect to Existing 6-inch Water Line	2	EA	_____	_____
12.	Install 3/4-inch Type K Copper Service Line	6,513	LF	_____	_____
13.	Install 3/4-inch Type K Copper Service Line - Materials Only	1,390	LF	_____	_____
14.	Install 1-inch Type K Copper Service Line	3,580	LF	_____	_____
15.	Install 1-inch Type K Copper Service Line - Materials Only	780	LF	_____	_____
16.	6-inch Gate Valve with Valve Box	4	EA	_____	_____
17.	4-inch Gate Valve with Valve Box	8	EA	_____	_____
18.	2-inch Gate Valve with Valve Box	2	EA	_____	_____
19.	3/4-inch Air Release Valve Assembly	12	EA	_____	_____
20.	3/4-inch Air Release Valve Assembly - Materials Only	1	EA	_____	_____
21.	Install Fire Hydrant Assembly	8	EA	_____	_____
22.	2-inch Blowoff Assembly	1	EA	_____	_____
23.	2-inch Blowoff Assembly - Materials Only	1	EA	_____	_____
24.	Pavement Replacement	232	LF	_____	_____
25.	Pavement Replacement - Materials Only	18	LF	_____	_____
26.	LMI - Water Meter Assembly (Including Meter)	51	EA	_____	_____
27.	LMI - Water Meter Assembly (Including Meter) - Materials Only	7	EA	_____	_____
28.	Non-LMI - Water Meter Assembly (Including Meter)	7	EA	_____	_____
29.	Non-LMI - Water Meter Assembly (Including Meter) - Materials Only	1	EA	_____	_____

**BID (TOTAL)**

**\$**

(IN WORDS)