




Strandlinks® are used for splicing applications with overhead or down guy wire.

## Features

- Rated to hold a minimum of 90% of RBS of the strand used
- "Universal Grades" are recommended for use with Alumoweld, EHS, aluminized and galvanized steel
- "All Grades" are recommended for use on common grade, Siemens-Martin, high strength utility grade, galvanized and aluminized steel strand

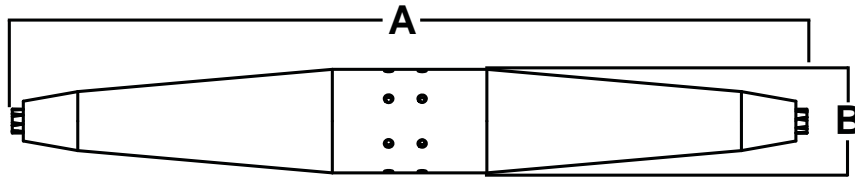


## Universal Grade

Catalog Number	Primary Strand Application	Range (In)	A	B
5039	3/16"	.145-.215	7.50	1.03
5040	1/4"	.215-.270	7.62	1.13
5041	5/16"	.270-.315	9.28	1.26
5042	3/8"	.325-.392	10.62	1.45
5043	7/16"	.392-.455	10.59	1.59
5044	1/2"	.455-.520	10.75	1.70

## All Grade

Catalog Number	Primary Strand Application	Range (In)	A	B
4999	3/16"	.185-.193	5.10	0.70
5000	1/4"	.240-.253	6.40	0.90
5001	5/16"	.310-.335	7.25	1.04
5002	3/8"	.360-.405	8.00	1.25



## Reducers


Catalog Number	Primary Strand Application	Range Large End (In)	Range Small End (In)
5086	1/4" x 3/16"	.215-.270	.145-.215
5087	5/16" x 1/4"	.270-.315	.215-.270
5022	3/8" x 5/16"	.360-.450	.310-.335
5023	7/16" x 3/8"	.410-.455	.360-.405



Strandvises® are used for deadend applications with overhead or down guy wire.

## Features

- Rated to hold a minimum of 90% of RBS of the strand used
- Color indicator for easy identification
- "Universal Grades" are recommended for use with Alumoweld, EHS, aluminized and galvanized steel
- "All Grades" are recommended for use on common grade, Siemens-Martin, high strength utility grade, galvanized and aluminized steel strand

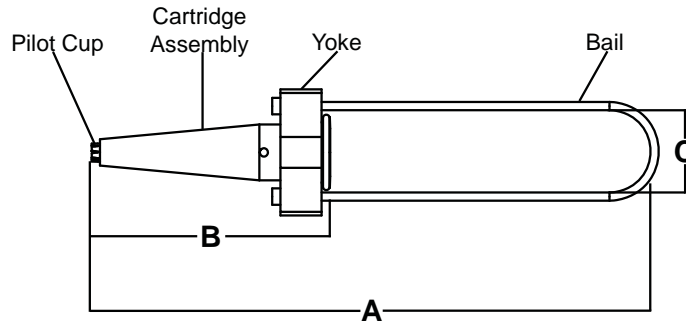

### 3/16" Universal Grade Strand - Red

Wire Range: .145-.215				
Catalog Number	A	B	C	Bail Type
5199	10.12	4.66	1.63	A
5255	12.75	4.66	2.75	E
5261	22.31	4.66	2.75	E

### 1/4" Universal Grade Strand - Yellow

Wire Range: .215-.270				
Catalog Number	A	B	C	Bail Type
5200	10.38	4.88	1.63	A
5250	13.87	4.88	2.25	B
5200L	13.87	4.88	1.63	C
5262	22.62	4.88	2.75	E
5268	28.63	4.88	2.75	E

### 5/16" Universal Grade Strand - Black

Wire Range: .270-.315				
Catalog Number	A	B	C	Bail Type
5201	10.69	5.38	1.63	A
5251	14.00	5.38	2.25	B
5201L	15.75	5.38	1.63	C
5257	14.06	5.38	2.75	E
5263	23.44	5.38	2.75	E
5269	29.69	5.38	2.75	E

### 3/16" All Grade Strand - Red

Wire Range: .185-.193				
Catalog Number	A	B	C	Bail Type
5099	8.06	2.97	1.63	A

### 1/4" All Grade Strand - Yellow

Wire Range: .240-.253				
Catalog Number	A	B	C	Bail Type
5100	9.56	3.94	1.63	A
5150	12.82	3.94	2.25	B
5100L	13.10	3.94	1.63	C

### 3/8" Universal Grade Strand - Orange

Wire Range: .325-.392				
Catalog Number	A	B	C	Bail Type
5202	12.88	6.47	1.63	A
5252	15.12	6.47	2.25	B
5202L	18.00	6.47	2.00	C
5264	25.00	6.47	2.75	E
5270	31.00	6.47	2.75	E

### 7/16" Universal Grade Strand - Green

Wire Range: .392-.455				
Catalog Number	A	B	C	Bail Type
5203	14.75	6.72	2.06	A
5253-6	17.25	6.72	2.75	D
5203L	21.00	6.72	2.00	C

### 1/2" Universal Grade Strand - Blue

Wire Range: .455-.520				
Catalog Number	A	B	C	Bail Type
5204	16.31	7.09	2.06	A
5254	17.50	7.09	2.25	B
5254-6	17.38	7.09	2.75	D
5204L	20.50	7.09	2.00	C

### 5/16" All Grade Strand - Black

Wire Range: .310-.335				
Catalog Number	A	B	C	Bail Type
5101	9.88	4.37	1.63	A
5151	13.10	4.37	2.25	B
5151-6	13.26	4.37	2.75	D

### 3/8" All Grade Strand - Orange

Wire Range: .360-.405				
Catalog Number	A	B	C	Bail Type
5102	11.88	5.00	1.63	A
5152	13.82	5.00	2.25	B
5152-6	13.50	5.00	2.75	D