


# GPS-FC-3-BAS

## Cold Plasma Air Purification Device

# PRODUCT DATA SHEET

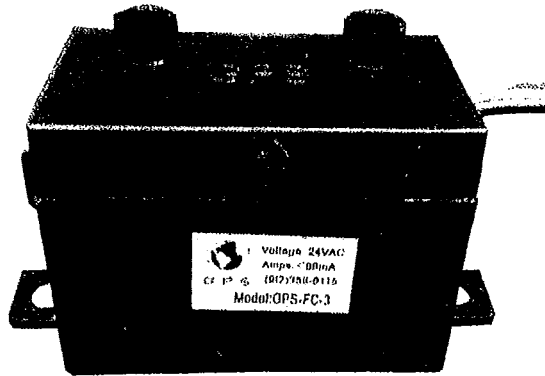

**Product Description:** The GPS-FC-3-BAS unit is designed to be mounted inside of fan coils, heatpumps PTACs, ductless mini-splits and air handlers up to 3,200 CFM or 8 tons. It's compact size and simple mounting requirement allows it to be mounted almost anywhere in just a few minutes.

**Standard Features Include:** Carbon Fiber Brushes, LED Operation Status, Integral BAS Alarm Contacts

**Benefits:** Neutralizes Odors, Kills Mold, Bacteria and Virus, Helps to Control Allergens\* and Asthma\*, Particle Reduction, Smoke Control, Ease of Installation and Service and Prevents Dirty Sock Syndrome (DSS)

**Applications:** Commercial Including Odor, Smoke, Pathogen, Mold/Mildew Control and Particle Reduction

**Specifications:**

Input Voltage:	24VAC
Power Required:	12 VA
Frequency:	50/60HZ
Capacity:	0-3,200 CFM
Unit Dimensions:	2.6"L x 1.9"H x 1.3"D
Weight:	1 lb
Electric Approvals:	UL
BMS Alarm Contact Rating:	"Dry" Contact Type—3A/115V Maximum

\*These statements are based on numerous customer testimonials and have not been evaluated by the FDA

Global Plasma Solutions  
10 Mall Terrace, Building C  
Savannah, GA 31406



Phone: 912-356-0115  
Fax: 912-356-0114  
Web: [www.globalplasmasolutions.com](http://www.globalplasmasolutions.com)