
## Notes

- Wall to be 2" x 4" stud walls with 5/8" Type X drywall.
  Walls will extend to just below the ceiling grid with a closure trim at top.
- 3. Walls shall be laterially tied off to roof steel framing every 5 feet.
- 4. There are two (2) counter tops for reception area and Computer Lab area.
- 5. Counter and trim to be constructed with 3/4" 5 ply B/C plywood with Wilsonart Laminate, color to be Antique Topaz
- 6. Ceiling grid shall be place around lateral bracing.
- 7. Owner shall provide existing doors. Contractor will trim with casing.
- 8. Contractor to replace damaged rear door A-106 and B-106 with same guage door and simular hardware.
- 9. Counter A will have a height of 3'0". Counter C will be 3'0" from floor.
- 10. Counters to be supported by blocking in walls and knee bracing on both counter. Counters support will be primed and painted same a trim.

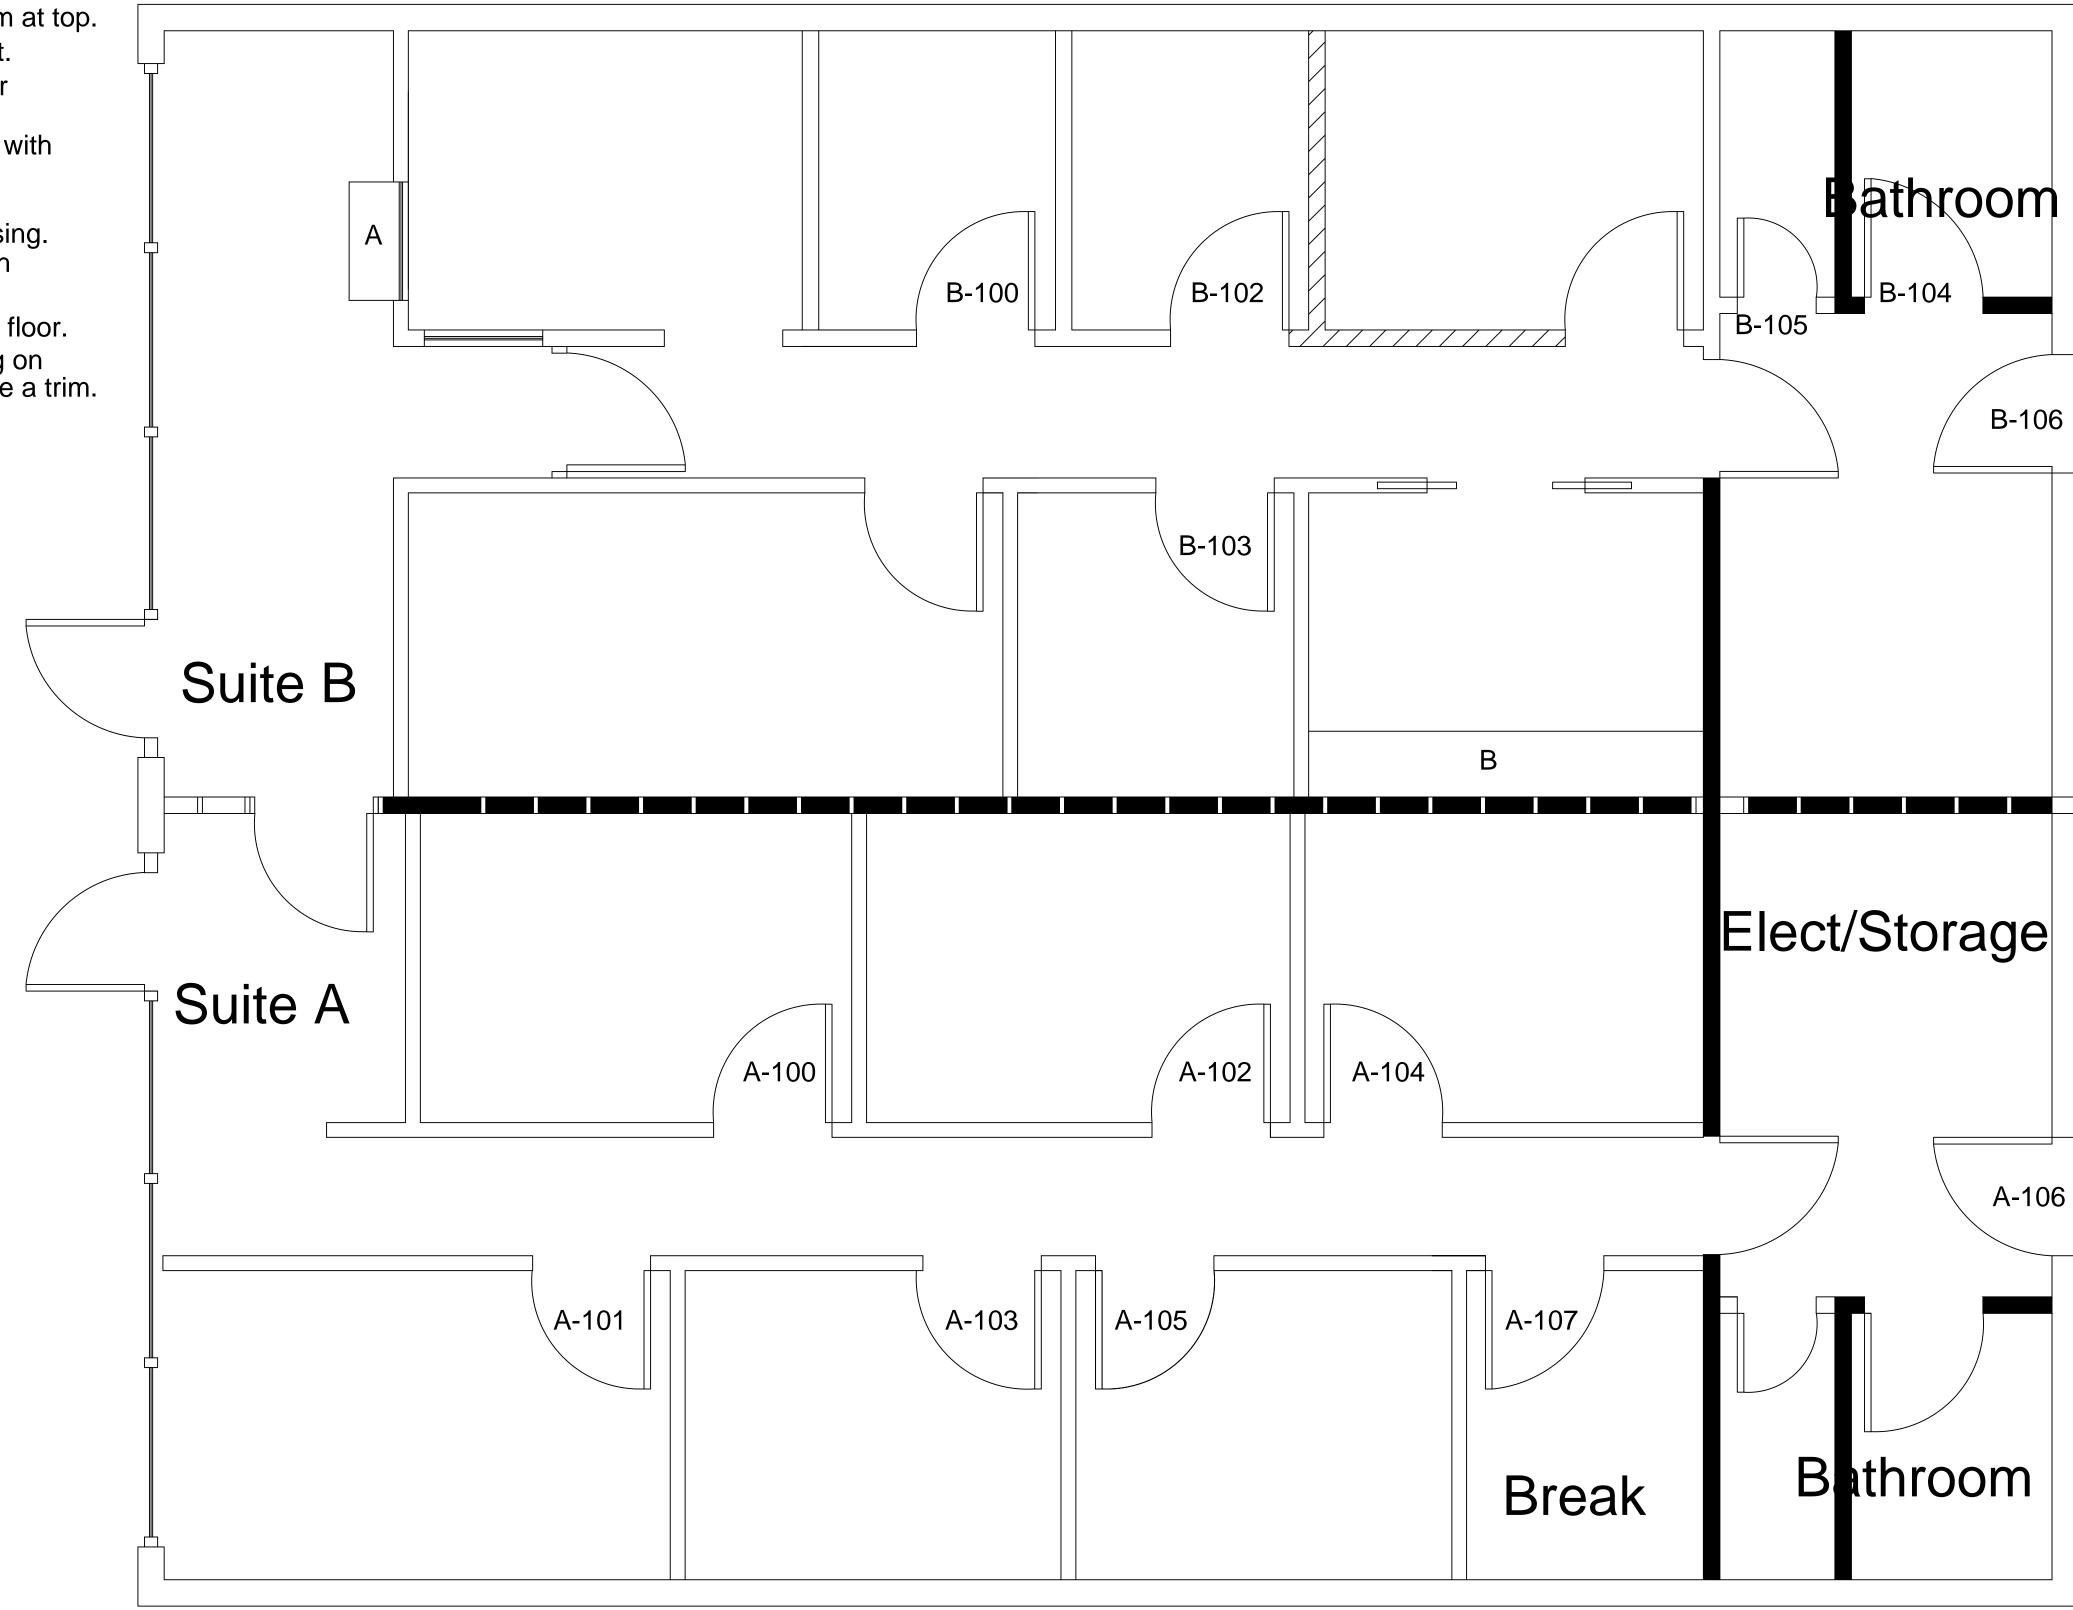

**Existing Wall** 

Existing 3/4 Height Wall

Drawn By	DC	REV.	DESCRIPTION	DATE	BY
Checked By	DC		PLAN-VIEW		
App'd By	APPDBY				
Date	NOV30/2016				

CITY OF SPARTANBURG CONSTRUCTION MANAGEMENT

PIEDMONT COMMUNITY ACTION OFFICE RENOVATION 601 JOHN B WHITE BLVD.

Project No.	Dwg. No.
	1
Scale :	6
SCALE	of