


- EROSION CONTROL NOTES:**
1. EROSION CONTROL DEVICES SHALL BE INSTALLED AND MAINTAINED IN ACCORDANCE WITH THE TDEC'S EROSION AND SEDIMENT CONTROL HANDBOOK AND THE CITY OF KNOXVILLE'S SITE DEVELOPMENT PERMIT REQUIREMENTS. THE DEVICES SHOWN ON THE DRAWINGS ARE THE MINIMUM REQUIRED. THE CONTRACTOR SHALL PROVIDE ADDITIONAL EROSION CONTROL DEVICES AS NEEDED.
 2. INSTALL TEMPORARY DIVERSION BERMS OR DIVERSION CHANNELS AS NECESSARY TO DIVERT STORM WATER FROM RUNNING ONTO THE DISTURBED AREAS AND TO DIVERT RUNOFF FROM DISTURBED AREAS TO THE APPROPRIATE SEDIMENT CONTROL.
 3. APPLY TEMPORARY SEEDING WHENEVER GRADING OPERATIONS ARE TEMPORARILY HALTED FOR OVER 14 DAYS AND FINAL GRADING OF EXPOSED SURFACES IS TO BE COMPLETED WITHIN ONE YEAR. APPLY TEMPORARY SEEDING TO SOIL STOCKPILES.
 4. APPLY PERMANENT SEEDING WHENEVER GRADING OPERATIONS ARE COMPLETED AND ALL CONSTRUCTION OPERATIONS WILL NOT IMPACT THE DISTURBED AREA. APPLY PERMANENT SEEDING TO ALL NON-CONSTRUCTION AREAS, WHICH SHOW SIGNS OF EXCESSIVE EROSION.
 5. PERMANENT SEEDING SHALL BE DROUGHT TOLERANT, HYBRID KENTUCKY 31 (AGUJAR, LANCER, REBEL IV, FALCON IV, ETC.), SEED AT A RATE OF 6-8 LBS./1000 S.F. USE A SLOW RELEASE STARTER FERTILIZER WITH 1 LBS./1000 S.F. NITROGEN. IF GRADING IS PERFORMED DURING THE WINTER MONTHS, SEED MIXTURE SHALL BE SUPPLEMENTED WITH A WINTER RYE OR OTHER APPROPRIATE MIXTURE TO ASSURE STABILIZATION DURING THE WINTER SEASON.
 6. MULCH WITH STRAW AT A RATE OF 100 LBS./1000 S.F. OVER THE SEEDED AREAS.
 7. THE CONTRACTOR IS RESPONSIBLE FOR THE INSTALLATION AND MAINTENANCE OF SITE CONSTRUCTION POLLUTION PREVENTION CONTROLS THROUGHOUT THE LIFE OF THE PROJECT.
 8. ADEQUATE DRAINAGE, EROSION AND SEDIMENT CONTROL MEASURES, BEST MANAGEMENT PRACTICES, AND/OR OTHER STORMWATER MANAGEMENT FACILITIES SHALL BE PROVIDED AND MAINTAINED AT ALL TIMES DURING CONSTRUCTION. DAMAGES TO ADJACENT PROPERTY AND/OR THE CONSTRUCTION SITE CAUSED BY THE CONTRACTOR'S FAILURE TO PROVIDE AND MAINTAIN ADEQUATE DRAINAGE, EROSION PREVENTION AND SEDIMENT CONTROL FOR THE CONSTRUCTION AREA SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.

- PHASE 1 SEQUENCING NOTES:**
1. BEGIN PHASE 1 EROSION PREVENTION AND SEDIMENT CONTROL BY INSTALLING A CONSTRUCTION ENTRANCE. THIS WILL BE THE FIRST CONSTRUCTION WORK ON THE PROJECT.
 2. INSTALL PERIMETER EROSION CONTROL WATTLES AND INLET SEDIMENT PROTECTION AS SHOWN ON THE PHASE 1 PLANS.
 3. STOP AND CONTACT THE ENGINEER FOR OBSERVATION. THE CITY OF KNOXVILLE WILL INSPECT THE SITE AND ISSUE A NOTICE OF COVERAGE (NOC) IF THE INITIAL BMP'S ARE PROPERLY INSTALLED.
 4. THIS WILL END PHASE 1.


Adam Rabinoff

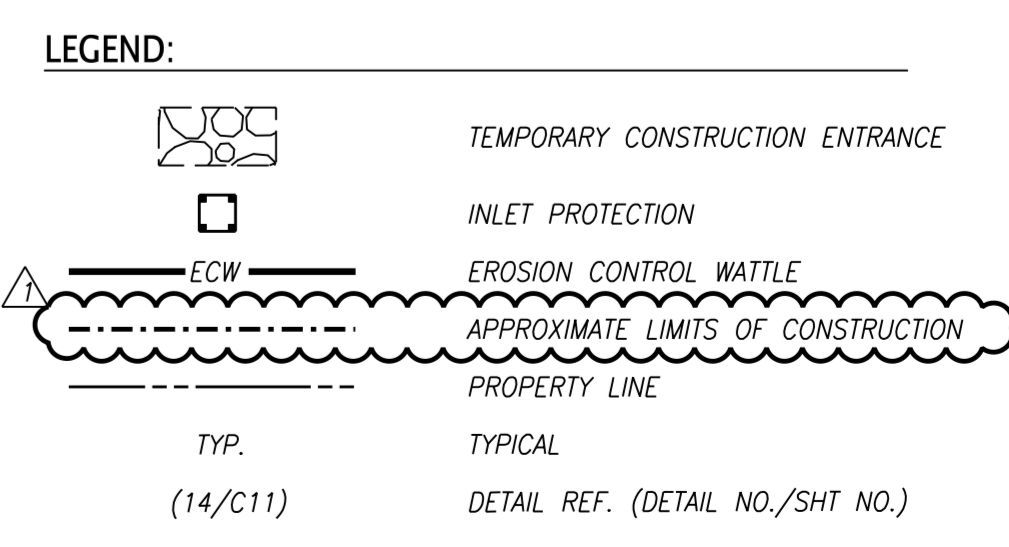

CITY OF KNOXVILLE
 DEPARTMENT OF ENGINEERING
APPROVED
Adam Rabinoff
 07/24/19



10330 HARDIN VALLEY ROAD
 SUITE 201
 KNOXVILLE, TN 37932
 OFFICE: 865.690.6419
 FAX: 865.690.6448
 www.fulghummacindoe.com

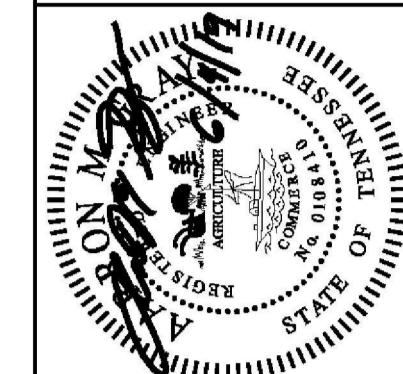

CITY SOUTH APARTMENTS
 2019 DAVENPORT ROAD
 KNOXVILLE, TENNESSEE 37920

DOMINION DEVELOPMENT GROUP
 PO BOX 52067
 KNOXVILLE, TN 37950
 CONTACT: PETER HALL
 TELEPHONE NO: 865.207.1480
 EMAIL: peterh@domindog.com

EROSION PREVENTION AND SEDIMENT CONTROL PLAN - PHASE 1

PROJ. NO.	AMC	DESIGNED BY	AMC	DRAWN BY	ADC	Date

Project: Sheet
 431-008
 Date: 03/08/19
 Scale: 1"=20'
APPROVED
 CITY OF KNOXVILLE
 DEPARTMENT OF ENGINEERING
 07/24/19
 Peter Hall

File Name: 151211_031089.dwg Plot Date: 07/24/19

©2019 FULGHUM MACINDOE & ASSOCIATES, INC. THIS DOCUMENT SHALL NOT BE LOANED, REPRODUCED, TRANSFERRED TO ANOTHER MEDIA OR USED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF FULGHUM MACINDOE & ASSOCIATES, INC.