


# BILLINGSLEY

A R C H I T E C T U R E

DOCUMENT 00 09 00

ADDENDUM NO. 2

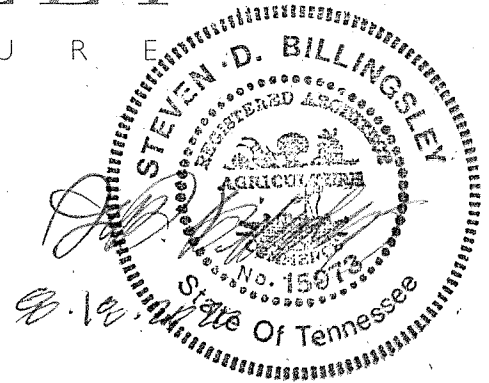

Date: **August 18, 2020**

Architect: **Billingsley/Architecture**

Project: **Chattanooga Police Crime Scene Unit**

Suite 800 Republic Centre

**Contract No. P-20-003-201**

633 Chestnut Street

3204 Amnicola Highway

Chattanooga, Tennessee 37450

Chattanooga, Tennessee 37406

(423) 752-003

This addendum forms a part of the Contract Documents and modifies the original Documents dated August 18, 2020, as noted below. Acknowledge receipt of this Addendum No. 2 in the space provided on the Bid Form and Contracts. Failure to do so may subject the Bidder to disqualification.

This Addendum No. 2 consists of (3) three 8½" x 11" sheets and (8) eight 24" x 36" sheets.

## GENERAL

1. Pre-bid Meeting Attendance: See attached roster.
2. Due to the Bid date being moved to August 27<sup>th</sup>, the last date for the City of Chattanooga to receive questions from General Contractors of record shall be Friday, August 21, 4:00 p.m.

## CHANGES TO THE PROJECT MANUAL

1. Summary of Work, Section 01 00 10, Paragraph 1.2, Point #5: Light fixtures for this project shall be furnished by the City of Chattanooga to the General Contractor for their installation.
2. Finish Hardware, Section 08 71 00:  
Delete requirement for Door #113 to be a part of hardware set #5. Add Door #113 to hardware set #9 and provide a new door, frame, and hardware.

## CHANGES TO THE DRAWINGS

1. Sheet A1.2, 1<sup>st</sup> Floor Demolition Plan:
  - A. Add Line defining area of work.

Planning / Architecture / Interiors

Republic Centre . Suite 800 . 633 Chestnut Street . Chattanooga, Tennessee . 37450

Addendum No. 2 | 00 09 00 - 1

- B. Add note clarifying walls of 8" concrete block masonry construction to be removed.
  - C. Add note identifying additional electrical and mechanical equipment to be removed.
  - D. Add doors and frames at Floor Plan locations 113 and 114 to be removed.
  - E. Add notes clarifying existing construction to remain.
  - F. At NOTES, add notes 4 and 5 to clarify requirements for removal of existing materials.
2. Sheet A2.1 – 1<sup>st</sup> Floor Plan
- A. WALL LEGEND: Corrections made to the wall type hatch patterns and notes.
  - B. First Floor Plan:
    - 1. Corrections made to the wall type hatch patterns.
    - 2. Additional wall type noted.
3. Sheet A2.2:
- A. Finish Materials & Legend: Change wall paint SW7066, Gray Matters call-out to P-5.
  - B. Typical Wall Section 2: Studs of new construction at Lab 125 and Second Floor perimeter wall to be 3 5/8" metal studs, 25 ga., at 24" on center.
  - C. Typical Wall Section 3: Delete in its entirety.
  - D. Typical Wall Section 4: Modify existing section to include existing electrical conduits, existing wood studs to be identified as such, the addition of new wood (or metal) studs in front of the existing studs with gypsum board attached to the exterior face.
  - E. Typical Wall Section 5: Delete in its entirety.
4. Sheet A2.3:
- A. Details 4, 5, and 6: Delete in their entirety.
  - B. Door and Frame Schedule:
    - 1. Add door, frame, and hardware requirements for door 113.
    - 2. Modify requirements for Door 127.
    - 3. Door locations labeled 'E' are existing doors and frames and no work is required.
5. Sheet A2.4:
- A. Mezzanine Floor Plan: Add Wall Type labels.
6. Sheet A4.1:
- A. EQUIPMENT KEYNOTES: modify various requirements. Safe (Item #25) to be relocated by the general contractor is approximately 21" D x 21" W x 3'-6" tall and weighs approximately 250 pounds.
  - B. NOTES: Add Notes #2 and #3 with specifications for required Contractor furnished refrigerator and dishwasher.
7. Sheet A4.2:
- A. TOILET ACCESSORIES: Modify requirements. See Project Manual Specifications, Section 10 28 00.
  - B. Interior Elevation E: Modify requirement at backsplash to require PL-2 on the wall from the top of the counter top to the bottom of the wall cabinets.

8. Sheet A6.1:
  - A. 1<sup>st</sup> Floor Reflected Ceiling Plan: Add Wall Section Labels.
  - B. Ceiling Legend: Add requirement to "See Finish Schedule" at acoustical lay-in ceilings for various ceiling heights.
  - C. Wall Section #1: Clarify location of existing wood studs, new studs, and new gypsum board.

**END OF DOCUMENT**

SIGN-IN SHEET

PROJECT: P-20-003 ORANGE SCENE UNIT 8/5/2020 1PM PREBID MEETING

NAME	COMPANY	PHONE	EMAIL
1 JOHN LYONS	CC	603 6070	JOHN@CHATTANOOGA.GOV
2 RANDY BELL	CC	603 5189	REBEL@CHATTANOOGA.GOV
3 BONNIE MUMFORD	CC	603 6031	EMUMFORD@CHATTANOOGA.GOV
4 DEBBIE PAUL	CC	603 77230	DTALLEY@CHATTANOOGA.GOV
5 Steve Billingsley	Bill/Architect	732 1120	Steve@billingsley.com
6 Dane Bradford	Dill Contracting	615-631-5775	dbradford@dillcontracting.com
7 DAVID LYNN	J+J Contractors	423-265-3233	David@jjcontractors.com
8 JON CLINARD	INTEGRATED PROPERTIES	423-643-8448	JCLINARD@INTEGRATEDPROPERTIES.COM
9 JASON BLACK	PBC CONST	426-664-5480	JASON@PBC-CONST.COM
10 Tommy Thompson	MORIS BUILD	423-802-0087	TThompson@MorisBuild.com
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			