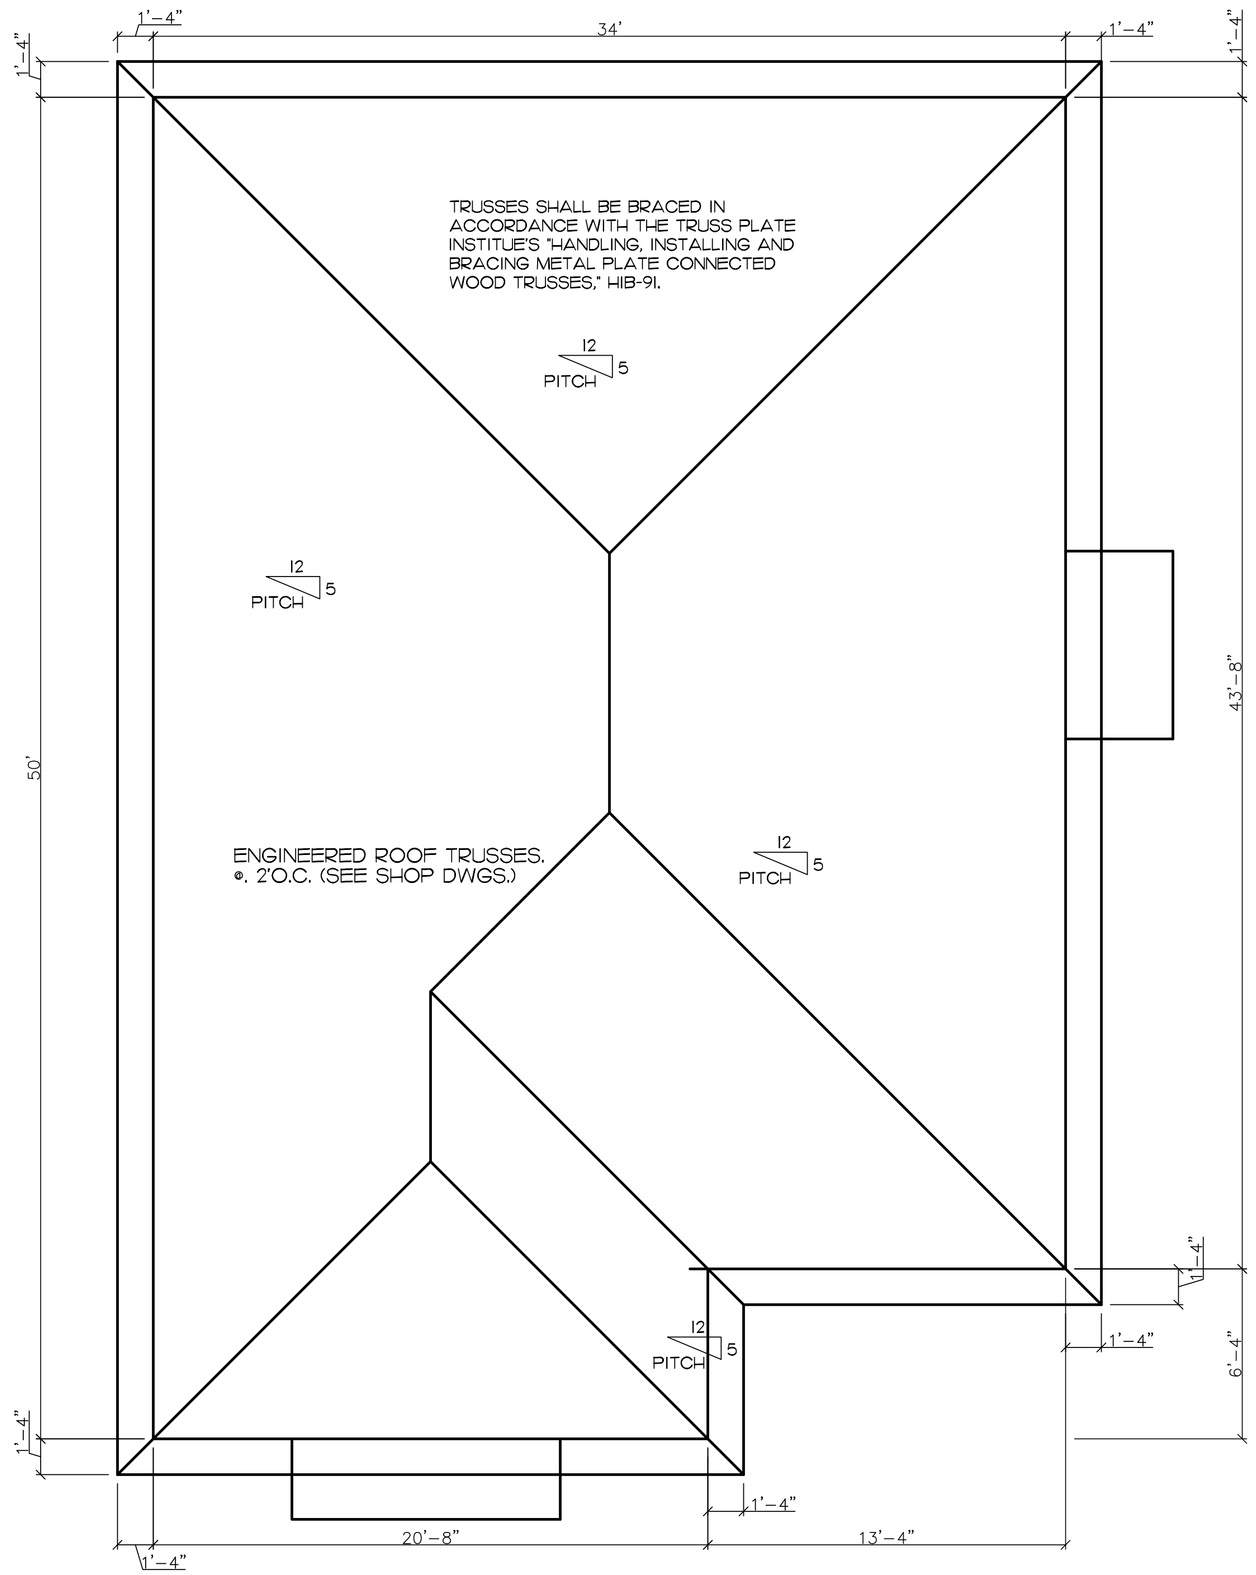

ROOF PLAN 1/4"=1'-0"

TRUSS ANCHORS:

ALL HETA20

ROOF ASSEMBLY/NAILING DETAIL

SHEATING TYPE & FASTENING:
7/16" O.S.B. OR CDX PLYWOOD SHEATHING
W/8D COMMON NAILS
FIRST FOUR FEET (4'-0") OF ROOF SHEATHING FROM ALL EDGES @4" O.C., AND @ 6" O.C. INTERIOR ZONE.

ROOF VENTILATION

14' RIDGE VENT @ 18sq" PER FOOT = 252sq"
148' VENTED SOFFIT @ 22.5sq" PER FOOT = 3330sq"

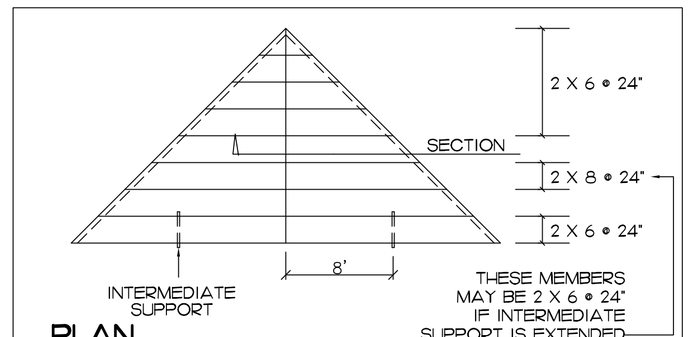

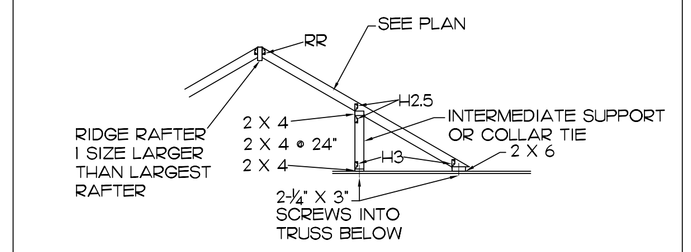

VALLEY FRAMING DETAIL

COMPUTER GENERATED DRAWING: HANDY HELPER DRAFTING & DESIGN, 386-846-2450

COMM NUMBER

DATE | REVISED

HANDY HELPER DRAFTING
386-846-2450

CERTIFIED BY:
DAVID C. LEETE
AR0000731

DUHART ULYSSES & ETHEL
332 ELLSWORTH ST.
DAYTONA BEACH, FL. 32114

JOB NO:
19142

Sheet No
S-2