



# STREETSCAPE ENHANCEMENTS

NORTHEAST CORNER OF LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

(ARCHITECTURAL)

PROJECT NUMBER 20-22


















FOR PRICING AND PERMIT

09 NOV 2020


ABBREVIATIONS:

@	At	JAN.	Janitor
A.B.	Anchor Bolt	J.B.	Joist Bearing
A.C.	Air Conditioner	JST.	Joist
ACOUST.	Acoustical	J.T.	Joist
ALUM.	Aluminum		
ARCH.	Architectural		
A.T.	Acoustical Tile		
		LAV.	Lavatory
		LLV.	Long Leg Vertical
B.C.	Bottom of Curb	MAS., MSRY	Masonry
BLK.	Block	MCS	Modular Cabinet System
BOTT.	Bottom	MECH.	Mechanical
		MIN.	Minimum
CER.	Ceramic	N	North
CHM.	Custom Hollow Metal	NA	Not Applicable
C.I.	Curb Inlet	N.I.C.	Not In Contract
		NTS	Not to Scale
CLO.	Closet		
CMU.	Concrete Masonry Unit		
C.O.	Clean Out		
COL.	Column		
CONC.	Concrete		
CONST.	Construction		
CONT.	Continuous		
C.T.	Ceramic Tile		
CHR.	Coat & Hat Rack		
C.J.	Control Joint		
		O.C.	On Center
		OPP.	Opposite
		PL	Plate
		PT	Pressure Treated
		PEJ	Premolded Expansion
		PLAST	Plaster
		PSF	Pounds Per Square Foot
		PSI	Pounds Per Square Inch
		R	Radius
		REF	Refrigerator
		REQ'D	Required
		RL	Roof Level
		RM	Room
		RT	Resilient Tile
		RW	Regular Weight Round
		SQ.	Square
		SIM	Similar
		SLV	Short Leg Vertical
		S.M.	Sheet Metal
		STL	Steel
		STO.; STOR	Storage
		STRUCT.	Structural
		SH	Shelves
		TC	Teacher Cabinet
		T.C.	Top of Curb
		TD	Turn Down
		TFF	Top of Finished Floor
		TFS	Top of Finished Slab
		T & G	Tongue and Groove
		T.M.	Transitional Material
		TP	Top of Pavement
		T/S	Top of Steel
		TYP.	Typical
		U.N.O.	Unless Noted Otherwise
		Y.C.J.	Veneer Control Joint
		VERT.	Vertical
		VRS	Varies
		VWC	Vinyl Wall Covering
		W	Width
		W/	With
		W.C.	Water Cooler
		WD	Wood
		WWF	Welded Wire Fabric

CONSTRUCTION MATERIALS:

PLAN / SECTION	
	face brick
	hollow concrete masonry
	gypsum wallboard
	ceramic/quarry tile
	acoustical tile
	resilient flooring
	carpet
	steel/iron
	aluminum
	small scale metal
	rough lumber
	large scale finish lumber
	small scale finish lumber
	large scale plywood
	small scale plywood
	batt/blanket insulation
	laminated plastic

INDEX OF SYMBOLS:


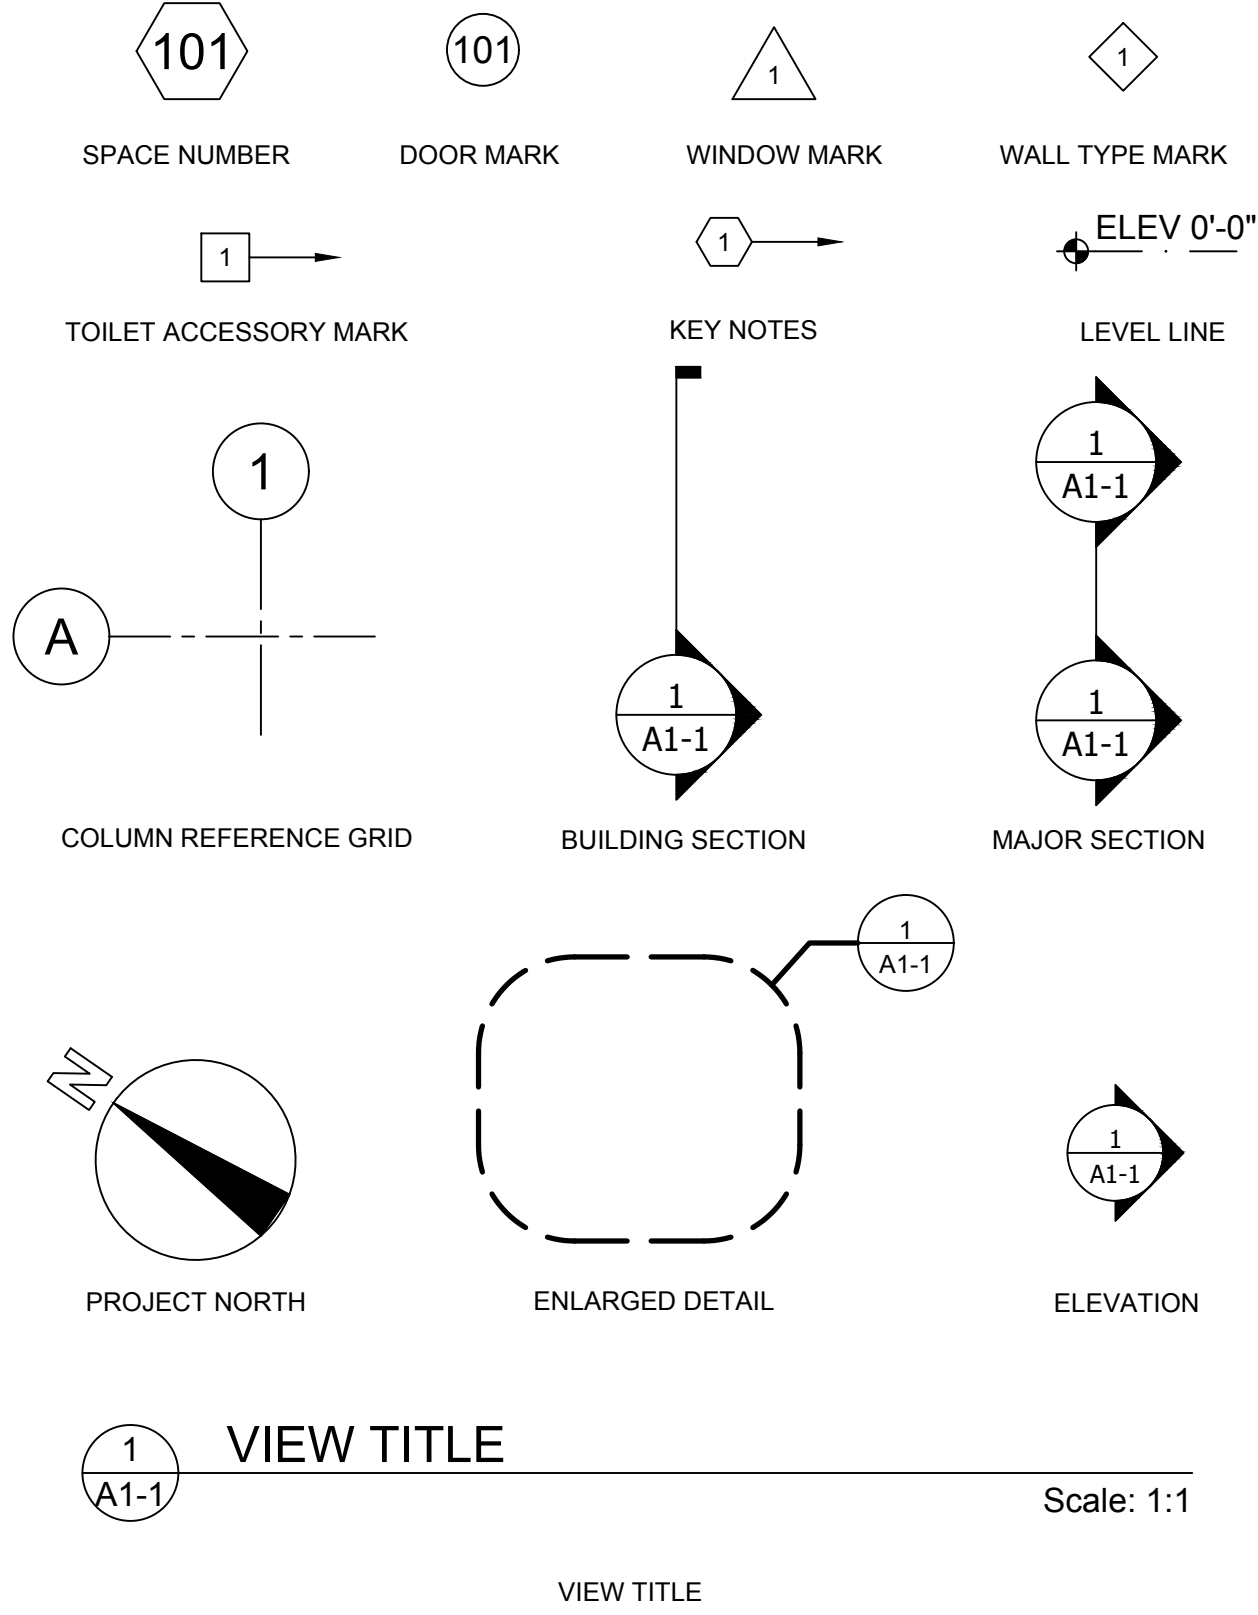


SCOPE OF WORK OF GENERAL CONTRACTOR

1. BASE BID - THE CITY OF LAGRANGE WILL FINISH GRADE, PROVIDE AND INSTALL 6" G.A.B., AND PROVIDE AND INSTALL ALL CONCRETE PAVERS AS CALLED FOR ON THE DRAWINGS
2. ALL ELECTRICAL IS TO BE PROVIDED AND INSTALLED BY CITY OF LAGRANGE. (INCLUDING ALL LIGHT POST CONCRETE PEDESTALS)
3. ALL GAS PIPING AND GAS LANTERNS ARE TO BE PROVIDED AND INSTALLED BY CITY OF LAGRANGE.
4. ALL DEMOLITION OF EXISTING CURBS AND GUTTERS, SIDEWALKS AND EXISTING PAVERS TO BE BY CITY OF LAGRANGE.
5. ALL GRADING, NEW CONCRETE CURBS, TRENCH DRAINS, CONCRETE AND MORTAR AT VEHICULAR PAVERS, FOUNDATION DRAINS, BASE UNDER PEDESTRIAN PAVERS AND COMPACTION TESTING TO BE PROVIDED AND INSTALLED BY GENERAL CONTRACTOR. SEALING OF ALL PAVERS BY GENERAL CONTRACTOR. G.C. TO PROVIDE AND INSTALL ALL STEPS AND RAILINGS.
6. GENERAL CONTRACTOR TO PROVIDE ALL GEORGIA D.O.T. SIGNAGE AND FLAGMAN AS REQUIRED BY GDOT FOR ALL WORK AT INTERSECTIONS.
7. ALL OTHER WORK SHOWN ON THE DRAWINGS ARE TO BE PROVIDED BY THE GENERAL CONTRACTOR.
8. ALL IRRIGATION SYSTEM AND METER WILL BE PROVIDED BY CITY OF LAGRANGE. GENERAL CONTRACTOR TO PROVIDE DUPLEX WEATHERPROOF OUTLET FOR CITY IRRIGATION CONTROLLER TO CONNECT TO.
9. ALL LANDSCAPING WILL BE PROVIDED AND INSTALLED BY CITY OF LAGRANGE.
10. TO BE SUBSTANTIALLY COMPLETE WITHIN 100 CONSECUTIVE CALENDAR DAYS AFTER NOTICE TO PROCEED.

INDEX OF SHEETS

GENERAL	
G-1	COVER SHEET
G-2	INDEX OF SHEETS
SD-1	SITE PLAN - EXISTING
SD-2	SITE PLAN - EXISTING
SD-3	SITE PLAN - PROPOSED
SD-4	PARTIAL SITE PLAN - PROPOSED
SD-5	PARTIAL SITE PLAN - PROPOSED
SD-6	PARTIAL SITE PLAN - PROPOSED
SD-7	PARTIAL SITE PLAN - PROPOSED
SD-8	PARTIAL SITE PLAN - PROPOSED
SD-9	PARTIAL SITE PLAN - PROPOSED
SD-10	SITE DETAILS
SD-11	SITE DETAILS
SD-12	SITE DETAILS
SD-13	SITE DETAILS
SD-14	SITE DETAILS
SD-15	SITE DETAILS
SD-16	SITE DETAILS
SD-17	SITE DETAILS
SD-18	SITE DETAILS
SG-1	SITE PLAN - GAS PLAN
A3-1	ELEVATION - PROPOSED
A3-2	ELEVATION - PROPOSED
A3-3	ELEVATION - PROPOSED
A3-4	ELEVATION - PROPOSED
A4-1	BUILDING SECTION - EXISTING
A4-2	BUILDING SECTION - PROPOSED
E-1	SITE PLAN - LIGHTING
E-2	SITE LIGHTING DETAILS
E-3	SITE LIGHTING DETAILS
E-4	SITE LIGHTING DETAILS
E-5	SITE LIGHTING DETAILS
E-6	SITE LIGHTING DETAILS

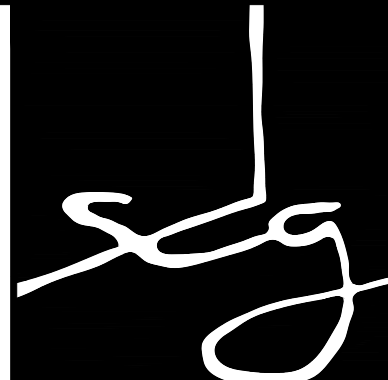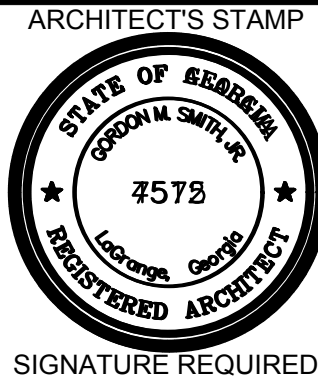

SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

REVISIONS


DATE	DESCRIPTION

PROJECT:  
**STREETSCAPE ENHANCEMENTS**  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY  
  
RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:  
  
**INDEX OF SHEETS**  
  
**ABBREVIATIONS LEGENDS**

MODIFIED DATE:	JOB NO:
ISSUED DATE:	20-22
FOR BID AND PERMIT	SHEET:
09 NOV 2020	<b>G-2</b>



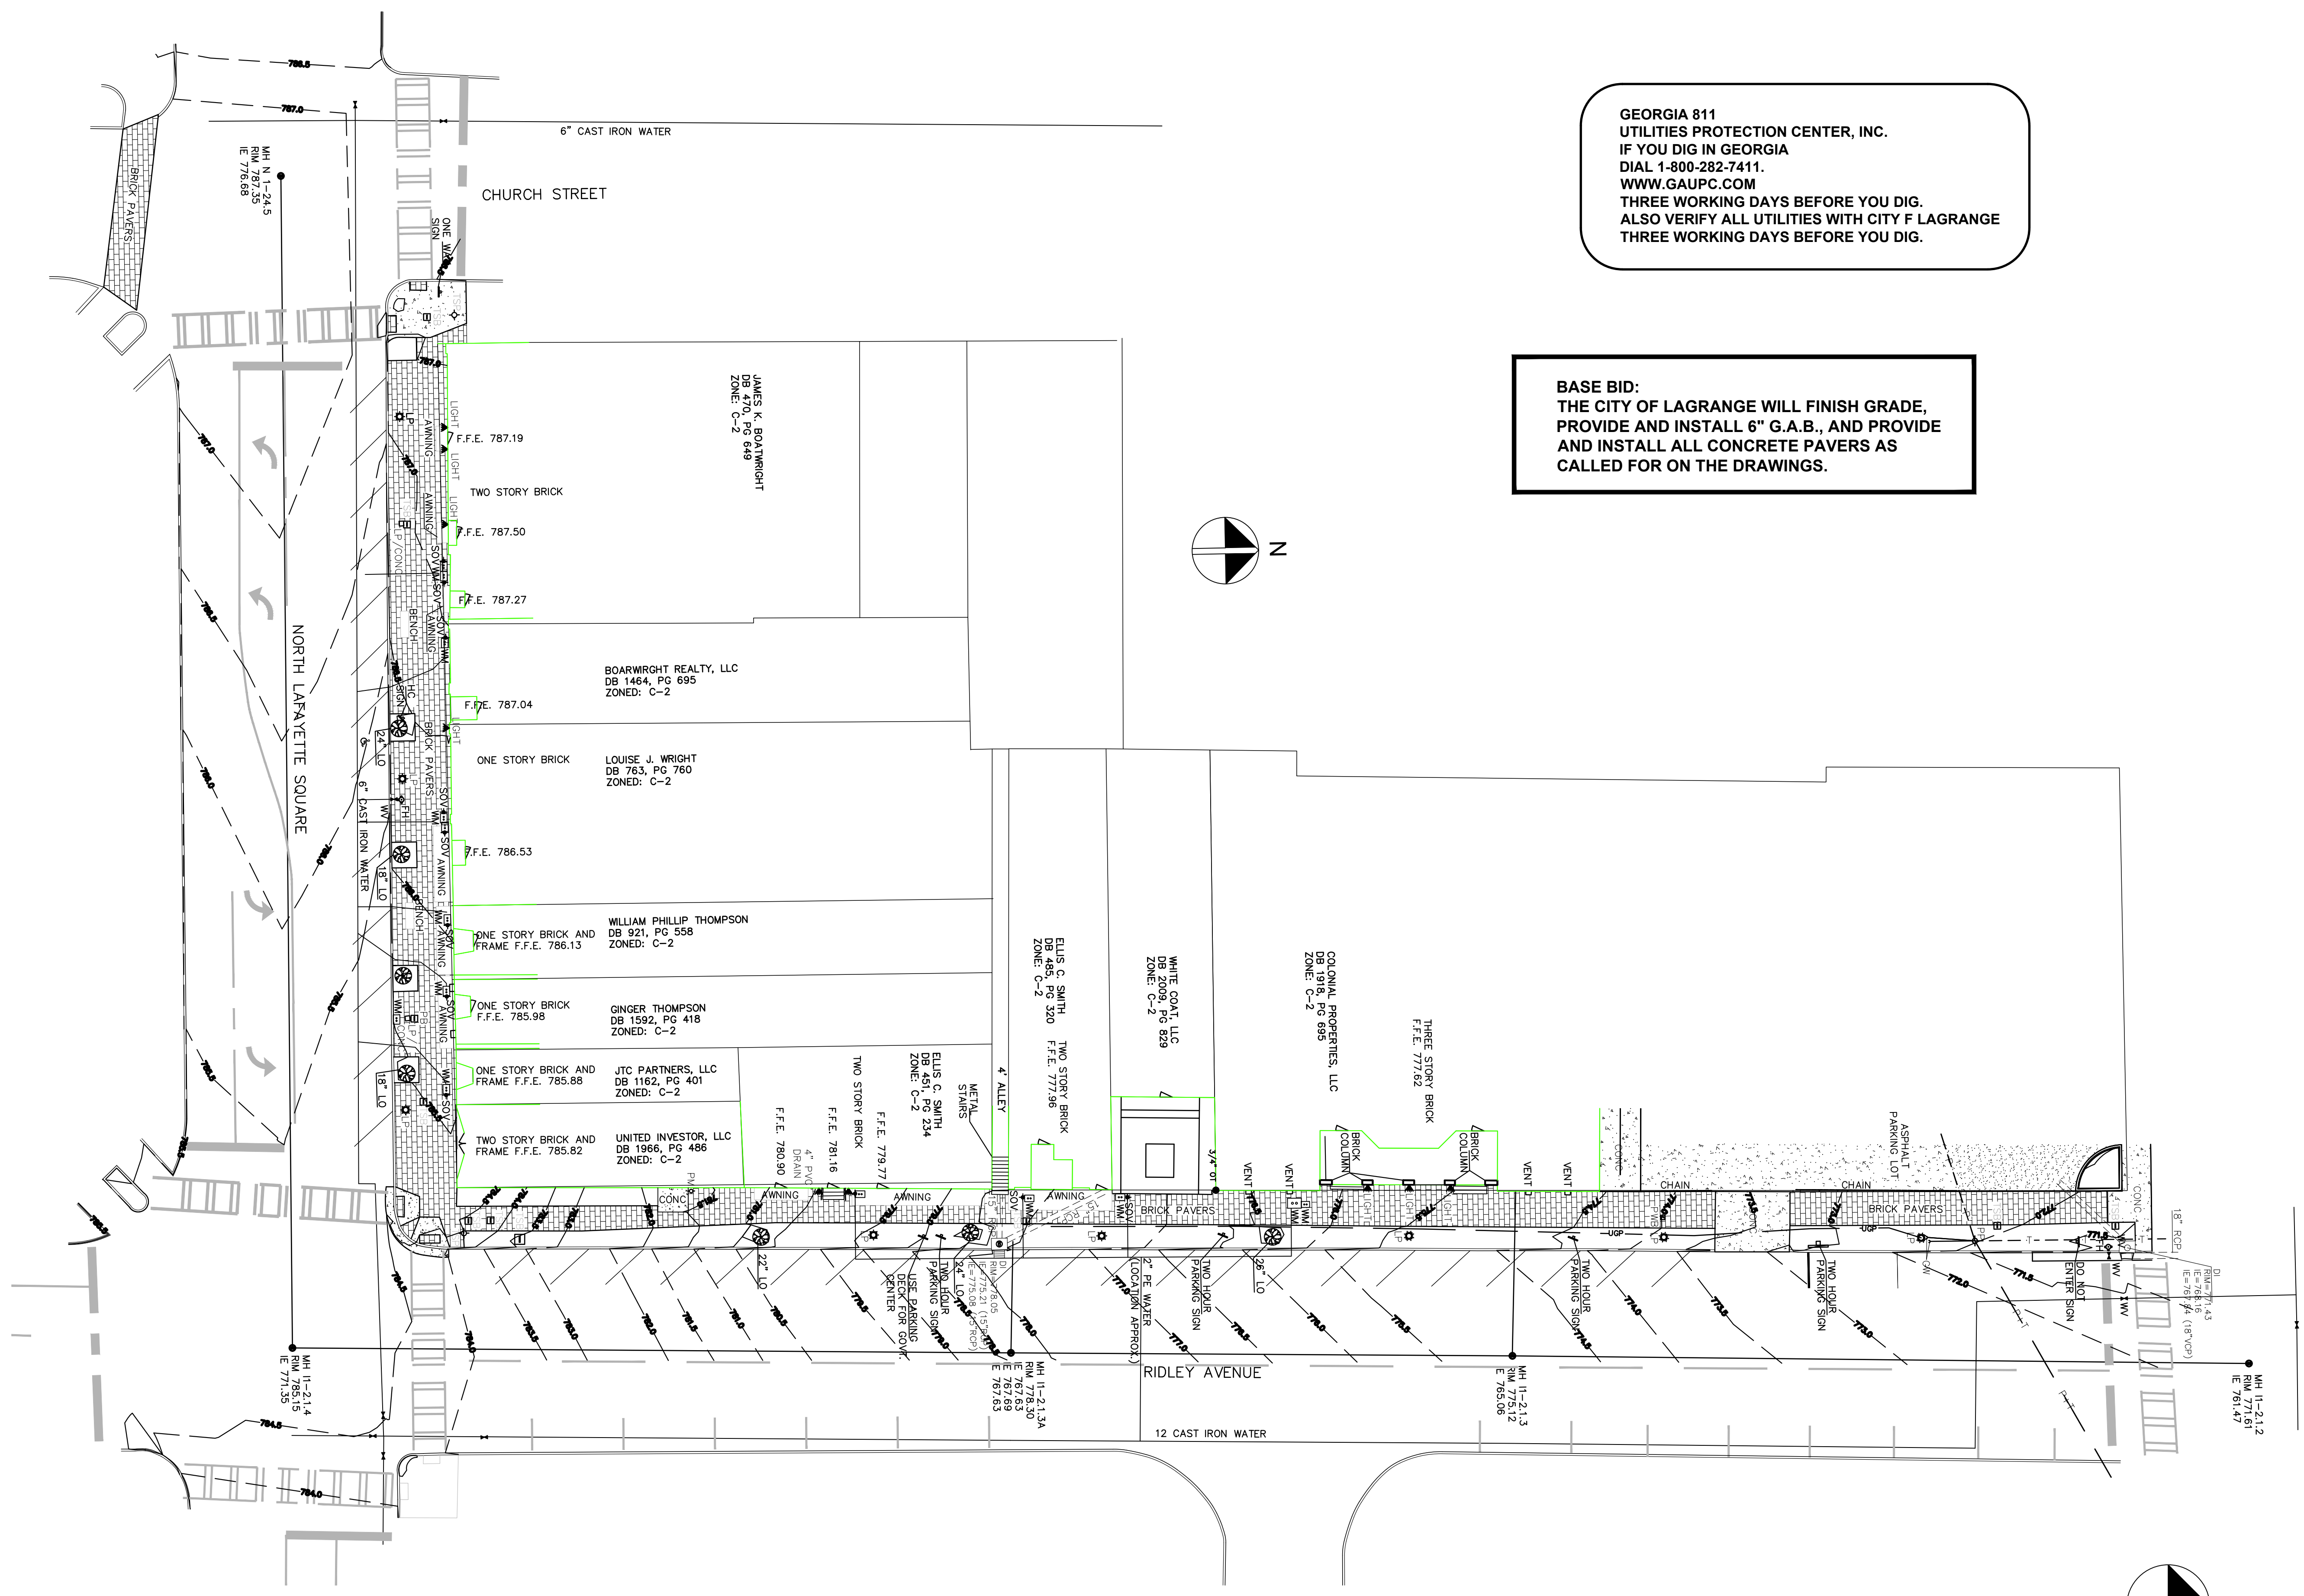

KEYNOTES

GEORGIA 811  
UTILITIES PROTECTION CENTER, INC.  
IF YOU DIG IN GEORGIA  
DIAL 1-800-282-7411.  
WWW.GAUPC.COM  
THREE WORKING DAYS BEFORE YOU DIG.  
ALSO VERIFY ALL UTILITIES WITH CITY OF LAGRANGE  
THREE WORKING DAYS BEFORE YOU DIG.

BASE BID:  
THE CITY OF LAGRANGE WILL FINISH GRADE,  
PROVIDE AND INSTALL 6" G.A.B., AND PROVIDE  
AND INSTALL ALL CONCRETE PAVERS AS  
CALLED FOR ON THE DRAWINGS.

1 SITE PLAN - EXISTING  
Scale: 1" = 20'-0"

ARCHITECT'S STAMP

STATE OF GEORGIA  
CORNELL SMITH  
7573  
REGISTERED ARCHITECT

SIGNATURE REQUIRED

SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

REVISIONS	
DATE	DESCRIPTION

PROJECT:


STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

SITE PLAN  
EXISTING

MODIFIED DATE:	JOB NO: 20-22
ISSUED DATE: FOR BID AND PERMIT 09 NOV 2020	SHEET: SD-1



*[Signature]*


SMITH DESIGN GROUP, INC.  
206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240  
706-882-5511

REVISIONS	
DATE	DESCRIPTION

PROJECT:  
**STREETSCAPE ENHANCEMENTS**  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY  
  
RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:  
  
**SITE PLAN  
EXISTING**

MODIFIED DATE:	JOB NO: <b>20-22</b>
ISSUED DATE: 09 NOV 2020	SHEET: <b>SD-2</b>

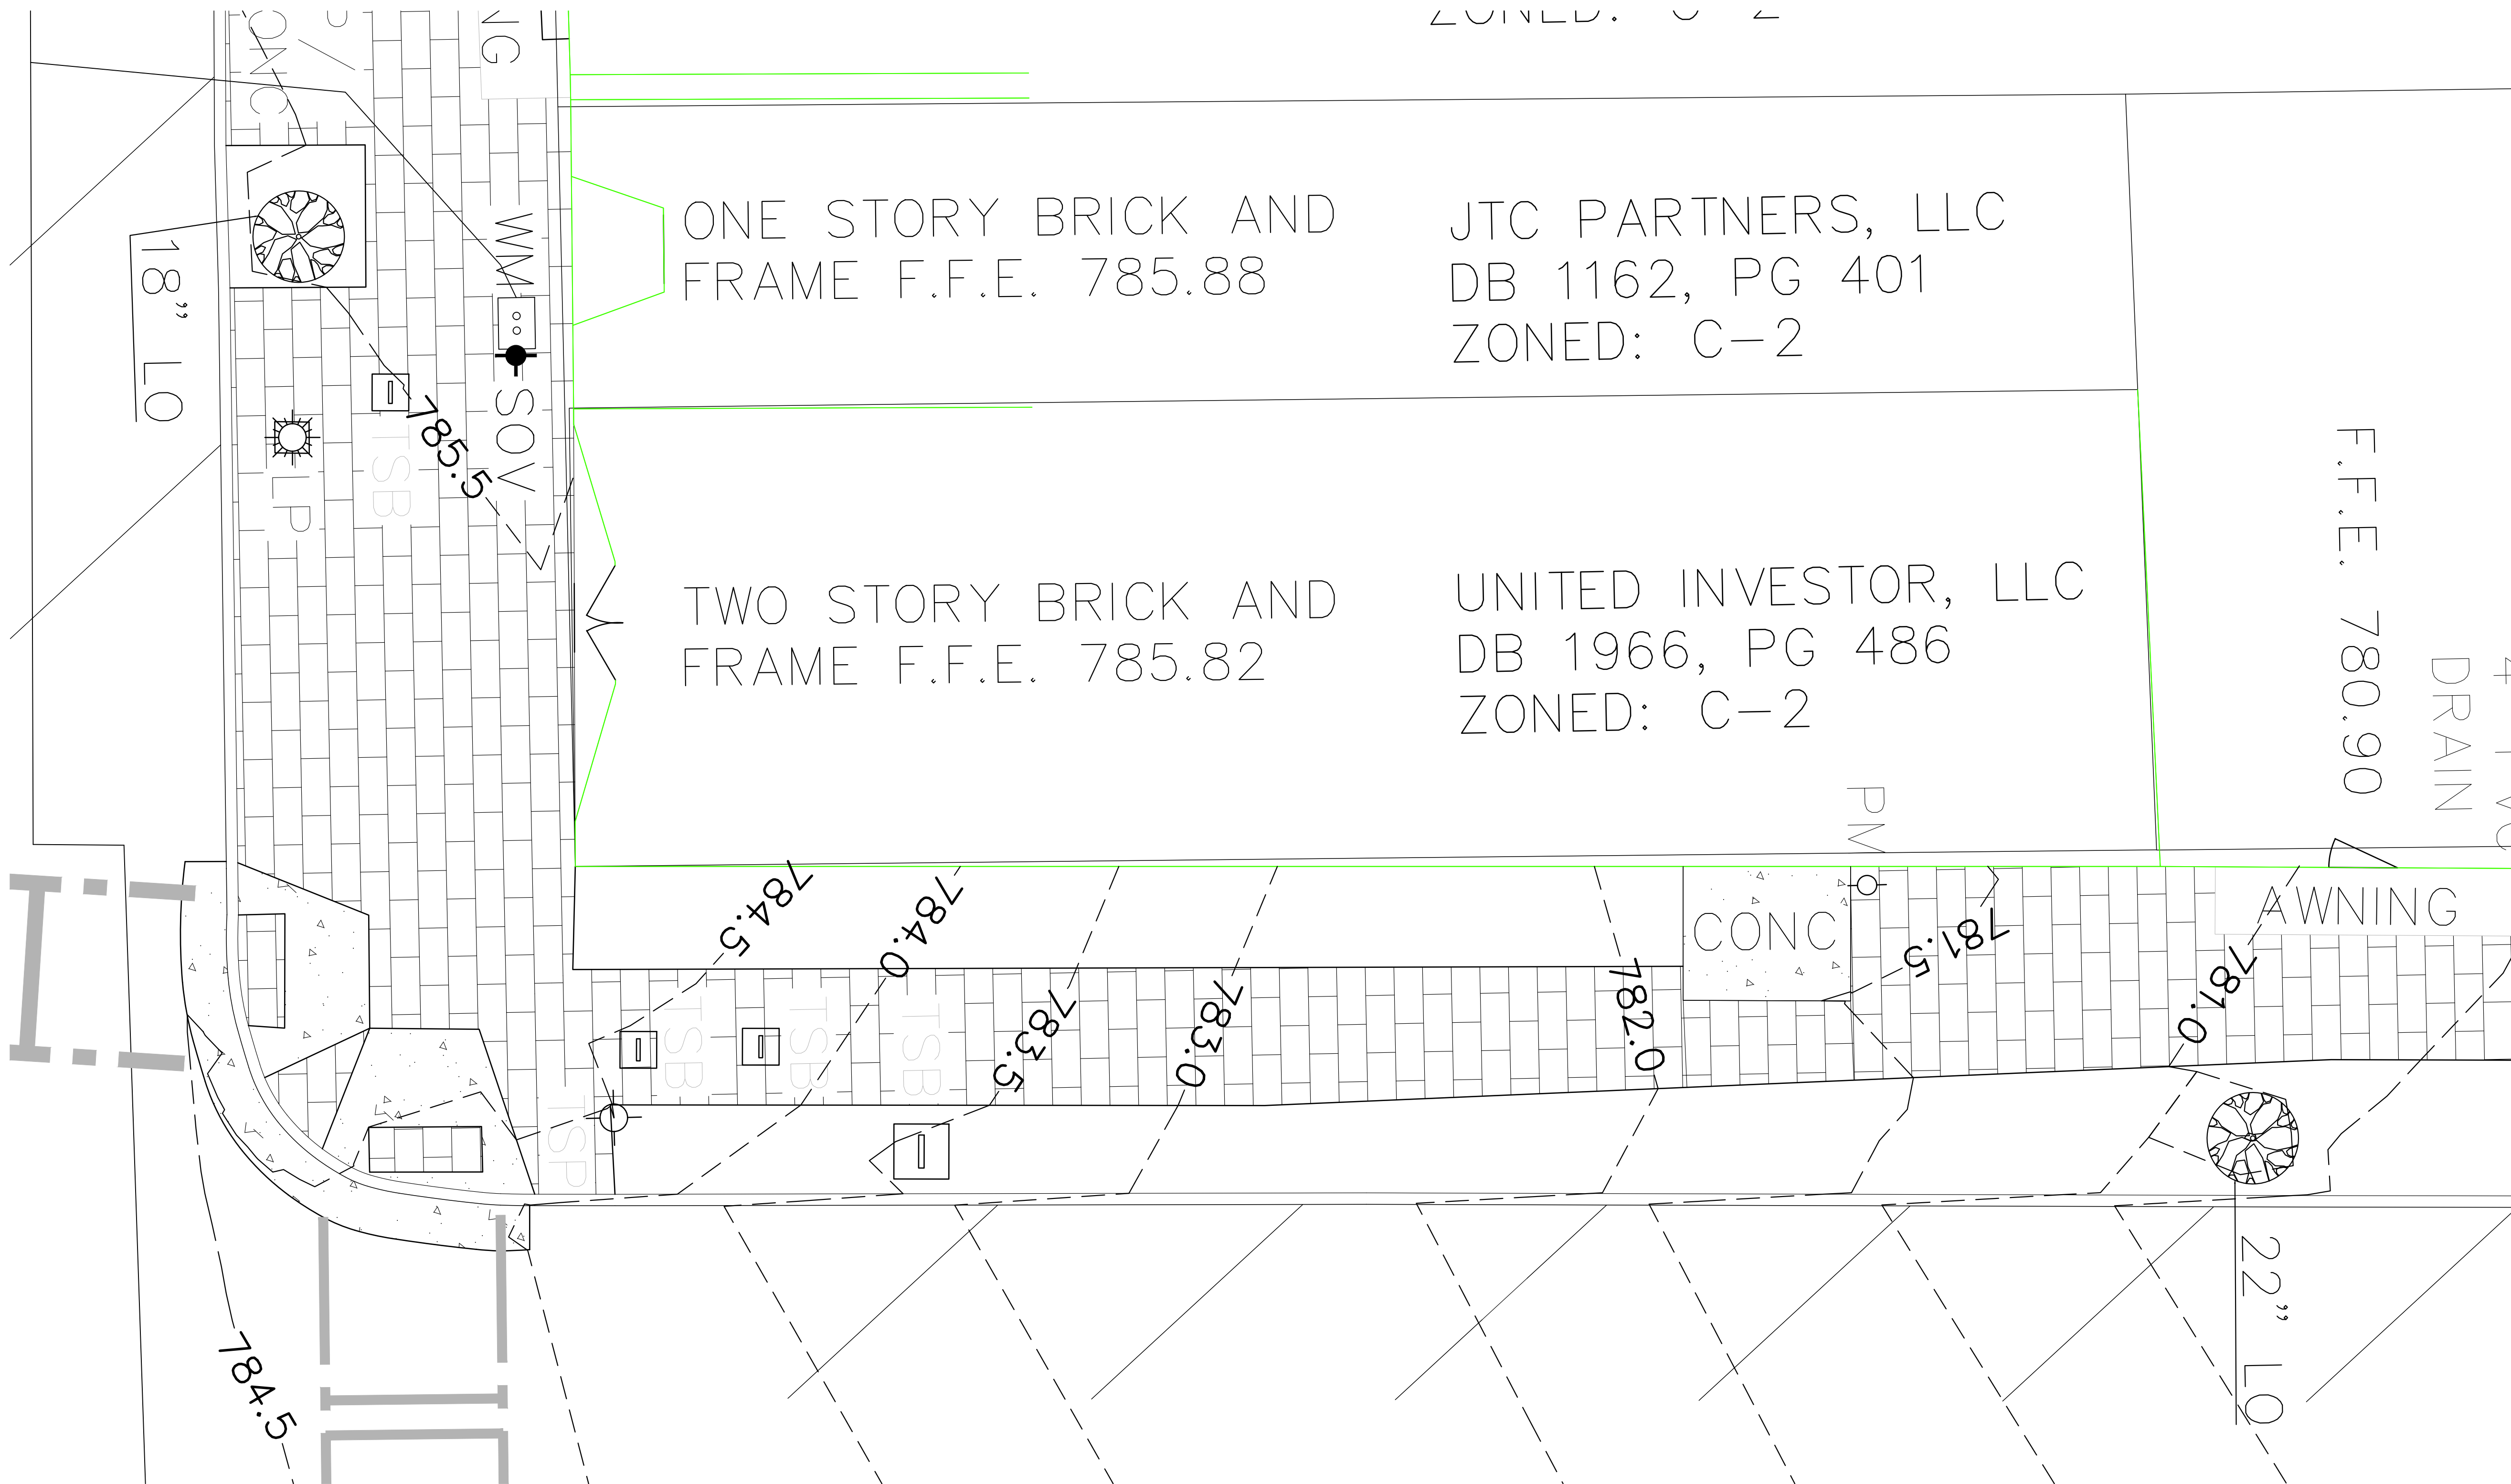

1 SITE PLAN - EXISTING  
SD-2 Scale: 1/8" = 1'-0"




GINGER THOMPSON  
DB 1592, PG 418  
ZONED: C-2

GEORGIA 811  
UTILITIES PROTECTION CENTER, INC.  
IF YOU DIG IN GEORGIA  
DIAL 1-800-282-7411.  
WWW.GAUPC.COM  
THREE WORKING DAYS BEFORE YOU DIG.  
ALSO VERIFY ALL UTILITIES WITH CITY OF LAGRANGE  
THREE WORKING DAYS BEFORE YOU DIG.

KEYNOTES

- 1 GAS LANTERN ON PIER. SEE DETAILS ON SHEET SD-16.
- 2 GAS LANTERN ON POST. SEE DETAILS ON SHEET SD-16.
- 3 CONCRETE CURB - SEE DETAIL 1/SD-11
- 4 CONCRETE PAVERS - SEE DETAIL 1/SD-13
- 5 CONCRETE CURB AT STREET - SEE DETAIL 10/SD-10
- 6 CURB RAMP FLUSH WITH ASPHALT - SEE DETAIL 3/SD-13
- 7 ACCESSIBLE PATH SIGNAGE - SEE DETAIL 4/SD-13
- 8 LANDSCAPE AREA WITH DRIP IRRIGATION SYSTEM ON TIMER
- 9 6" ROUND CAST IRON DOWNSPOUT BOOT TO TIE INTO 6" PVC ROOF DRAIN UNDER PATIO TO LANDSCAPE AREA.
- 10 NEW CONCRETE FOOTINGS FOR RAMP AND PATIO.
- 11 EXISTING DOWNSPOUT - FIELD VERIFY EXACT LOCATIONS. TIE INTO ROOF DRAINAGE PIPES UNDER PATIO
- 12 RAIL DETAIL - SEE 15/SD-10
- 13 DECORATIVE ELECTRIC LIGHT POST (BLACK) WITH ACORN FIXTURE PROVIDED AND INSTALLED BY CITY OF LAGRANGE
- 14 SEE NEW SIGNAGE PER DETAILS 2.3.4.5 ON SHEET SD-11
- 15 6" PERFORATED FOUNDATION DRAIN WITH SOCK IN 12" X 12" X CONT. #57 STONE GRAVEL. SLOPE DRAIN DISCHARGE AT GRADE OF LANDSCAPE AREA.
- 16 PEDESTAL SIGNAGE OF MAP OF DOWNTOWN LAGRANGE. SEE DETAILS ON SHEET 4/SD-16.
- 17 REMOVABLE COVER OVER TRENCH DRAIN. SLOPE TO DISCHARGE AT CURB AT STREET. G.C. FIELD VERIFY ELEVATIONS. SEE DETAIL 2/SD-8.



SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

BASE BID:  
THE CITY OF LAGRANGE WILL FINISH GRADE,  
PROVIDE AND INSTALL 6" G.A.B., AND PROVIDE  
AND INSTALL ALL CONCRETE PAVERS AS  
CALLED FOR ON THE DRAWINGS.

ONE STORY BRICK AND FRAME F.F.E. 785.88

F.F.E. 780.90

4" P  
DRA

F.F.E. 785.82

F.F.E. 785.88

F.F.E. 785.82

F.F.E. 785.82

REVISIONS

DATE	DESCRIPTION

PROJECT:

STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

SITE PLAN  
PROPOSED

MODIFIED DATE:

ISSUED DATE:

FOR BID AND PERMIT  
09 NOV 2020

JOB NO:

20-22


SHEET:

SD-3


1  
SD-3

SITE PLAN - PROPOSED

Scale: 1/4" = 1'-0"






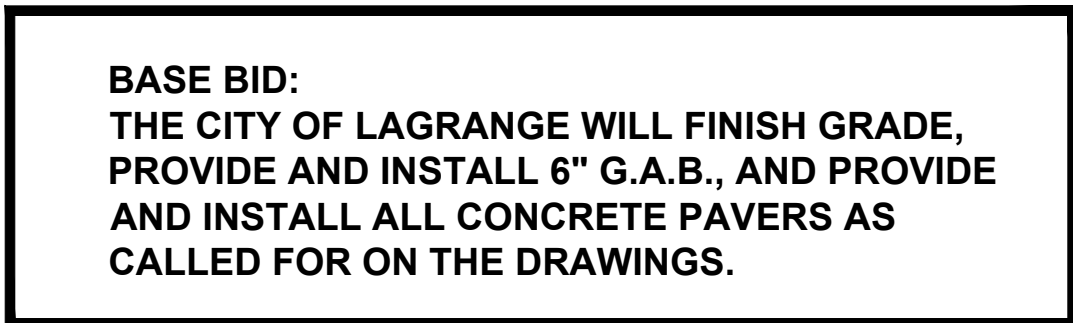


F.F.E. 7

- 

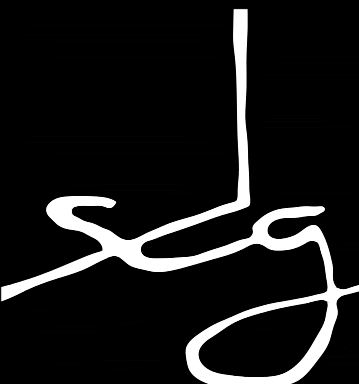

706-882-5511

MODIFIED DATE:	JOB NO: <b>20-22</b>
ISSUED DATE:  FOR BID AND PERMIT  <b>09 NOV 2020</b>	SHEET:  <b>SD-4</b>

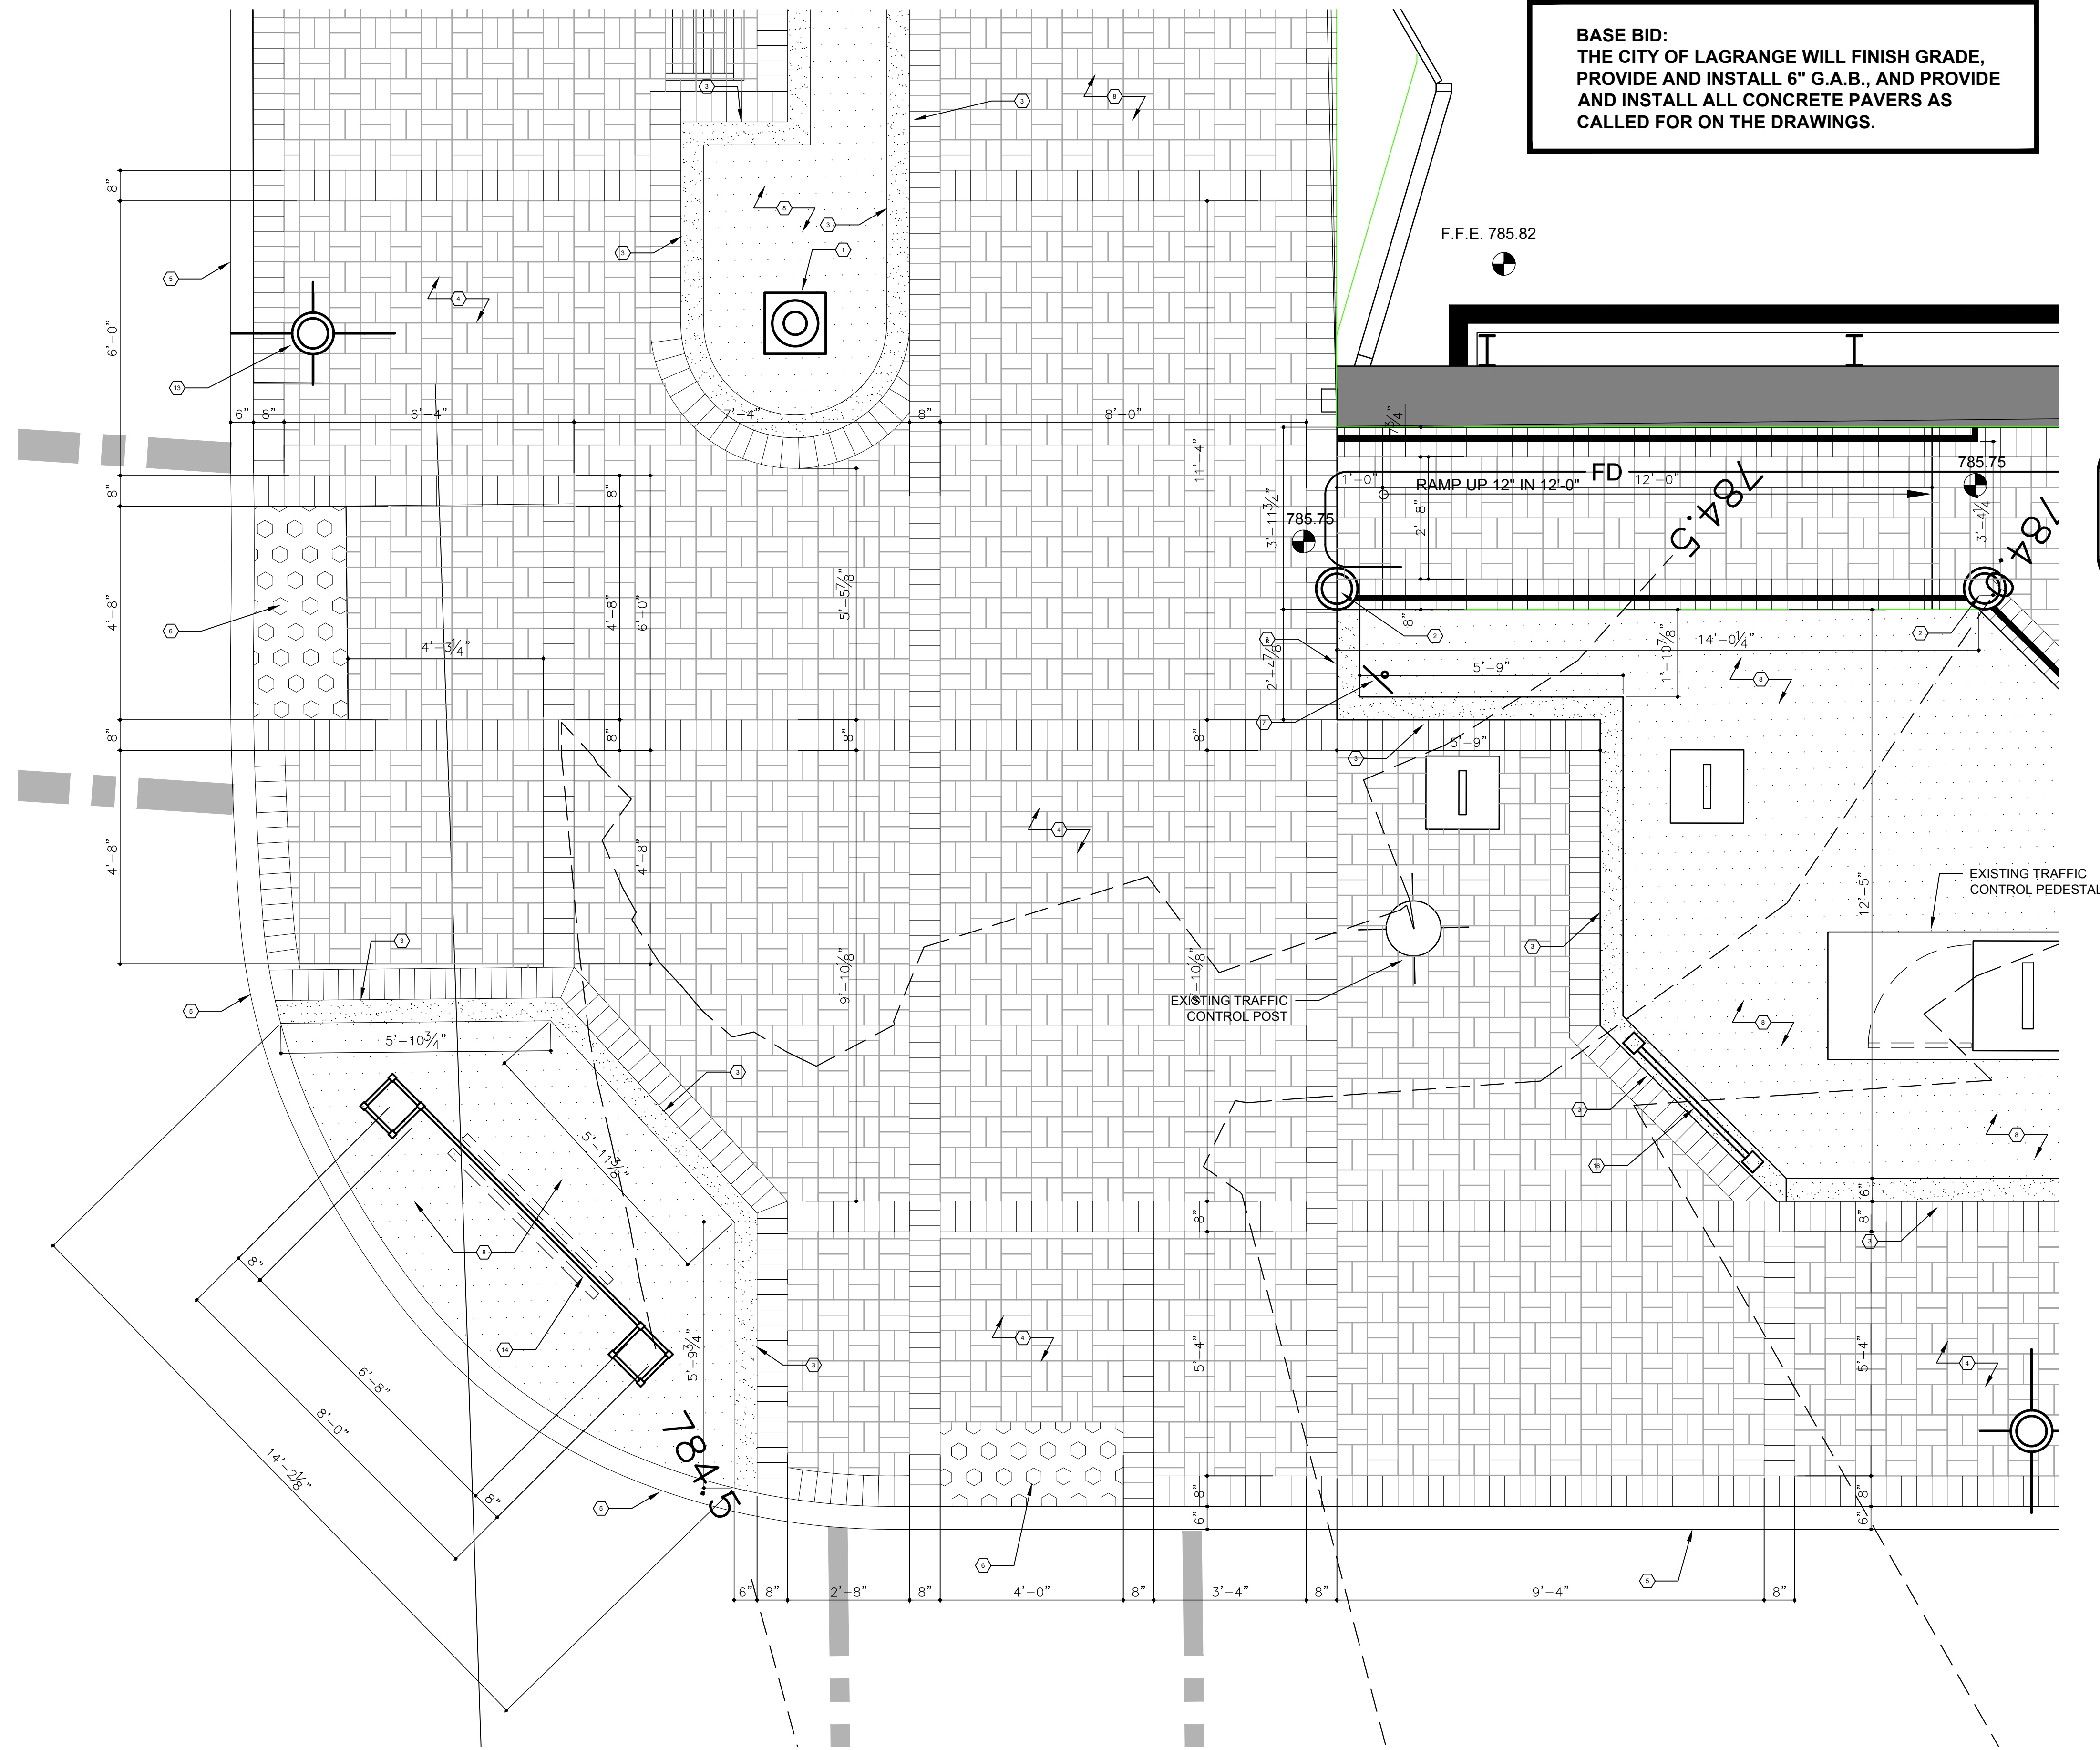


**BASE BID:**  
THE CITY OF LAGRANGE WILL FINISH GRADE,  
PROVIDE AND INSTALL 6" G.A.B., AND PROVIDE  
AND INSTALL ALL CONCRETE PAVERS AS  
CALLED FOR ON THE DRAWINGS.

**KEYNOTES**

- ① GAS LANTERN ON PIER. SEE DETAILS ON SHEET SD-16.
- ② GAS LANTERN ON POST. SEE DETAILS ON SHEET SD-16.
- ③ CONCRETE CURB - SEE DETAIL 1/SD-11
- ④ CONCRETE PAVERS - SEE DETAIL 1/SD-13
- ⑤ CONCRETE CURB AT STREET - SEE DETAIL 10/SD-10
- ⑥ CURB RAMP FLUSH WITH ASPHALT - SEE DETAIL 3/SD-13
- ⑦ ACCESSIBLE PATH SIGNAGE - SEE DETAIL 4/SD-13
- ⑧ LANDSCAPE AREA WITH DRIP IRRIGATION SYSTEM ON TIMER
- ⑨ 6" ROUND CAST IRON DOWNSPOUT BOOT TO TIE INTO 6" PVC ROOF DRAIN UNDER PATIO TO LANDSCAPE AREA.
- ⑩ NEW CONCRETE FOOTINGS FOR RAMP AND PATIO.
- ⑪ EXISTING DOWNSPOUT - FIELD VERIFY EXACT LOCATIONS. TIE INTO ROOF DRAINAGE PIPES UNDER PATIO
- ⑫ RAIL DETAIL - SEE 15/SD-10
- ⑬ DECORATIVE ELECTRIC LIGHT POST (BLACK) WITH ACORN FIXTURE PROVIDED AND INSTALLED BY CITY OF LAGRANGE
- ⑭ SEE NEW SIGNAGE PER DETAILS 2.3.4.5 ON SHEET SD-11
- ⑮ 6" PERFORATED FOUNDATION DRAIN WITH SOCK IN 12" X 12" X CONT. #67 STONE GRAVEL. SLOPE DRAIN DISCHARGE AT GRADE OF LANDSCAPE AREA.
- ⑯ PEDESTAL SIGNAGE OF MAP OF DOWNTOWN LAGRANGE. SEE DETAILS ON SHEET 4/SD-16
- ⑰ REMOVABLE COVER OVER TRENCH DRAIN. SLOPE TO DISCHARGE AT CURB AT STREET. G.C. FIELD VERIFY ELEVATIONS. SEE DETAIL 2/SD-8.

GEORGIA 811  
UTILITIES PROTECTION CENTER, INC.  
IF YOU DIG IN GEORGIA  
DIAL 1-800-282-7411.  
WWW.GAUPC.COM  
THREE WORKING DAYS BEFORE YOU DIG.  
ALSO VERIFY ALL UTILITIES WITH CITY OF LAGRANGE  
THREE WORKING DAYS BEFORE YOU DIG.

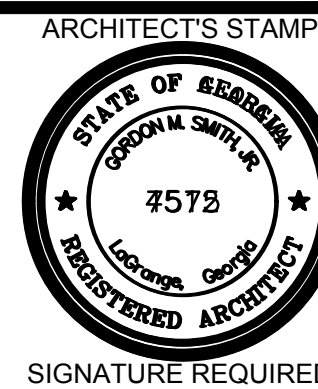

**SMITH DESIGN GROUP, INC.**

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

**REVISIONS**

Δ	DATE	DESCRIPTION

PROJECT:

**STREETSCAPE  
ENHANCEMENTS**  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

**PARTIAL SITE PLAN  
PROPOSED**

MODIFIED DATE:

ISSUED DATE:

FOR BID AND PERMIT  
09 NOV 2020

JOB NO:

**20-22**


SHEET:

**SD-5**

1  
SD-5

**PARTIAL SITE PLAN - PROPOSED**

Scale: 1/2" = 1'-0"





GEORGIA 811  
UTILITIES PROTECTION CENTER, INC.  
IF YOU DIG IN GEORGIA  
DIAL 1-800-282-7411.  
WWW.GAUPC.COM  
THREE WORKING DAYS BEFORE YOU DIG.  
ALSO VERIFY ALL UTILITIES WITH CITY F LAGRANGE  
THREE WORKING DAYS BEFORE YOU DIG.

BASE BID:  
THE CITY OF LAGRANGE WILL FINISH GRADE,  
PROVIDE AND INSTALL 6" G.A.B., AND PROVIDE  
AND INSTALL ALL CONCRETE PAVERS AS  
CALLED FOR ON THE DRAWINGS.

- ⑫ SEE NEW SIGNAGE PER DETAILS 2.3,4,5 ON SHEET SD-11  
⑬ 6" PERFORATED FOUNDATION DRAIN WITH SOCK IN 12" X 12" X CONT.  
#57 STONE GRAVEL. SLOPE DRAIN DISCHARGE AT GRADE OF LANDSCAPE AREA.  
⑭ PEDESTAL SIGNAGE OF MAP OF DOWNTOWN LAGRANGE  
SEE DETAILS ON SHEET 4/SD-16.  
⑮ REMOVABLE COVER OVER TRENCH DRAIN. SLOPE TO DISCHARGE AT CURB  
AT STREET. G.C. FIELD VERIFY ELEVATIONS. SEE DETAIL 2/SD-8.

#### KEYNOTES

- ① GAS LANTERN ON PIER. SEE DETAILS ON SHEET SD-16.  
② GAS LANTERN ON POST. SEE DETAILS ON SHEET SD-16.  
③ CONCRETE CURB - SEE DETAIL 1/SD-11  
④ CONCRETE PAVERS - SEE DETAIL 1/SD-13  
⑤ CONCRETE CURB AT STREET - SEE DETAIL 10/SD-10  
⑥ CURB RAMP FLUSH WITH ASPHALT - SEE DETAIL 3/SD-13  
⑦ ACCESSIBLE PATH SIGNAGE - SEE DETAIL 4/SD-13  
⑧ LANDSCAPE AREA WITH DRIP IRRIGATION SYSTEM ON TIMER  
⑨ 6" ROUND CAST IRON DOWNSPOUT BOOT TO TIE INTO  
6" PVC ROOF DRAIN UNDER PATIO TO LANDSCAPE AREA.  
⑩ NEW CONCRETE FOOTINGS FOR RAMP AND PATIO.  
⑪ EXISTING DOWNSPOUT - FIELD VERIFY EXACT LOCATIONS.  
TIE INTO ROOF DRAINAGE PIPES UNDER PATIO  
⑫ RAIL DETAIL - SEE 15/SD-10  
⑬ DECORATIVE ELECTRIC LIGHT POST (BLACK) WITH ACORN FIXTURE  
PROVIDED AND INSTALLED BY CITY OF LAGRANGE



SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

#### REVISIONS

DATE	DESCRIPTION

PROJECT:

STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

PARTIAL SITE PLAN  
PROPOSED

MODIFIED DATE:

ISSUED DATE:

FOR BID AND PERMIT  
09 NOV 2020


JOB NO:

20-22

SHEET:

SD-6

1  
SD-6 PARTIAL SITE PLAN - PROPOSED  
Scale: 1/2" = 1'-0"





BASE BID:  
THE CITY OF LAGRANGE WILL FINISH GRADE,  
PROVIDE AND INSTALL 6" G.A.B., AND PROVIDE  
AND INSTALL ALL CONCRETE PAVERS AS  
CALLED FOR ON THE DRAWINGS.

GEORGIA 811  
UTILITIES PROTECTION CENTER, INC.  
IF YOU DIG IN GEORGIA  
DIAL 1-800-282-7411.  
WWW.GAUPC.COM  
THREE WORKING DAYS BEFORE YOU DIG.  
ALSO VERIFY ALL UTILITIES WITH CITY F LAGRANGE  
THREE WORKING DAYS BEFORE YOU DIG.

KEYNOTES


- 1 GAS LANTERN ON PIER - SEE DETAILS ON SHEET SD-16.
- 2 GAS LANTERN ON POST - SEE DETAILS ON SHEET SD-16.
- 3 CONCRETE CURB - SEE DETAIL 1/SD-11
- 4 CONCRETE PAVERS - SEE DETAIL 1/SD-13
- 5 CONCRETE CURB AT STREET - SEE DETAIL 10/SD-10
- 6 CURB RAMP FLUSH WITH ASPHALT - SEE DETAIL 3/SD-13
- 7 ACCESSIBLE PATH SIGNAGE - SEE DETAIL 4/SD-13
- 8 LANDSCAPE AREA WITH DRIP IRRIGATION SYSTEM ON TIMER
- 9 6" ROUND CAST IRON DOWNSPOUT BOOT TO TIE INTO 6" PVC ROOF DRAIN UNDER PATIO TO LANDSCAPE AREA.
- 10 NEW CONCRETE FOOTINGS FOR RAMP AND PATIO.
- 11 EXISTING DOWNSPOUT - FIELD VERIFY EXACT LOCATIONS. TIE INTO ROOF DRAINAGE PIPES UNDER PATIO
- 12 RAIL DETAIL - SEE 15/SD-10
- 13 DECORATIVE ELECTRIC LIGHT POST (BLACK) WITH ACORN FIXTURE PROVIDED AND INSTALLED BY CITY OF LAGRANGE.
- 14 SEE NEW SIGNAGE PER DETAILS 2,3,4,5 ON SHEET SD-11
- 15 6" PERFORATED FOUNDATION DRAIN WITH SOCK IN 12" X 12" X CONT. #57 STONE GRAVEL. SLOPE DRAIN DISCHARGE AT GRADE OF LANDSCAPE AREA.
- 16 PEDESTAL SIGNAGE OF MAP OF DOWNTOWN LAGRANGE SEE DETAILS ON SHEET 4/SD-16.
- 17 REMOVABLE COVER OVER TRENCH DRAIN. SLOPE TO DISCHARGE AT CURB AT STREET. G.C. FIELD VERIFY ELEVATIONS. SEE DETAIL 2/SD-8.



SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240


706-882-5511

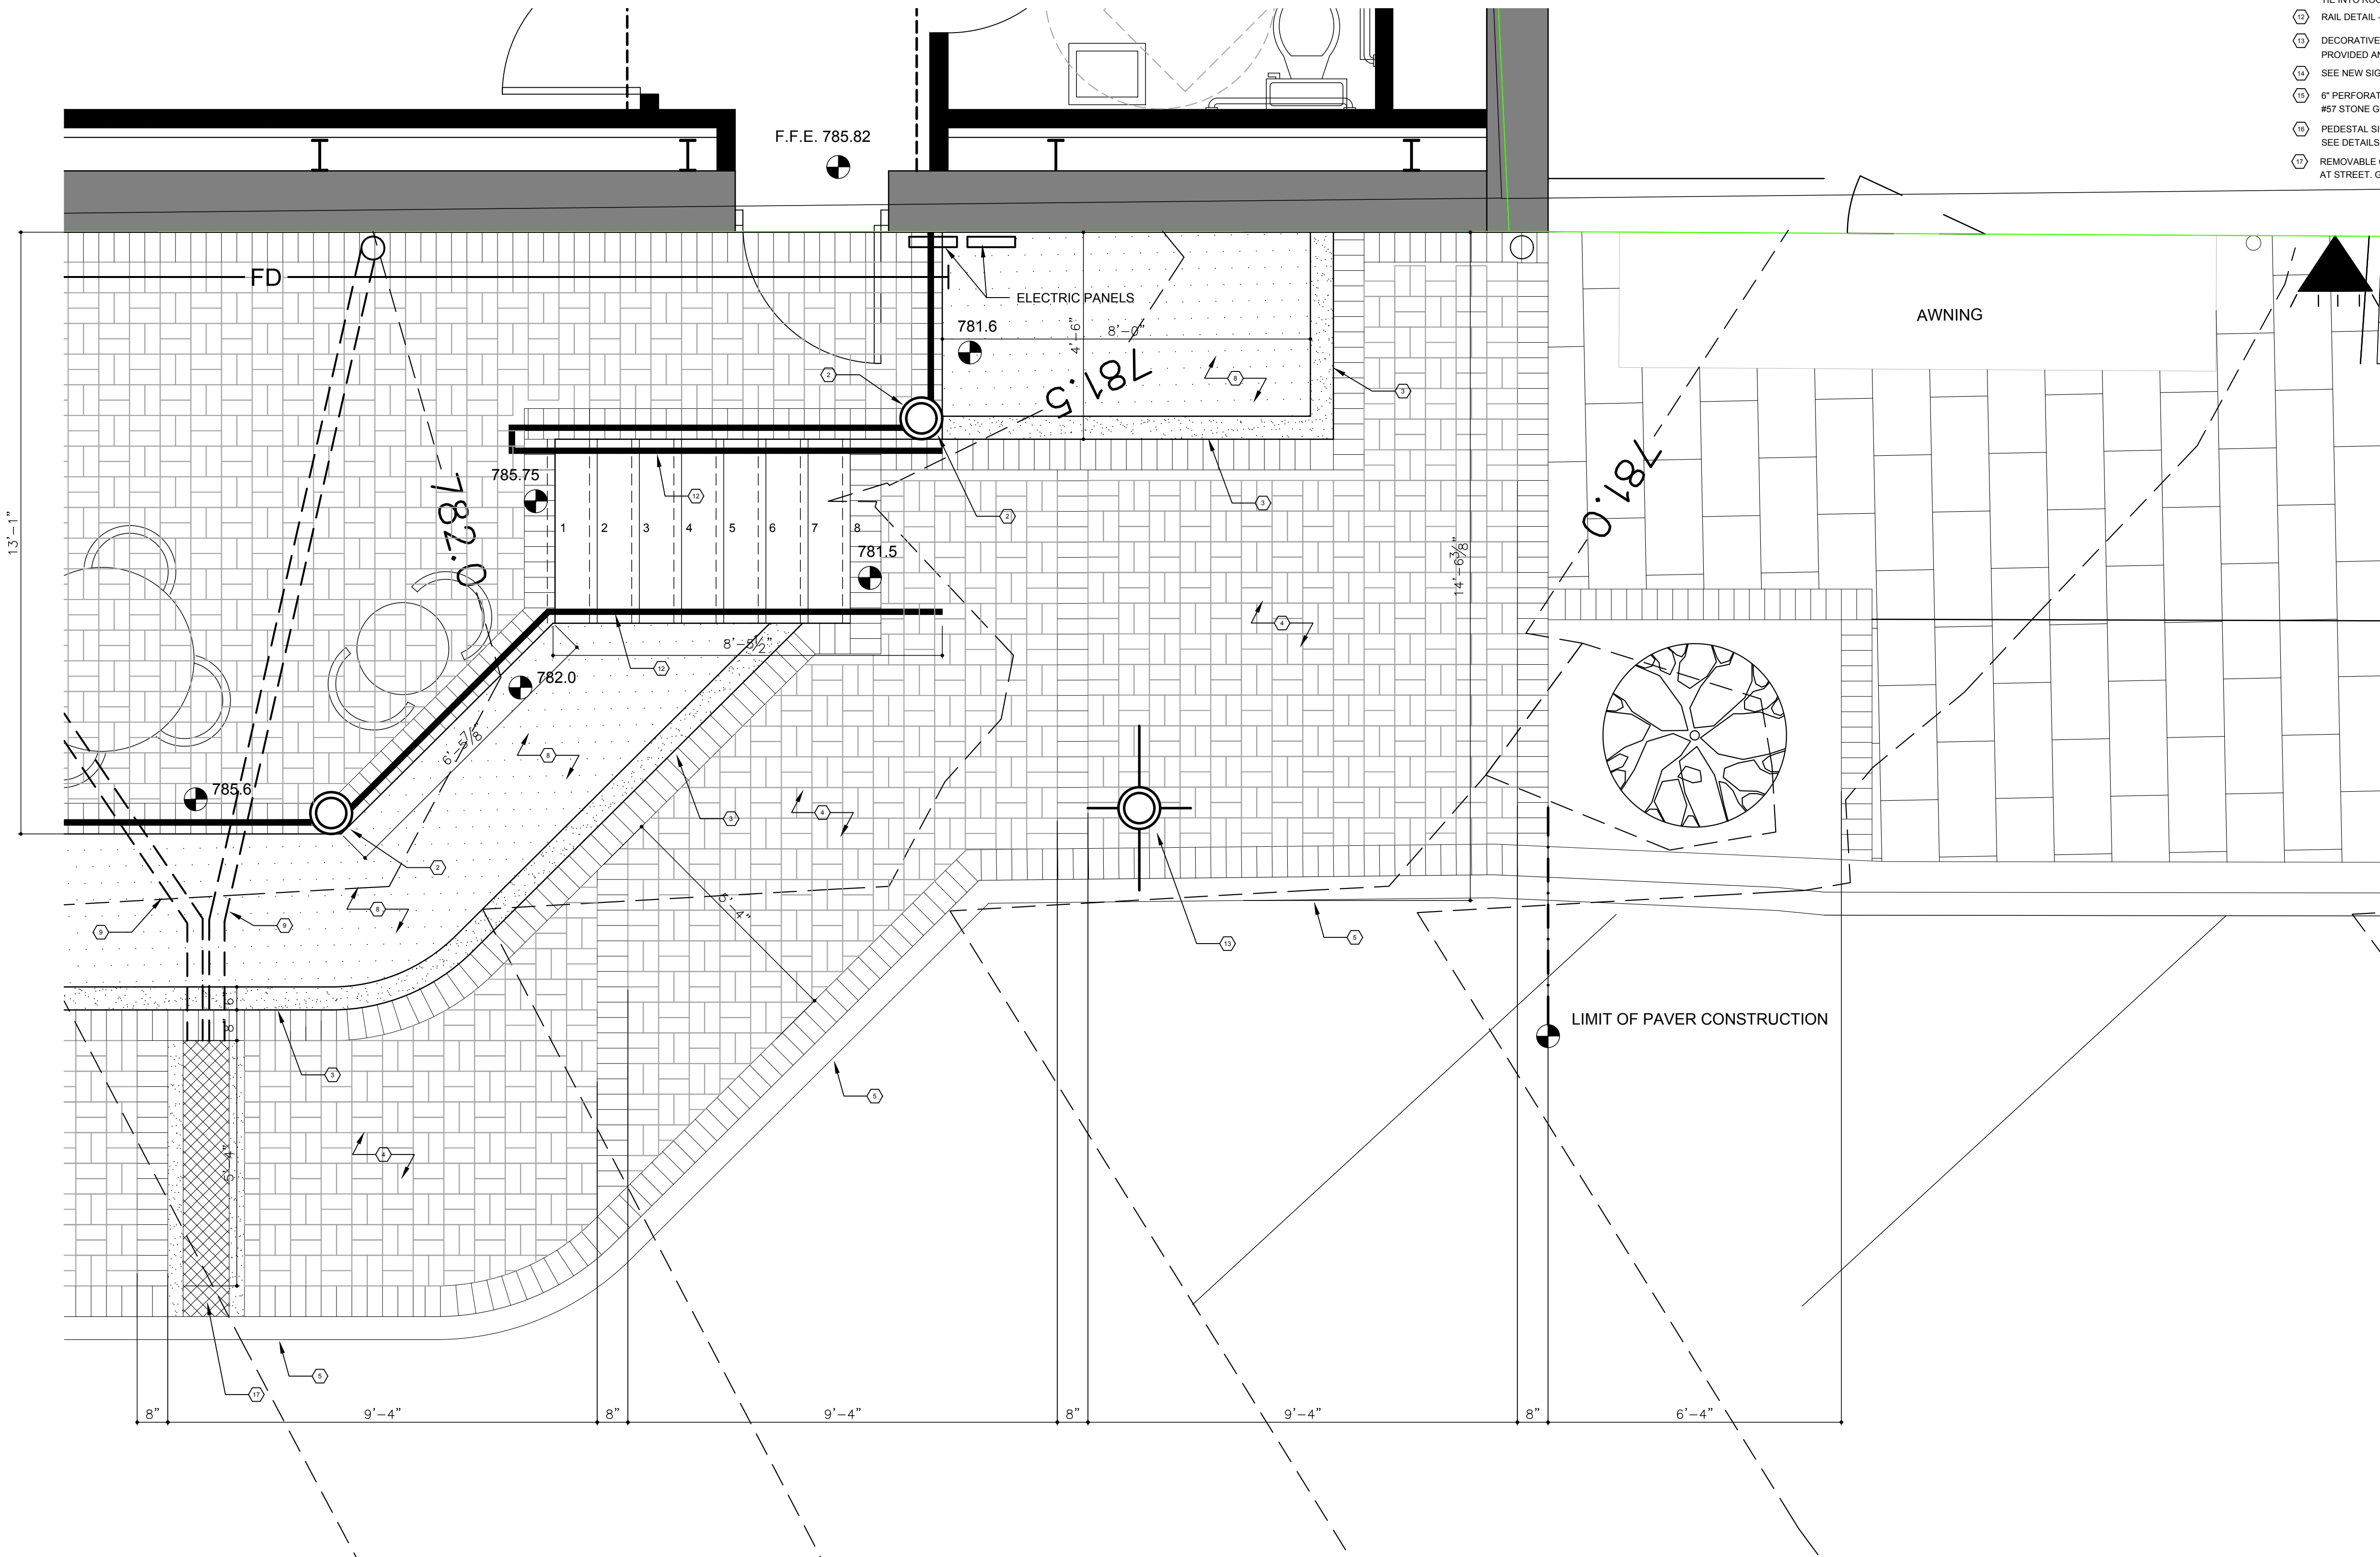

1  
SD-7

PARTIAL SITE PLAN - PROPOSED

Scale: 1/2" = 1'-0"



REVISIONS

DATE	DESCRIPTION

PROJECT:

STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

PARTIAL SITE PLAN  
PROPOSED

MODIFIED DATE:

JOB NO:

20-22

ISSUED DATE:


SHEET:

FOR BID AND PERMIT  
09 NOV 2020

SD-7


BASE BID:  
THE CITY OF LAGRANGE WILL FINISH GRADE,  
PROVIDE AND INSTALL 6" G.A.B., AND PROVIDE  
AND INSTALL ALL CONCRETE PAVERS AS  
CALLED FOR ON THE DRAWINGS.

GEORGIA 811  
UTILITIES PROTECTION CENTER, INC.  
IF YOU DIG IN GEORGIA  
DIAL 1-800-282-7411.  
WWW.GAUPC.COM  
THREE WORKING DAYS BEFORE YOU DIG.  
ALSO VERIFY ALL UTILITIES WITH CITY F LAGRANGE  
THREE WORKING DAYS BEFORE YOU DIG.

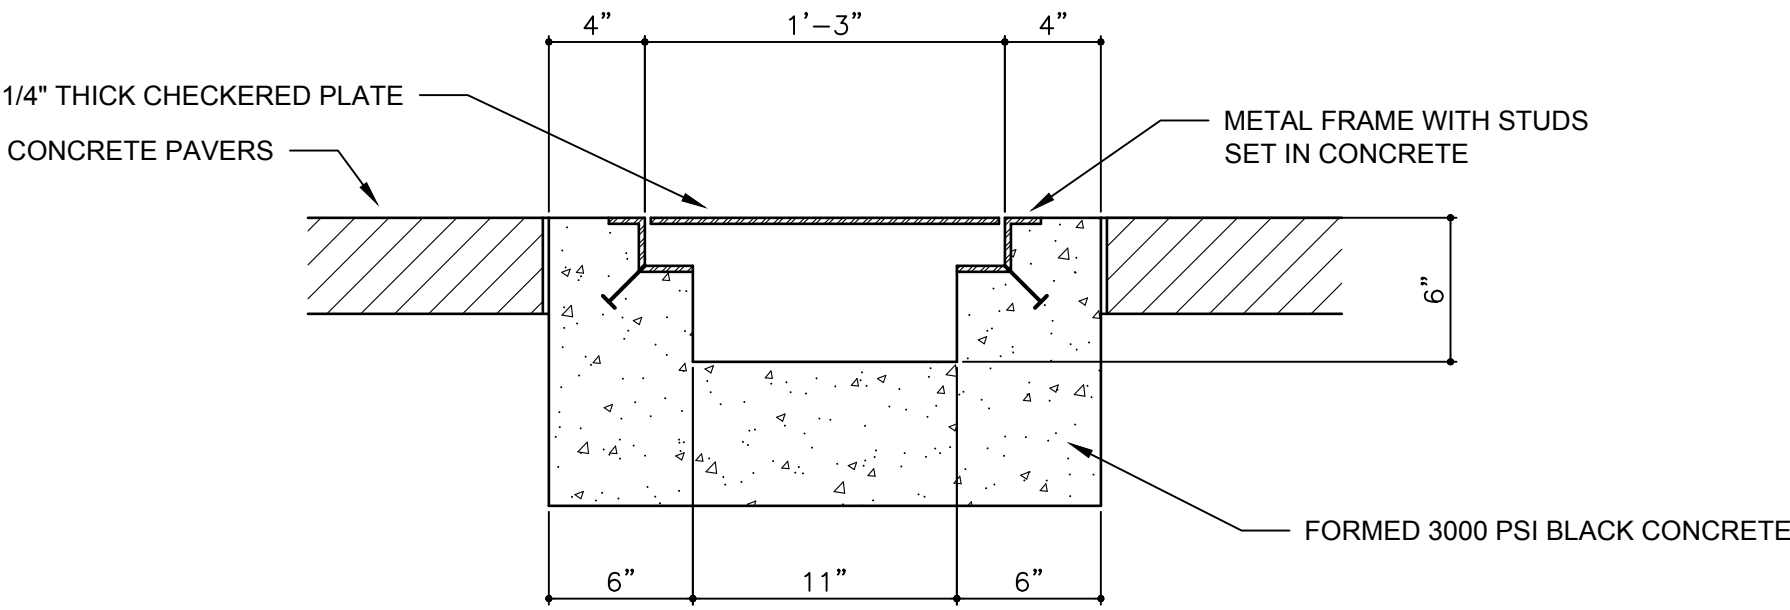


2  
SD-8  
**TRENCH COVER DETAIL**  
SCALE: 1-1/2" = 1'-0"

TRENCH COVER FOR DOWNSPOUTS  
SLOPE ASSEMBLY TO DISCHARGE  
AT CURB AT STREET

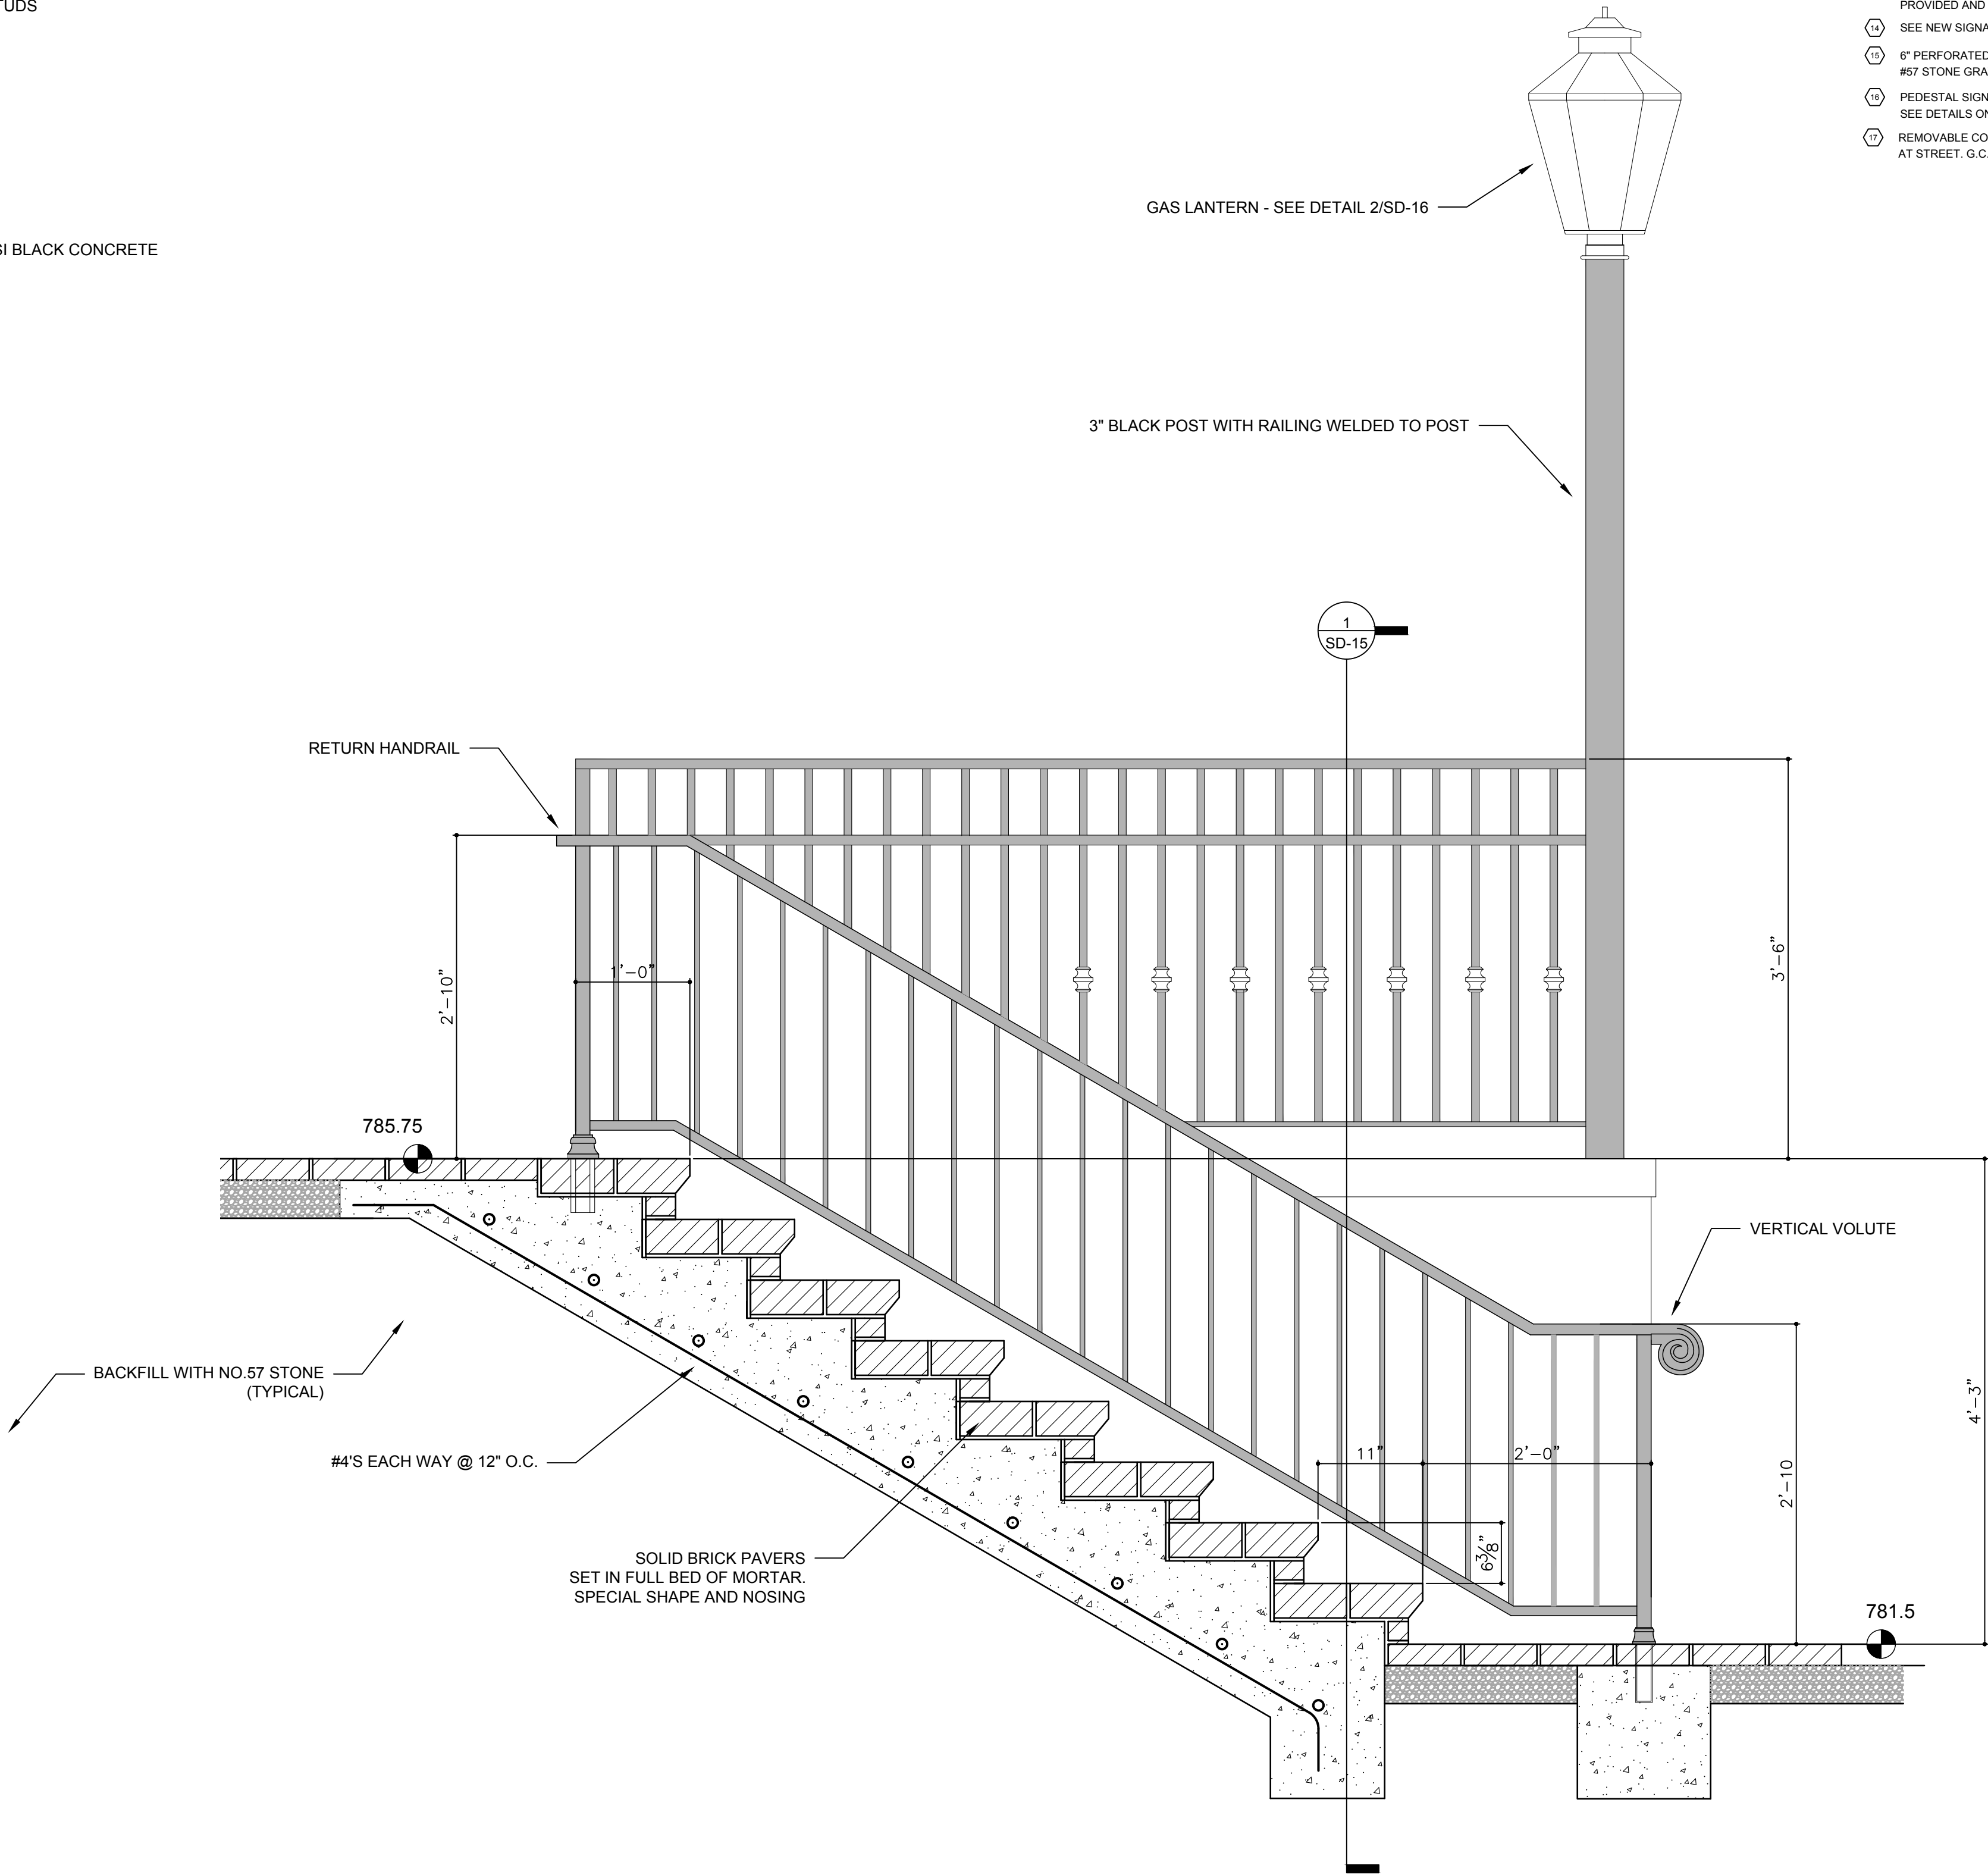

1  
SD-8  
**STAIR SECTION**  
SCALE: 1" = 1'-0"

- KEYNOTES**
- 1 GAS LANTERN ON PIER. SEE DETAILS ON SHEET SD-16.
  - 2 GAS LANTERN ON POST. SEE DETAILS ON SHEET SD-16.
  - 3 CONCRETE CURB - SEE DETAIL 1/SD-11
  - 4 CONCRETE PAVERS - SEE DETAIL 1/SD-13
  - 5 CONCRETE CURB AT STREET - SEE DETAIL 10/SD-10
  - 6 CURB RAMP FLUSH WITH ASPHALT - SEE DETAIL 3/SD-13
  - 7 ACCESSIBLE PATH SIGNAGE - SEE DETAIL 4/SD-13
  - 8 LANDSCAPE AREA WITH DRIP IRRIGATION SYSTEM ON TIMER
  - 9 6" ROUND CAST IRON DOWNSPOUT BOOT TO TIE INTO 6" PVC ROOF DRAIN UNDER PATIO TO LANDSCAPE AREA.
  - 10 NEW CONCRETE FOOTINGS FOR RAMP AND PATIO.
  - 11 EXISTING DOWNSPOUT - FIELD VERIFY EXACT LOCATIONS. TIE INTO ROOF DRAINAGE PIPES UNDER PATIO
  - 12 RAIL DETAIL - SEE 15/SD-10
  - 13 DECORATIVE ELECTRIC LIGHT POST (BLACK) WITH ACORN FIXTURE PROVIDED AND INSTALLED BY CITY OF LAGRANGE
  - 14 SEE NEW SIGNAGE PER DETAILS 2,3,4,5 ON SHEET SD-11
  - 15 6" PERFORATED FOUNDATION DRAIN WITH SOCK IN 12" X 12" X CONT. #57 STONE GRAVEL. SLOPE DRAIN DISCHARGE AT GRADE OF LANDSCAPE AREA.
  - 16 PEDESTAL SIGNAGE OF MAP OF DOWNTOWN LAGRANGE SEE DETAILS ON SHEET 4/SD-16.
  - 17 REMOVABLE COVER OVER TRENCH DRAIN. SLOPE TO DISCHARGE AT CURB AT STREET. G.C. FIELD VERIFY ELEVATIONS. SEE DETAIL 2/SD-8.

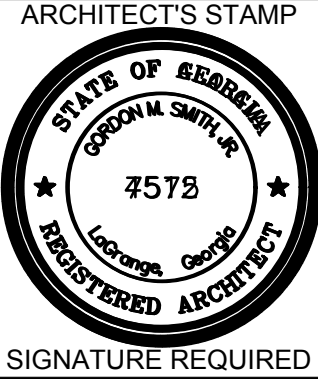

*[Signature]*

**SMITH DESIGN GROUP, INC.**

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

**REVISIONS**

DATE	DESCRIPTION

PROJECT:  
**STREETSCAPE ENHANCEMENTS**  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY  
  
RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:  
  
**STAIR SECTION**

MODIFIED DATE:

JOB NO:


20-22

ISSUED DATE:

SHEET:

FOR BID AND PERMIT  
09 NOV 2020


**SD-8**

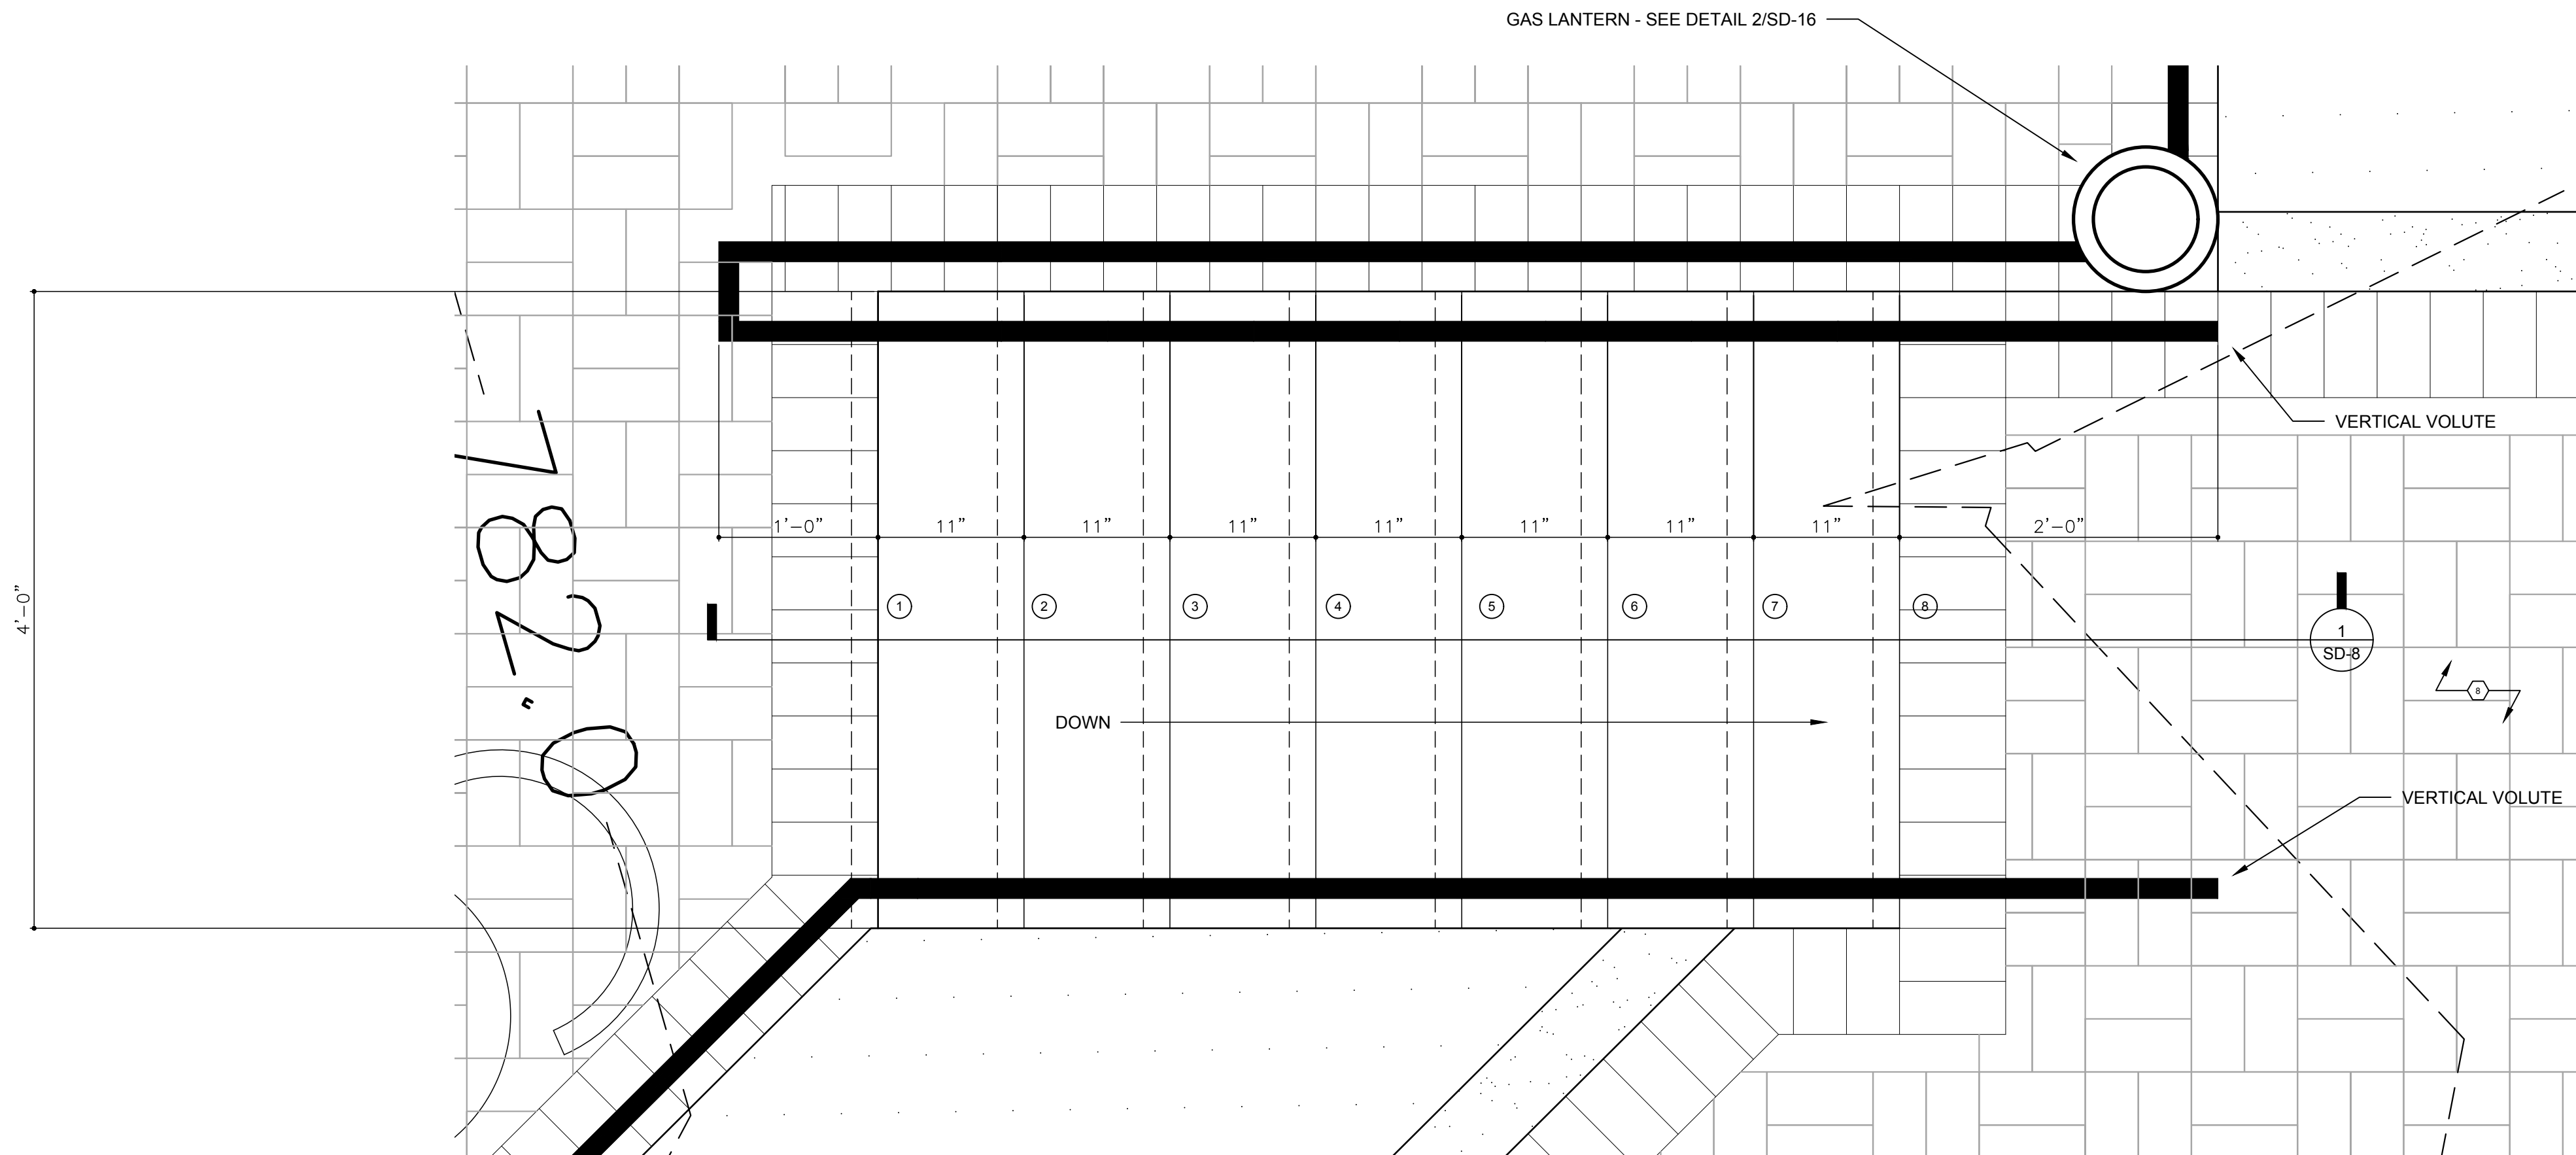

**1**  
**SD-9** **STAIR PLAN**  
SCALE: 1" = 1'-0"

**KEYNOTES**

- 1 GAS LANTERN ON PIER. SEE DETAILS ON SHEET SD-16.
- 2 GAS LANTERN ON POST. SEE DETAILS ON SHEET SD-16.
- 3 CONCRETE CURB - SEE DETAIL 1/SD-11
- 4 CONCRETE PAVERS - SEE DETAIL 1/SD-13
- 5 CONCRETE CURB AT STREET - SEE DETAIL 10/SD-10
- 6 CURB RAMP FLUSH WITH ASPHALT - SEE DETAIL 3/SD-13
- 7 ACCESSIBLE PATH SIGNAGE - SEE DETAIL 4/SD-13
- 8 LANDSCAPE AREA WITH DRIP IRRIGATION SYSTEM ON TIMER
- 9 6" ROUND CAST IRON DOWNSPOUT BOOT TO TIE INTO 6" PVC ROOF DRAIN UNDER PATIO TO LANDSCAPE AREA.
- 10 NEW CONCRETE FOOTINGS FOR RAMP AND PATIO.
- 11 EXISTING DOWNSPOUT - FIELD VERIFY EXACT LOCATIONS. TIE INTO ROOF DRAINAGE PIPES UNDER PATIO
- 12 RAIL DETAIL - SEE 15/SD-10
- 13 DECORATIVE ELECTRIC LIGHT POST (BLACK) WITH ACORN FIXTURE PROVIDED AND INSTALLED BY CITY OF LAGRANGE
- 14 SEE NEW SIGNAGE PER DETAILS 2.3,4,5 ON SHEET SD-11
- 15 6" PERFORATED FOUNDATION DRAIN WITH SOCK IN 12" X 12" X CONT. #57 STONE GRAVEL. SLOPE DRAIN DISCHARGE AT GRADE OF LANDSCAPE AREA.
- 16 PEDESTAL SIGNAGE OF MAP OF DOWNTOWN LAGRANGE SEE DETAILS ON SHEET 4/SD-16.
- 17 REMOVABLE COVER OVER TRENCH DRAIN. SLOPE TO DISCHARGE AT CURB AT STREET. G.C. FIELD VERIFY ELEVATIONS. SEE DETAIL 2/SD-8.

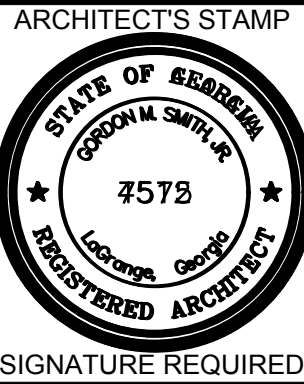

*Signature*

**SMITH DESIGN GROUP, INC.**

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

**REVISIONS**

DATE	DESCRIPTION

PROJECT:

**STREETSCAPE  
ENHANCEMENTS**  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

**STAIR PLAN**

MODIFIED DATE:

JOB NO:






**20-22**

ISSUED DATE:

SHEET:

FOR BID AND PERMIT  
09 NOV 2020

**SD-9**

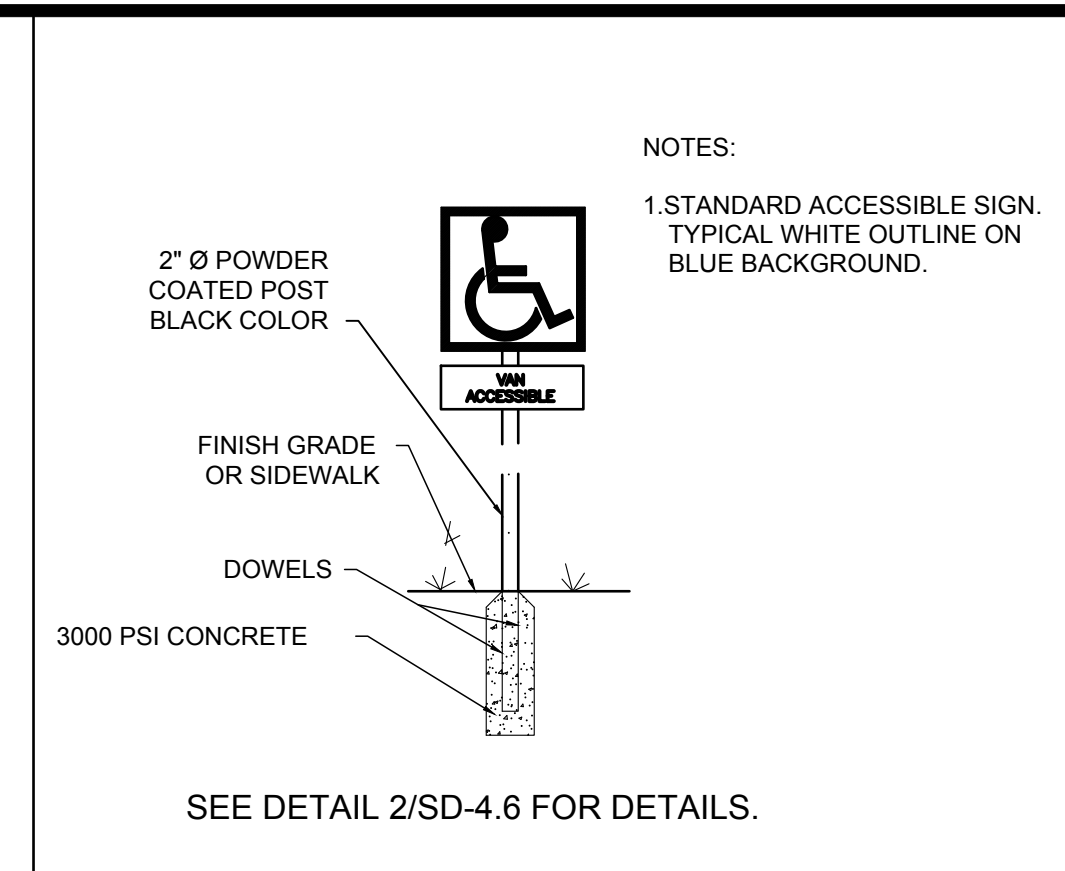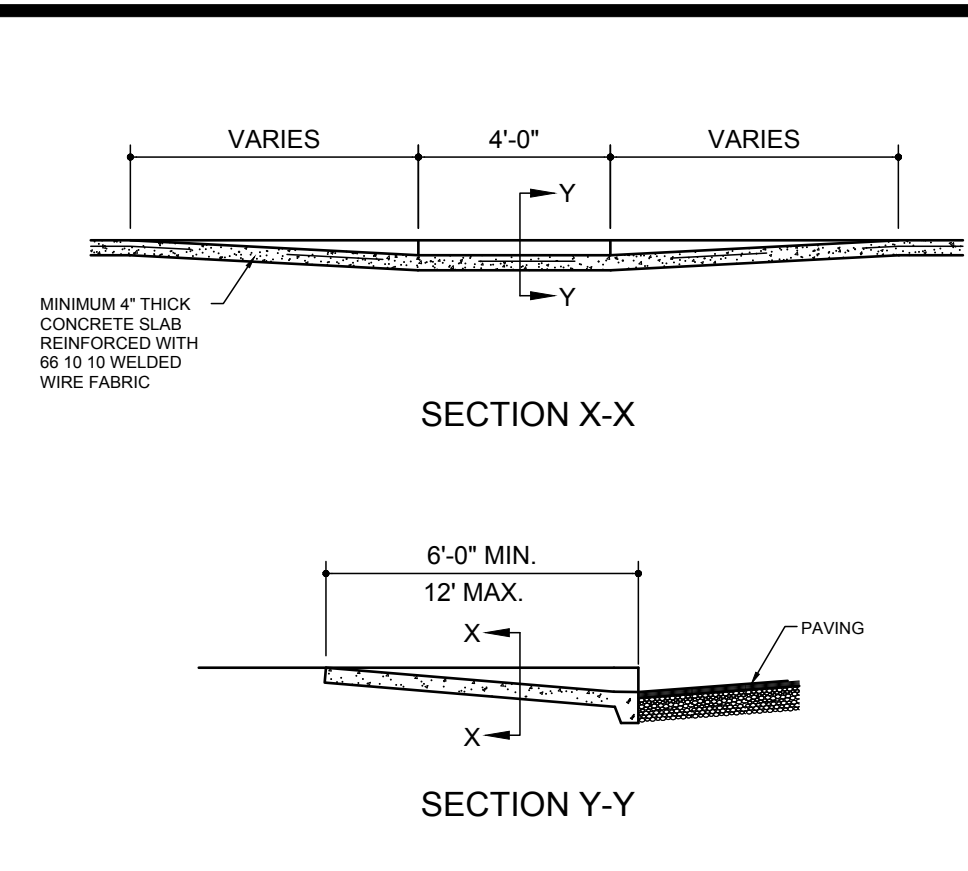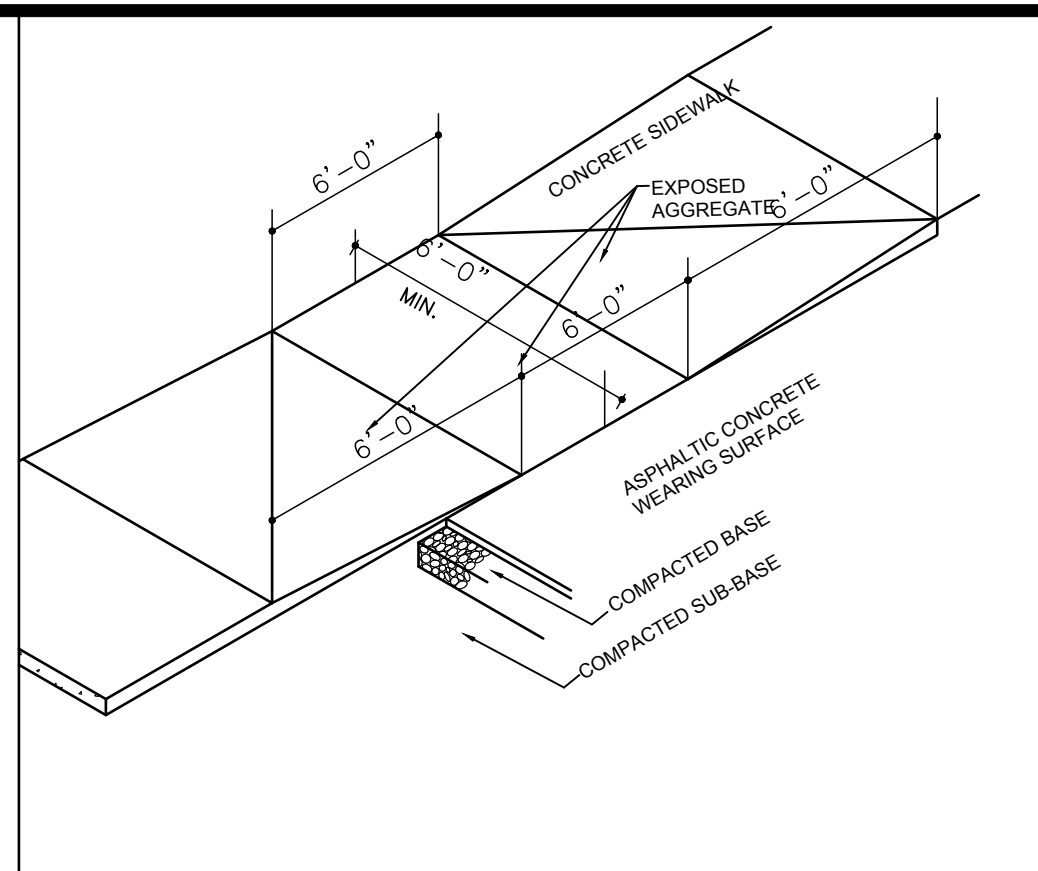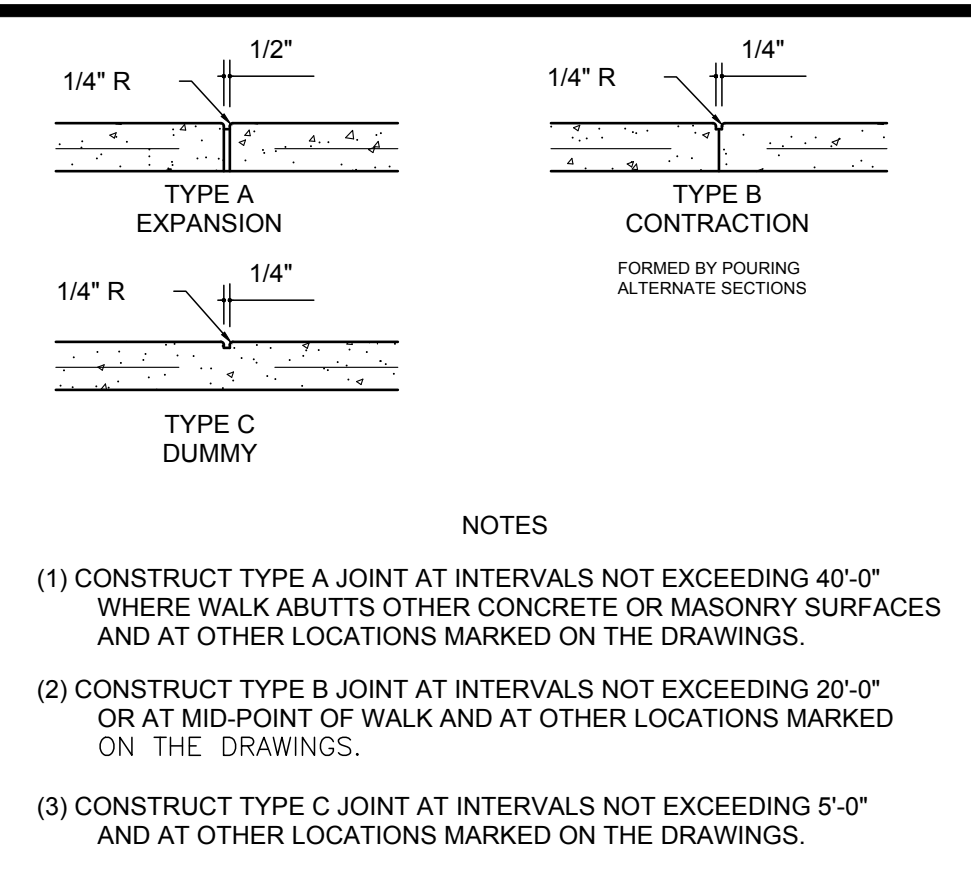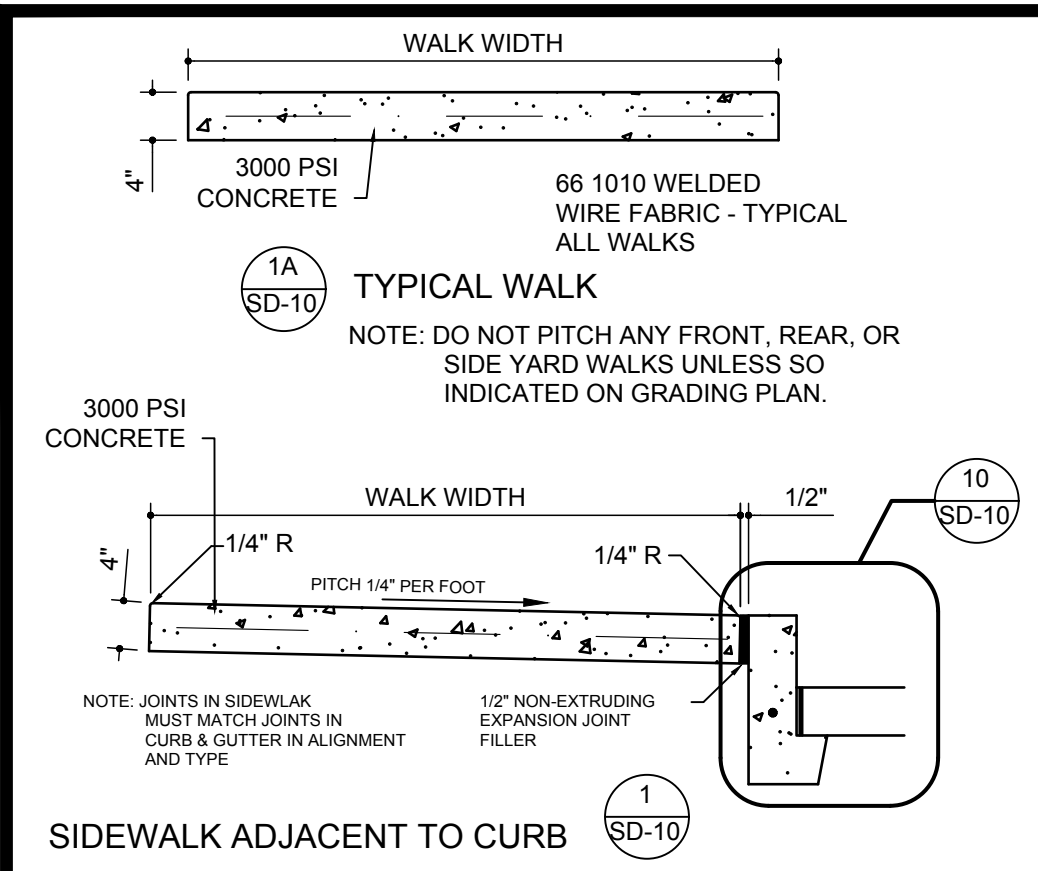






**1 TYPICAL CONCRETE WALK SECTIONS**  
SD-10  
SCALE 3/4" = 1'-0"

**2 CONCRETE WALK JOINTS**  
SD-10  
SCALE 3/4" = 1'-0"

**3 ISOMETRIC-WHEELCHAIR RAMP**  
SD-10  
SCALE 1/4" = 1'-0"

**4 WHEELCHAIR RAMP DETAILS**  
SD-10  
SCALE 1/4" = 1'-0"

**5 ACCESSIBLE PARKING SIGNAGE**  
SD-10  
NO SCALE

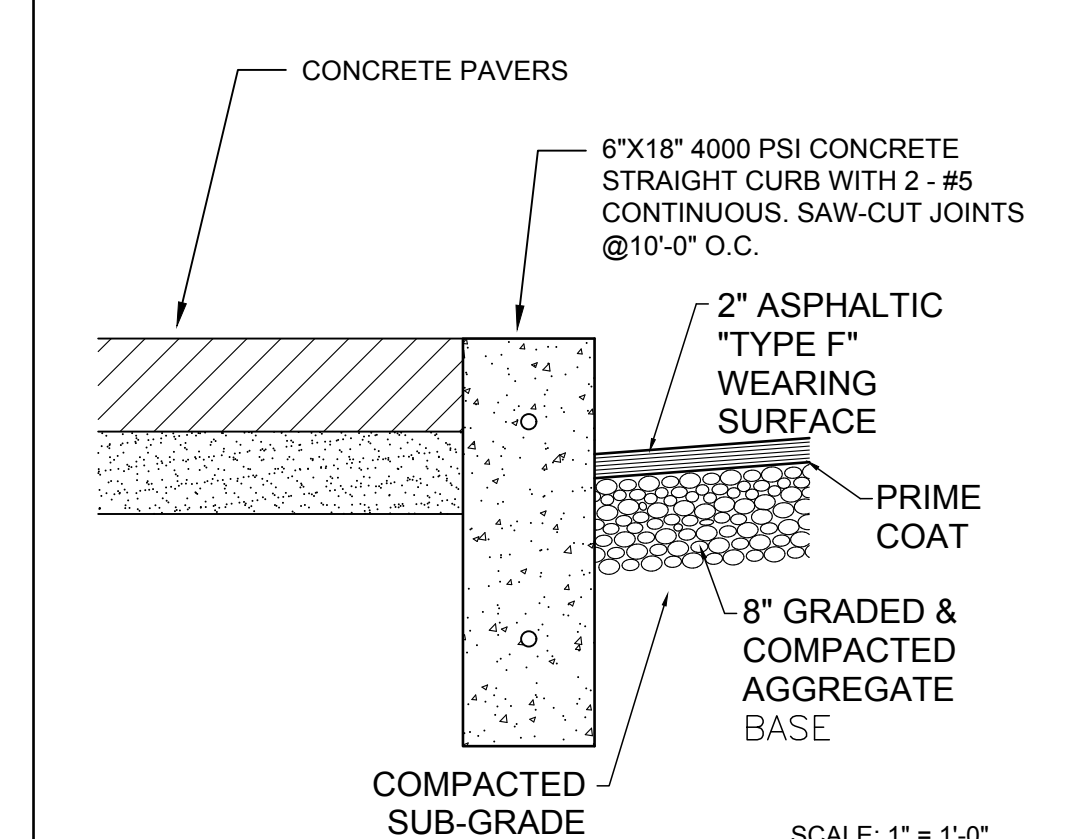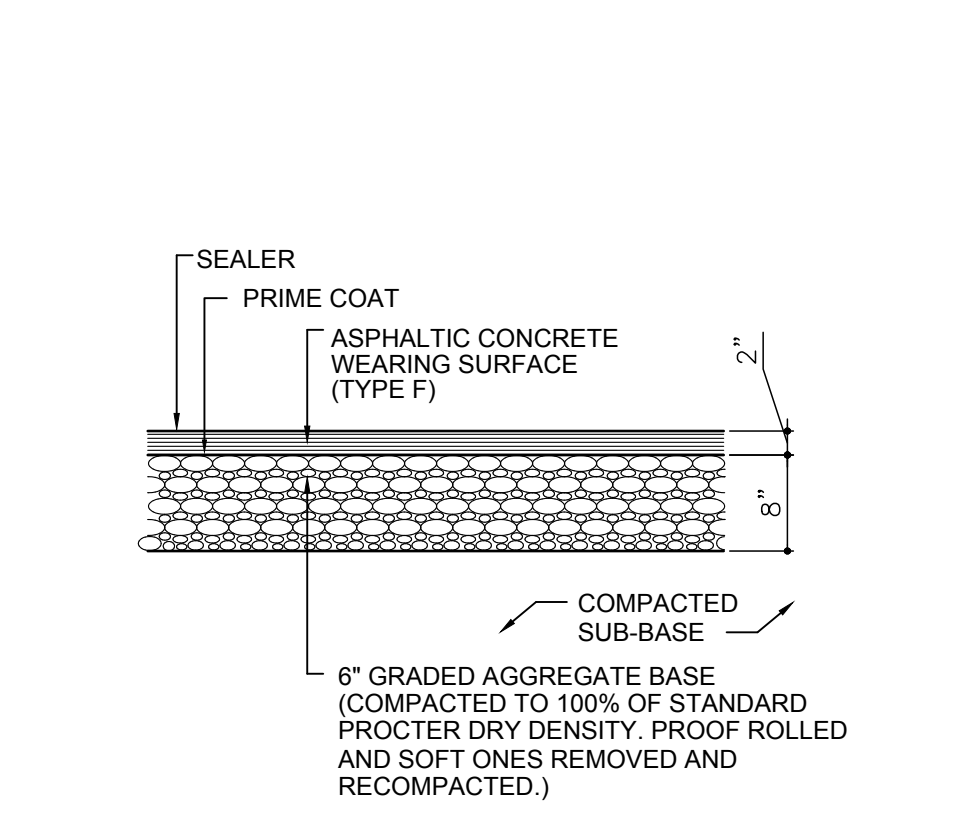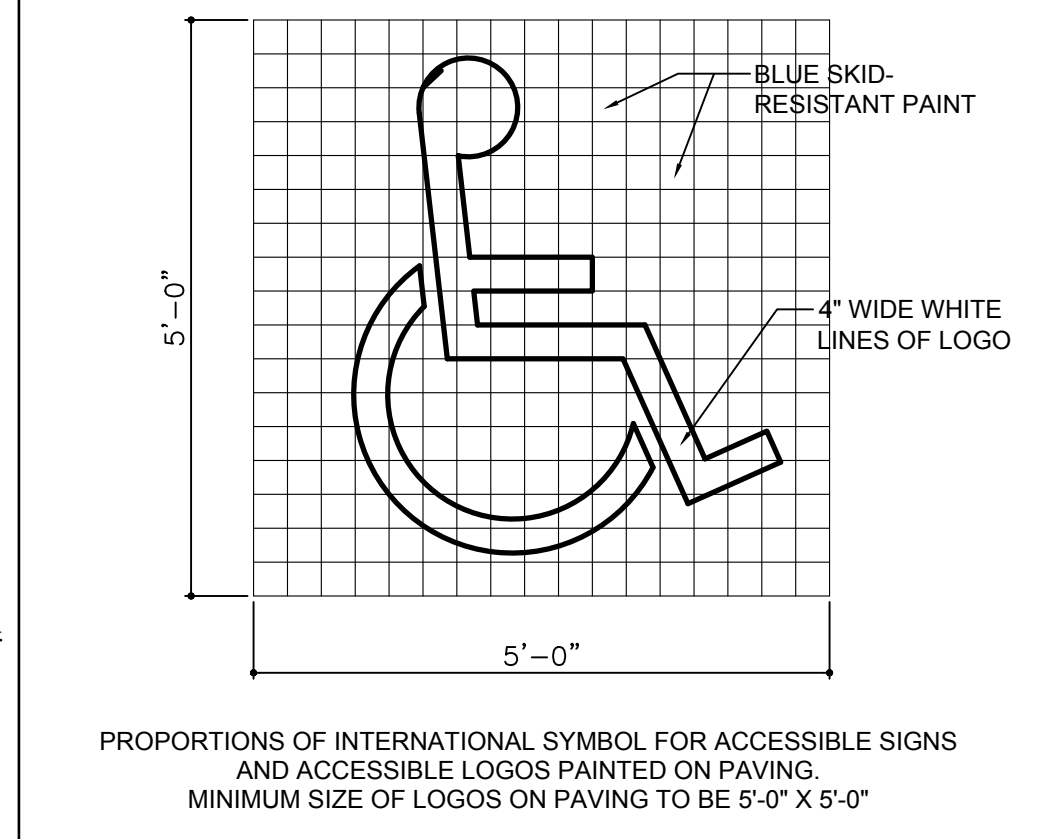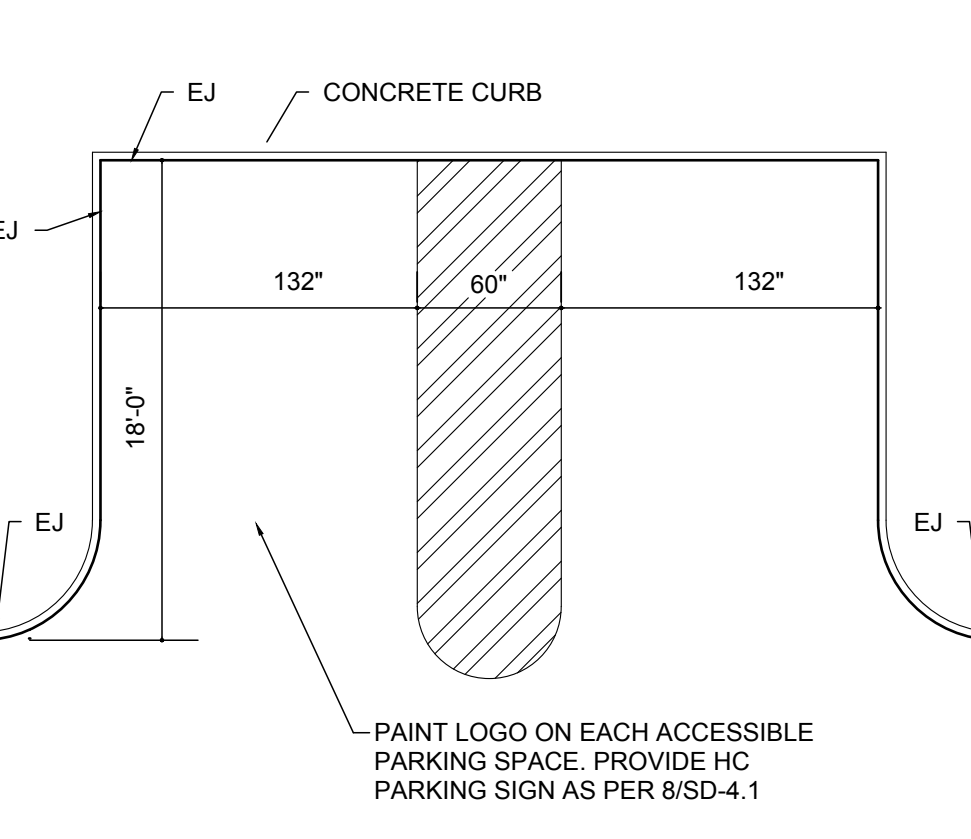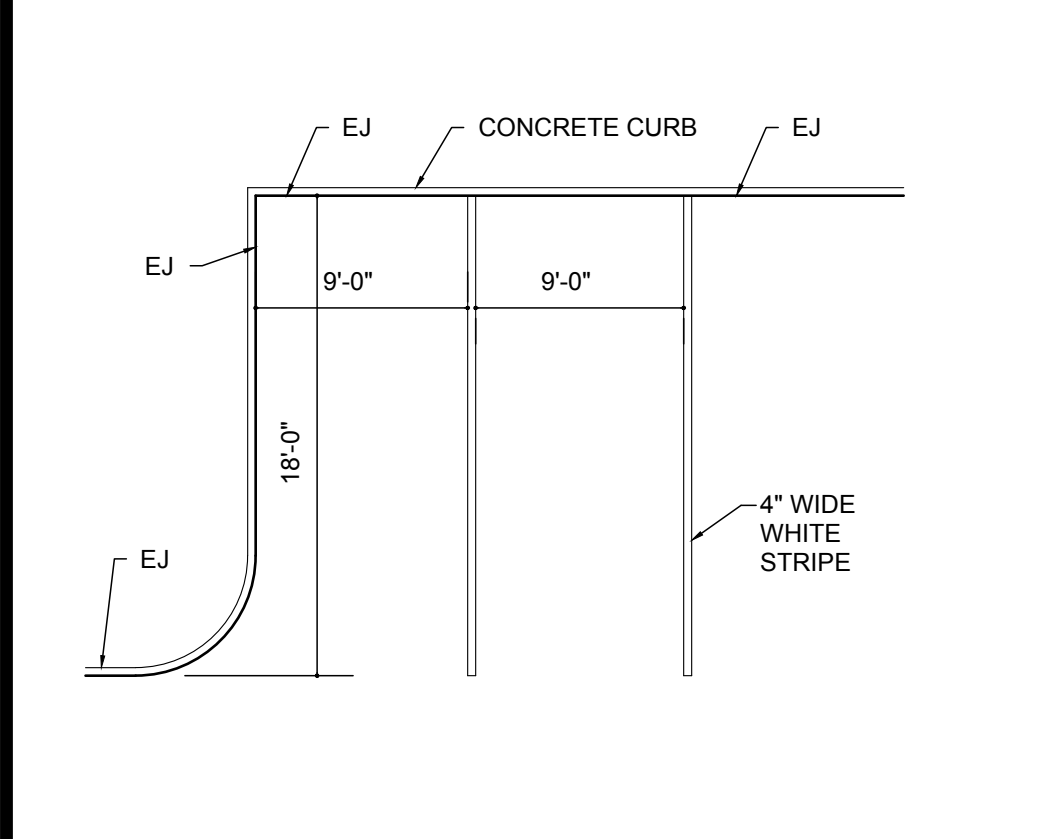





**6 PLAN-TYPICAL NON-ACCESSIBLE PARKING SPACES**  
SD-10  
SCALE 1/8" = 1'-0"

**7 UNIVERSAL ACCESSIBLE PARKING SPACE**  
SD-10  
SCALE 1/8" = 1'-0"

**8 ACCESSIBLE LOGO**  
SD-10  
NO SCALE  
(TO BE PAINTED ON ALL ACCESSIBLE PARKING SPACES)

**9 DETAIL - LIGHT DUTY ASPHALTIC CONCRETE PAVING**  
SD-10  
SCALE: 1" = 1'-0"

**10 CONCRETE CURB AND ASPHALTIC CONCRETE PAVING - TRAVERSE SECTION**  
SD-10  
SCALE: 1" = 1'-0"

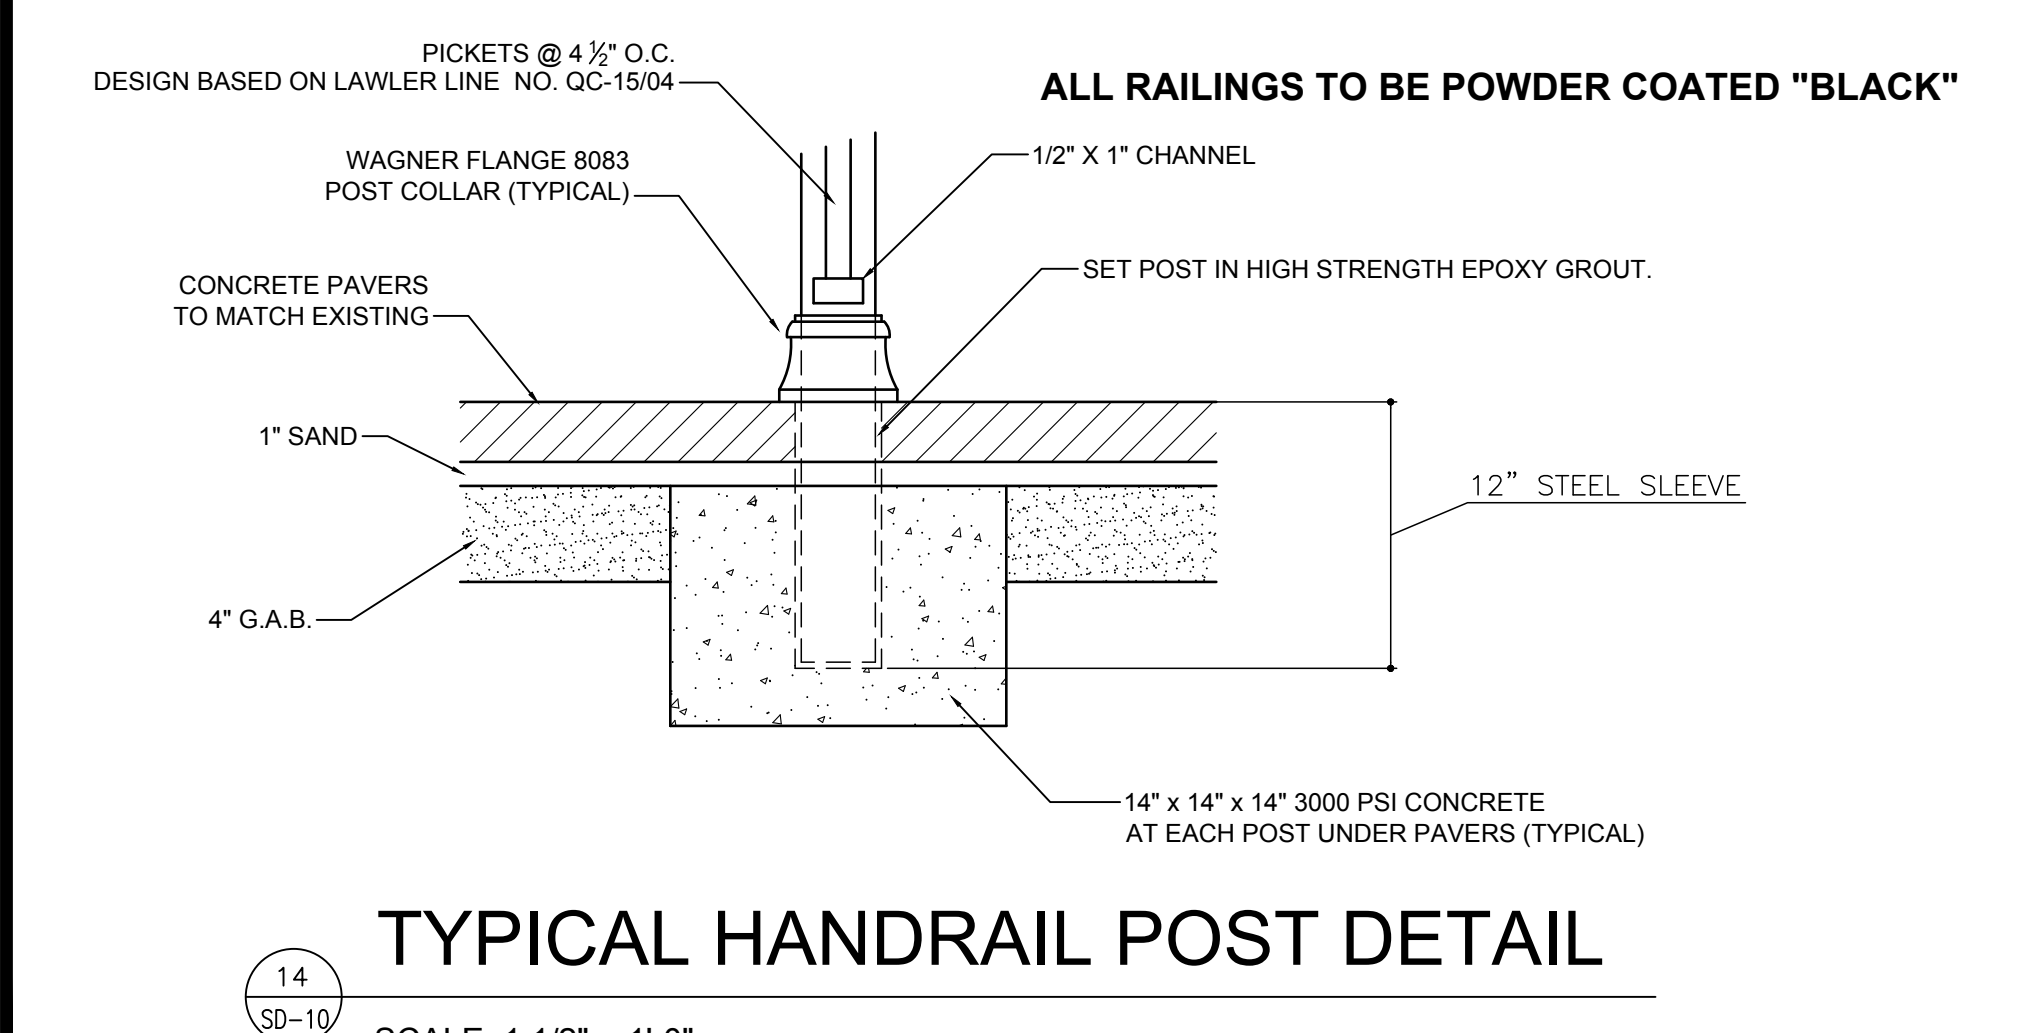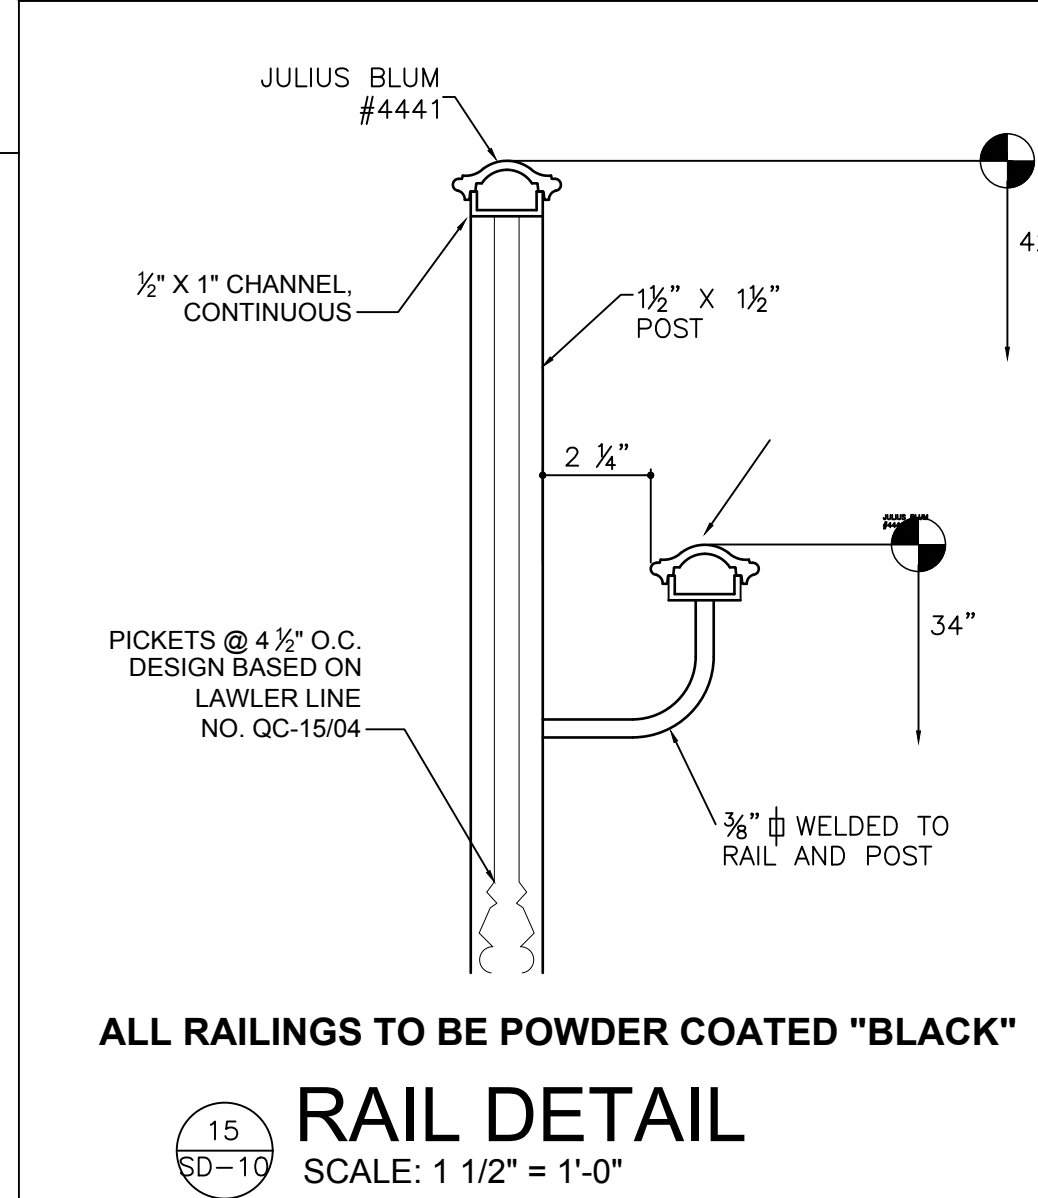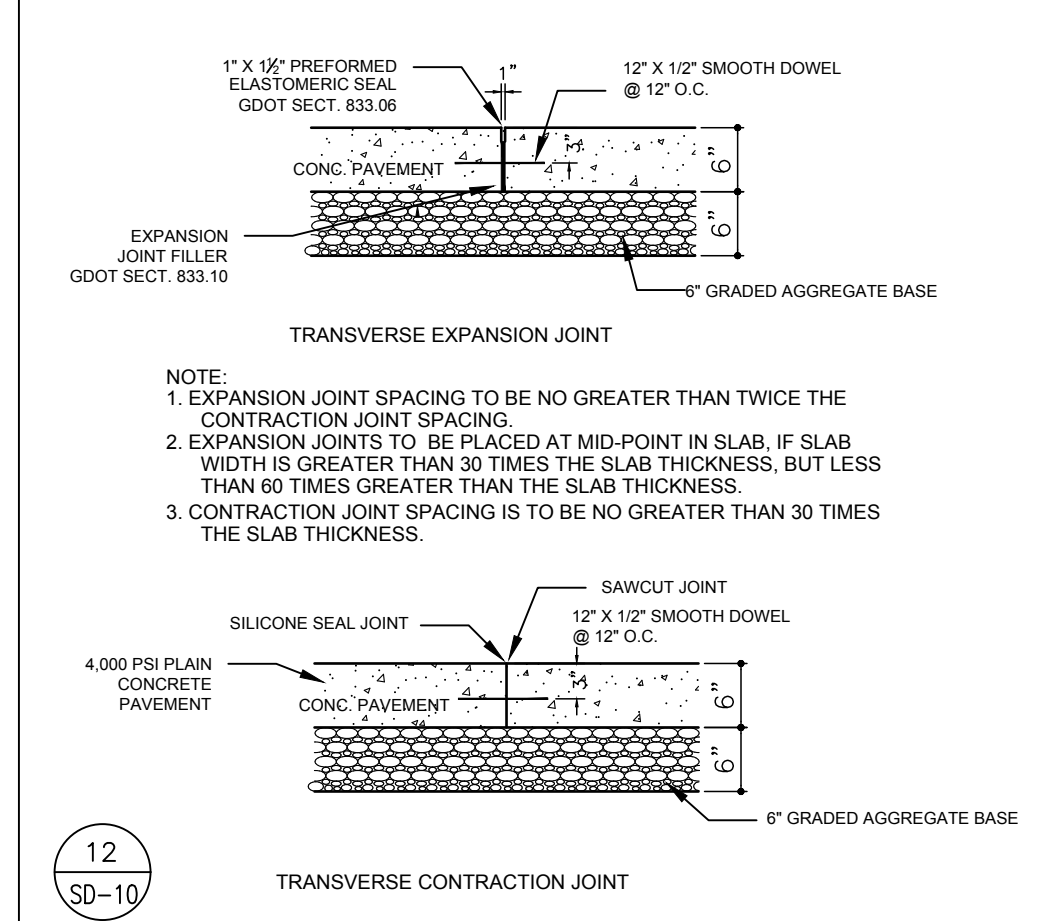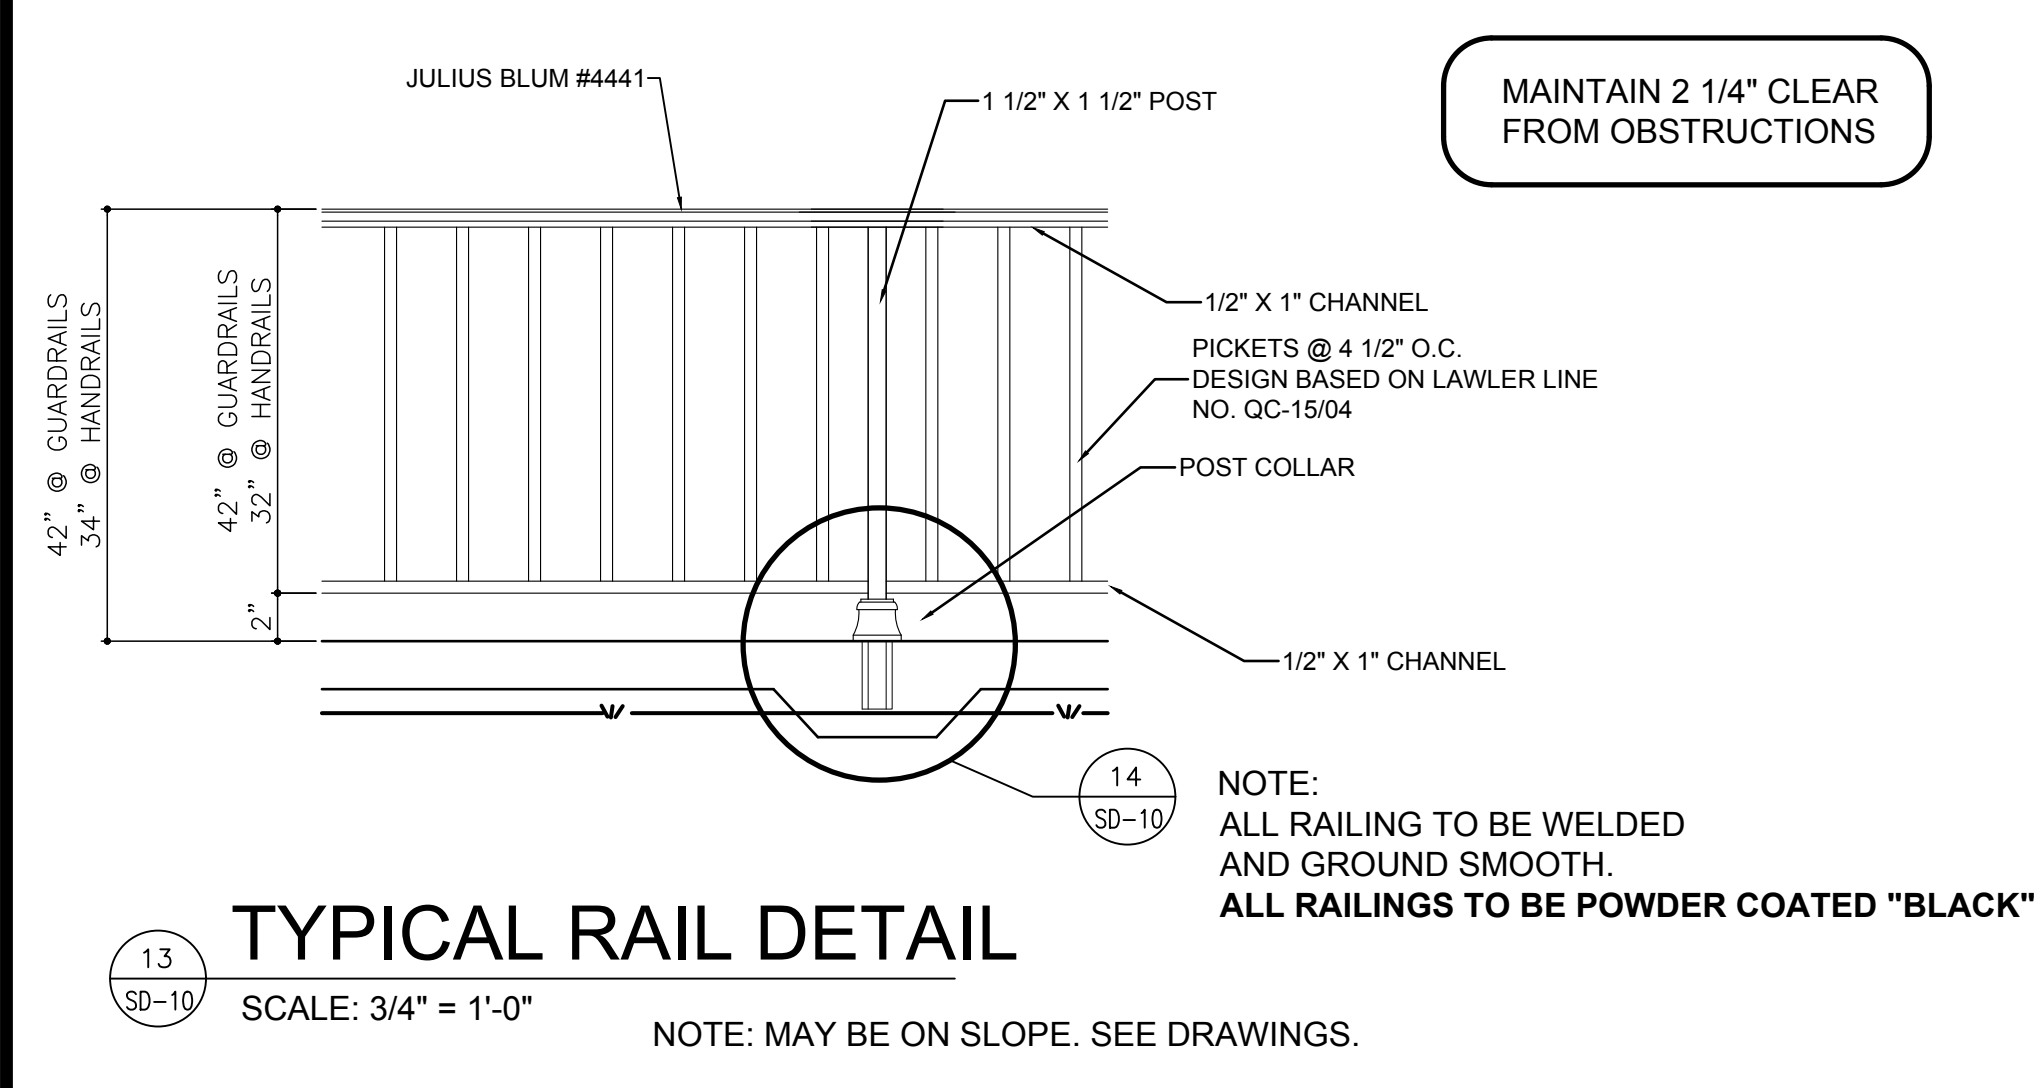

**BASE BID:**  
THE CITY OF LAGRANGE WILL FINISH GRADE, PROVIDE AND INSTALL 6" G.A.B., AND PROVIDE AND INSTALL ALL CONCRETE PAVERS AS CALLED FOR ON THE DRAWINGS.

GEORGIA 811 UTILITIES PROTECTION CENTER, INC. IF YOU DIG IN GEORGIA DIAL 1-800-282-7411. WWW.GAUPC.COM THREE WORKING DAYS BEFORE YOU DIG. ALSO VERIFY ALL UTILITIES WITH CITY F LAGRANGE THREE WORKING DAYS BEFORE YOU DIG.

ARCHITECT'S STAMP

STATE OF GEORGIA  
CORBAM SMITH, P.C.  
7578  
REGISTERED ARCHITECT

SIGNATURE REQUIRED

SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

REVISIONS		
Δ	DATE	DESCRIPTION

PROJECT:

**STREETSCAPE ENHANCEMENTS**  
NORTHEAST CORNER OF LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY


RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:


**SITE DETAILS**

MODIFIED DATE:	JOB NO: <b>20-22</b>
ISSUED DATE:	SHEET: <b>SD-10</b>
FOR BID AND PERMIT 09 NOV 2020	



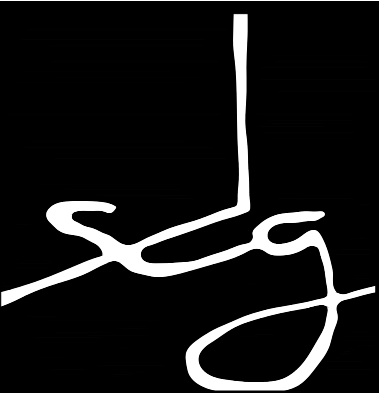

706-882-5511

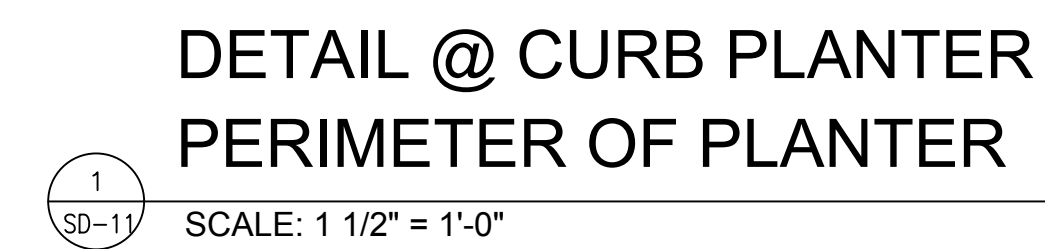
[illegible]

TITLE:

SITE DETAILS / NOTES  
AND SPECIFICATIONS

MODIFIED DATE:	JOB NO: <b>20-22</b>
ISSUED DATE:  FOR BID AND PERMIT <b>09 NOV 2020</b>	SHEET:  <b>SD-11</b>



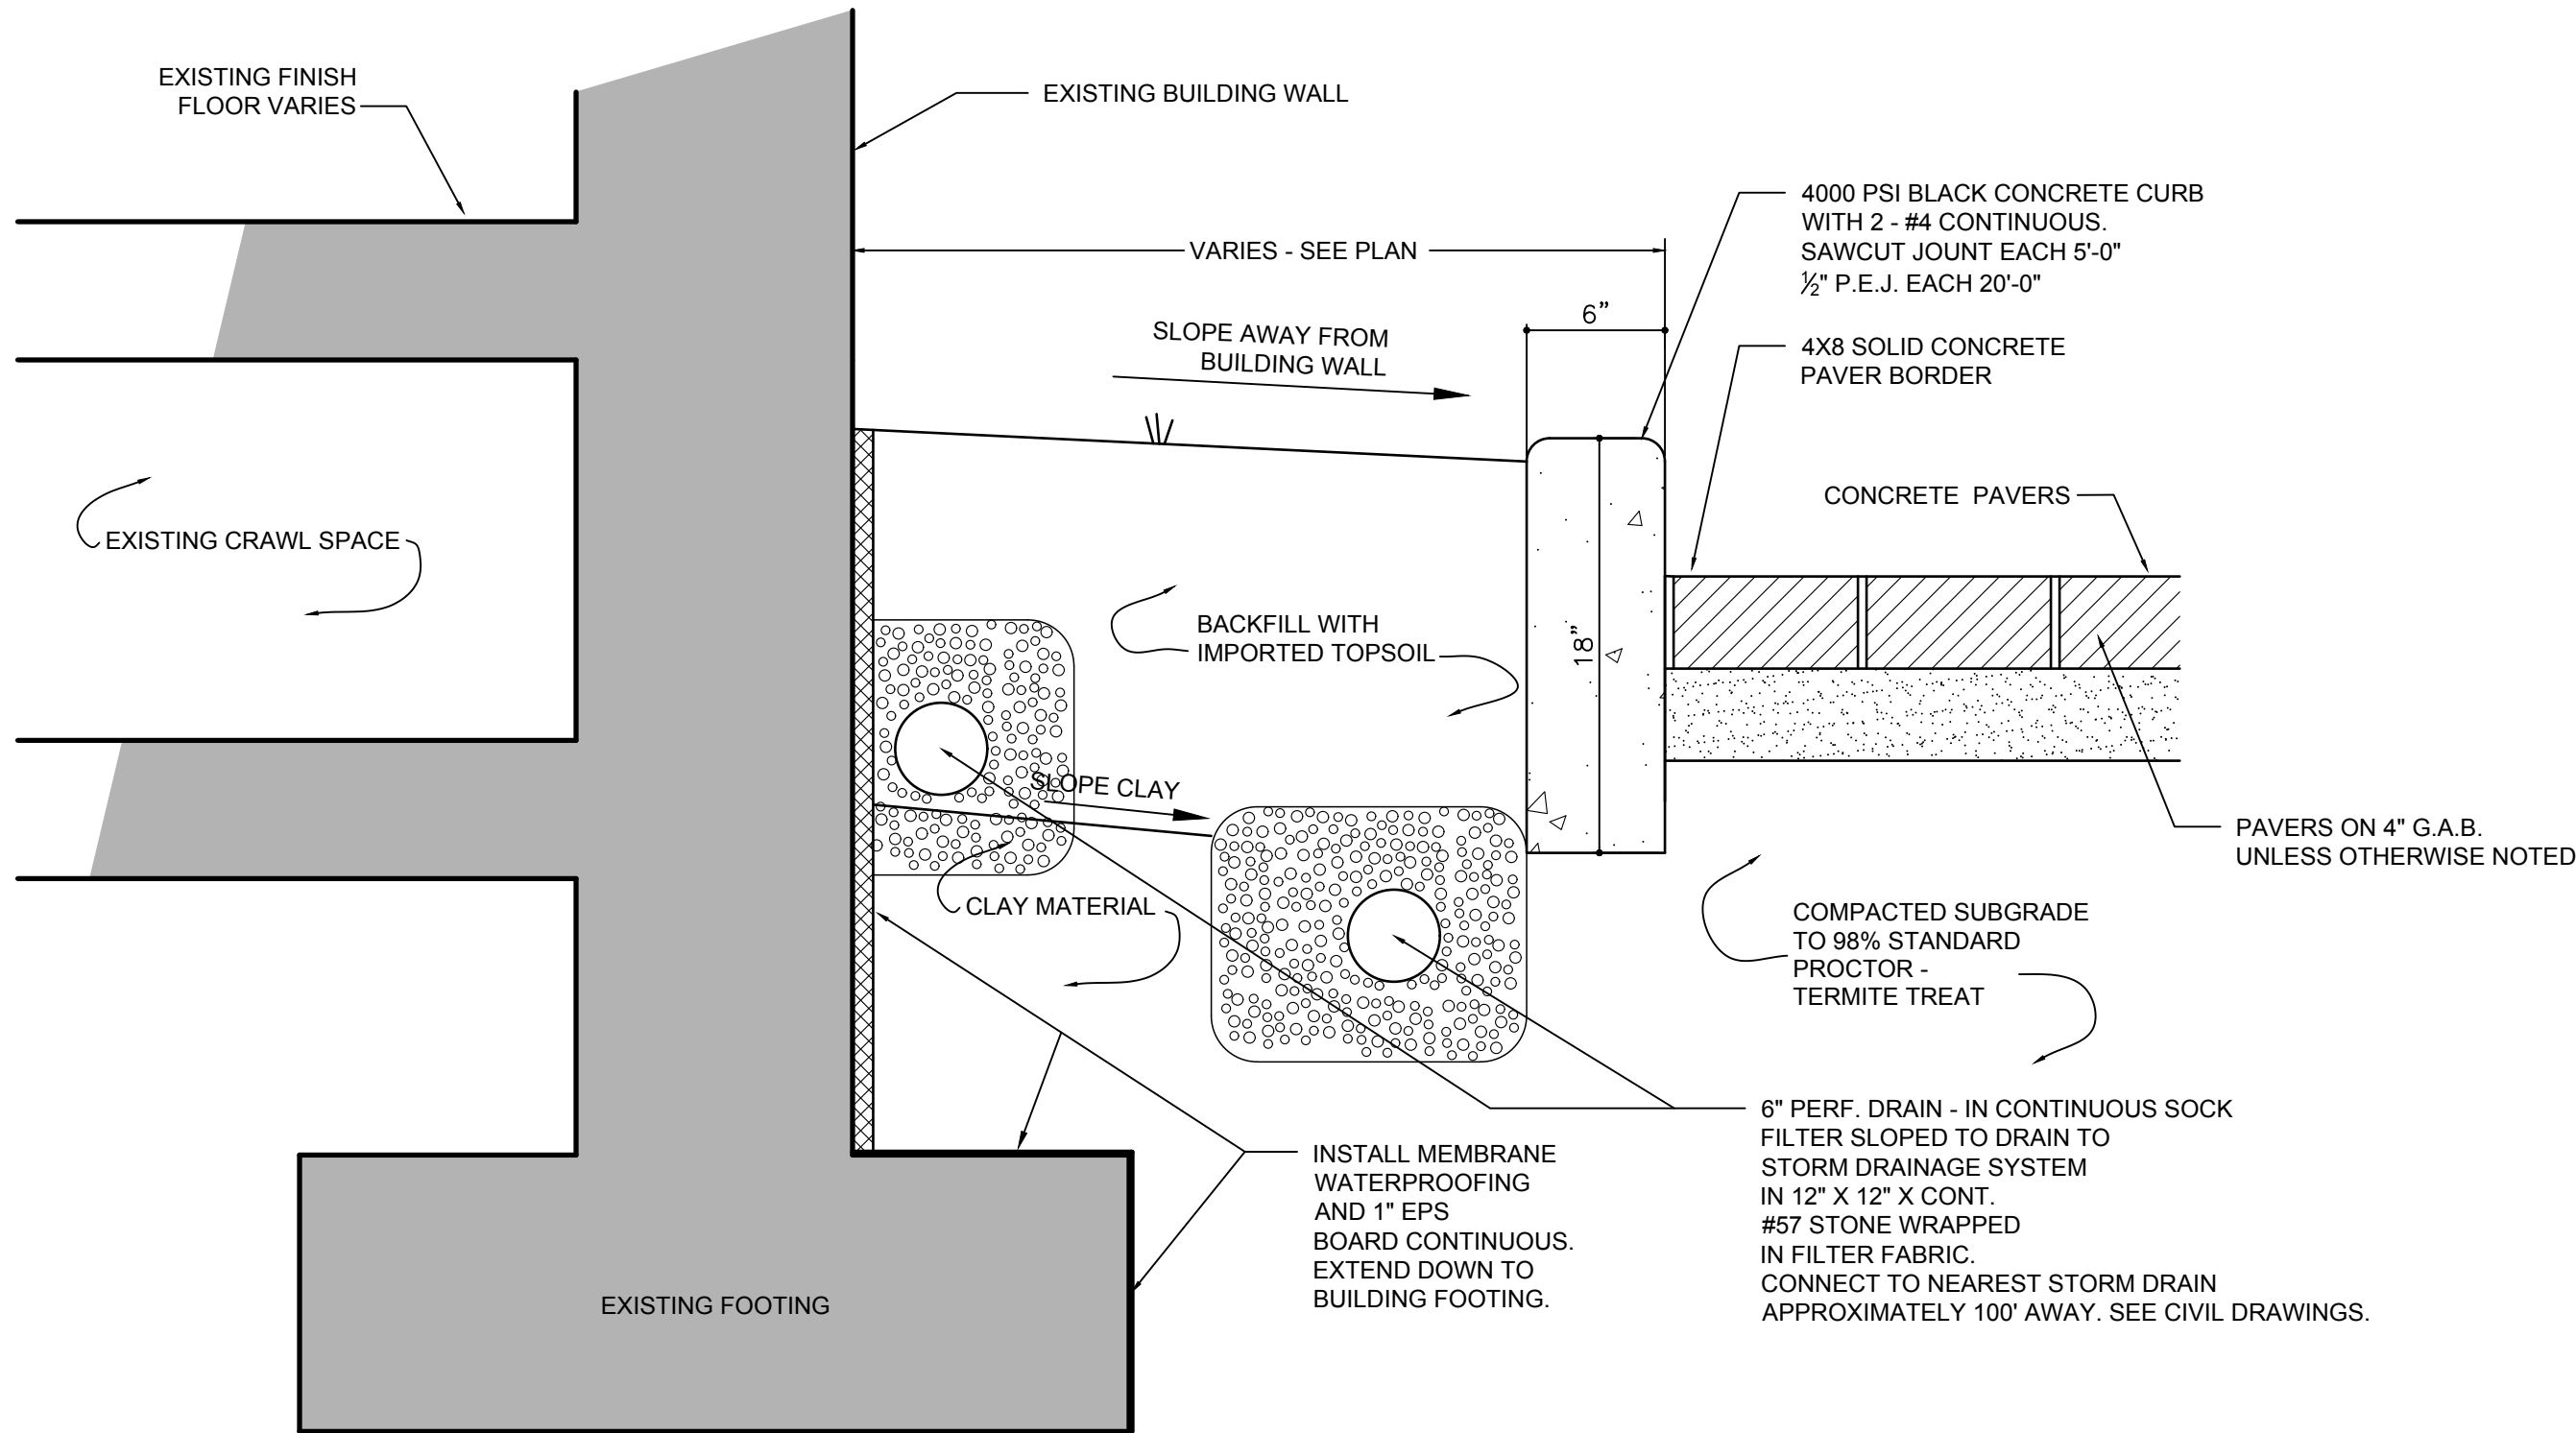

1  
SD-12  
DETAIL @ CURB PLANTER  
SCALE: 1 1/2" = 1'-0"

GEORGIA 811  
UTILITIES PROTECTION CENTER, INC.  
IF YOU DIG IN GEORGIA  
DIAL 1-800-282-7411.  
WWW.GAUPC.COM  
THREE WORKING DAYS BEFORE YOU DIG.  
ALSO VERIFY ALL UTILITIES WITH CITY F LAGRANGE  
THREE WORKING DAYS BEFORE YOU DIG.

BASE BID:  
THE CITY OF LAGRANGE WILL FINISH GRADE,  
PROVIDE AND INSTALL 6" G.A.B., AND PROVIDE  
AND INSTALL ALL CONCRETE PAVERS AS  
CALLED FOR ON THE DRAWINGS.

BRICK AND COLORED MORTAR  
CASH ALLOWNACE

1. PROVIDE CASH ALLOWANCE OF \$1,000.00 PER 1,000 BRICK.
2. PROVIDE CASH ALLOWANCE OF \$20.00 PER BAG OF COLORED MORTAR.
3. PROVIDE SOLID BRICKS IN CASH ALLOWANCE.

Manufacturer:  
Seal 'n Lock System Corp.  
13215 N. Nebraska Ave. Bldg. A  
Tampa, Florida 33613  
Office: 813.852.1500  
Fax: 813.304.2442  
info@SealnLock.com  
Emergency Tel: USA 1-800-335-3503  
Emergency Tel: Int'l 1-352-323-3500  
Issue Date: 8/16



Product Data/Application Guide

THE FIRST 'ALL IN ONE DAY' PROCESS

Super-Wet

Two-Part, Water Based Pure Urethane Sealer

**DESCRIPTION:** Super-Wet is an ultra-low VOC, two-part-water based pure urethane sealer that penetrates into the pavers to provide a protective barrier, ultimate enhancement and superior joint stabilization.

Super-Wet is formulated to seal products made to ASTM C-936 specifications having an absorption rate of 5% or less. Pavers with higher absorption will require additional application(s) of sealer to achieve the desired results.

ADVANTAGES:

- One day process (No down time)
- Provides a Protective Barrier
- May be applied to a damp surface
- User friendly and environmentally safe
- 34% Solids
- Minimal toxic odor
- Will not harm vegetation, inhibits weed growth and ant mines
- Superior joint stabilization (for paver joints up to 1/4" in width), no need for polymeric sand
- VOC compliant in all 50 states <35 g/L
- UV Protection Plus

**ESTIMATING GUIDE:** Typically, the application rate will vary from 200 to 240 sq. ft. per gallon including dilution, although this rate will vary depending on the porosity/absorption rate and the width of the paver joints.

(Dilution does not increase the square footage, as this is a two coat application system)

**DIRECTIONS FOR USE:** We recommend wearing protective goggles and latex gloves. For best results, apply Super-Wet at temperatures between 60° F and 90° F. In cooler conditions, the sealer should be warmed to approximately 70° F. Do not apply if surface or ambient temperature is below 50°F. If temperature is going to drop below freezing (32° F) make sure sealer has time to cure. A test for compatibility, penetration and adhesion is recommended.

**MIXING:** Super-Wet is a two-part water based urethane which comes packaged in a 2 gallon kit (3 1/3 gallon pail) and a 5 gallon kit (6 gallon pail). Part B (metal container) is cradled inside of Part A (pail). Part A and Part B require mixing and stirring 2 minutes prior to use. **Super-Wet must be diluted.** (DO NOT APPLY WITHOUT DILUTION) After mixing, the product must be used within two (2) hours (3) at the most and cannot be stored for future use. Use the entire product so there is no waste to dispose of. We recommend using a portable drill paint mixer/paddle to stir thoroughly.

NOTES:

- Pavers with high absorption rate will require additional top coats of sealer to provide a protective barrier and desired enhancement.
- Not intended for submerged surfaces.

PROCEDURE:

**1. Pressure Washing:** Pressure wash the area to be sealed, ensuring that surfaces are clean and free of oil, efflorescence, laitance or contaminants prior to beginning the sealing process. Remove at least 1 to 2 inches of the old joint sand so the new coarse sand (C144) can be replaced in the paver joints. **NOTE:** Use proper pressure washing extraction equipment for treating the contaminants from the cleaning process. See [www.pressurewasher.net](http://www.pressurewasher.net)

**2. Rinsing:** Rinse the pavers with water. If any acids/cleaners were used during the cleaning phase, make sure that the acids and cleaners are thoroughly neutralized and rinsed before sealing as acids will change the PH of the sealer.

**3. Sanding:** We recommend wet sanding with a coarse fractured sand (C144) for the paver joints. Broadcast joint sand over the pavers. Rinse the sand into the paver joints to 1/8" below the chamfer (beveled) edge of the pavers. You may sweep the sand into the paver joints, but you must wait for the paver to thoroughly dry. Use a leaf blower to blow off any residual sand left on the surface of the pavers. Do not use mason or play sand as it is too fine.

**Do Not Apply Sealer Full Strength Without Dilution - Do Not Seal If Rain Is In The Near Forecast**

**4. Application:** Super-Wet can be applied even though the pavers are damp. Super-Wet cannot be applied to pavers in standing water, as the sealer will not cure and stabilize joint sand. Paver overlays on concrete should be sealed the next day to allow the water to drain so that the sand has a chance to dry and without rain in the near forecast. We recommend 3 parts water to 1 part sealer for the flood coat application. Top coat (second coat), we recommend Super - Wet to be diluted 1 part water to 1 part sealer to provide a protective barrier. Extra coats may be applied for desired enhancement. A slip guard additive may be necessary with additional coats. Use a leaf blower to blow out any sealer that puddles in the low lying areas of the pavers, or textured paver/natural stone and the paver joints.

**Pavers with polymeric sand,** we recommend two even consistent coats of sealer without flooding the paver joints. Use a leaf blower to blow out any excessive sealer that puddles in the paver joints or low lying areas. We also recommend using a leaf blower to move the sealer around for consistency with textured pavers and or natural stone.

**Once Part A & Part B are mixed, there is a 2 hour pot life, 3 at the most, whereas, all of the mixture has to be used.**

Using our battery operated pail pump application system or pump sprayer, uniformly apply a flood coat of Super-Wet for joint stabilization and to start the sealing process. Allow sealer to tack and then apply a consistent second coat (top coat). Hold sprayer tip 10" - 12" from the paver surface (avoid overspray on adjacent surfaces, rinse any overspray with water). Super-Wet appears white when initially applied, but dries crystal clear. Always back roll, broom, or blow the sealer for consistency to prevent blotching and to achieve consistency. Do not allow sealer to puddle in the paver joints.

**5. Resealing Existing Sealed Pavers:** Super-Wet can be applied over existing sealed pavers, as long as there is no delaminating (peeling) of existing sealer and is worn evenly. If there are any shiny areas, or areas that are white from other sealers, we recommend stripping the existing sealer before applying Super-Wet. Call Tech Support in regard to the stripping process.

**We recommend adding Textured Polymer (Slip Guard Additive) to the second coat (top coat) for pool decks with pavers, concrete, etc. that have been previously sealed and all dense substrates.**

**EFFLORESCENCE:** New paver installations, wait at least 30 days minimum or longer before sealing. Call for Tech Support if efflorescence is present and instructions for removal before sealing. See Efflo-Remover data sheet.

**DRYING TIME:** Super-Wet sealer will normally dry in sunny areas within approximately 1 hour. Shaded areas, lower temperature or high relative humidity will slow the drying process. The surface may be open to foot traffic in 4 hours and to vehicular traffic in 48 hours. To minimize tire marks, vehicles should not make sudden stops or tight turns. Swimming pools, 2 days before swimming. **Always check for tackiness before foot and especially vehicle traffic.**

**MAINTENANCE:** Periodic washing of pavers with a mild detergent to keep the area clean is recommended. DO NOT USE ACIDS on sealed surfaces. Gasoline, hydraulic fluids and motor oil spills should be removed from the surface of the pavers as soon as possible. We recommend that surfaces previously sealed with Super-Wet should be cleaned and resealed every 2-3 years depending on environmental exposure and traffic.

**CLEANUP:** Immediately flush system after sealing with a mixture of 3 gallons water and 3 oz. PineSol, then flush out the pump system with 3 gallons of fresh water. Add 1 ounce of PineSol to 1 gallon of water, stir well and draw into pump system for storage. Always flush system out with water prior to next use. Dispose of the clean-out mixture properly.

**STORAGE:** Super-Wet should be stored in a tightly closed container in ambient temperatures. Shelf life is one year

**LIMITED WARRANTY:** Seal 'n Lock System Corp. provides a Limited Warranty of one (1) year for inherent defects in its materials or products only. Seal 'n Lock does not maintain control or oversight in the application of its products or materials. Therefore, Seal 'n Lock cannot provide a guarantee for completed work. Seal 'n Lock is only responsible for claims that are submitted with proof of purchase of Seal 'n Lock material. Should a warranty claim be accepted by Seal 'n Lock, only the original purchase price of the product used will be applicable. It is solely the responsibility of the user of Seal 'n Lock products to test the product in a small inconspicuous place to ensure that the product is performing to the standards and specifications provided by Seal 'n Lock. Should the product not perform to its standards, the user should immediately cease application of product and notify Seal 'n Lock. At no time shall Seal 'n Lock be responsible for incorrect application or use of its products. In the case of incorrect application, including excessive application of sealer that may induce a slippery condition, or other use of Seal 'n Lock products beyond their recommended usage including acquiring the desired enhancement, the user assumes all responsibility and liability of products, ancillary materials, or persons that may be damaged as a result of the incorrect application. Seal 'n Lock does not warranty to protect against natural disasters or acts of God or for a time period more than what is expressed in this Limited Warranty. There are no other warranties made by Seal 'n Lock whether expressed or implied other than this Limited Warranty as stated. This limited warranty excludes any liability for any consequential, incidental, indirect or special damages. Except for the limited warranty made above, manufacturer specifically disclaims and excludes any other express warranty, any implied warranty of merchantability of goods and implied warranty of fitness of goods for any particular purpose. Be sure your contractor provides you with a receipt for the purchase of the Seal 'n Lock product applied.

**CAUTION:** Too many coats of sealer may induce a slippery condition. May be slippery during the application if walked on. May cause skin and eye irritation. Gasoline, hydraulic fluids and motor oil spills should be removed from the surface of the pavers as soon as possible. Do not take internally. Wear mask. All label directions should be read thoroughly before use. Not recommended for the DIY.

KEEP OUT OF REACH OF CHILDREN

ARCHITECT'S STAMP



Signature of Gordon Smith

SIGNATURE REQUIRED

SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

REVISIONS

DATE	DESCRIPTION

PROJECT:

STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

SITE DETAILS

MODIFIED DATE:	JOB NO: 20-22
ISSUED DATE:	SHEET: SD-12
FOR BID AND PERMIT 09 NOV 2020	






1  
SD-13

# CONCRETE PAVER PATTERN

SCALE: NOT TO SCALE



MODIFIED DATE:	JOB NO: <b>20-22</b>
ISSUED DATE: FOR BID AND PERMIT 09 NOV 2020	SHEET: <b>SD-13</b>

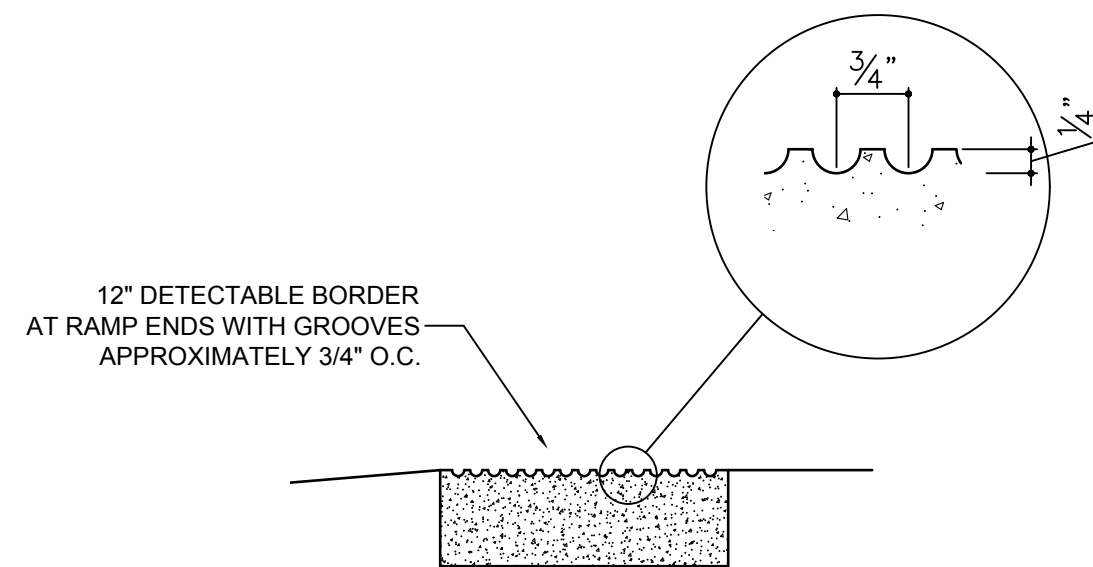

2  
SD-14

# RAMP WARNING STRIP DETAIL

SCALE: 1 1/2" = 1'-0"

RADIUS 1/2" MAX (13 MM)  
TYPICAL FOR ALL PROFILES

(a) RADIUS OF TREAD EDGE

30° MAX

(b) ANGLED RISER

1 1/2" MAX (38 MM)

(c) CURVED NOSING

1 1/2" MAX (38 MM)

(d) BEVELLED NOSING

PRIMER

$\frac{1}{2}$ "

SIKA FLEX 2-C SEALER

BACKER ROD ETHAFOAM SM

$\frac{1}{2}$ "

EXPANSION JOINT FILLER

SEAL TITE FIBRE


CONCRETE: 6" THICKNESS, 3500 PSI WITH 6"x6" W1.4XW1.4 WWF  
OR FIBERMESH. LAMBERT CORP. DEEP BLACK 3% COLOR SHALL  
BE MIXED BY CONCRETE VENDOR.

SUB-GRADE: 6" COMPACTED SUB-GRADE, LBR 40 COMPACTED  
TO 98% AASHTO T-180.

SCALE: 1 1/2" = 1'-0"

SCALE: 3/4" = 1'-0"

SCALE: 3/4" = 1'-0"

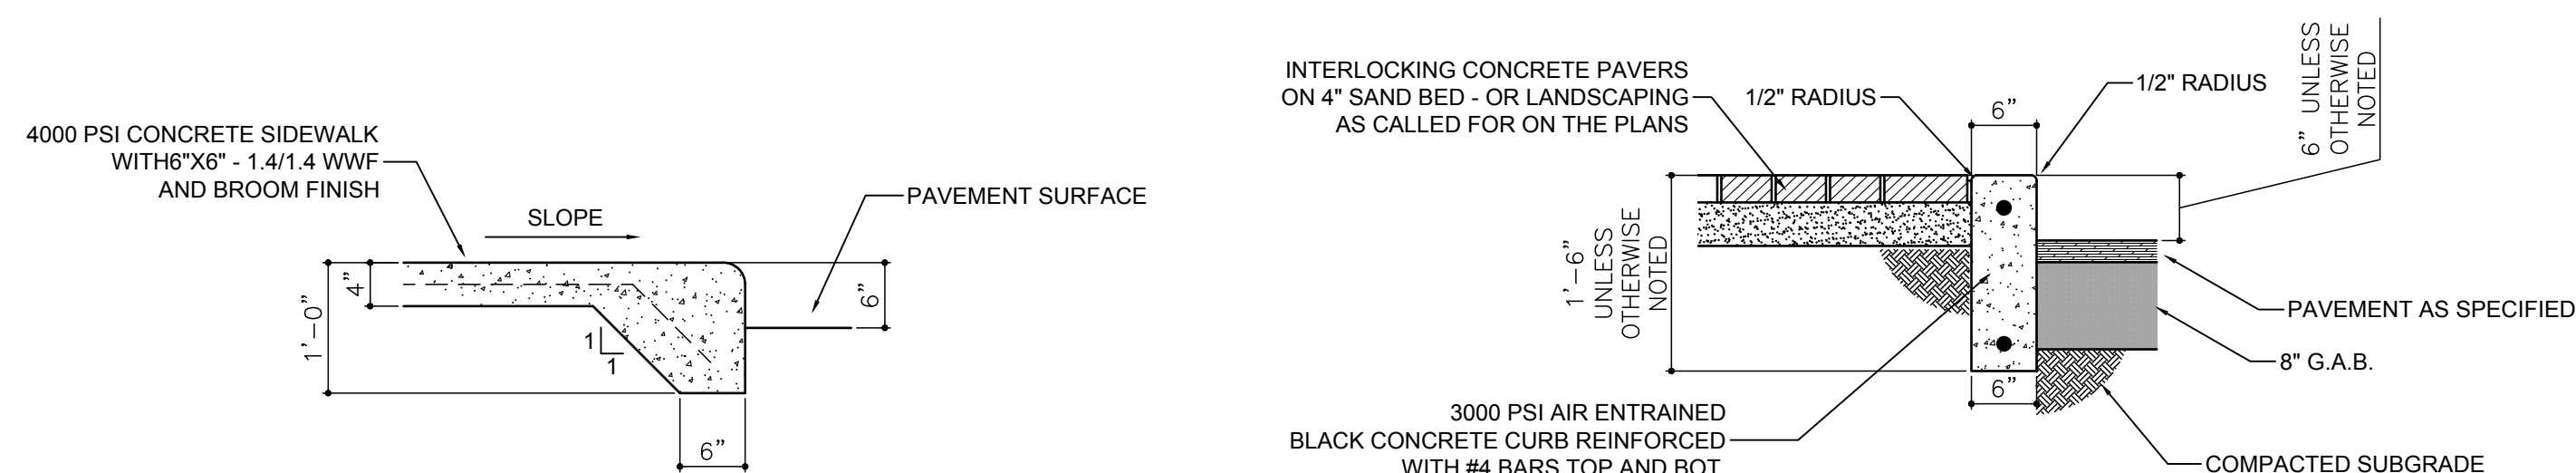

Technical drawing of a proposed ramp with a 1:12 slope. The drawing includes the following dimensions and labels:

- 12" DETECTABLE WARNING STRIP**: Indicated on the left and right edges of the ramp.
- 48" MIN LENGTH LANDING**: Indicated at both the start and end of the ramp.
- PROPOSED RAMP WITH SLOPE 1:12 MAX**: The main ramp section.
- 4" HIGH WHEEL GUARD, TYPICAL**: Located along the bottom edge of the ramp.
- Horizontal Dimensions**: Three segments of **'EQ' 5'-0" MAX** are shown above the ramp.
- Vertical Dimensions**:
  - 35" MIN - 38" MAX**: Total height of the ramp structure.
  - 2'-5" CLEAR**: Clearance height for the ramp.
  - 1'-0"**: Height of the lower rail.
  - 11"**: Height of the upper rail.
  - 1'-0"**: Height of the lower rail at the landing.
  - 2'-3"**: Height of the lower rail at the landing.
  - 36" MIN - 38" MAX**: Total height of the landing structure.

ARCHITECT'S STAMP

STATE OF GEORGIA  
GORDON M. SMITH, JR.  
4572  
LaGrange, Georgia  
REGISTERED ARCHITECT

SIGNATURE REQUIRED

706-882-5511

[illegible]

## SITE DETAILS



MODIFIED DATE:	JOB NO: <b>20-22</b>
ISSUED DATE: FOR BID AND PERMIT <b>09 NOV 2020</b>	SHEET: <b>SD-14</b>



a. Physical properties: provide the following:


- 1. Compressive Strength: ASTM C 1194: 6,500 psi (45 Mpa) min. for products at 28 days.
- 2. Absorption: ASTM C 1195: 6% max. by cold water method, or 10% max. by the boiling method for products at 28 days.
- 3. Air Content: ASTM C 173 or C 231, for wet cast product shall be 4-6% for units used in a freeze-thaw environment.

b. Manufacturer of cast stone must be a producer member of the Cast Stone Institute. Provide detailed shop drawings with mix design meeting Cast Stone Institute specifications. Color to be white or off-white to match sample in Architect's office at a ten foot distance.

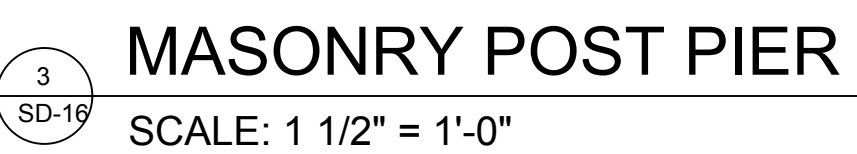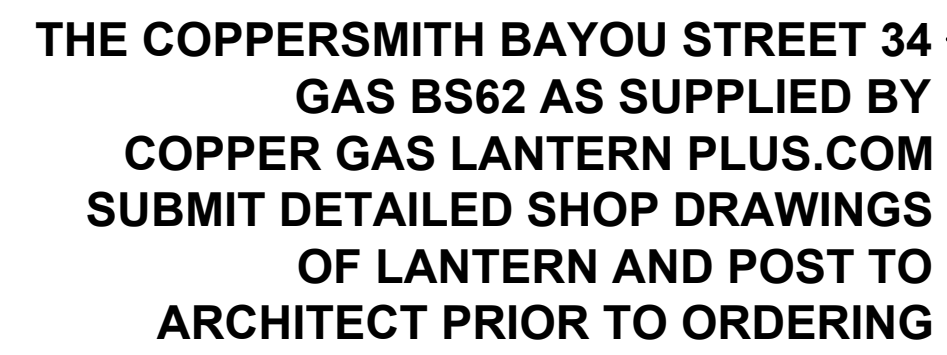

706-882-5511


MODIFIED DATE:	JOB NO: <b>20-22</b>
ISSUED DATE: FOR BID AND PERMIT 09 NOV 2020	SHEET: <b>SD-16</b>

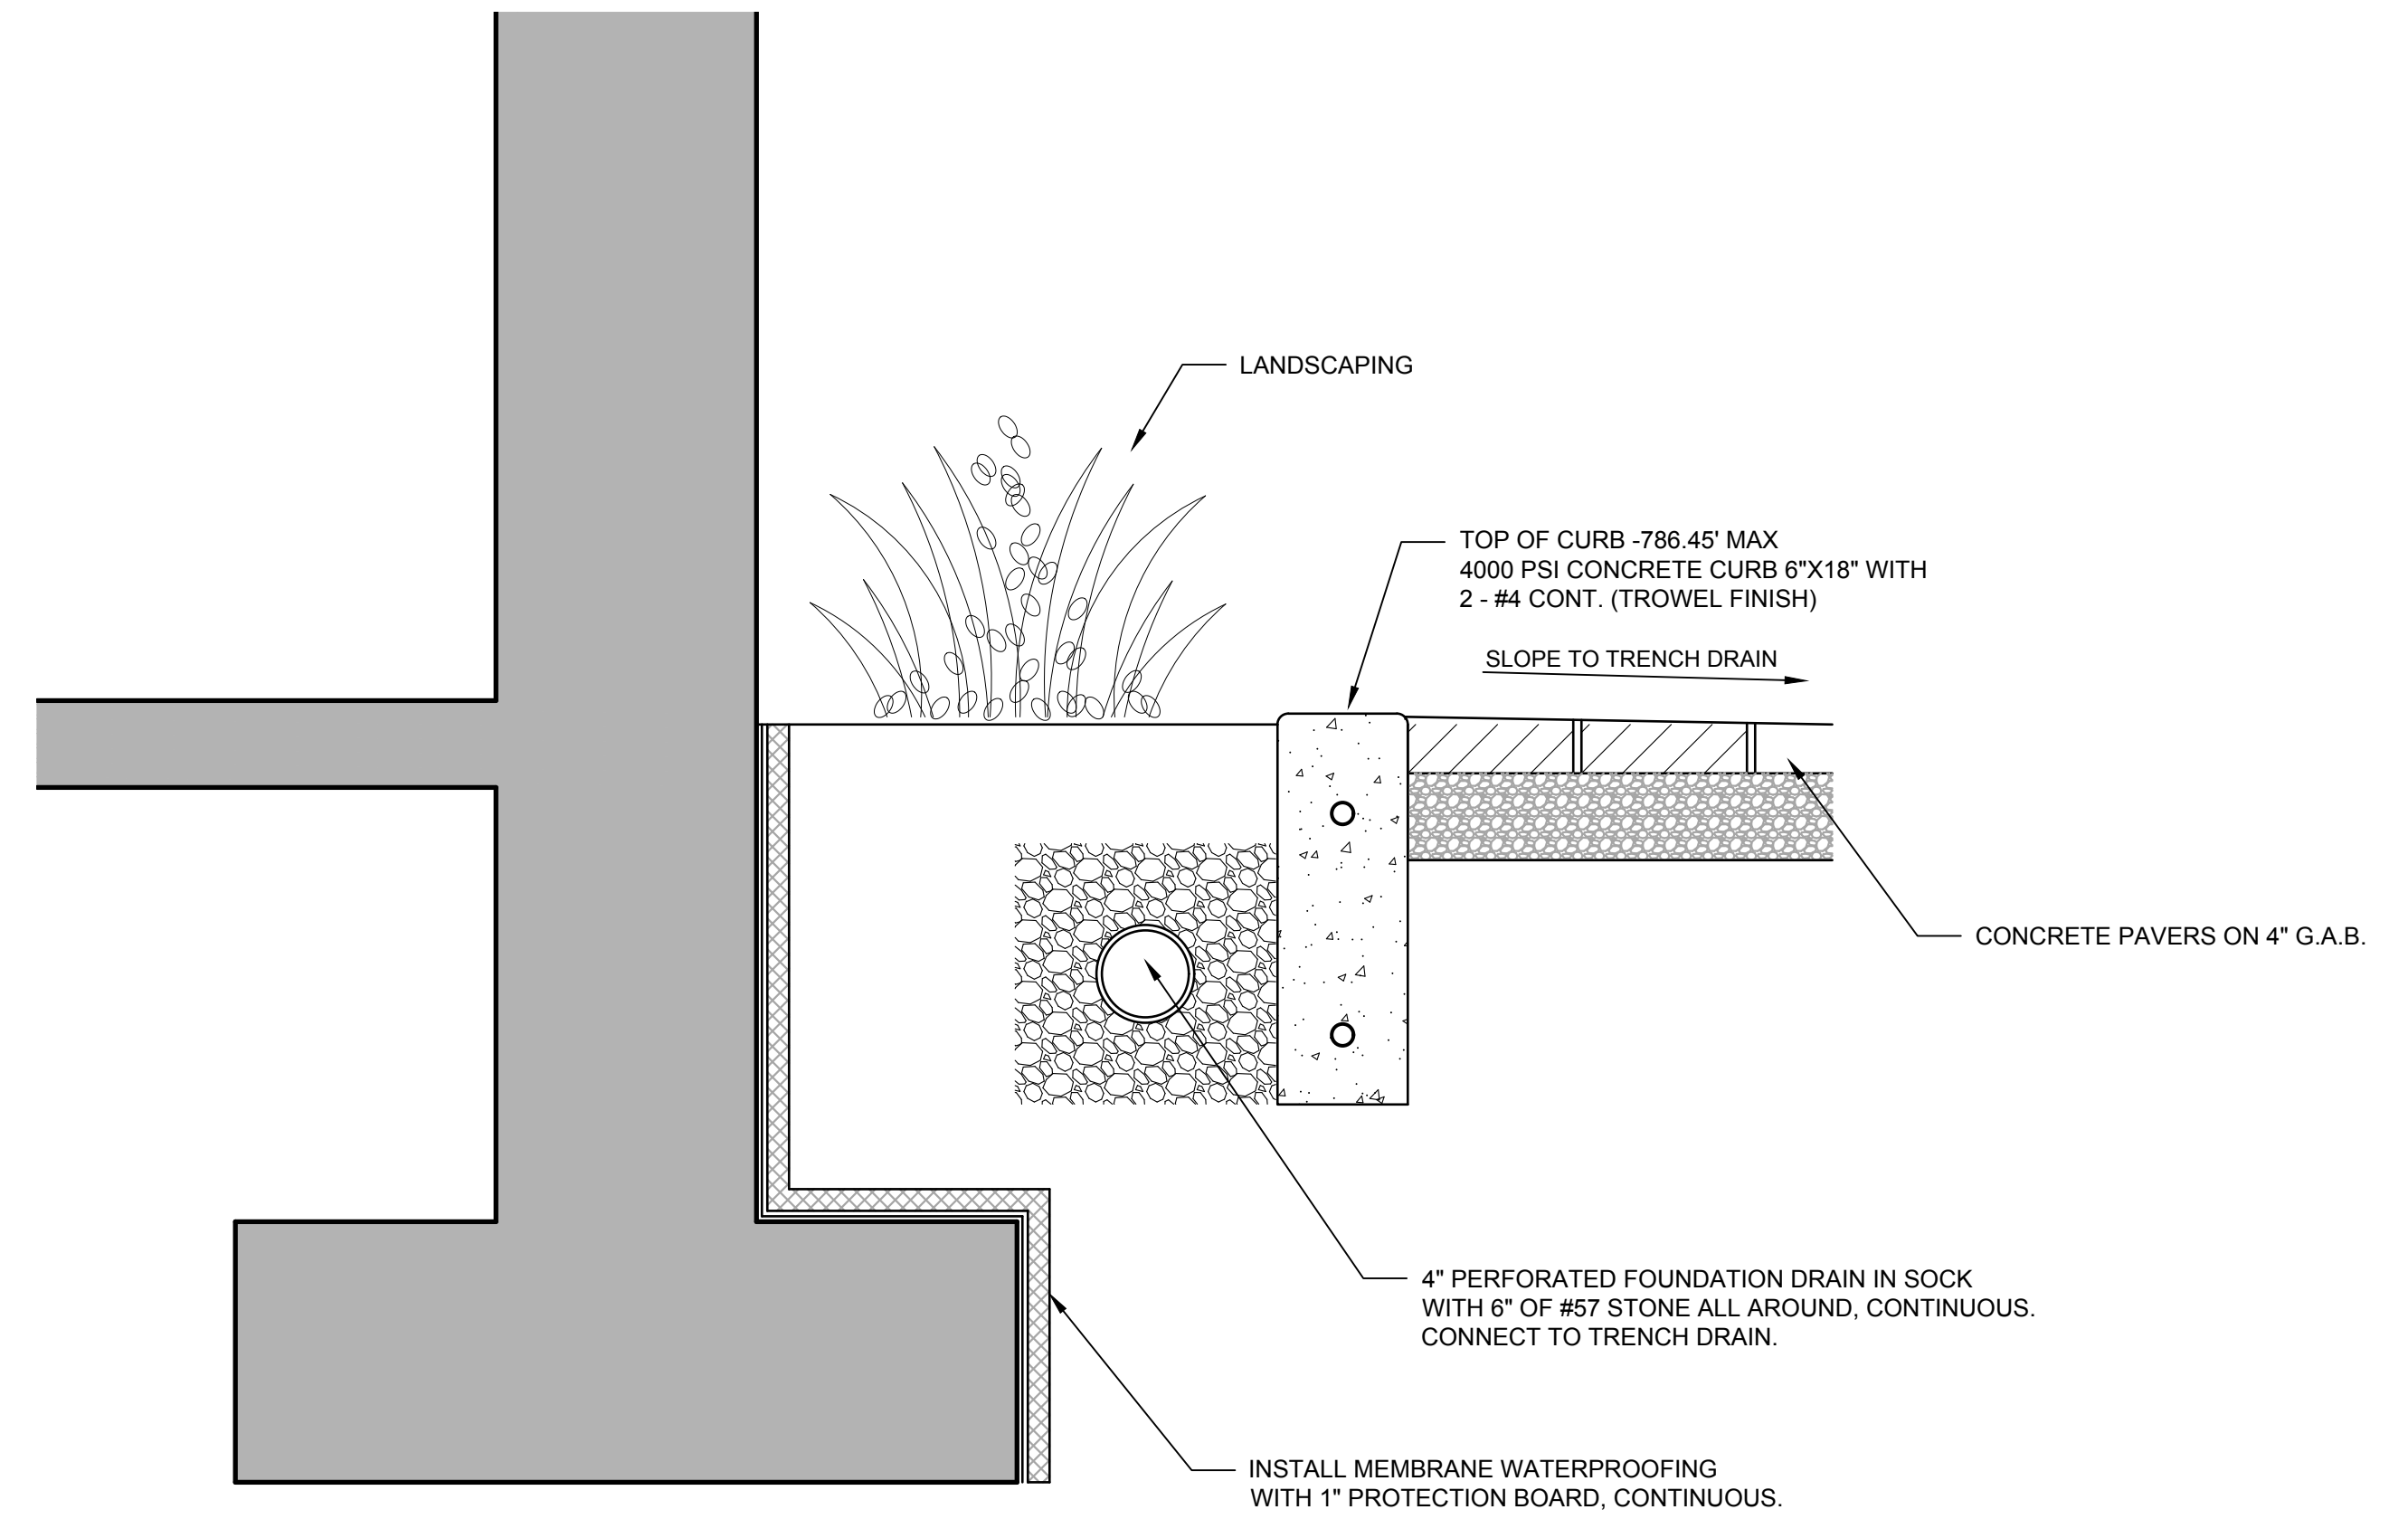

1  
SD-17

**PLANTER DETAIL**


SCALE: 1 1/2" = 1'-0"

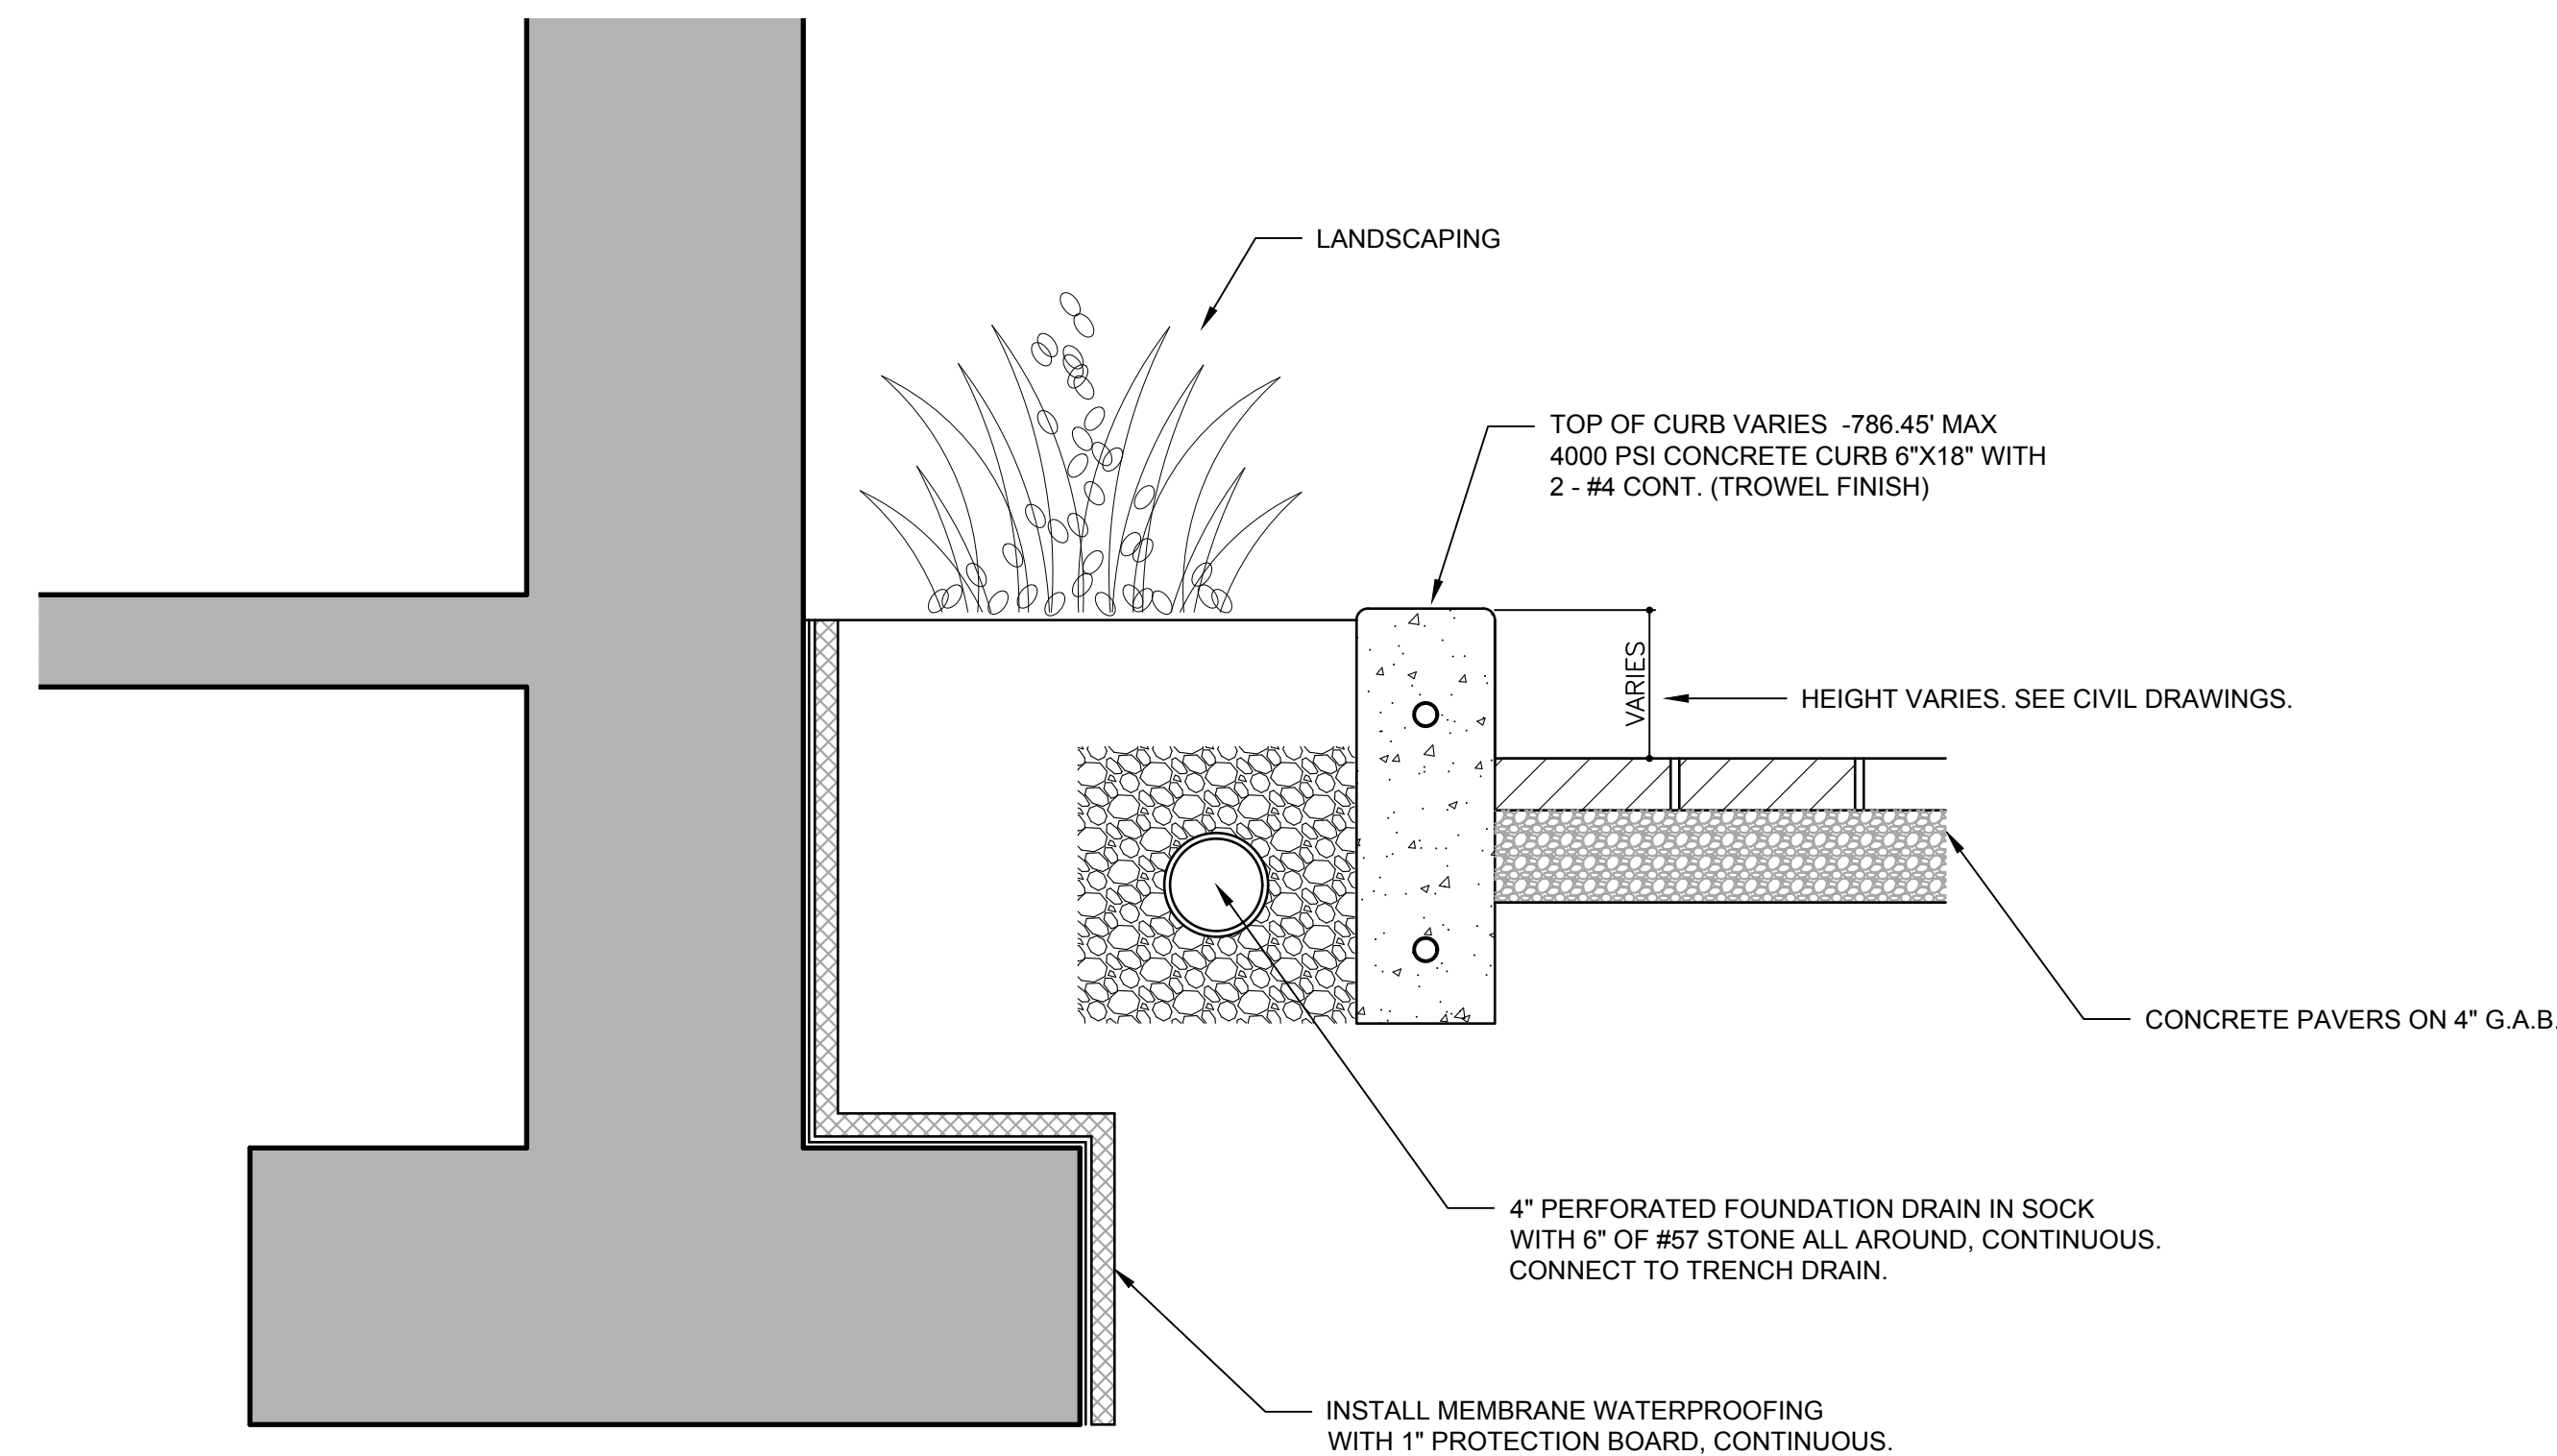

2  
SD-17

**PLANTERS DETAIL**

SCALE: 1 1/2" = 1'-0"

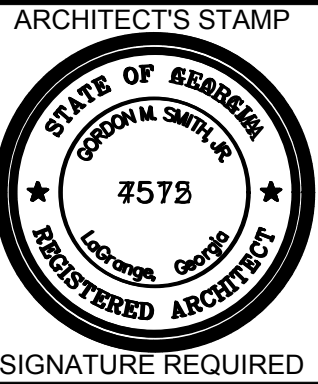


*Signature*

**SMITH DESIGN GROUP, INC.**

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

REVISIONS		
	DATE	DESCRIPTION

PROJECT:

**STREETSCAPE  
ENHANCEMENTS**  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY


RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

**STEP DETAIL**

MODIFIED DATE:	JOB NO: <b>20-22</b>
ISSUED DATE: FOR BID AND PERMIT 09 NOV 2020	SHEET: <b>SD-17</b>




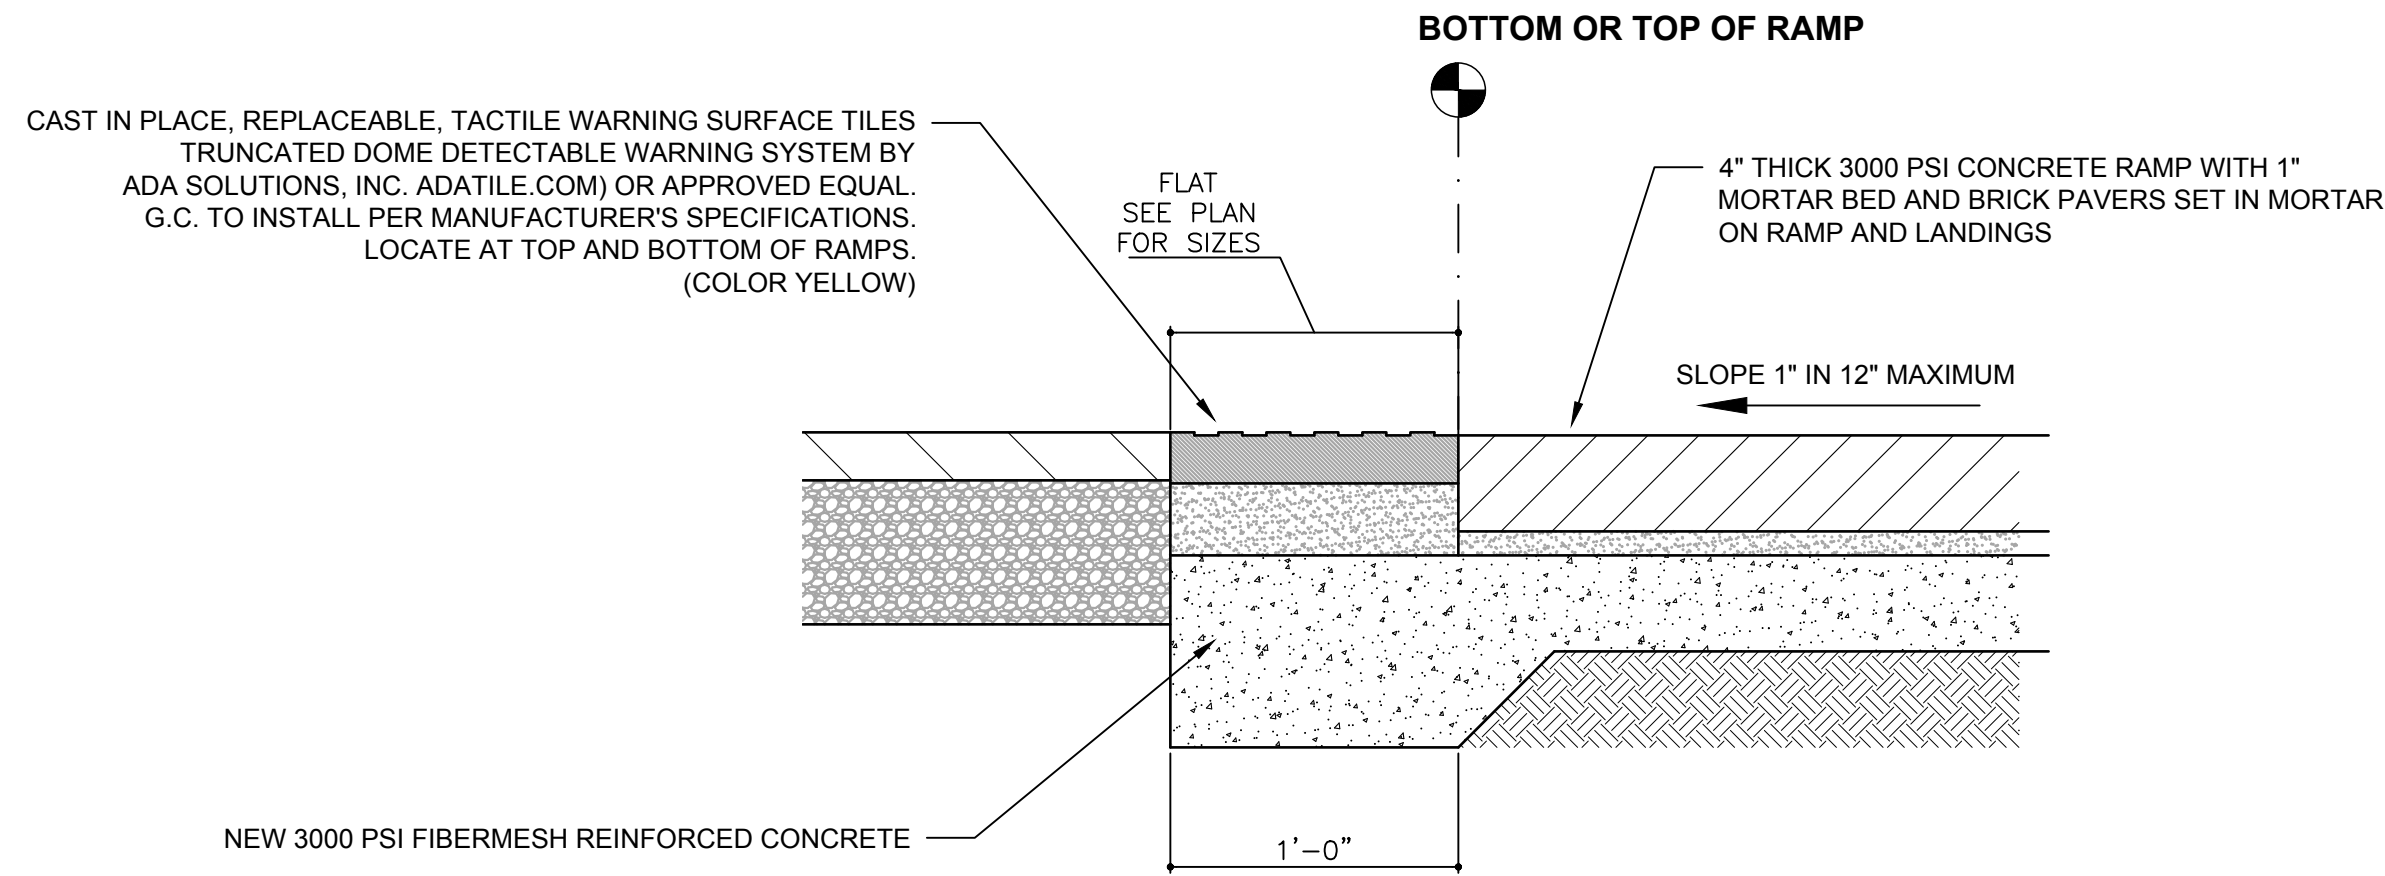

1  
SD-19


**TRUNCATED DOME INSTALLATION DETAIL**

SCALE: 1 1/2" = 1'-0"

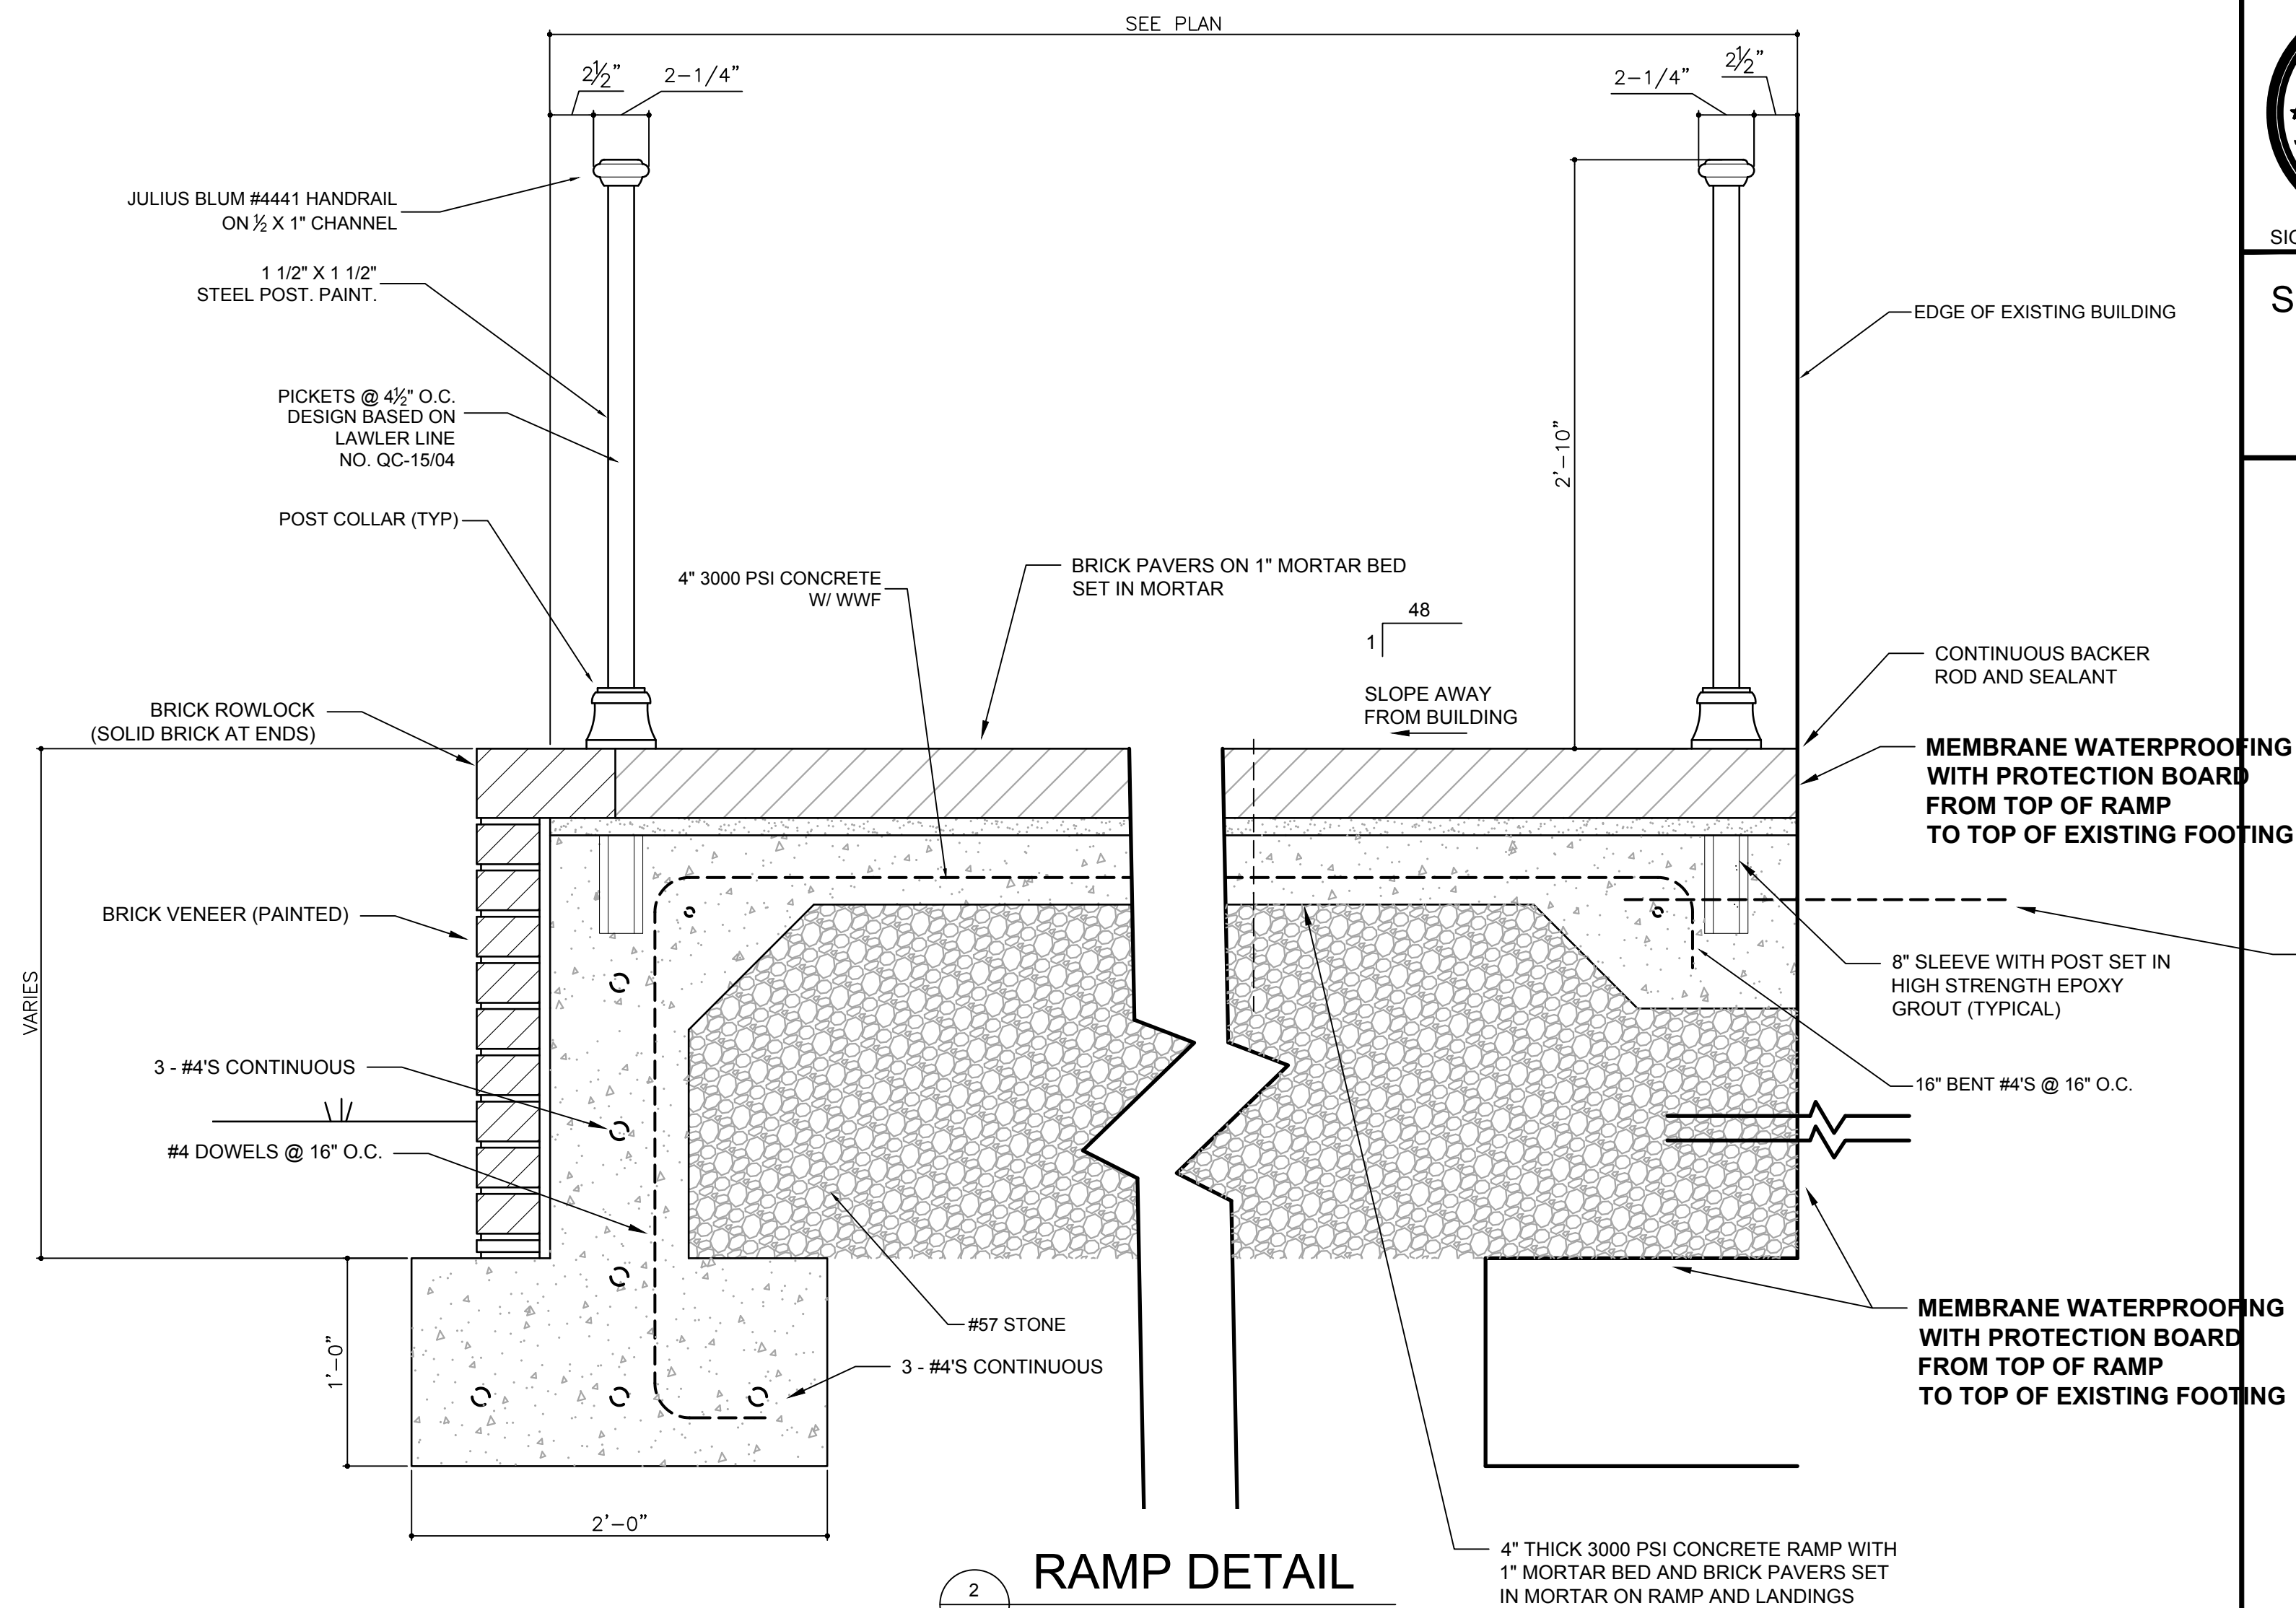

**RAMP DETAIL**

SCALE: 1-1/2" = 1'-0"

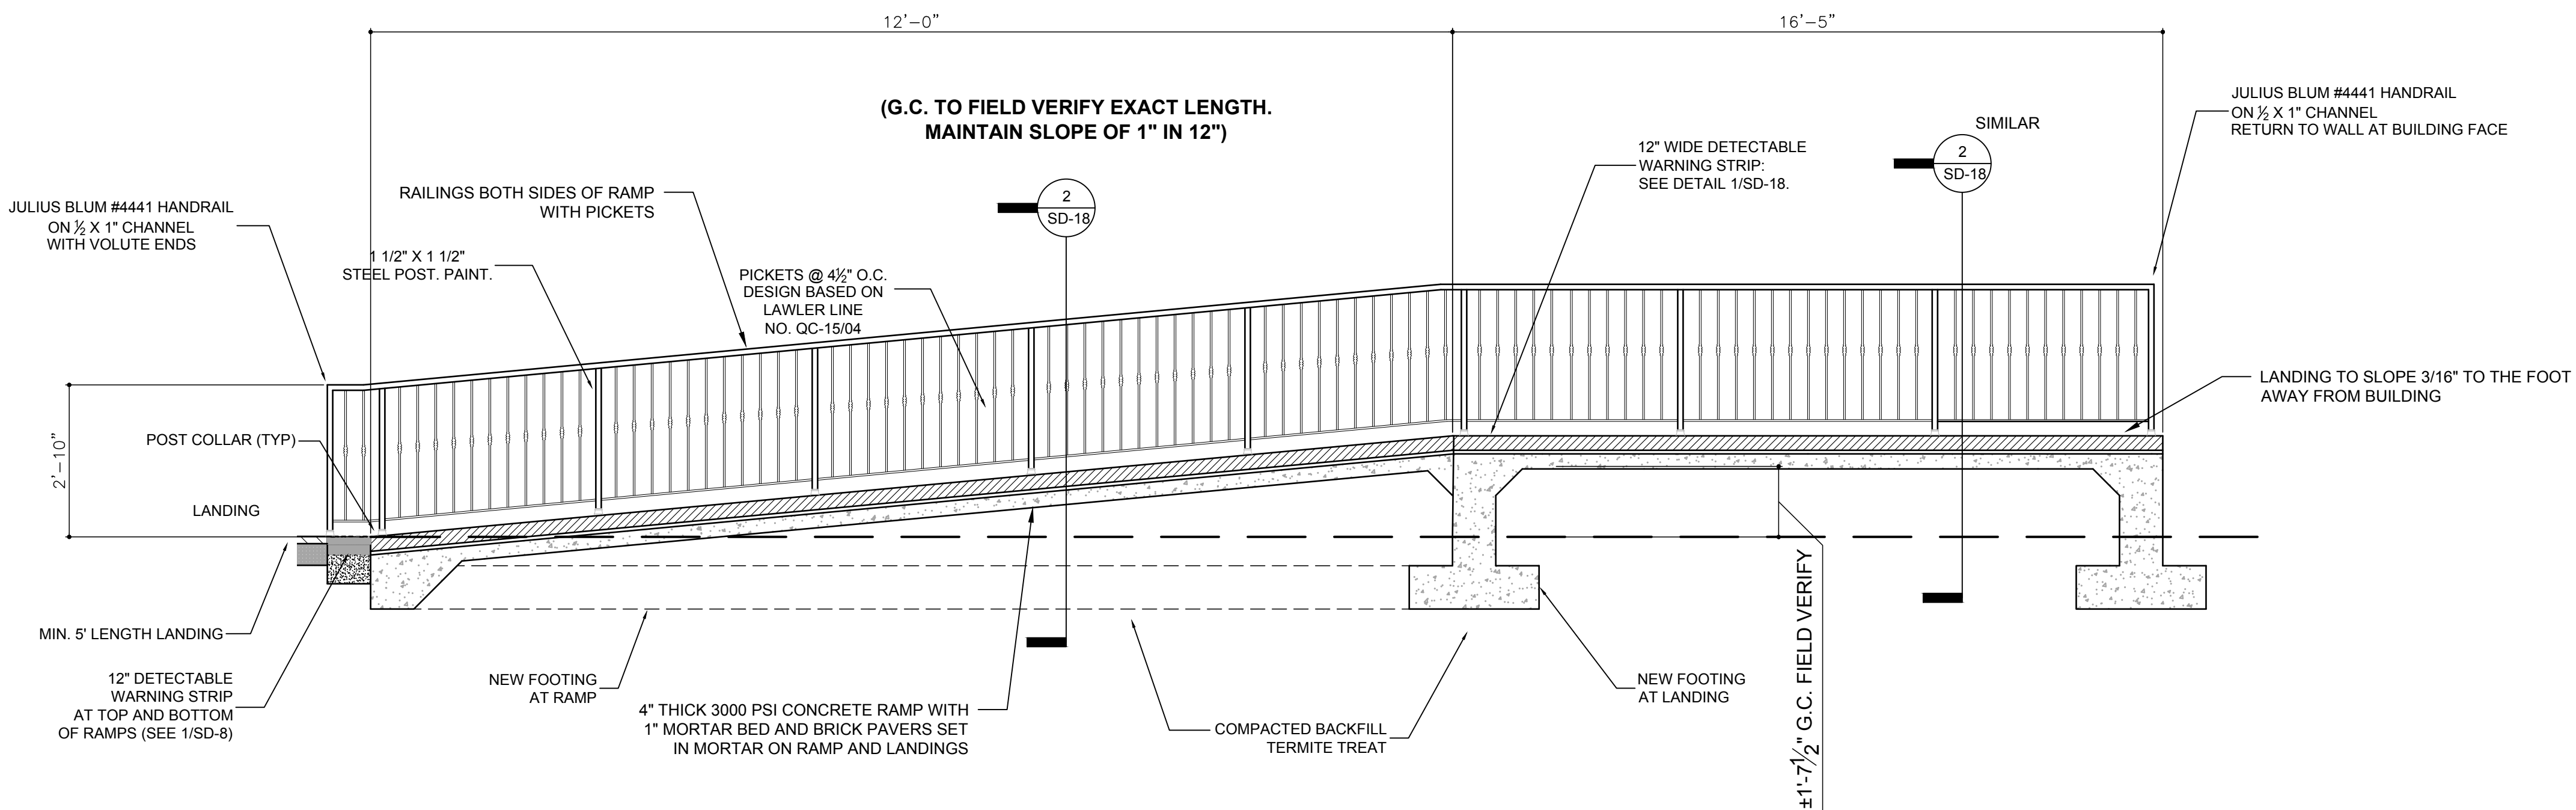

3  
SD-19

**RAMP / STEPS ELEVATION**

SCALE: 3/8" = 1'-0"



**SMITH DESIGN GROUP, INC.**

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

REVISIONS		
Δ	DATE	DESCRIPTION

PROJECT:

**STREETSCAPE ENHANCEMENTS**  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY


RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

**SITE DETAILS**

MODIFIED DATE:	JOB NO:
10 NOV 2014	20-22
ISSUED DATE:	SHEET:
FOR BID AND PERMIT 09 NOV 2020	<b>SD-18</b>



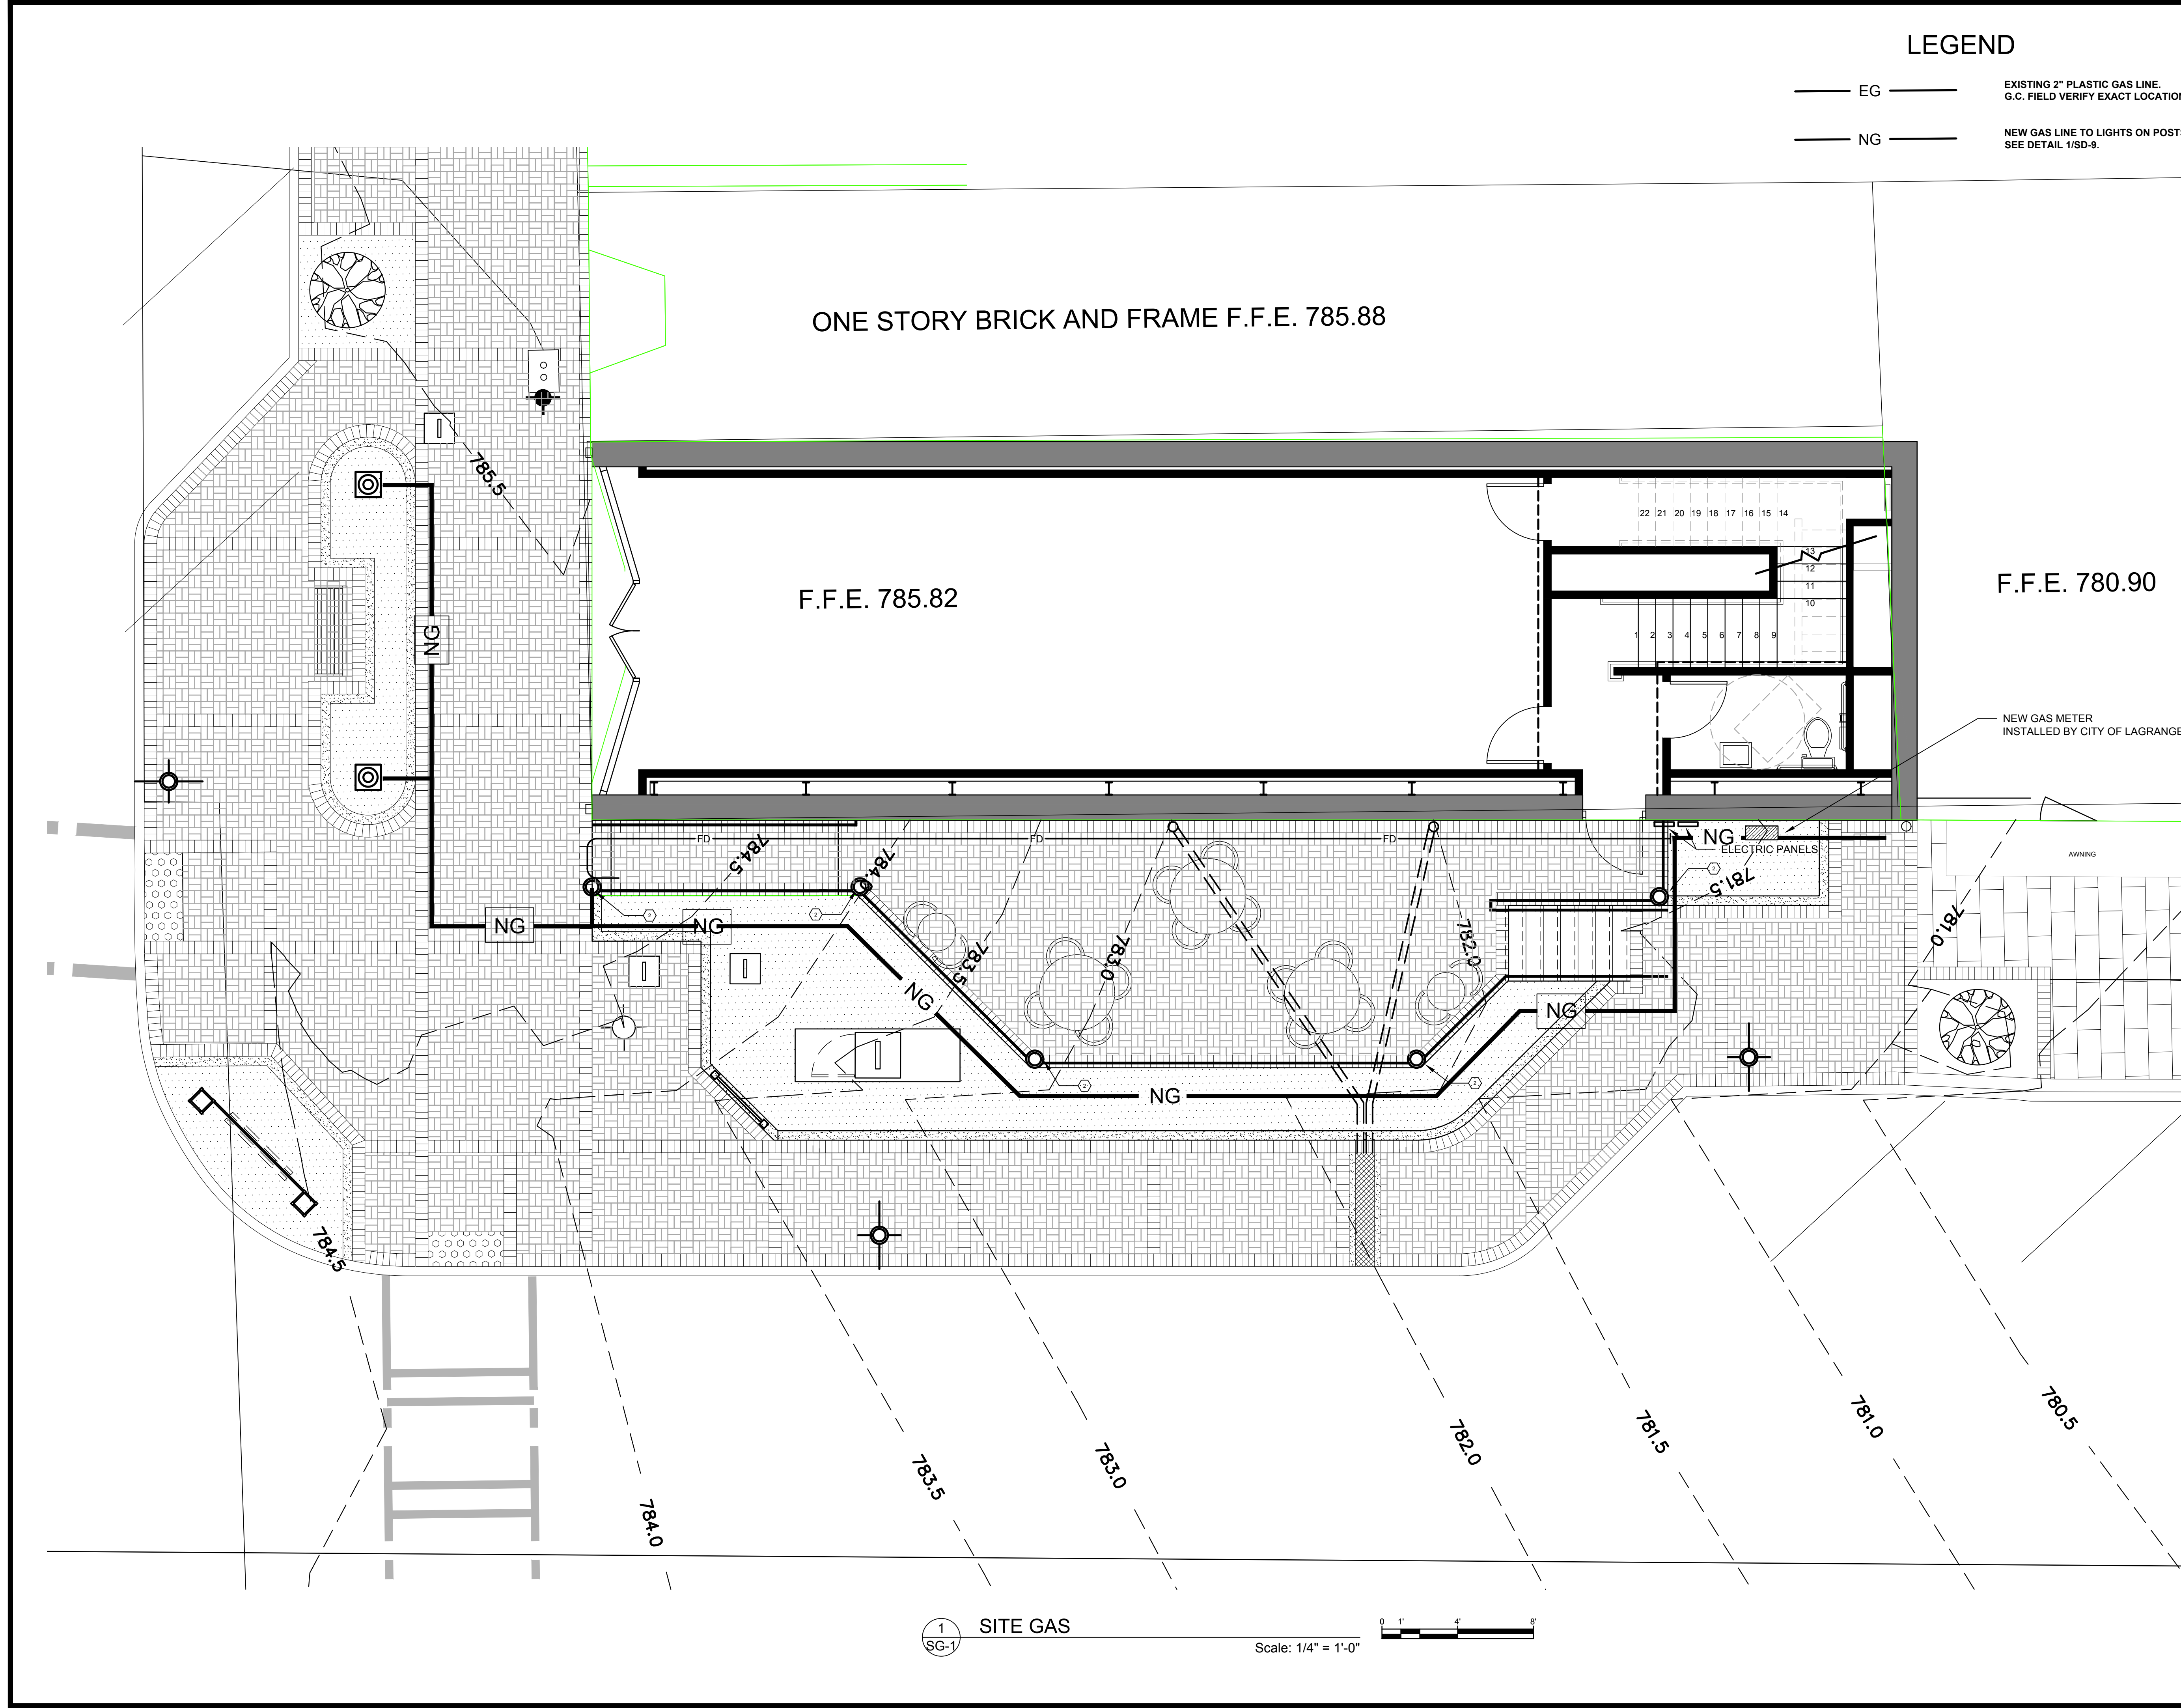

LEGEND

- EG EXISTING 2" PLASTIC GAS LINE.  
G.C. FIELD VERIFY EXACT LOCATION.
- NG NEW GAS LINE TO LIGHTS ON POSTS.  
SEE DETAIL 1/SD-9.

ARCHITECT'S STAMP

STATE OF GEORGIA  
7575  
CORAM SMITH, P.C.  
REGISTERED ARCHITECT

SIGNATURE REQUIRED

SMITH DESIGN GROUP, INC.  
206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240  
706-882-5511

KEYNOTES

- 1 GAS LANTERN ON BRICK PIER AND 8' POST. SEE DETAIL 1/SD-16.
- 2 GAS LANTERN ON 8' POST IN HANDRAIL.

REVISIONS

Δ	DATE	DESCRIPTION

PROJECT:  
**STREETSCAPE ENHANCEMENTS**  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY  
  
RIDLEY AVENUE  
LAGRANGE, GEORGIA


TITLE:  
  
**SITE GAS**

MODIFIED DATE:	JOB NO: <b>20-22</b>
ISSUED DATE: FOR BID AND PERMIT 09 NOV 2020	SHEET: <b>SG-1</b>

1 SITE GAS  
SG-1

Scale: 1/4" = 1'-0"



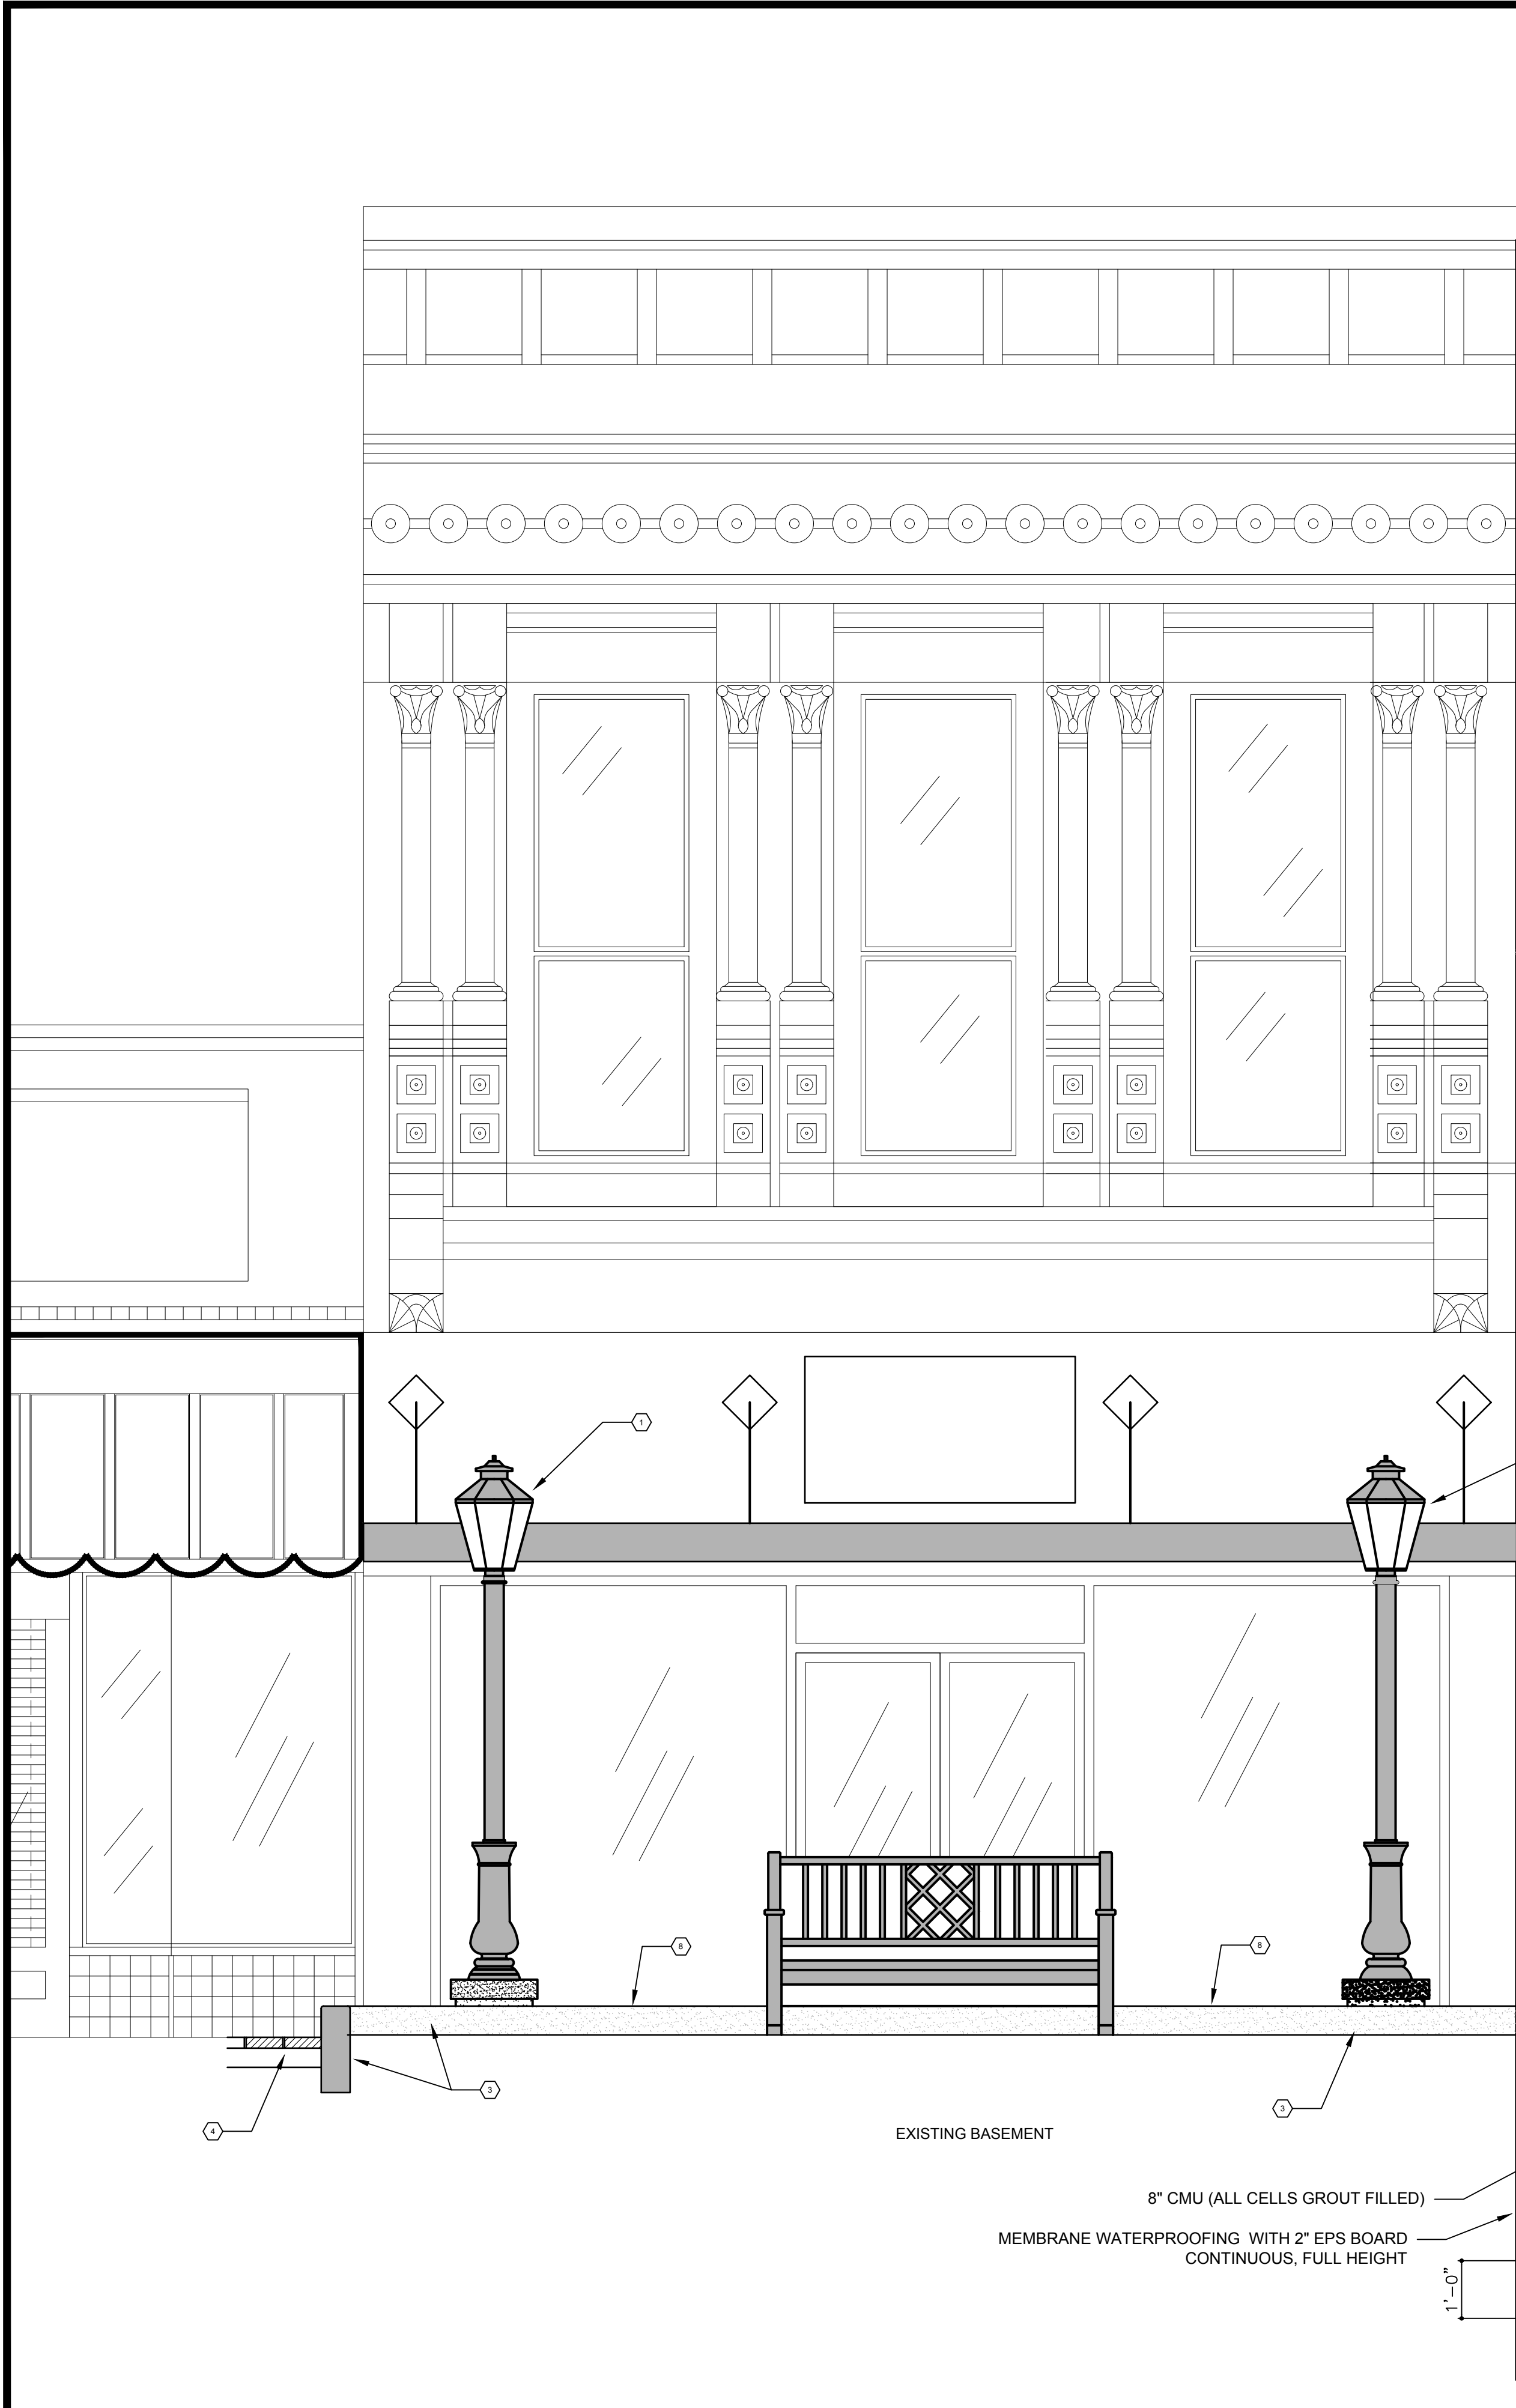

EXISTING BUILDING BEYOND


EXISTING BASEMENT

8" CMU (ALL CELLS GROUT FILLED)  
MEMBRANE WATERPROOFING WITH 2" EPS BOARD  
CONTINUOUS, FULL HEIGHT

1'-6"  
BACKFILL WITH NO. 57 STONE  
(TYPICAL)  
TERMITE TREAT (TYPICAL)

BUILDING F.F.E. 785.82


N.I.C.

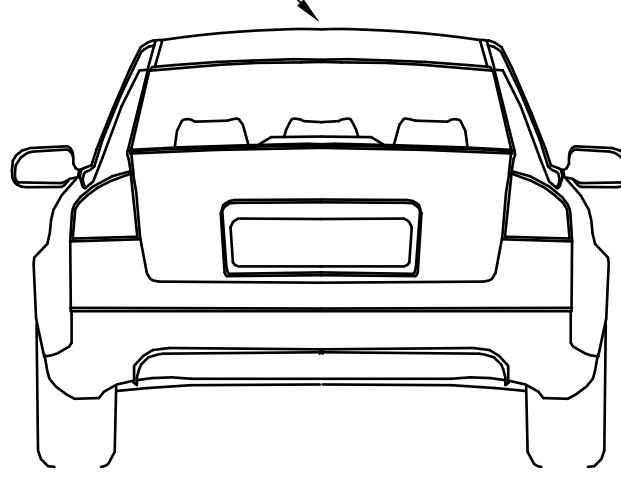

SAW-CUT EXISTING ASPHALT

### KEYNOTES

- 1 GAS LANTERN ON PIER. SEE DETAILS ON SHEET SD-16.
- 2 GAS LANTERN ON POST. SEE DETAILS ON SHEET SD-16.
- 3 CONCRETE CURB - SEE DETAIL 1/SD-11
- 4 CONCRETE PAVERS - SEE DETAIL 1/SD-13
- 5 CONCRETE CURB AT STREET - SEE DETAIL 10/SD-10
- 6 CURB RAMP FLUSH WITH ASPHALT - SEE DETAIL 3/SD-13
- 7 ACCESSIBLE PATH SIGNAGE - SEE DETAIL 4/SD-13
- 8 LANDSCAPE AREA WITH DRIP IRRIGATION SYSTEM ON TIMER
- 9 6" ROUND CAST IRON DOWNSPOUT BOOT TO TIE INTO 6" PVC ROOF DRAIN UNDER PATIO TO LANDSCAPE AREA.
- 10 NEW CONCRETE FOOTINGS FOR RAMP AND PATIO.
- 11 EXISTING DOWNSPOUT - FIELD VERIFY EXACT LOCATIONS. TIE INTO ROOF DRAINAGE PIPES UNDER PATIO
- 12 RAIL DETAIL - SEE 15/SD-10
- 13 DECORATIVE ELECTRIC LIGHT POST (BLACK) WITH ACORN FIXTURE PROVIDED AND INSTALLED BY CITY OF LAGRANGE
- 14 SEE NEW SIGNAGE PER DETAILS 2.3.4.5 ON SHEET SD-11
- 15 6" PERFORATED FOUNDATION DRAIN WITH SOCK IN 12" X 12" X CONT. #57 STONE GRAVEL. SLOPE DRAIN DISCHARGE AT GRADE OF LANDSCAPE AREA.
- 16 PEDESTAL SIGNAGE OF MAP OF DOWNTOWN LAGRANGE SEE DETAILS ON SHEET 4/SD-16.
- 17 REMOVABLE COVER OVER TRENCH DRAIN. SLOPE TO DISCHARGE AT CURB AT STREET. G.C. FIELD VERIFY ELEVATIONS. SEE DETAIL 2/SD-8.

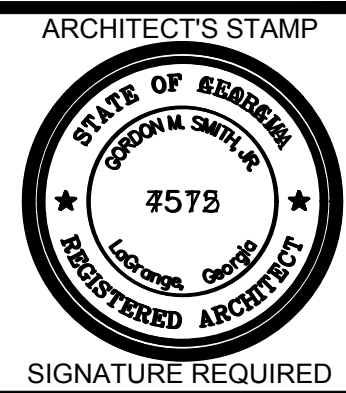

SMITH DESIGN GROUP, INC.  
206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240  
706-882-5511

### REVISIONS

DATE	DESCRIPTION


PROJECT:  
**STREETSCAPE ENHANCEMENTS**  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY  
  
RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:  
**ELEVATIONS - PROPOSED**

MODIFIED DATE:	JOB NO: <b>20-22</b>
ISSUED DATE: FOR BID AND PERMIT 09 NOV 2020	SHEET: <b>A3-1</b>

GEORGIA 811  
UTILITIES PROTECTION CENTER, INC.  
IF YOU DIG IN GEORGIA  
DIAL 1-800-282-7411.  
WWW.GAUPC.COM  
THREE WORKING DAYS BEFORE YOU DIG.  
ALSO VERIFY ALL UTILITIES WITH CITY F LAGRANGE  
THREE WORKING DAYS BEFORE YOU DIG.

- KEYNOTES
- 1 GAS LANTERN ON PIER. SEE DETAILS ON SHEET SD-16.
  - 2 GAS LANTERN ON POST. SEE DETAILS ON SHEET SD-16.
  - 3 CONCRETE CURB - SEE DETAIL 1/SD-11
  - 4 CONCRETE PAVERS - SEE DETAIL 1/SD-13
  - 5 CONCRETE CURB AT STREET - SEE DETAIL 10/SD-10
  - 6 CURB RAMP FLUSH WITH ASPHALT - SEE DETAIL 3/SD-13
  - 7 ACCESSIBLE PATH SIGNAGE - SEE DETAIL 4/SD-13
  - 8 LANDSCAPE AREA WITH DRIP IRRIGATION SYSTEM ON TIMER
  - 9 6" ROUND CAST IRON DOWNSPOUT BOOT TO TIE INTO 6" PVC ROOF DRAIN UNDER PATIO TO LANDSCAPE AREA.
  - 10 NEW CONCRETE FOOTINGS FOR RAMP AND PATIO.
  - 11 EXISTING DOWNSPOUT - FIELD VERIFY EXACT LOCATIONS. TIE INTO ROOF DRAINAGE PIPES UNDER PATIO
  - 12 RAIL DETAIL - SEE 15/SD-10
  - 13 DECORATIVE ELECTRIC LIGHT POST (BLACK) WITH ACORN FIXTURE PROVIDED AND INSTALLED BY CITY OF LAGRANGE
  - 14 SEE NEW SIGNAGE PER DETAILS 2.3,4,5 ON SHEET SD-11
  - 15 6" PERFORATED FOUNDATION DRAIN WITH SOCK IN 12" X 12" X CONT. #57 STONE GRAVEL. SLOPE DRAIN DISCHARGE AT GRADE OF LANDSCAPE AREA.
  - 16 PEDESTAL SIGNAGE OF MAP OF DOWNTOWN LAGRANGE SEE DETAILS ON SHEET 4/SD-16.
  - 17 REMOVABLE COVER OVER TRENCH DRAIN. SLOPE TO DISCHARGE AT CURB AT STREET. G.C. FIELD VERIFY ELEVATIONS. SEE DETAIL 2/SD-8.

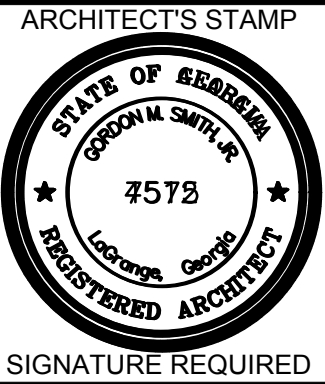


SMITH DESIGN GROUP, INC.  
206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240  
706-882-5511

REVISIONS		
Δ	DATE	DESCRIPTION

PROJECT:  
**STREETSCAPE ENHANCEMENTS**  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY  
  
RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:  
**ELEVATIONS - PROPOSED**

MODIFIED DATE:	JOB NO: <b>20-22</b>
ISSUED DATE: FOR BID AND PERMIT 09 NOV 2020	SHEET: <b>A3-2</b>

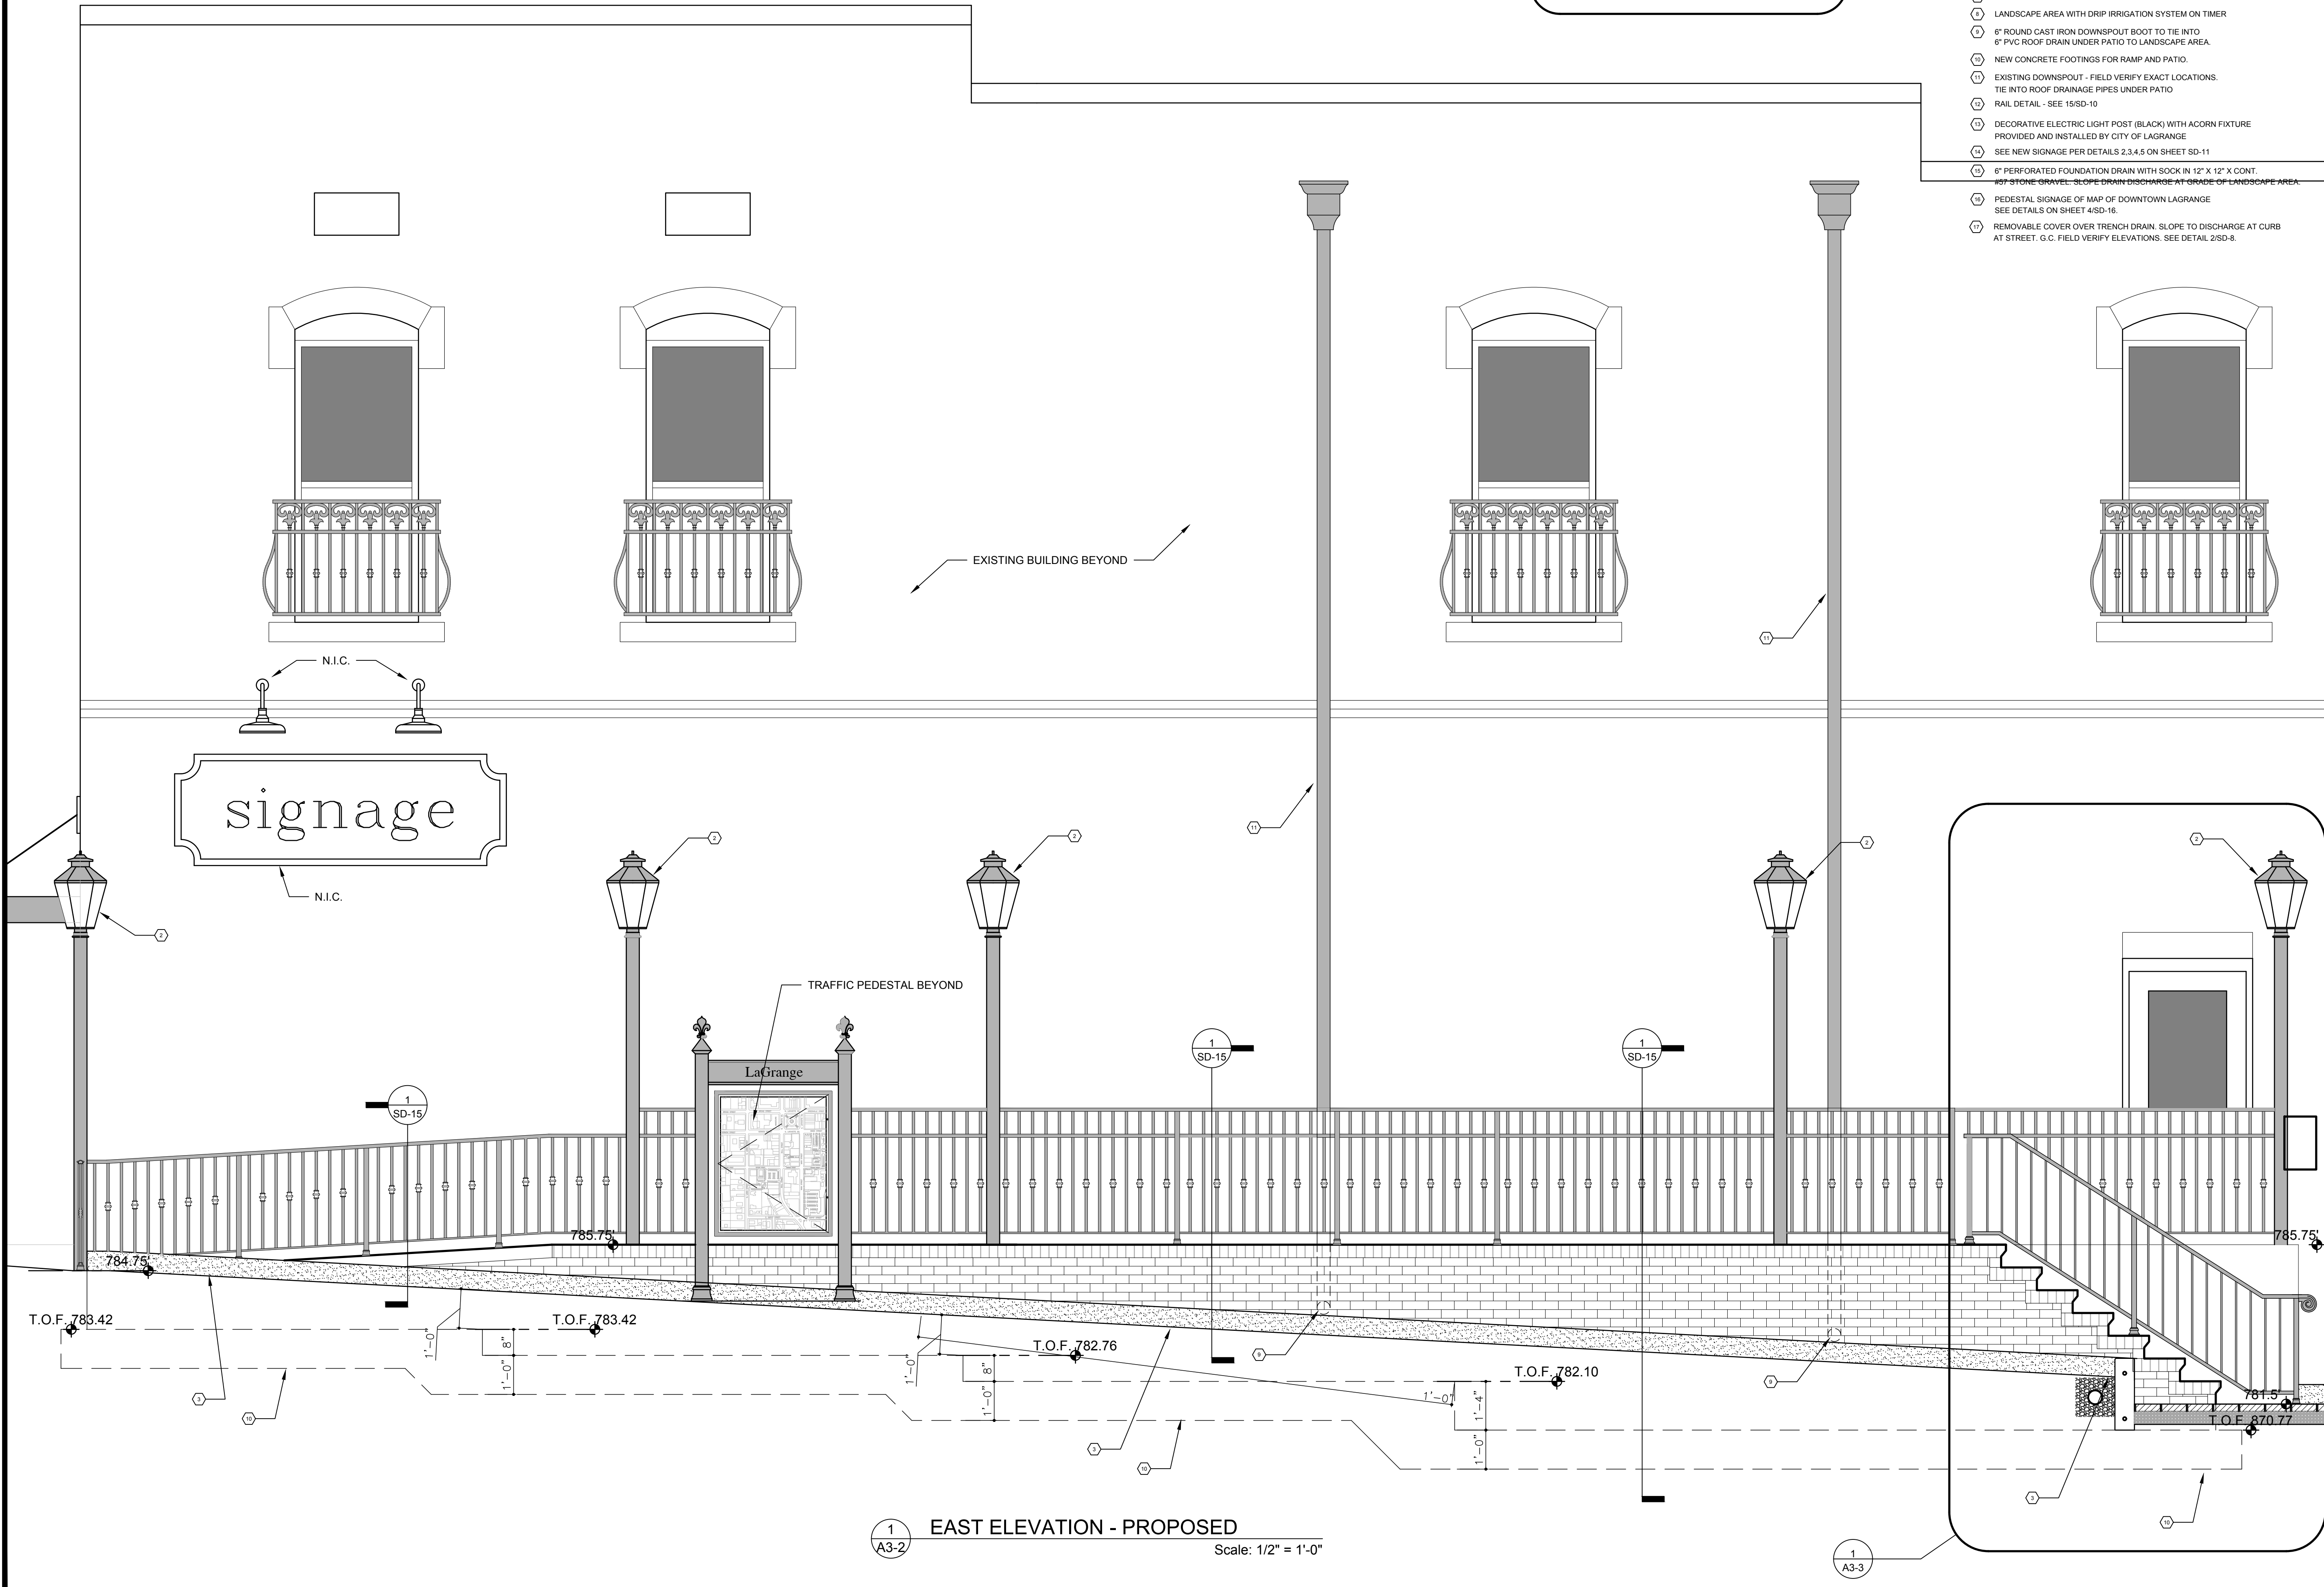

1 EAST ELEVATION - PROPOSED  
Scale: 1/2" = 1'-0"

GEORGIA 811  
UTILITIES PROTECTION CENTER, INC.  
IF YOU DIG IN GEORGIA  
DIAL 1-800-282-7411.  
WWW.GAUPC.COM  
THREE WORKING DAYS BEFORE YOU DIG.  
ALSO VERIFY ALL UTILITIES WITH CITY F LAGRANGE  
THREE WORKING DAYS BEFORE YOU DIG.

KEYNOTES


- 1 GAS LANTERN ON PIER. SEE DETAILS ON SHEET SD-16.
- 2 GAS LANTERN ON POST. SEE DETAILS ON SHEET SD-16.
- 3 CONCRETE CURB - SEE DETAIL 1/SD-11
- 4 CONCRETE PAVERS - SEE DETAIL 1/SD-13
- 5 CONCRETE CURB AT STREET - SEE DETAIL 10/SD-10
- 6 CURB RAMP FLUSH WITH ASPHALT - SEE DETAIL 3/SD-13
- 7 ACCESSIBLE PATH SIGNAGE - SEE DETAIL 4/SD-13
- 8 LANDSCAPE AREA WITH DRIP IRRIGATION SYSTEM ON TIMER
- 9 6" ROUND CAST IRON DOWNSPOUT BOOT TO TIE INTO  
6" PVC ROOF DRAIN UNDER PATIO TO LANDSCAPE AREA.
- 10 NEW CONCRETE FOOTINGS FOR RAMP AND PATIO.
- 11 EXISTING DOWNSPOUT - FIELD VERIFY EXACT LOCATIONS.  
TIE INTO ROOF DRAINAGE PIPES UNDER PATIO
- 12 RAIL DETAIL - SEE 15/SD-10
- 13 DECORATIVE ELECTRIC LIGHT POST (BLACK) WITH ACORN FIXTURE  
PROVIDED AND INSTALLED BY CITY OF LAGRANGE
- 14 SEE NEW SIGNAGE PER DETAILS 2,3,4,5 ON SHEET SD-11
- 15 6" PERFORATED FOUNDATION DRAIN WITH SOCK IN 12" X 12" X CONT.  
#57 STONE GRAVEL. SLOPE DRAIN DISCHARGE AT GRADE OF LANDSCAPE AREA.
- 16 PEDESTAL SIGNAGE OF MAP OF DOWNTOWN LAGRANGE  
SEE DETAILS ON SHEET 4/SD-16.
- 17 REMOVABLE COVER OVER TRENCH DRAIN. SLOPE TO DISCHARGE AT CURB  
AT STREET. G.C. FIELD VERIFY ELEVATIONS. SEE DETAIL 2/SD-8.



SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

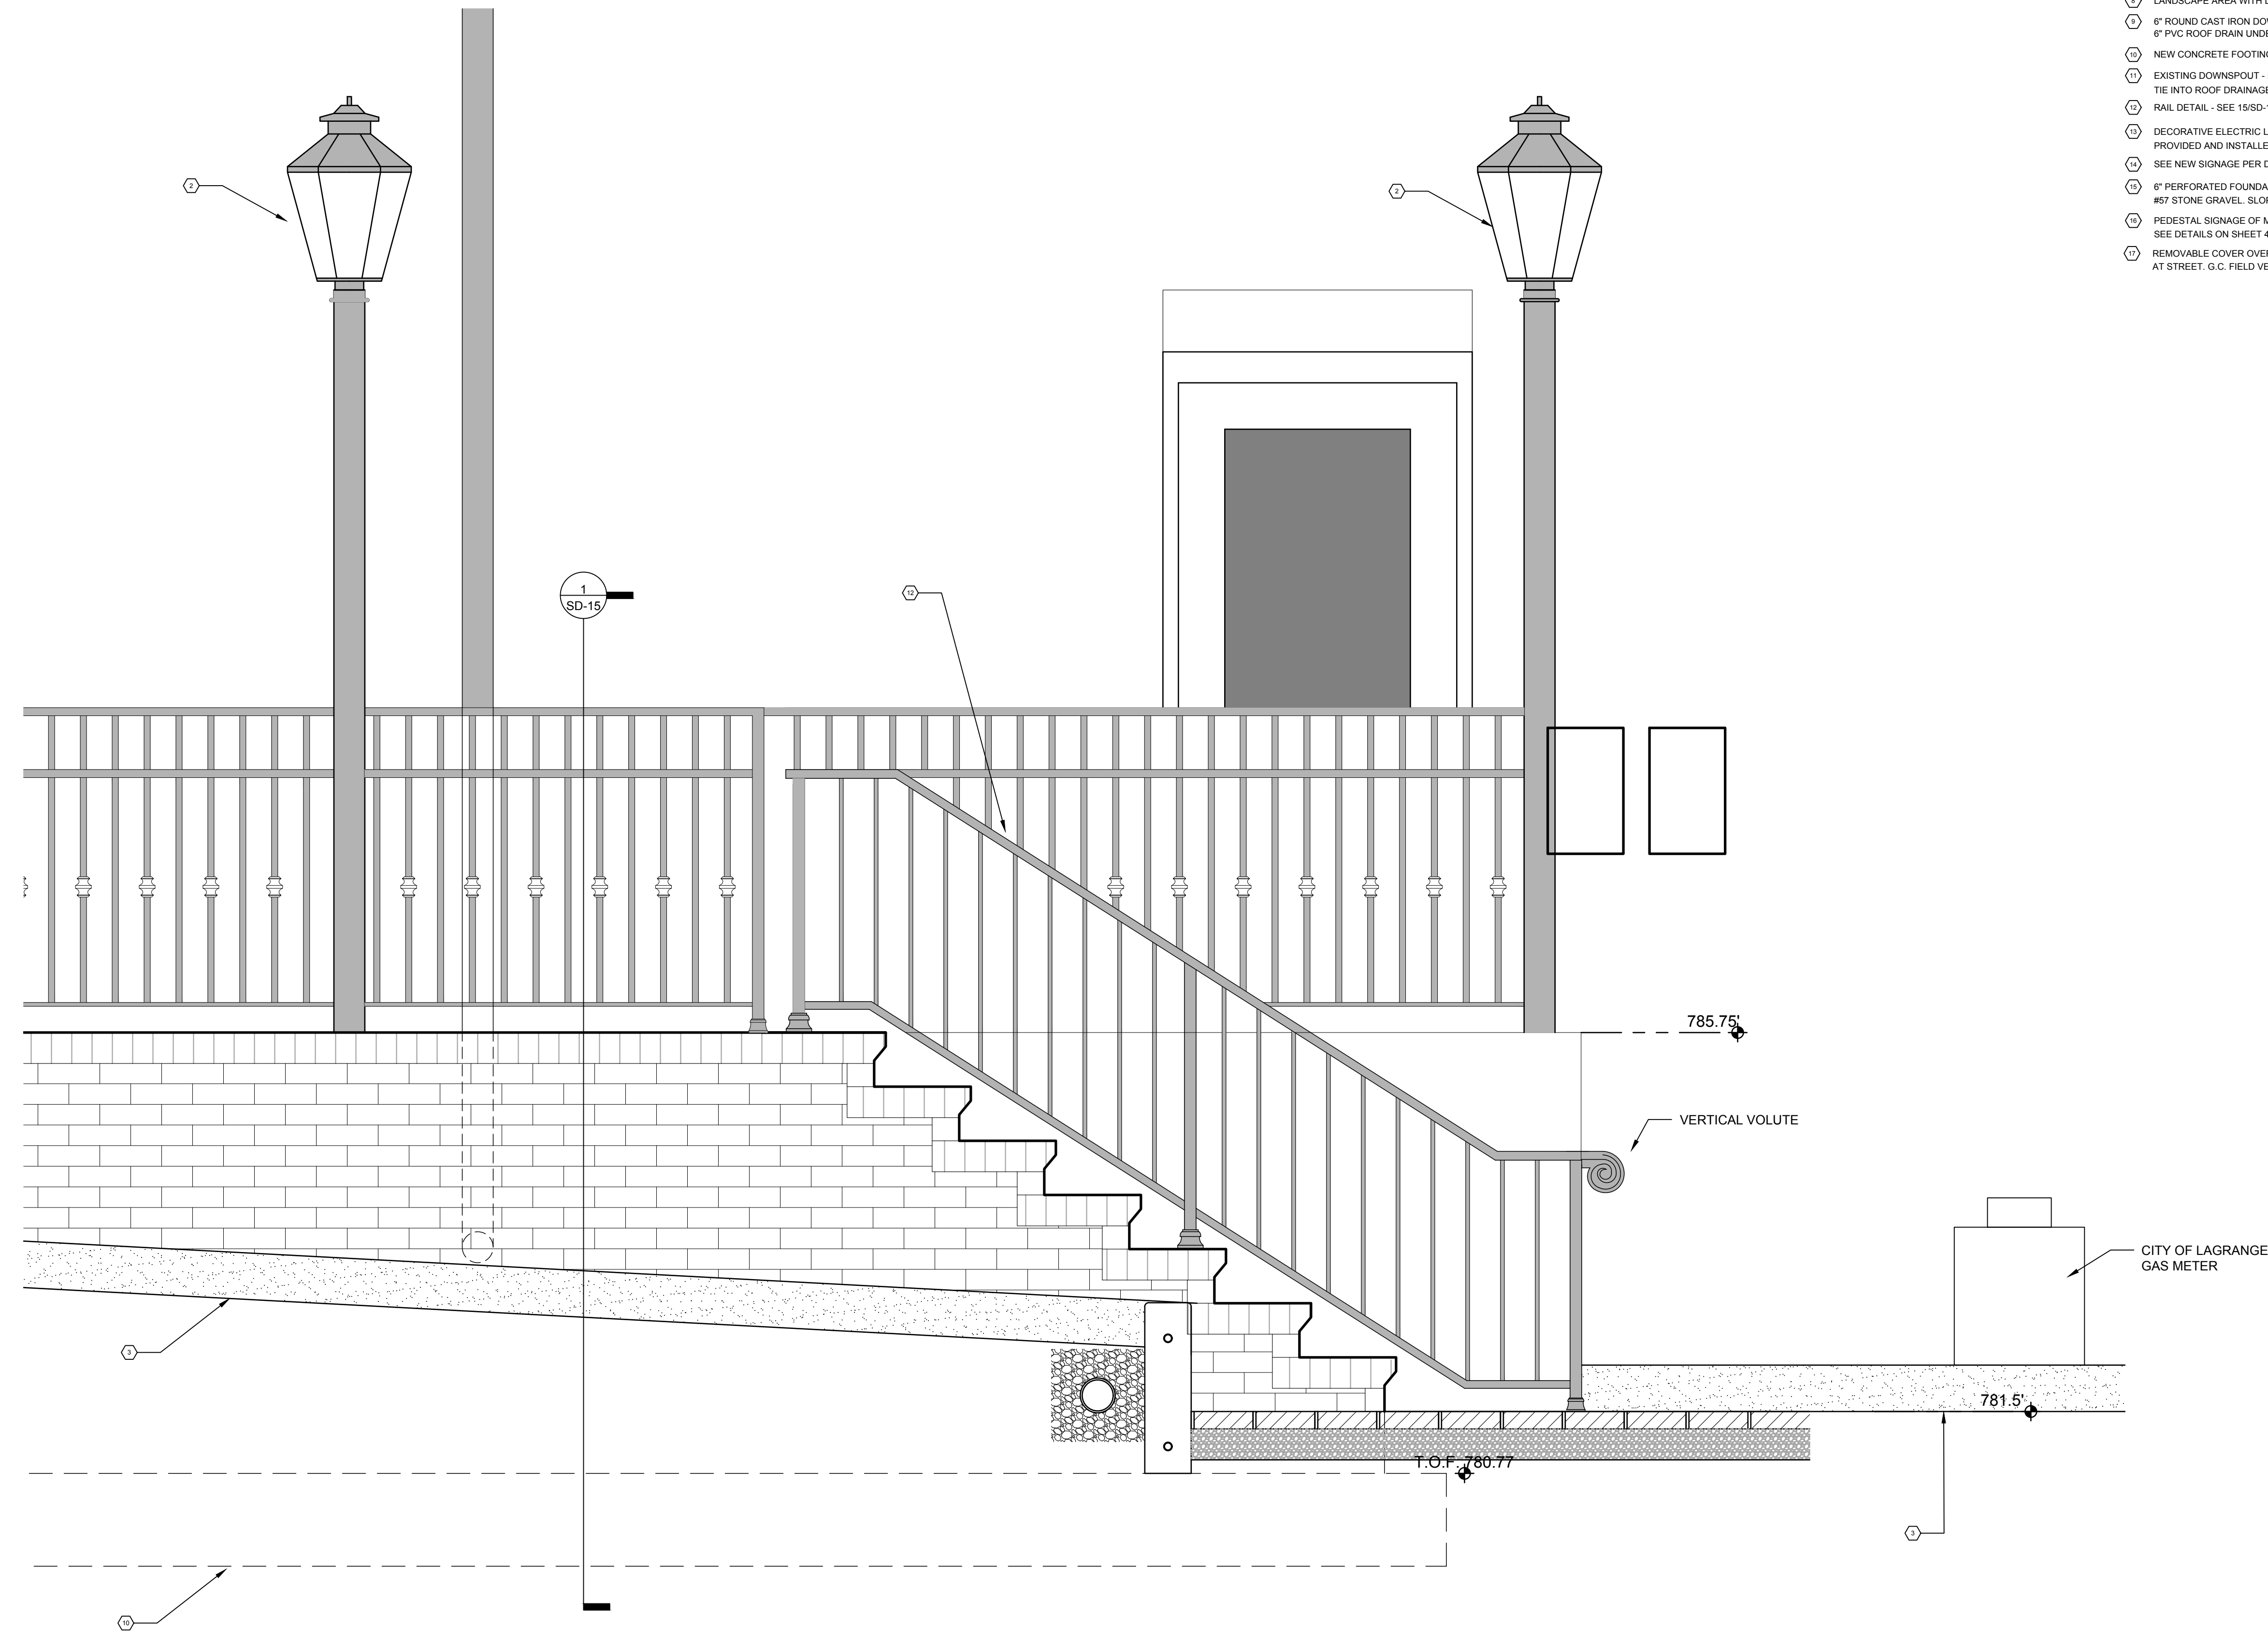

1 EAST ELEVATION - PARTIAL PROPOSED  
A3-3 Scale: 1" = 1'-0"

REVISIONS

DATE	DESCRIPTION

PROJECT:

STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

ELEVATIONS - PROPOSED

MODIFIED DATE:

JOB NO:

20-22


ISSUED DATE:

FOR BID AND PERMIT  
09 NOV 2020

SHEET:

A3-3




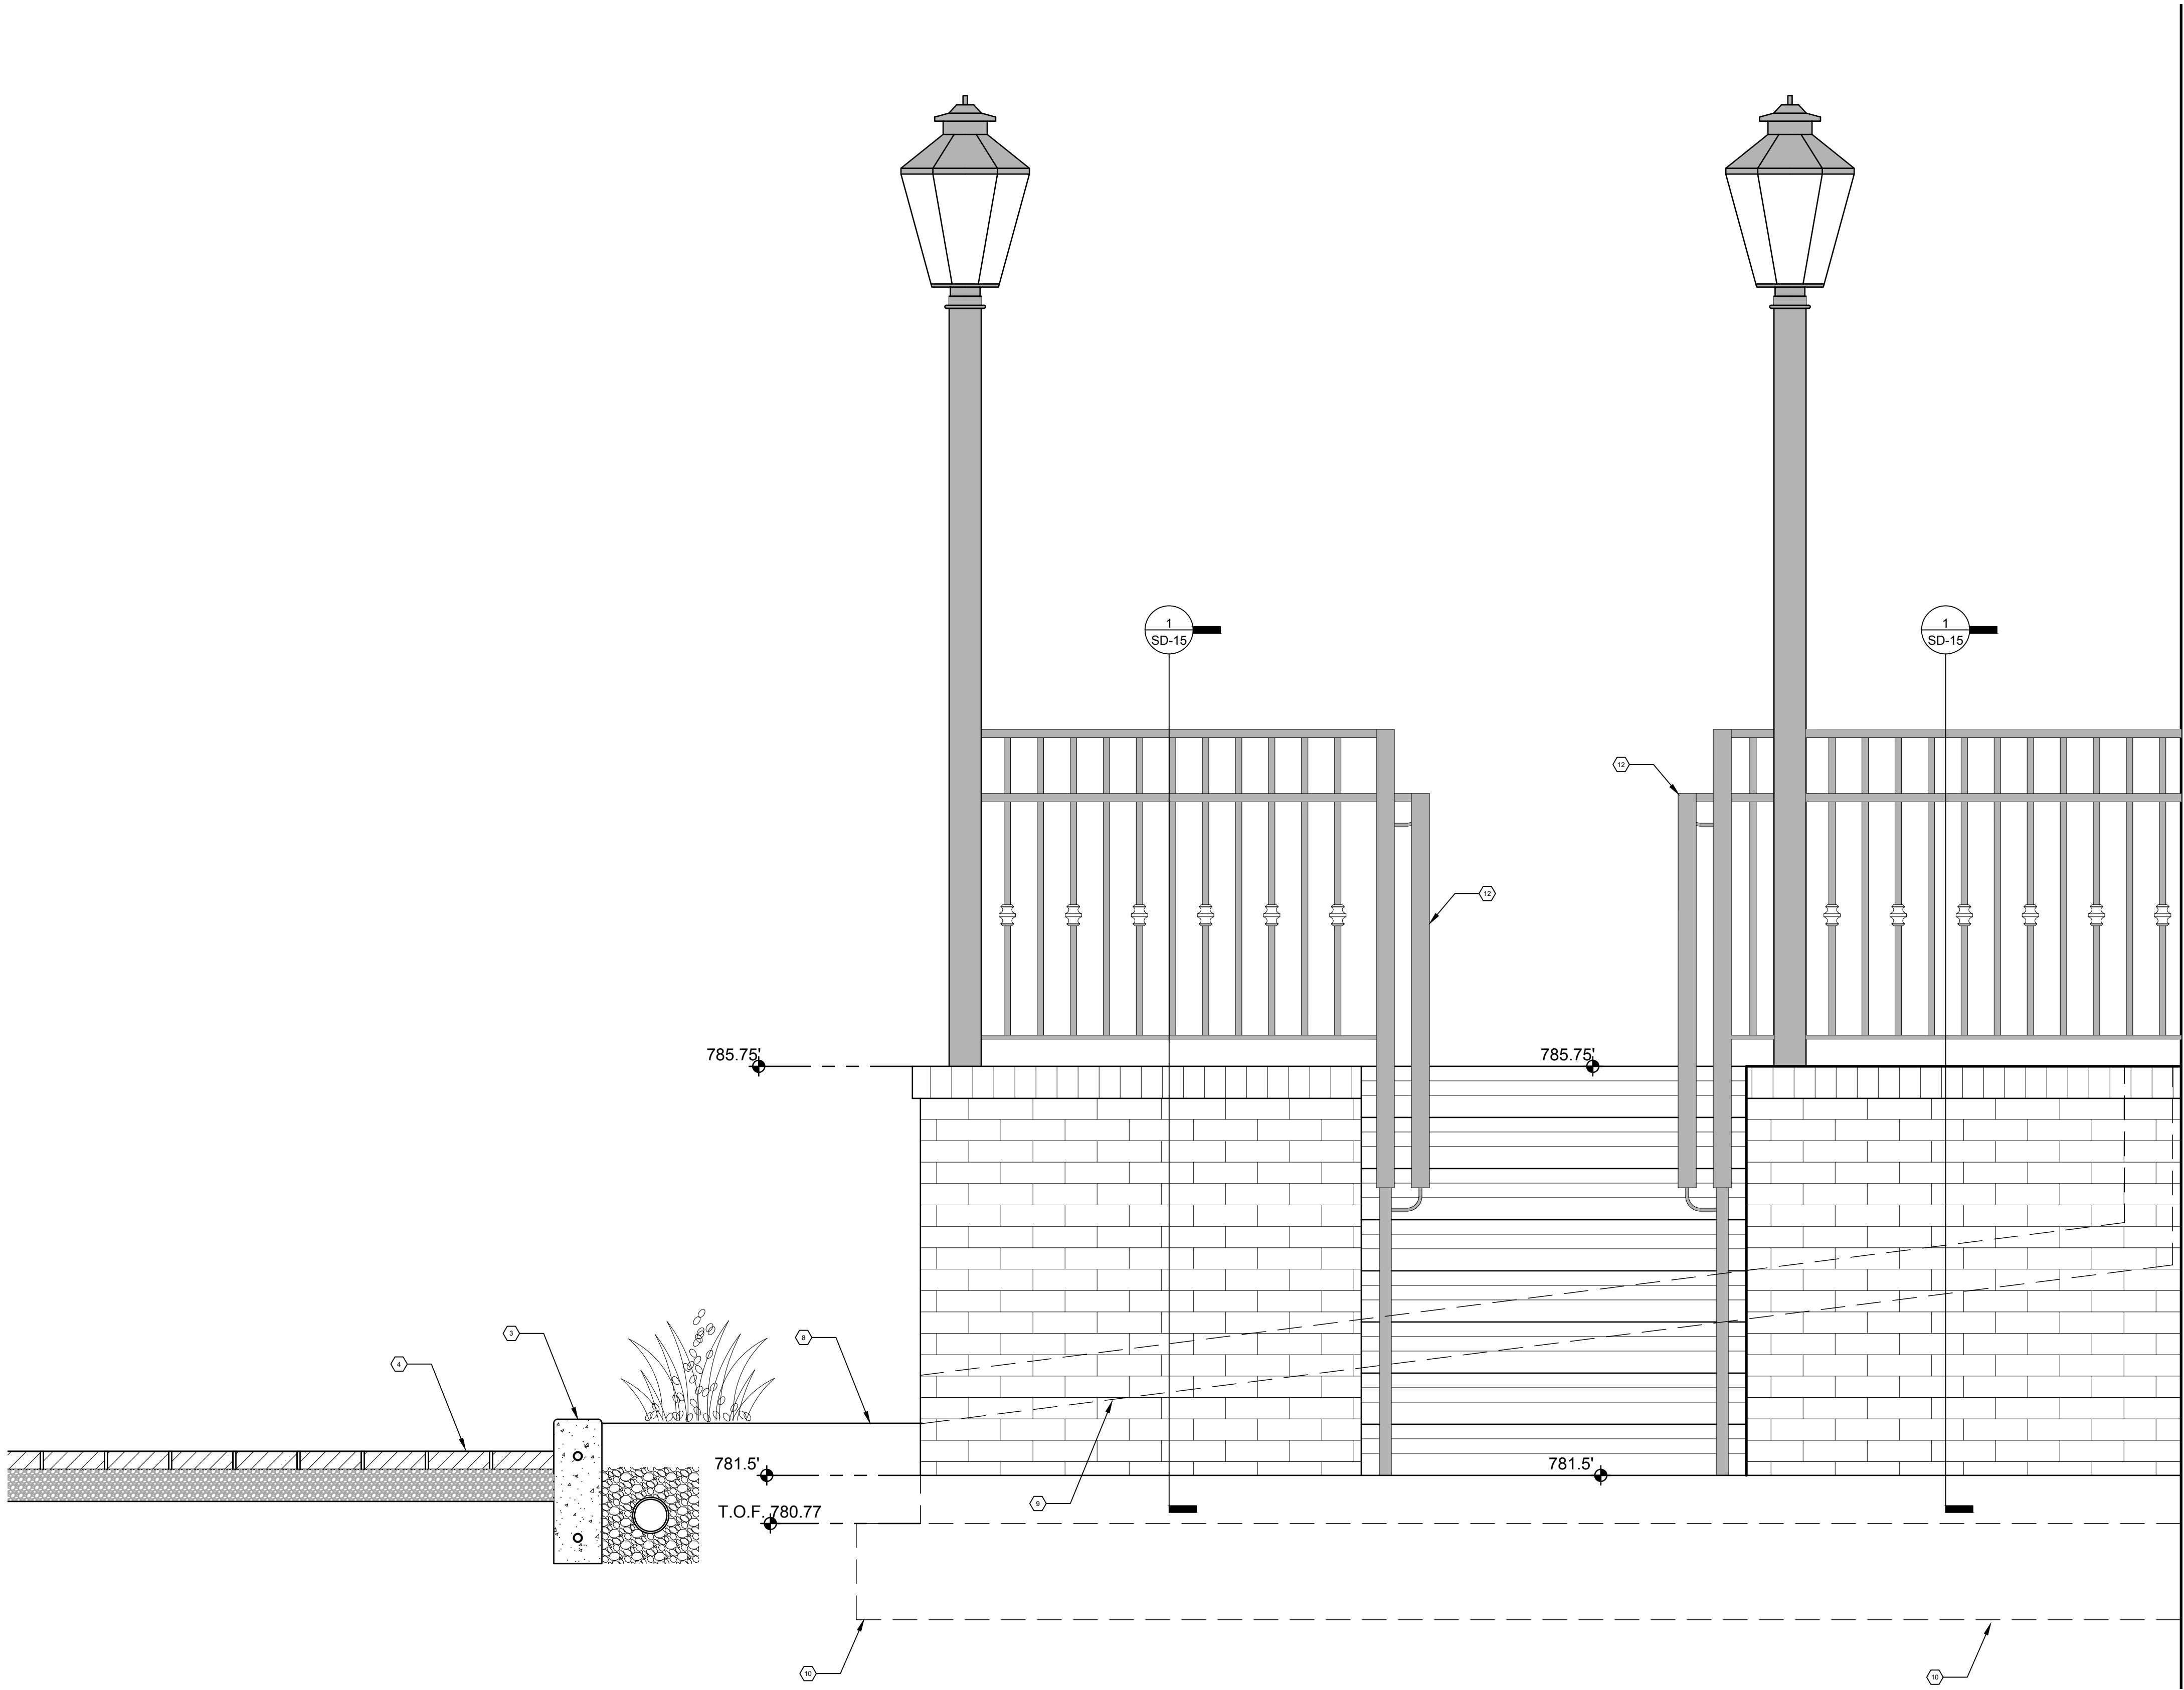



1 EAST ELEVATION - PARTIAL PROPOSED  
A3-3 Scale: 1" = 1'-0"

KEYNOTES

- 1 GAS LANTERN ON PIER. SEE DETAILS ON SHEET SD-16.
- 2 GAS LANTERN ON POST. SEE DETAILS ON SHEET SD-16.
- 3 CONCRETE CURB - SEE DETAIL 1/SD-11
- 4 CONCRETE PAVERS - SEE DETAIL 1/SD-13
- 5 CONCRETE CURB AT STREET - SEE DETAIL 10/SD-10
- 6 CURB RAMP FLUSH WITH ASPHALT - SEE DETAIL 3/SD-13
- 7 ACCESSIBLE PATH SIGNAGE - SEE DETAIL 4/SD-13
- 8 LANDSCAPE AREA WITH DRIP IRRIGATION SYSTEM ON TIMER
- 9 6" ROUND CAST IRON DOWNSPOUT BOOT TO TIE INTO 6" PVC ROOF DRAIN UNDER PATIO TO LANDSCAPE AREA.
- 10 NEW CONCRETE FOOTINGS FOR RAMP AND PATIO.
- 11 EXISTING DOWNSPOUT - FIELD VERIFY EXACT LOCATIONS. TIE INTO ROOF DRAINAGE PIPES UNDER PATIO
- 12 RAIL DETAIL - SEE 15/SD-10
- 13 DECORATIVE ELECTRIC LIGHT POST (BLACK) WITH ACORN FIXTURE PROVIDED AND INSTALLED BY CITY OF LAGRANGE
- 14 SEE NEW SIGNAGE PER DETAILS 2,3,4,5 ON SHEET SD-11
- 15 6" PERFORATED FOUNDATION DRAIN WITH SOCK IN 12" X 12" X CONT. #57 STONE GRAVEL. SLOPE DRAIN DISCHARGE AT GRADE OF LANDSCAPE AREA.
- 16 PEDESTAL SIGNAGE OF MAP OF DOWNTOWN LAGRANGE. SEE DETAILS ON SHEET 4/SD-16.
- 17 REMOVABLE COVER OVER TRENCH DRAIN. SLOPE TO DISCHARGE AT CURB AT STREET. G.C. FIELD VERIFY ELEVATIONS. SEE DETAIL 2/SD-8.

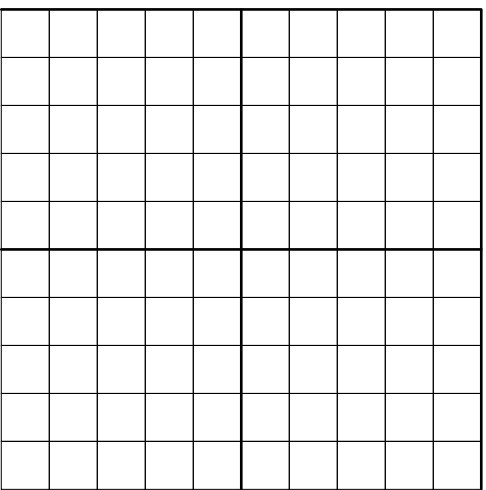

3" X 3" GRID

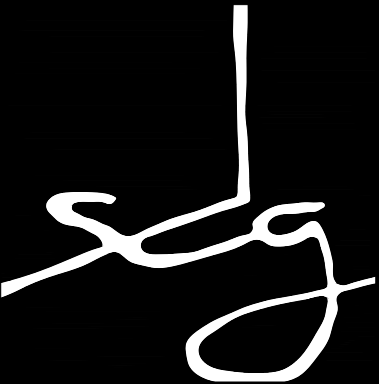

SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

REVISIONS

DATE	DESCRIPTION

PROJECT:

STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

ELEVATIONS - PROPOSED

MODIFIED DATE:

JOB NO:


20-22

ISSUED DATE:

SHEET:


FOR BID AND PERMIT  
09 NOV 2020

A3-4

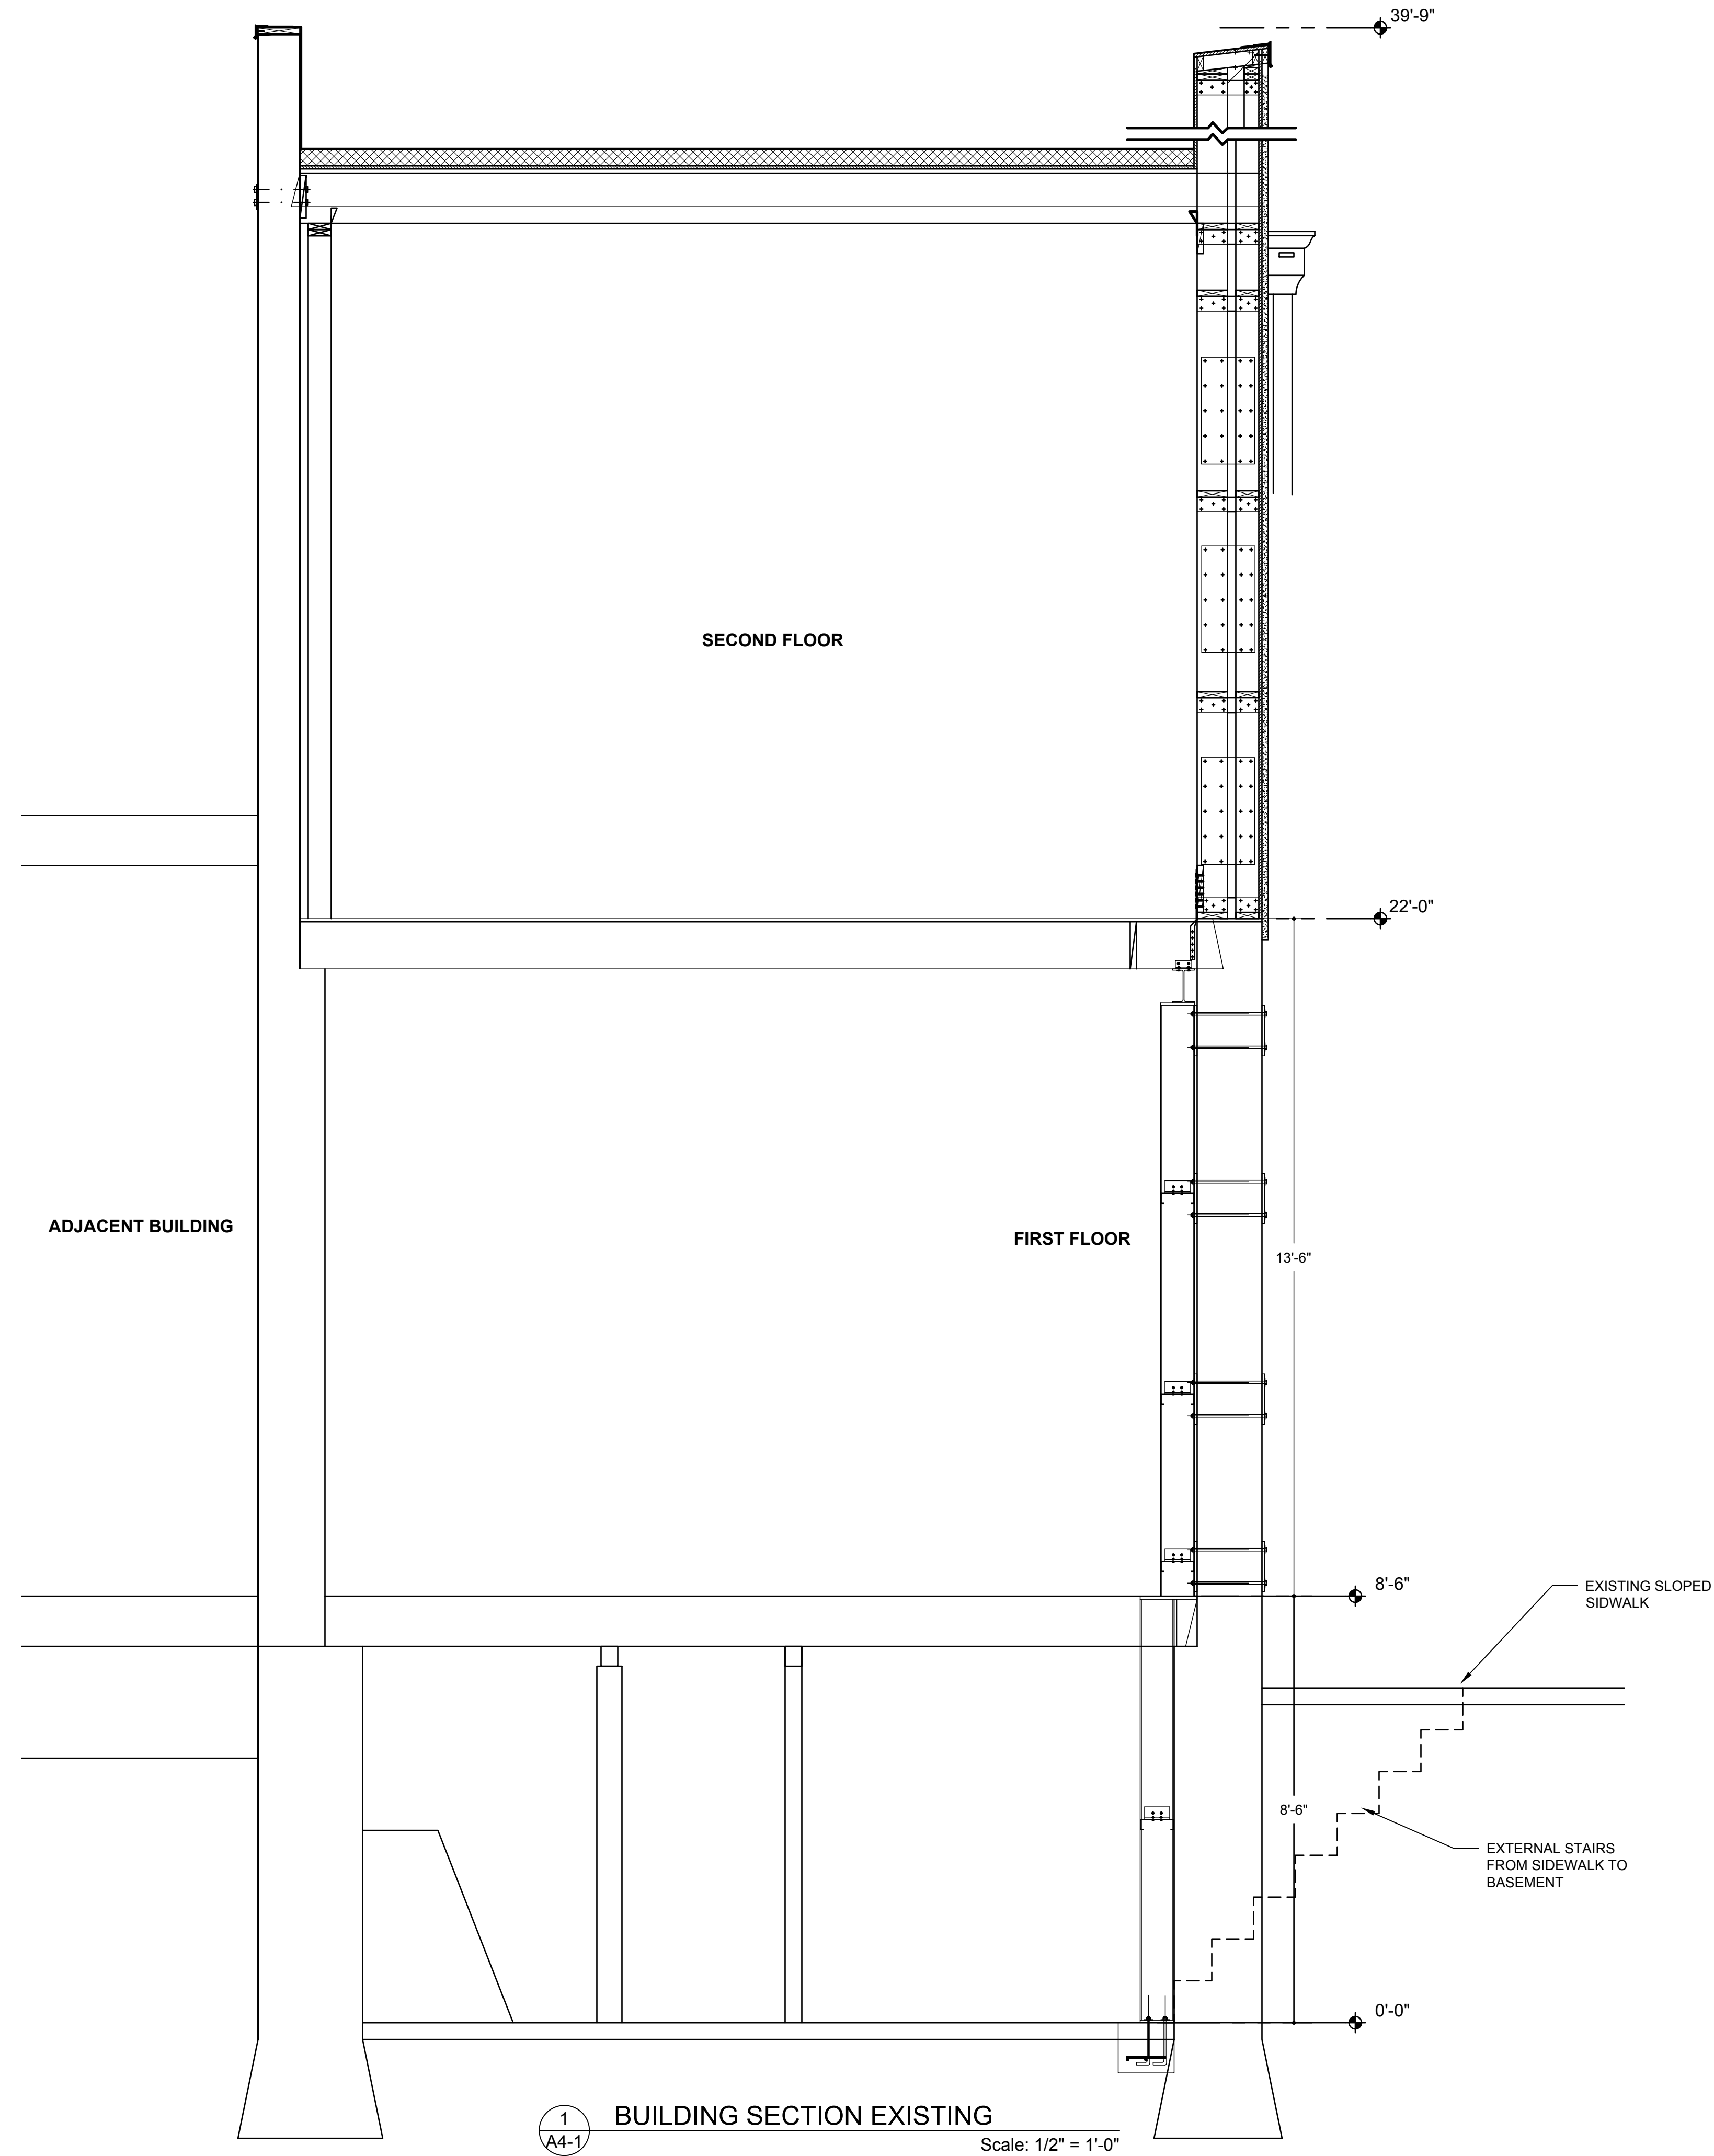

## KEYNOTES

1 KEYNOTES

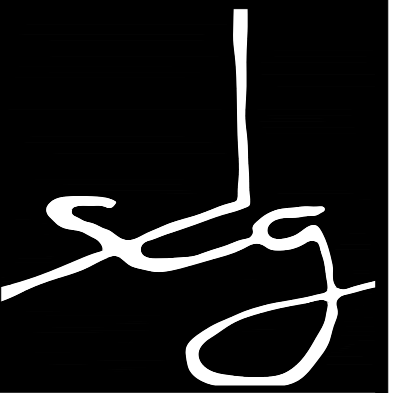

SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

### REVISIONS

DATE	DESCRIPTION

PROJECT:

STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

BUILDING SECTION  
EXISTING

MODIFIED DATE:

JOB NO:

20-22

ISSUED DATE:


SHEET:

FOR BID AND PERMIT  
09 NOV 2020

A4-1


1  
A4-1  
BUILDING SECTION EXISTING  
Scale: 1/2" = 1'-0"



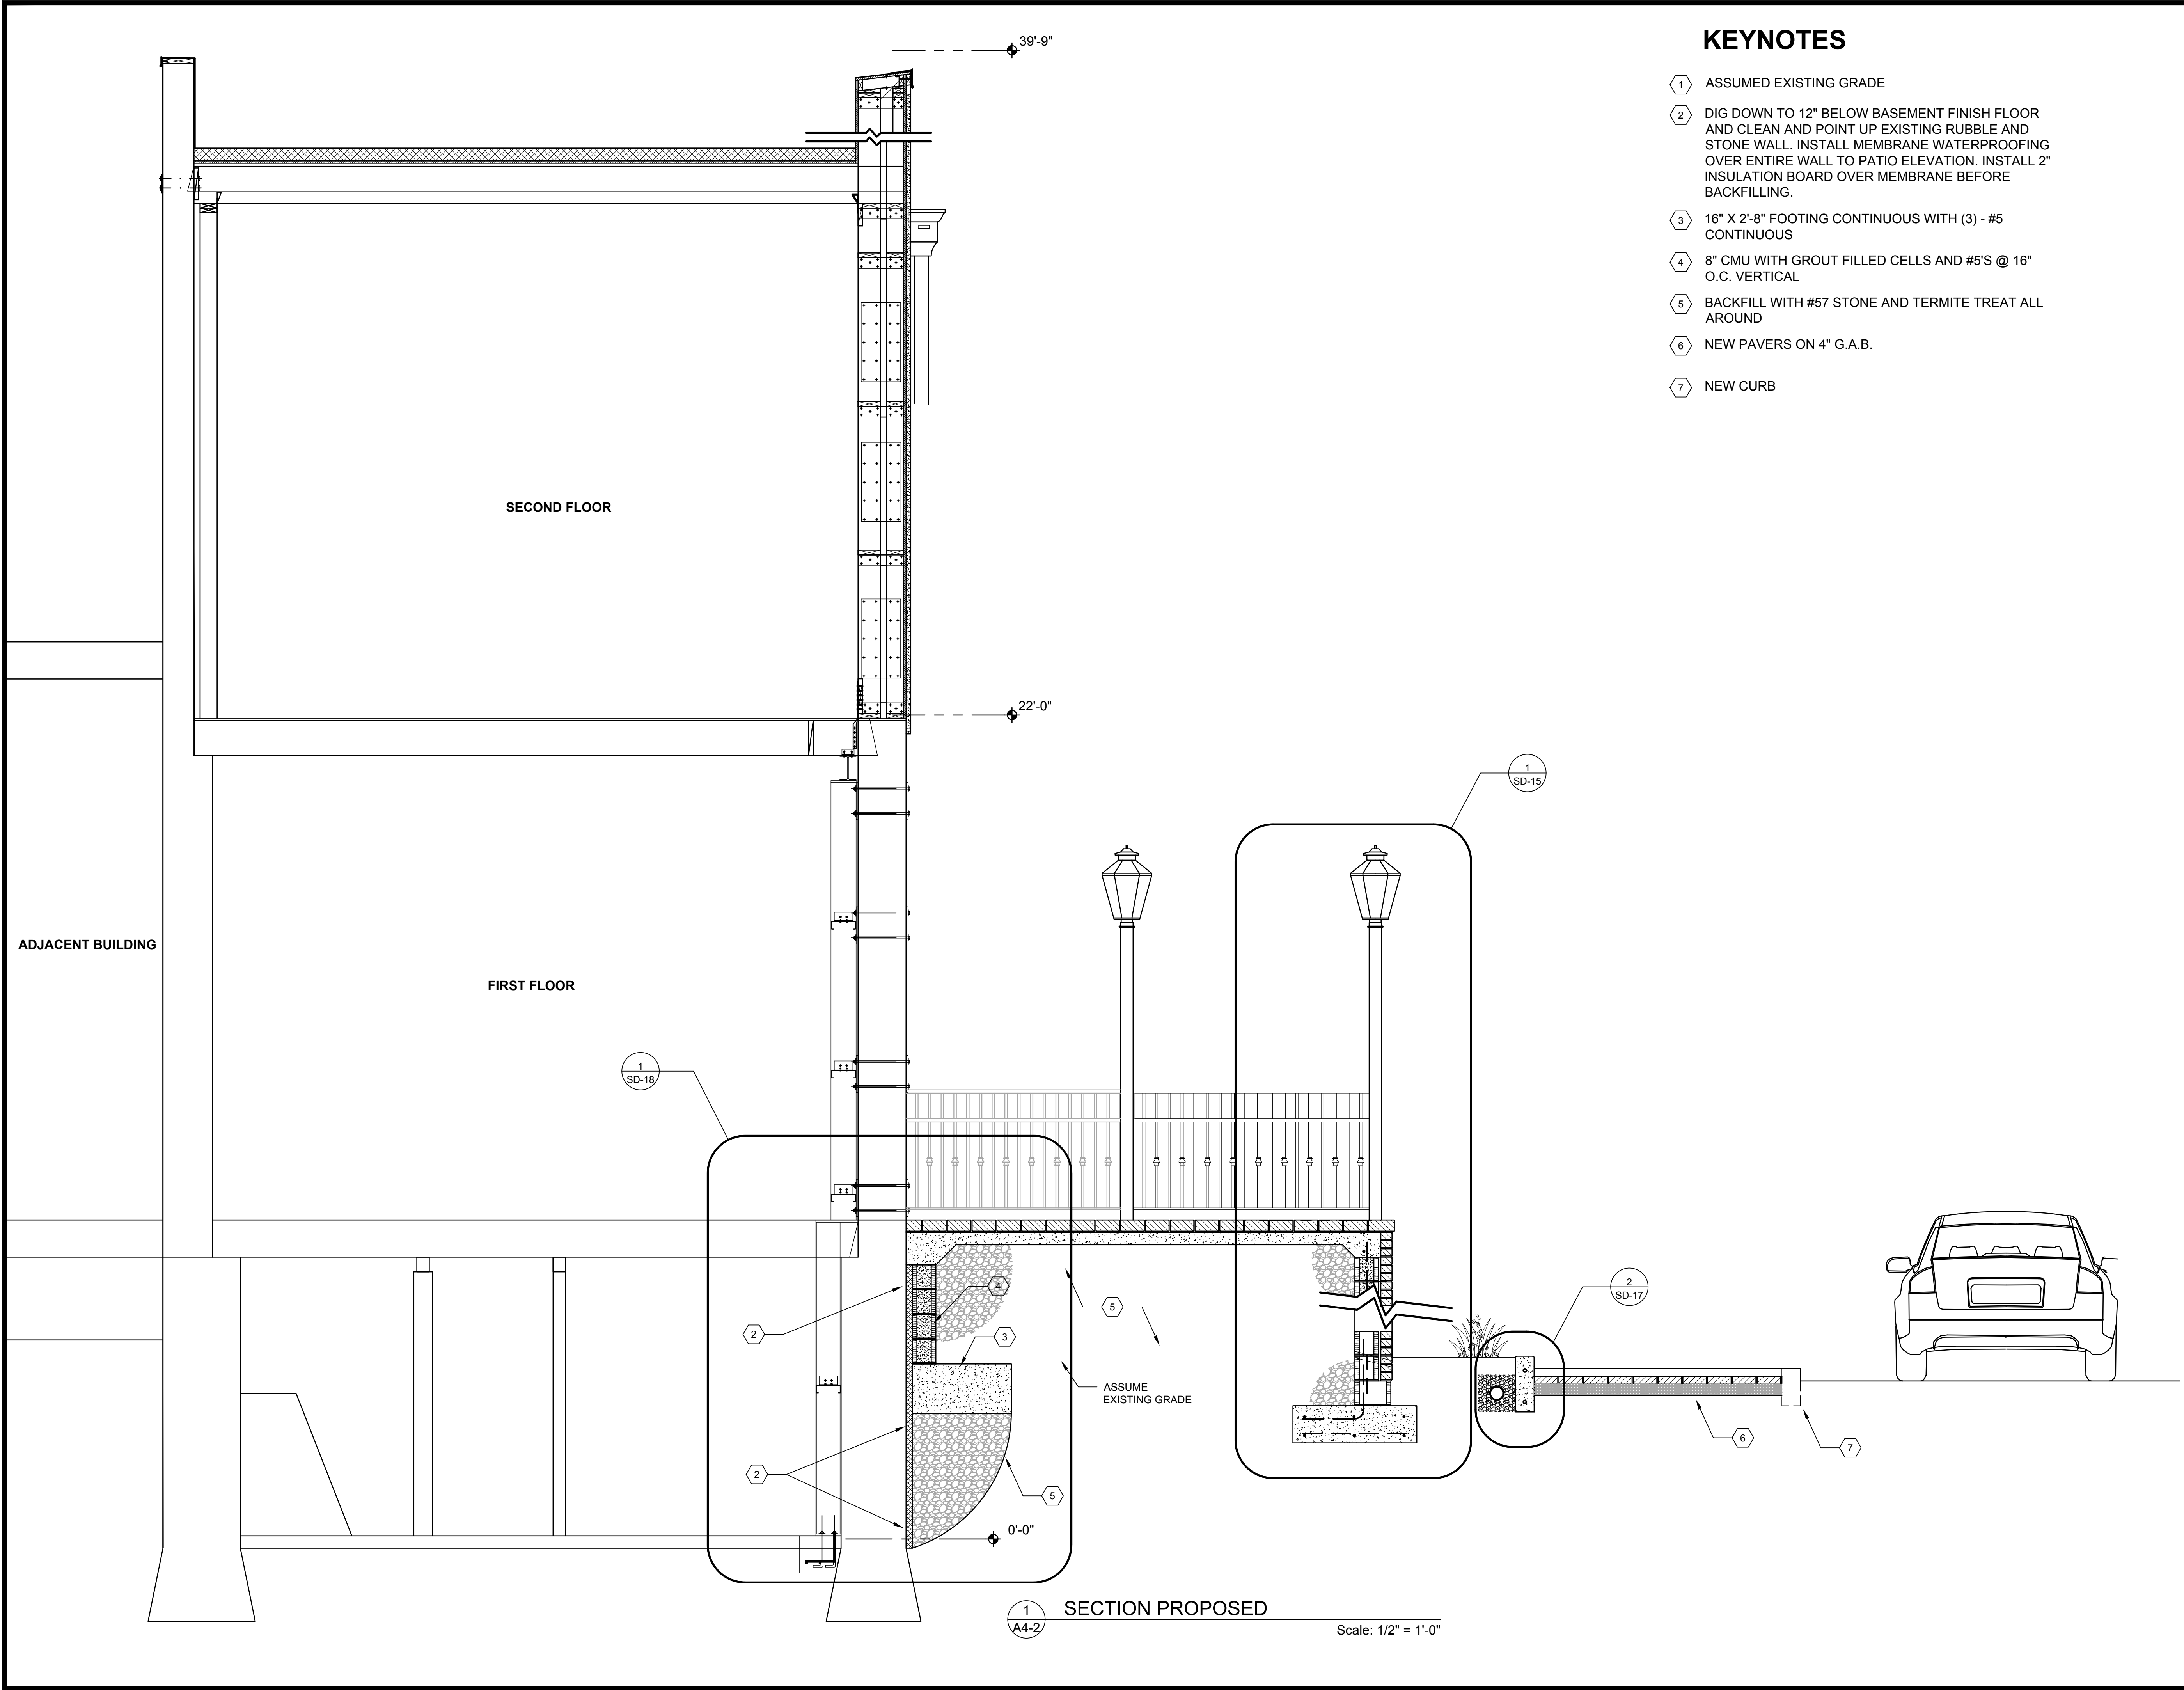

KEYNOTES

- 1 ASSUMED EXISTING GRADE
- 2 DIG DOWN TO 12" BELOW BASEMENT FINISH FLOOR AND CLEAN AND POINT UP EXISTING RUBBLE AND STONE WALL. INSTALL MEMBRANE WATERPROOFING OVER ENTIRE WALL TO PATIO ELEVATION. INSTALL 2" INSULATION BOARD OVER MEMBRANE BEFORE BACKFILLING.
- 3 16" X 2'-8" FOOTING CONTINUOUS WITH (3) - #5 CONTINUOUS
- 4 8" CMU WITH GROUT FILLED CELLS AND #5'S @ 16" O.C. VERTICAL
- 5 BACKFILL WITH #57 STONE AND TERMITE TREAT ALL AROUND
- 6 NEW PAVERS ON 4" G.A.B.
- 7 NEW CURB

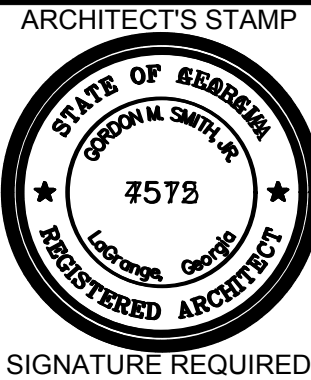

*Lawrence Smith*

SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

REVISIONS

Δ	DATE	DESCRIPTION

PROJECT:

STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

BUILDING SECTION  
PROPOSED

MODIFIED DATE:

JOB NO:

20-22

ISSUED DATE:

SHEET:

FOR BID AND PERMIT  
09 NOV 2020

A4-2



GEORGIA 811  
UTILITIES PROTECTION CENTER, INC.  
IF YOU DIG IN GEORGIA  
DIAL 1-800-282-7411.  
WWW.GAUPC.COM  
THREE WORKING DAYS BEFORE YOU DIG.  
ALSO VERIFY ALL UTILITIES WITH CITY F LAGRANGE  
THREE WORKING DAYS BEFORE YOU DIG.

KEYNOTES

- 1 GAS LANTERN ON PIER. SEE DETAILS ON SHEET SD-16.
- 2 GAS LANTERN ON POST. SEE DETAILS ON SHEET SD-16.
- 3 CONCRETE CURB - SEE DETAIL 1/SD-11
- 4 CONCRETE PAVERS - SEE DETAIL 1/SD-13
- 5 CONCRETE CURB AT STREET - SEE DETAIL 10/SD-10
- 6 CURB RAMP FLUSH WITH ASPHALT - SEE DETAIL 3/SD-13
- 7 ACCESSIBLE PATH SIGNAGE - SEE DETAIL 4/SD-13
- 8 LANDSCAPE AREA WITH DRIP IRRIGATION SYSTEM ON TIMER
- 9 6" ROUND CAST IRON DOWNSPOUT BOOT TO TIE INTO 6" PVC ROOF DRAIN UNDER PATIO TO LANDSCAPE AREA.
- 10 NEW CONCRETE FOOTINGS FOR RAMP AND PATIO.
- 11 EXISTING DOWNSPOUT - FIELD VERIFY EXACT LOCATIONS. TIE INTO ROOF DRAINAGE PIPES UNDER PATIO
- 12 RAIL DETAIL - SEE 15/SD-10
- 13 DECORATIVE ELECTRIC LIGHT POST (BLACK) WITH ACORN FIXTURE PROVIDED AND INSTALLED BY CITY OF LAGRANGE (PROVIDE WITH BANNER ARMS)
- 14 SEE NEW SIGNAGE PER DETAILS 2,3,4,5 ON SHEET SD-11
- 15 6" PERFORATED FOUNDATION DRAIN WITH SOCK IN 12" X 12" X CONT #57 STONE GRAVEL. SLOPE DRAIN DISCHARGE AT GRADE OF LANDSCAPE AREA.
- 16 PEDESTAL SIGNAGE OF MAP OF DOWNTOWN LAGRANGE SEE DETAILS ON SHEET 4/SD-16.
- 17 REMOVABLE COVER OVER TRENCH DRAIN. SLOPE TO DISCHARGE AT CURB AT STREET. G.C. FIELD VERIFY ELEVATIONS. SEE DETAIL 2/SD-8.

LEGEND

- WP WEATHERPROOF DUPLEX OUTLET. RUN CONDUITS UNDERGROUND TO UP EXTERIOR WALL. MOUNT 18" ABOVE GRADE.
- WP WEATHERPROOF DUPLEX OUTLET ON METAL POST. MOUNT 12" ABOVE GRADE ON 3"x3" BLACK POST. POWDER COATED
- DECORATIVE BLACK ELECTRIC LIGHT POST BY CITY TO MATCH EXISTING

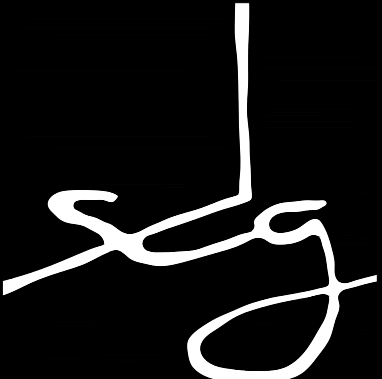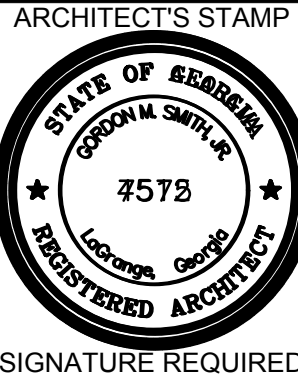

SMITH DESIGN GROUP, INC.  
206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240  
706-882-5511

ONE STORY BRICK AND FRAME F.F.E. 785.88

F.F.E. 785.82

F.F.E. 780.90

WEATHER PROOF / VANDAL PROOF  
LIGHTING / POWER CONTROL CABINET  
WITH LOCK

EXISTING TREE

1 SITE LIGHTING AND POWER  
E-1

Scale: 1/4" = 1'-0"

NOTE - ALL SITE LIGHTS TO BE ON  
BY PHOTOCELL AND OFF BY TIME  
CLOCK. LOCATE SITE LIGHTS AND  
IRRIGATION CONTROLS IN WALL  
MOUNTED PANEL BOX.

REVISIONS

DATE	DESCRIPTION

PROJECT:

STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

SITE LIGHTING AND  
POWER

MODIFIED DATE:

JOB NO:

20-22

ISSUED DATE:

SHEET:

FOR BID AND PERMIT  
09 NOV 2020

E-1





## FEATURES & SPECIFICATIONS

### INTENDED USE

The OLB LED Bullet Floodlight is a long-lasting energy-efficient landscape floodlight. Available with spot or flood optics making it ideal for many commercial and residential outdoor applications such as lighting of landscapes, building details and flag poles.

### CONSTRUCTION

Die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. The LED driver is mounted in the lower housing promoting a low operating temperature and long life. Housing is sealed against moisture and environmental contaminants (IP65). Finish: Exterior parts are protected by a thermoplastic powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling.

### OPTICS

Optics are engineered for superior field-to-beam ratios, uniformity and spacing. Available with 3W x 4 flood optics for illuminating larger objects or 2W x 2 spot optics for illuminating targets up to 30 ft away. Light engines are available in 3000K (80 CRI min.) or 5000K (65 CRI min.) configurations.

### ELECTRICAL

MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).

Light engine consists of four (4) discrete LEDs directly mounted directly to the heat sink to maximize heat dissipation and promote long life (100,000 hrs at 40°C, L80).

Driver is thermally isolated in base to promote long-life.

Operating temperature: -30°C to 40°C.

### INSTALLATION

Integral adjustable knuckle with 1/2-14 NPS threaded pipe facilitates quick and easy installation in variety of mounting methods.

### LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations within four feet of the ground.

Tested in accordance with IESNA LM-79 and LM-80 standards.

### WARRANTY

5-year limited warranty. Complete warranty terms located at [www.aclitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.aclitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Actual performance may differ as a result of end-user environment and application.

Note: Specifications subject to change without notice.

Catalog Number	Tree uplight at city Hall
Notes	Fixture "TL"
Type	

OLB

LED Bullet Flood Light



All dimensions are inches (centimeters) unless otherwise indicated.

ORDERING INFORMATION For shortest lead times, configure product using bolded options.					Example: OLB 8 30K DDB	
Series	Light engine	Color temperature (CCT)	Voltage	Finish		
OLBF	5W flood optics	30K	3000K	(blank)	MVOLT	DDB
OLBS	2W spot optics	50K	5000K			Dark bronze

DECORATIVE INDOOR & OUTDOOR

OLB LED



## PRODUCT DATA SHEET

Fixture "CL"

ColorBright™  
Color Changing  
RGB 150 Series



www.FlexfireLEDs.com

Weatherproof Color Changing RGB 150 Series • Product Datasheet

Fixture "CL"

## Description

The Outdoor ColorBright™ Color Changing 150 LED strip light is a reel of linear color changing LED chips mounted on a flexible strip of printed circuit board (PCB) with a strong adhesive backing. To achieve weather protection, the strips are enveloped in a silicone plastic casing. Sometimes referred to as "color changing LED tape lights," the flexible design of LED strips means the lights can be installed in basically any space you can imagine. With these strips you can change the lights to nearly any color combination for a wide range of creative options. These lights work perfectly for outdoor installations as well as indoor spaces such as aquariums or in bathrooms that may be exposed to water.

The IP65 rating means that the LED strip lights are able to withstand jets and splashes of water from all sides. It cannot be submerged in water, but it will withstand the elements. We also recommend outdoor lights for use indoors in high splash areas or if you're looking for a strip that is easier to clean.

## Product Features

- Highest Brightness RGB LED Chips
- Fully dimmable and color controllable
- Highest quality components and premium packaged
- 5050 LEDs
- Single BIN LED selection to ensure color consistency (3-Step MacAdam)
- 3M 9731 adhesive for a strong bond to the weatherproof silicone sleeve
- 120° Beam Angle
- Only 1/2" (12mm) strip width
- Short LED pitch of 1 1/4" (33mm)
- 12V or 24V DC Input Options
- Segment length of 4" (6 1/2" for 24V)
- Can be cut every 3 LEDs (5 LEDs for 24V)
- 9 LEDs / Foot (30 / Meter)
- Thick double layer 2oz copper PCB for excellent thermal management
- Operating Temperature -4°F to +104°F (-20°C to 40°C)
- IP65 Rated with non-yellowing and UV resistant silicone sleeve

## Product Specific Specifications

Product SKU	LED Chips per foot (Meter)	Voltage Input	Watts / foot (Meter)	Lumen / foot (Meter)	Color Wavelengths (Nanometers)	Max. Run Length in Series
IP65-CB-RGB-12V	9 LEDs/Foot (30/Meter)	12V DC	2.2 W/ft (7.2 W/m)	R: 11LM (35/m) G: 46LM (150/m) B: 10LM (30/m)	R: 617-627nm G: 515-525nm B: 464-474nm	32' 10" (10 meters)
IP65-CB-RGB-24V	9 LEDs/Foot (30/Meter)	24V DC	2.2 W/ft (7.2 W/m)	R: 11LM (35/m) G: 46LM (150/m) B: 10LM (30/m)	R: 617-627nm G: 515-525nm B: 464-474nm	48' (15 meters)

V.2017.12.11

page 1

Weatherproof Color Changing RGB 150 Series • Product Datasheet


## Ordering Code

Fixture "CL"

OUTDOOR

IP Protection	Brand	Color	Voltage	Length
IP65 - Weatherproof	CB - ColorBright™	RGB	12V	08 FT - 8 ft Reel
IP68 - Waterproof			24V	16 FT - 16 ft Reel

## Dimensions

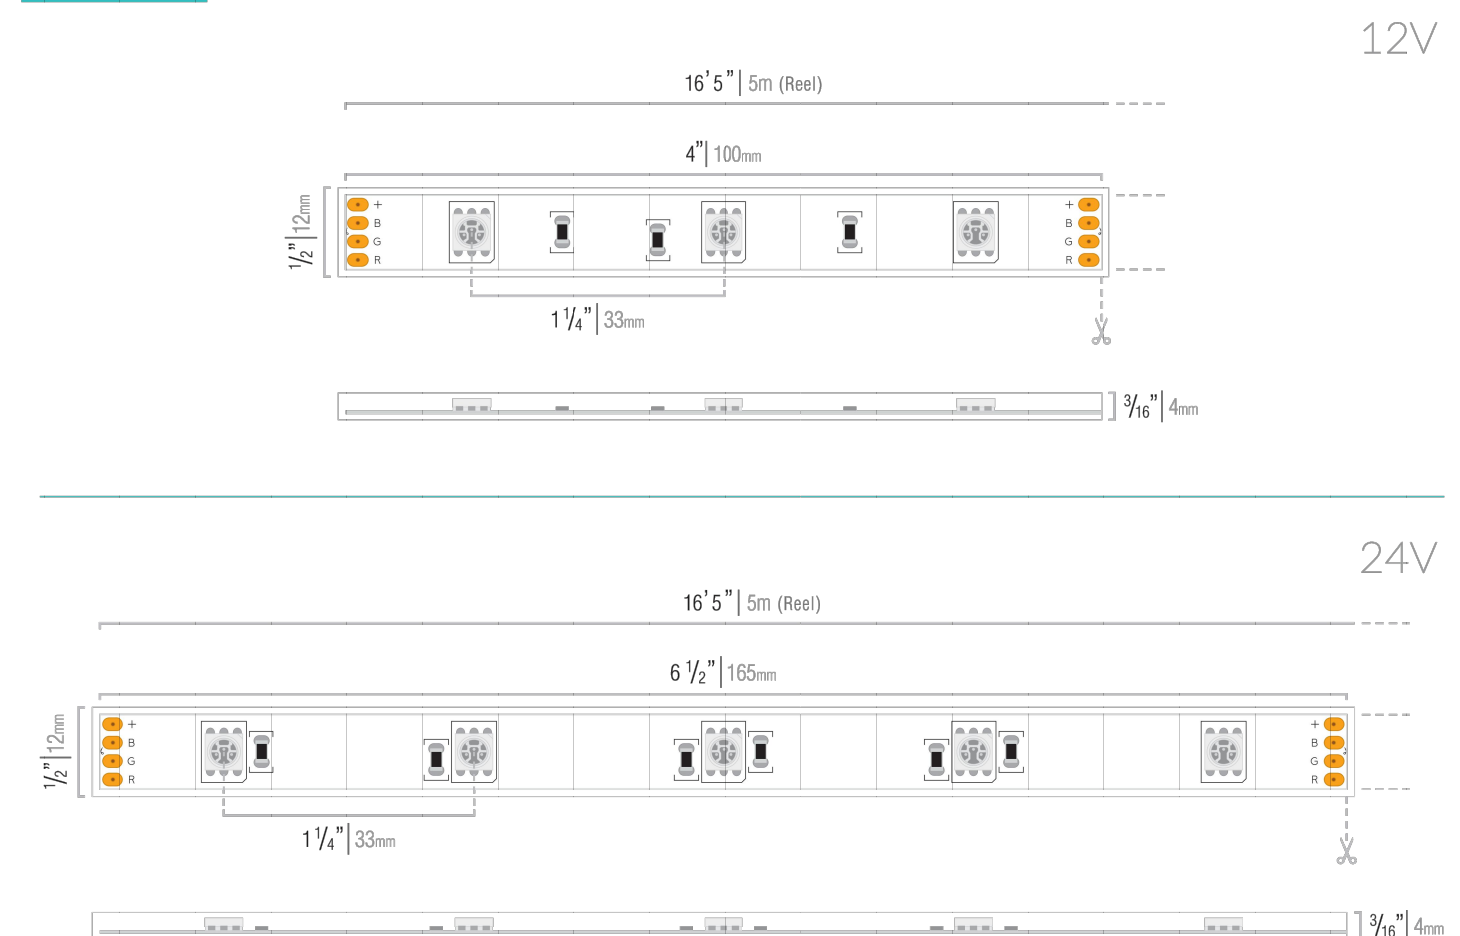

V.2017.12.11


page 2

Weatherproof Color Changing RGB 150 Series • Product Datasheet

## Example Installation and Layout

Fixture "CL"

IN SERIES

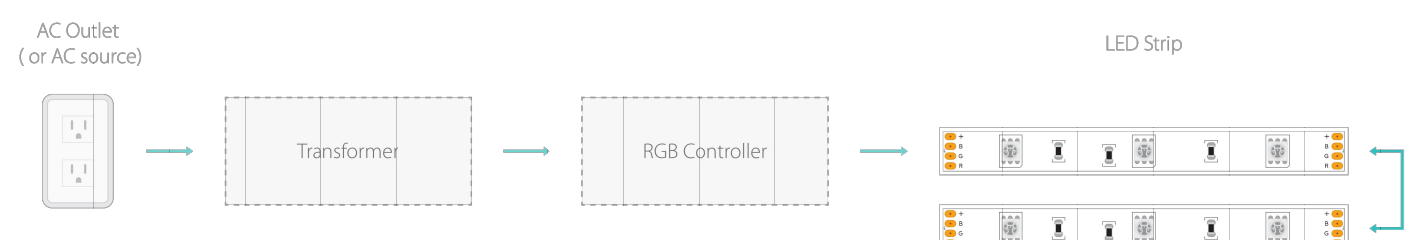

IN PARALLEL



V.2017.12.11


page 3

Weatherproof Color Changing RGB 150 Series • Product Datasheet

## Dimming Options

Fixture "CL"

In-Line Dimming

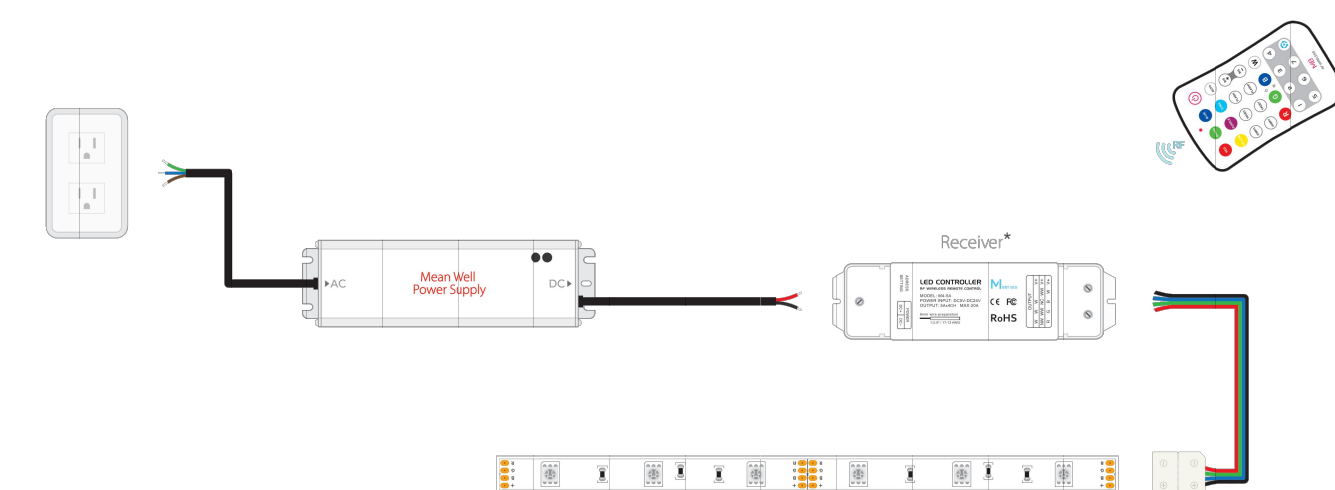

\* The receiver and controller may differ from the one shown.

Provide with three light colors and dimmers

V.2017.12.11

page 4

ARCHITECT'S STAMP



SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

## REVISIONS

DATE	DESCRIPTION

PROJECT:

STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

SITE LIGHTING DETAILS

MODIFIED DATE:

JOB NO:

20-22

ISSUED DATE:

SHEET:

FOR BID AND PERMIT  
09 NOV 2020


E-2





Weatherproof Color Changing RGB 150 Series • Product Datasheet

Included Accessories

Fixture “CL”

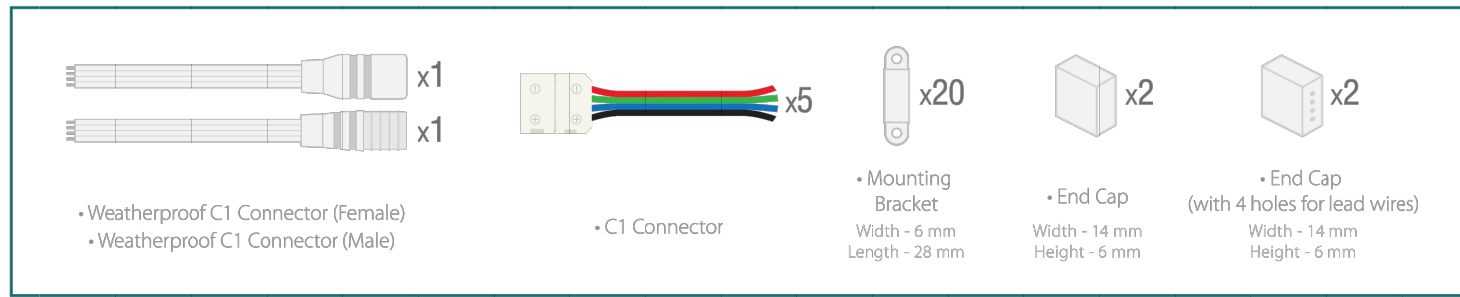


Resealing Outdoor Strips

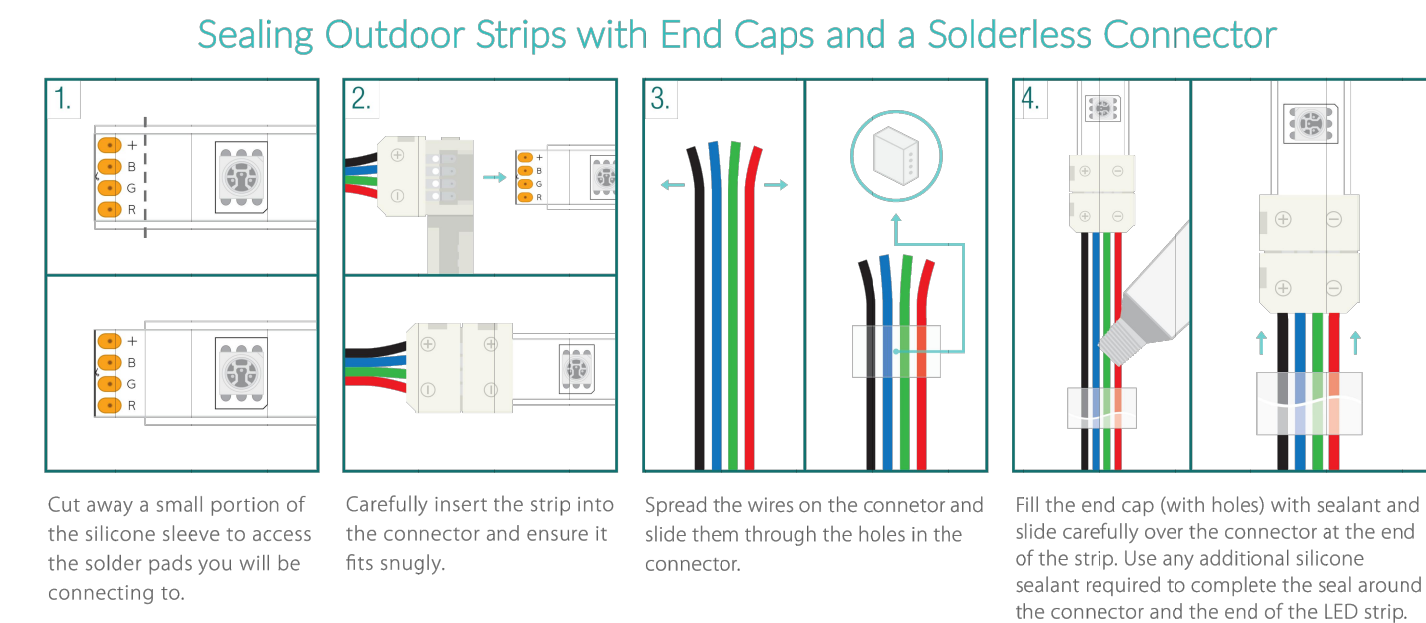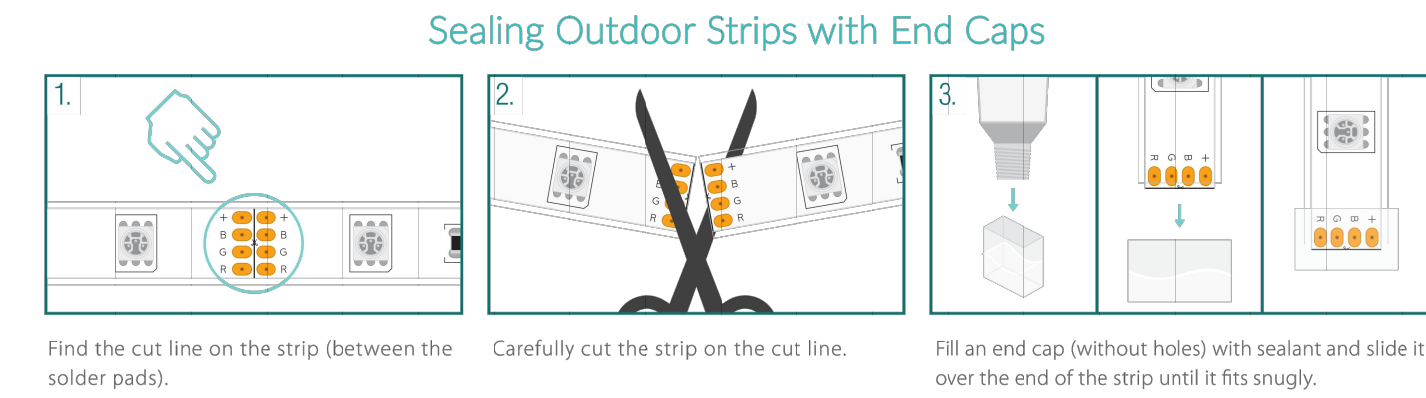

Weatherproof Color Changing RGB 150 Series • Product Datasheet

Compatible Drivers (12V only)

Fixture “CL”

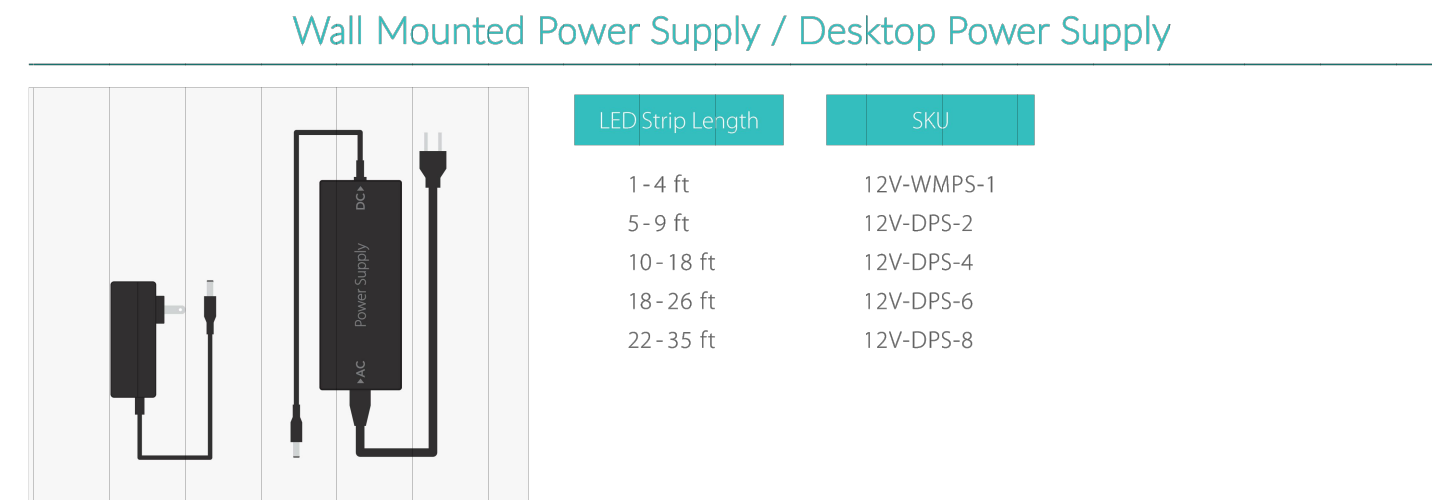

Mean Well

LED Strip Length	SKU
1 - 4 ft	12V-WMPS-1
5 - 9 ft	12V-DPS-2
10 - 18 ft	12V-DPS-4
18 - 26 ft	12V-DPS-6
22 - 35 ft	12V-DPS-8


LED Strip Length	SKU
1 - 8 ft	LPV-20-12
9 - 15 ft	HLG-40H-12A
14 - 23 ft	HLG-80H-12A
23 - 38 ft	LPV-100-12
28 - 46 ft	HLG-120H-12A
35 - 58 ft	HLG-150H-12A
44 - 74 ft	HLG-240H-12A

LED Strip Length	SKU
61 - 108 ft	HLG-320H-12A
109 - 185 ft	HLG-600H-12A

Weatherproof Color Changing RGB 150 Series • Product Datasheet

Compatible Drivers (24V only)

Fixture “CL”

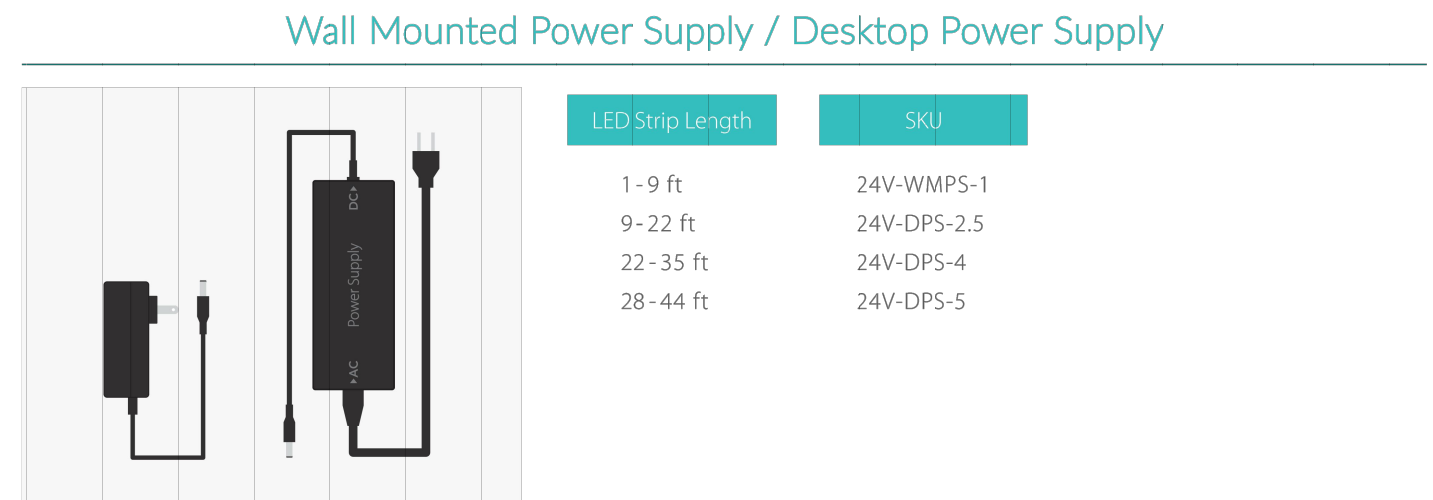

Mean Well

LED Strip Length	SKU
1 - 9 ft	24V-WMPS-1
9 - 22 ft	24V-DPS-2.5
22 - 35 ft	24V-DPS-4
28 - 44 ft	24V-DPS-5


LED Strip Length	SKU
1 - 8 ft	LPV-20-24
8 - 13 ft	LPV-35-24
9 - 15 ft	HLG-40H-24A
14 - 23 ft	HLG-60H-24A
22 - 37 ft	HLG-100H-24A
28 - 46 ft	HLG-120H-24A
43 - 71 ft	HLG-185H-24A
55 - 92 ft	HLG-240H-24A

LED Strip Length	SKU
73 - 125 ft	HLG-320H-24A
126 - 232 ft	HLG-600H-24A

Weatherproof Color Changing RGB 150 Series • Product Datasheet

Compatible Aluminum Extrusions

Fixture “CL”

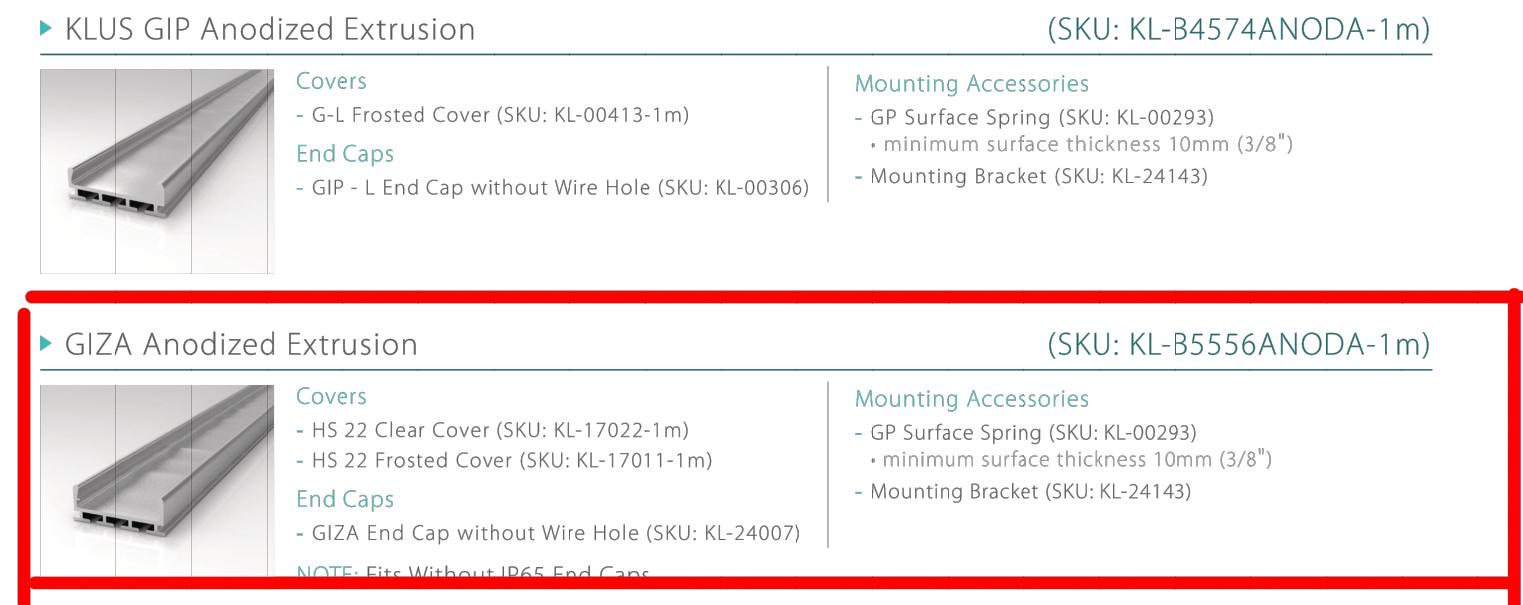

Weatherproof Color Changing RGB 150 Series • Product Datasheet



Safety And Disclosures

Fixture “CL”

1. Installation must be in accordance with local and national electrical code regulations.
2. To ensure safety and correct installation, our strips are intended to be installed by a qualified, licensed electrician.
3. Only install with a Class 2 DC Constant Voltage LED driver to meet UL requirements.
4. Do not install in environment where excessive heat may occur.
5. LED strip lights must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
6. Do not install indoor LED tape light products in outdoor / wet location environments. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
7. Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
8. Make sure the appropriate gauge wire is installed between driver, LEDs, and any dimmers. When choosing wire, calculate voltage drop, maximum amperage rating, and the location ratings on the wire. Improper wire selection and installation could overheat wires, and cause fire.
9. Do not modify product beyond instructions or warranty will be void.
10. We reserve the right to modify and improve the design of our fixtures without prior notice. Although we try our best to order the same colors every time, due to changes in technology and phosphors over time, we cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

Warranty Information

This product has a 5-year limited warranty that starts from the date of shipment. Products must be installed as instructed for warranty to be valid. This warranty does not include the additional accessories referenced in this data sheet. Complete warranty details for fixtures and additional accessories are available at <https://www.flexfireleds.com/returns-and-exchanges/> within the Policies section. For warranty related questions please contact our support team ([support@flexfireleds.com](mailto:support@flexfireleds.com)).

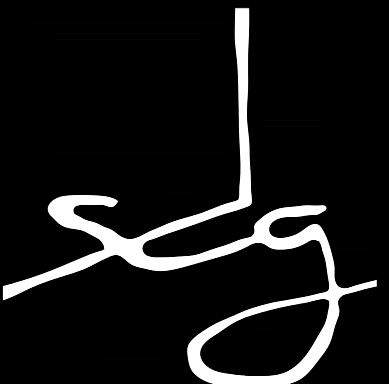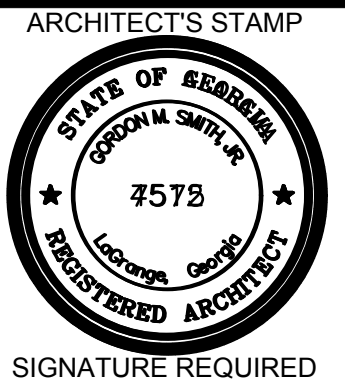

SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240

706-882-5511

REVISIONS

DATE	DESCRIPTION

PROJECT:

STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:

SITE LIGHTING DETAILS

MODIFIED DATE:

JOB NO:

20-22

ISSUED DATE:

SHEET:

FOR BID AND PERMIT  
09 NOV 2020

E-3



DBA

Project

Submitted By

DON BLACKBURN & ASSOC INC

Catalog Number

Notes

WA3

Type	Manufacturer/Brand	Catalog Number
WA3	ABL-Antique Street Lamps	RGPL D 32LED 700MA 4K ARF R3
WA3	ABL-Antique Street Lamps	PX NY20 12 F5 FG-S ANBK
WA3	ABL-Antique Street Lamps	RGPL D 32LED 700MA 4K ARF R3
WA3	ABL-Antique Street Lamps	PX NY20 12 F5 FG-S ANBK
WA3	ABL-Antique Street Lamps	RGPL D 32LED 700MA 4K ARF R3
WA3	ABL-Antique Street Lamps	PX NY20 12 F5 FG-S ANBK
WA3	ABL-Antique Street Lamps	RGPL D 32LED 700MA 4K ARF R3
WA3	ABL-Antique Street Lamps	PX NY20 12 F5 FG-S ANBK

Submit detailed shop drawing to architect for final approval of light fixtures prior to ordering

DBA

Project

Submitted By

DON BLACKBURN & ASSOC INC

Catalog Number

Notes

WA3

ANTIQUE STREET LAMPS

RG LED SERIES CLEAR TOP

CATALOG #

PROJECT

TYPE

This acorn styled luminaire consists of a decorative luminaire base with an integral globe holder/gear housing and an acorn shaped globe.

- Injection molded, refractive, clear acrylic or polycarbonate base with clear top
- Optional trim selection: Finales, Bands, Medallions
- Tool-less gear housing option
- Stainless steel hardware
- 9 Different styles of bases coordinate with this luminaire
- CSA listed and labeled as suitable for wet locations
- Powder coat finish
- 3" O.D. x 3" tall tenon required for mounting

Max EPA: 1.52 sq feet

Max Height: 44-1/2" (113.0cm)

Max Width: 15-1/8" (48.5cm)

Max Weight: 30 lbs (13.6 kg)

Listings: CSA listed for wet locations

Sample Catalog number as it might appear when ordering below:

Series	Decorative Base	LED/Driver	Color Temperature	Lens Options	Distribution Options	Voltage	Final Options	Arm Options
RGAL	A	AUP	32LED 525MA	3K	ARF	RVOLT	FFP	ARH
RGTL	D	E	32LED 700MA	4K	PRF	347	SMF	ARY
RGPL	K	M	32LED 700MA	5K	RF	480	SFF	ARU
	N	W					GF	ARV
	X						RF	
							SFF	
							SAF	
							RPF	
							AMF	
							PGF	

Ordering Guide:

Series	Decorative Base	LED/Driver	Color Temperature	Lens Options	Distribution Options	Voltage	Final Options	Arm Options
RGAL	A	AUP	32LED 525MA	3K	ARF	RVOLT	FFP	ARH
RGTL	D	E	32LED 700MA	4K	PRF	347	SMF	ARY
RGPL	K	M	32LED 700MA	5K	RF	480	SFF	ARU
	N	W					GF	ARV
	X						RF	
							SFF	
							SAF	
							RPF	
							AMF	
							PGF	

Med Options

MD3	MD12	BS1	BS71	BL41	PER1	SF	DBL
MD4	MD13	BS2	BS81	BL51	PER2	DF	DDB
MD5	MD14	BS3	BS11	BL61	PER3		DNA
MD6	MD15	BS4	BS12	BL71	PER4		DWH
MD7	MD16	BS5	BS13	BL81	PER5		CS
MD8	MD17	BS6	BS14	BL91	PER6		CM
MD9	MD18	BS7	BS15	BL101	PER7		ANBK
MD10	MD19	BS8	BS16	BL111	PER8		ANDB
MD11	MD20	BS9	BS17	BL121	PER9		ANDG
							ANVG

Historic / Progressive

RG LED SERIES

Antique Street Lamps™ | 3825 Columbus Road | Granville, OH 43023 | Phone: 1-800-410-8899 | www.antiquestreetlamps.com

©2013 Acuity Brands Lighting, Inc. All Rights Reserved.

DBA

Project

Submitted By

DON BLACKBURN & ASSOC INC

Catalog Number

Notes

WA3

SERIES

SELECT YOUR OPTIONS FROM

RGAL

RGTL

RGPL

DECORATIVE BASES

SELECT YOUR OPTIONS FROM

Mount to 3" O.D. x 3" tall tenon: 373

A

E

N

U

V

W

X

LED/DRIVER

SELECT YOUR OPTIONS FROM

32LED 525MA (Type V only)

32LED 700MA (Type V only)

COLOR TEMPERATURE

SELECT YOUR OPTIONS FROM

3K

4K

5K

Historic / Progressive

RG LED SERIES

Antique Street Lamps™ | 3825 Columbus Road | Granville, OH 43023 | Phone: 1-800-410-8899 | www.antiquestreetlamps.com

©2013 Acuity Brands Lighting, Inc. All Rights Reserved.

DBA

Project

Submitted By

DON BLACKBURN & ASSOC INC

Catalog Number

Notes

WA3

LENS OPTIONS

SELECT YOUR OPTIONS FROM

ARF

PRF

DISTRIBUTION OPTIONS

SELECT YOUR OPTIONS FROM

R3

R5

VOLTAGE

SELECT YOUR OPTIONS FROM

RVOLT

347

480

FINAL OPTIONS

SELECT YOUR OPTIONS FROM

FFP

SMF

SFF

PDF

GF

RF

FSF

SAF

RPF

AMF

PGF

ARM OPTIONS

SELECT YOUR OPTIONS FROM

ARH

ARY

ARU

ARV

Historic / Progressive

RG LED SERIES

Antique Street Lamps™ | 3825 Columbus Road | Granville, OH 43023 | Phone: 1-800-410-8899 | www.antiquestreetlamps.com

©2013 Acuity Brands Lighting, Inc. All Rights Reserved.

DBA

Project

Submitted By

DON BLACKBURN & ASSOC INC

Catalog Number

Notes

WA3

MED OPTIONS

SELECT YOUR OPTIONS FROM

MD3

MD4

MD5

MD6

MD7

MD8

MD9

MD10

MD11

MD12

MD13

MD14

MD15

MD16

MD17

MD18

MD19

BAND OPTIONS

SELECT YOUR OPTIONS FROM

BS1

BS2

BS3

BS4

BS5

BS6

BS7

BS8

BS9

BS10

BS11

BS12

BS13

BS14

BS15

BS16

BS17

BS18

BS19

BS20

BS21

BS22

BS23

BS24

BS25

BS26

BS27

BS28

BS29

BS30

BS31

BS32

BS33

BS34

BS35

BS36

BS37

BS38

BS39

BS40

BS41

BS42

BS43

BS44

BS45

BS46

BS47

BS48

BS49

BS50

BS51

BS52

BS53

BS54

BS55

BS56

BS57

BS58

BS59

BS60

BS61

BS62

BS63

BS64

BS65

BS66

BS67

BS68

BS69

BS70

BS71

BS72

BS73

BS74

BS75

BS76

BS77

BS78

BS79

BS80

BS81

BS82

BS83

BS84

BS85

BS86

BS87

BS88

BS89

BS90

BS91

BS92

BS93

BS94

BS95

BS96

BS97

BS98

BS99

BS100

BS101

BS102

BS103

BS104

BS105

BS106

BS107

BS108

BS109

BS110

BS111

BS112

BS113

BS114

BS115

BS116

BS117

BS118

BS119

BS120

BS121

BS122

BS123

BS124

BS125

BS126

BS127

BS128

BS129

BS130

BS131

BS132

BS133

BS134

BS135

BS136

BS137

BS138

BS139

BS140

BS141

BS142

BS143

BS144

BS145

BS146

BS147

BS148

BS149

BS150

BS151

BS152

BS153

BS154

BS155

BS156

BS157

BS158

BS159

BS160

BS161

BS162

BS163

BS164

BS165

BS166

BS167

BS168

BS169

BS170

BS171

BS172

BS173

BS174

BS175

BS176

BS177

BS178

BS179

BS180

BS181

BS182

BS183

BS184

BS185

BS186

BS187

BS188

BS189

BS190

BS191

BS192

BS193

BS194

BS195

BS196

BS197

BS198

BS199

BS200

BS201

BS202

BS203

BS204

BS205

BS206

BS207

BS208

BS209

BS210

BS211

BS212

BS213

BS214

BS215

BS216

BS217

BS218

BS219

BS220

BS221

BS222

BS223

BS224

BS225

BS226

BS227

BS228

BS229

BS230

BS231

BS232

BS233

BS234

BS235

BS236

BS237

BS238

BS239

BS240

BS241

BS242

BS243

BS244

BS245

BS246

BS247

BS248

BS249

BS250

BS251

BS252

BS253

BS254

BS255

BS256

BS257

BS258

BS259

BS260

BS261

BS262

BS263

BS264

BS265

BS266

BS267

BS268

BS269

BS270

BS271

BS272

BS273

BS274

BS275

BS276

BS277

BS278

BS279

BS280

BS281

BS282

BS283

BS284

BS285

BS286

BS287

BS288

BS289

BS290

BS291

BS292

BS293

BS294

BS295

BS296

BS297

BS298

BS299

BS300

BS301

BS302

BS303

BS304

BS305

BS306

BS307

BS308

BS309

BS310

BS311

BS312

BS313

BS314

BS315

BS316

BS317

BS318

BS319

BS320

BS321

BS322

BS323

BS324

BS325

BS326

BS327

BS328

BS329

BS330

BS331

BS332

BS333

BS334

BS335

BS336

BS337

BS338

BS339

BS340

BS341

BS342

BS343

BS344

BS345

BS346

BS347

BS348

BS349

BS350

BS351

BS352

BS353

BS354

BS355

BS356

BS357

BS358

BS359

BS360

BS361

BS362

BS363

BS364

BS365

BS366

BS367

BS368

BS369

BS370

BS371

BS372

BS373

BS374

BS375

BS376

BS377

BS378

BS379

BS380

BS381

BS382

BS383

BS384

BS385

BS386

BS387

BS388

BS389

BS390

BS391

BS392

BS393

BS394

BS395

BS396

BS397

BS398

BS399

BS400

BS401

BS402

BS403

BS404

BS405

BS406

BS407

BS408

BS409

BS410

BS411

BS412

BS413

BS414

BS415

BS416

BS417

BS418

BS419

BS420

BS421

BS422

BS423

BS424

BS425

BS426

BS427

BS428

BS429

BS430

BS431

BS432

BS433

BS434

BS435

BS436

BS437

BS438

BS439

BS440

BS441

BS442

BS443

BS444

BS445

BS446

BS447

BS448

BS449

BS450

BS451

BS452

BS453

BS454

BS455

BS456

BS457

BS458

BS459

BS460

BS461

BS462

BS463

BS464

BS465

BS466

BS467

BS468

BS469

BS470

BS471

BS472

BS473

BS474

BS475

BS476

BS477

BS478

BS479

BS480

BS481

BS482

BS483

BS484

BS485

BS486

BS487

BS488

BS489

BS490

BS491

BS492

BS493

BS494

BS495

BS496

BS497

BS498

BS499

BS500

BS501

BS502

BS503

BS504

BS505

BS506

BS507

BS508

BS509

BS510

BS511

BS512

BS513

BS514

BS515

BS516

BS517

BS518

BS519

BS520

BS521

BS522

BS523

BS524

BS525

BS526

BS527

BS528

BS529

BS530

BS531

BS532

BS533

BS534

BS535

BS536

BS537

BS538

BS539

BS540

BS541

BS542

BS543

BS544

BS545

BS546

BS547

BS548

BS549

BS550

BS551

BS552

BS553

BS554

BS555

BS556

BS557

BS558

BS559

BS560

BS561

BS562

BS563

BS564

BS565

BS566

BS567

BS568

BS569

BS570

BS571

BS572

BS573

BS574

BS575

BS576

BS577

BS578

BS579

BS580

BS581

BS582

BS583

BS584

BS585

BS586

BS587

BS588

BS589

BS590

BS591

BS592

BS593

BS594

BS595

BS596

BS597

BS598

BS599

BS600

BS601

BS602

BS603

BS604

BS605

BS606

BS607

BS608

BS609

BS610

BS611

BS612

BS613

BS614

BS615

BS616

BS617

BS618

BS619

BS620

BS621

BS622

BS623

BS624

BS625

BS626

BS627

BS628

BS629

BS630

BS631

BS632

BS633

BS634

BS635

BS636

BS637

BS638

BS639

BS640

BS641

BS642

BS643

BS644

BS645

BS646

BS647

BS648

BS649

BS650

BS651

BS652

BS653

BS654

BS655

BS656

BS657

BS658

BS659

BS660

BS661

BS662

BS663

BS664

BS665

BS666

BS667

BS668

BS669

BS670

BS671

BS672

BS673

BS674

BS675

BS676

BS677

BS678

BS679

BS680

BS681

BS682

BS683

BS684

BS685

BS686

BS687

BS688

BS689

BS690

BS691

BS692

BS693

BS694

BS695

BS696

BS697

BS698

BS699

BS700

BS701

BS702

BS703

BS704

BS705

BS706

BS707

BS708

BS709

BS710

BS711

BS712

BS713

BS714

BS715

BS716

BS717

BS718

BS719

BS720

BS721

BS722

BS723

BS724

BS725

BS726

BS727

BS728

BS729

BS730

BS731

BS732

BS733

BS734

BS735

BS736

BS737

BS738

BS739

BS740

BS741

BS742

BS743

BS744

BS745

BS746

BS747

BS748

BS749

BS750

BS751

BS752

BS753

BS754

BS755

BS756

BS757

BS758

BS759

BS760

BS761

BS762

BS763

BS764

BS765

BS766

BS767

BS768

BS769

BS770

BS771

BS772

BS773

BS774

BS775

BS776

BS777

BS778

BS779

BS780

BS781

BS782

BS783

BS784

BS785

BS786

BS787

BS788

BS789

BS790

BS791

BS792

BS793

BS794

BS795

BS796

BS797

BS798

BS799

BS800

BS801

BS802

BS803

BS804

BS805

BS806

BS807

BS808

BS809

BS810

BS811

BS812

BS813

BS814

BS815

BS816

BS817

BS818

BS819

BS820

BS821

BS822

BS823

BS824

BS825

BS826

BS827

BS828

BS829

BS830

BS831

BS832

BS833

BS834

BS835

BS836

BS837

BS838

BS839

BS840

BS841

BS842

BS843

BS844

BS845

BS846

BS847

BS848

BS849

BS850

BS851

BS852

BS853

BS854

BS855

BS856

BS857

BS858

BS859

BS860

BS861

BS862

BS863

BS864

BS865

BS866

BS867

BS868

BS869

BS870

BS871

BS872

BS873

BS874

BS875

BS876

BS877

BS878

BS879

BS880

BS881

BS882

BS883

BS884

BS885

BS886

BS887

BS888

BS889

BS890

BS891

BS892

BS893

BS894

BS895

BS896

BS897

BS898

BS899

BS900

BS901

BS902

BS903

BS904

BS905

BS906

BS907

BS908

BS909

BS910

BS911

BS912

BS913

BS914

BS915

BS916

BS917

BS918

BS919

BS920

BS921

BS922

BS923

BS924

BS925

BS926

BS927

BS928

BS929

BS930

BS931

BS932

BS933

BS934

BS935

BS936

BS937

BS938

BS939

BS940

BS941

BS942

BS943

BS944

BS945

BS946

BS947

BS948

BS949

BS950



**NOTE:**  
PROVIDE 110V WEATHERPROOF OUTLET  
AT THE BASE OF ALL (4) POSTS

PA-64

## FEATURES & SPECIFICATIONS

### INTENDED USE

The DUBL LED Bullet Floodlight is a long-lasting energy-efficient landscape flood light. Available with spot or flood optics making it ideal for many commercial and residential outdoor applications such as lighting of landscapes, building details and flag poles.

The image displays two views of the LED Bullet Flood Light. The top view is a front-facing perspective showing the lens, mounting bracket, and base. The bottom view is a side profile showing the height and mounting arm. Dimensions are provided in inches (in.) and millimeters (mm).

View	Dimension	Value (in.)	Value (mm)
Front View	Top Mounting Arm	3-1/16	(76.2)
	Top Mounting Arm	5-1/4	(133)
	Top Mounting Arm	8-3/8	(213)
Side View	Top Mounting Arm	3-1/16	(76.2)
	Top Mounting Arm	5-1/4	(133)
	Top Mounting Arm	8-3/8	(213)

ORDERING INFORMATION		For shortest lead times, configure product using <b>bolded options</b> .			Example: OLBf 8 30K DDB	
Series	8	Light engine	Color temperature (CCT)	Voltage	DDB	
OLBf OLBS	5x4 flood optics 2x2 spot optics	<b>8</b>	<b>30K</b> 3000K <b>50K</b> 5000K	( <b>blank</b> ) MVOLT	<b>DDB</b>	Dark bronze

DECORATIVE INDOOR & OUTDOOR OLB LED

ARCHITECT'S STAMP

STATE OF GEORGIA  
 GEORGE SMITH  
 4573  
 License Georgia  
 REGISTERED ARCHITECT

SIGNATURE REQUIRED

JSG

SMITH DESIGN GROUP, INC.

206 WEST HARALSON STREET  
 LAGRANGE, GEORGIA 30240

706-882-5511

--






[illegible]

PROJECT:

STREETSCAPE  
ENHANCEMENTS  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY

RIDLEY AVENUE  
LAGRANGE, GEORGIA




TITLE:  SITE LIGHTING DETAILS	
MODIFIED DATE:	JOB NO:  20-22
ISSUED DATE:  FOR BID AND PERMIT 09 NOV 2020	SHEET:  E-5
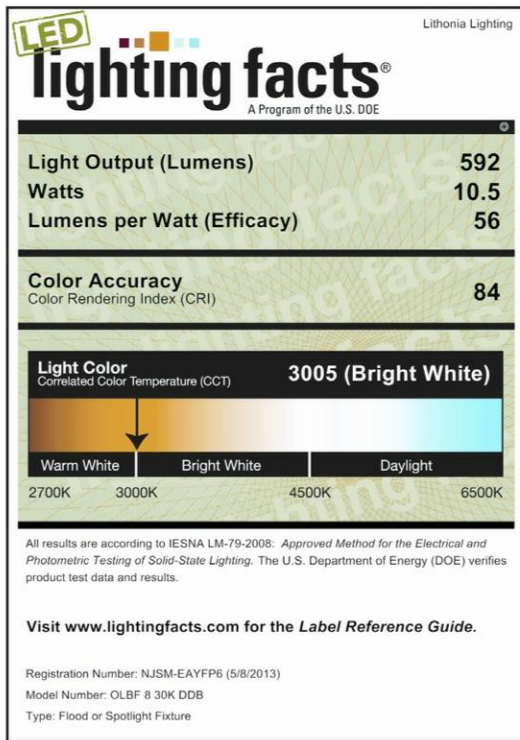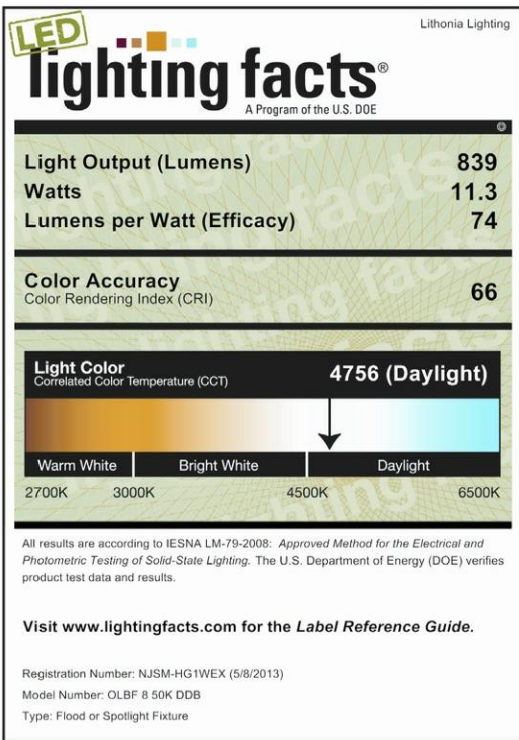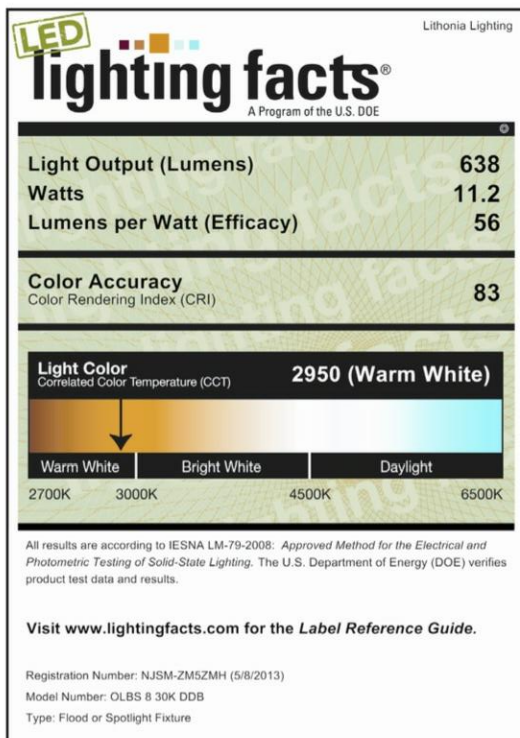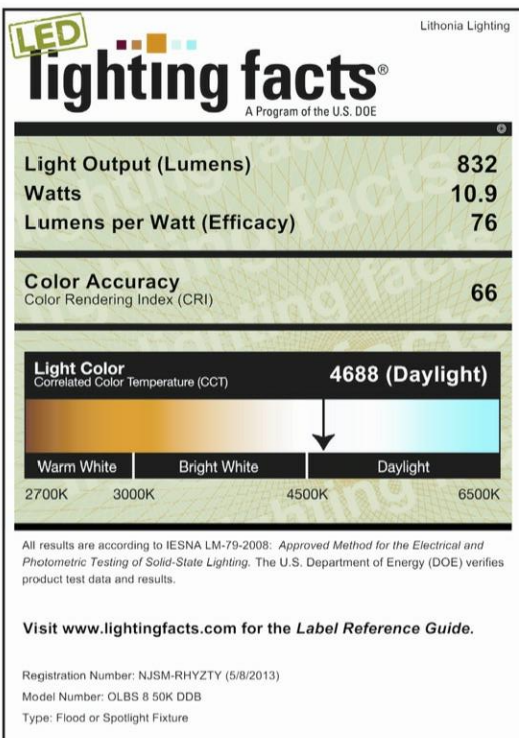
<b>OLB LED Bullet Flood Light</b>		
<b>LIGHTING FACTS</b>		
To see complete photometric reports or download .IES files for this product, visit <a href="http://www.lithoniaighting.com">www.lithoniaighting.com</a> . Actual wattage may differ by +/- 8% when operating at 220V or 277V +/- 10%.		
<b>OLBF 830K DDB</b>	<b>OLBF 850K DDB</b>	
<div>  <p><b>Lighting facts®</b> A Program of the U.S. DOE</p> <p><b>Light Output (Lumens)</b> 592  <b>Watts</b> 10.5  <b>Lumens per Watt (Efficacy)</b> 56</p> <p><b>Color Accuracy</b> Color Rendering Index (CRI) 84</p> <p><b>Light Color</b> Correlated Color Temperature (CCT) 3005 (Bright White)</p> <p>Warm White      Bright White      Daylight</p> <p>2700K      3000K      4000K      6500K</p> <p><small>All results are according to IESNA LM-79-2009. Approved Method for the Electrical and Photometric Testing of Solid State Lighting. The U.S. Department of Energy (DOE) releases product test data and results.</small></p> <p>Visit <a href="http://www.lightingfacts.com">www.lightingfacts.com</a> for the Label Reference Guide.</p> <p>Registration Number: NLSM-243776 (5/8/2013)  Model Number: OLBF 83K DDB  Type: Flood or Spotlight Fixture</p> </div>	<div>  <p><b>Lighting facts®</b> A Program of the U.S. DOE</p> <p><b>Light Output (Lumens)</b> 839  <b>Watts</b> 11.3  <b>Lumens per Watt (Efficacy)</b> 74</p> <p><b>Color Accuracy</b> Color Rendering Index (CRI) 86</p> <p><b>Light Color</b> Correlated Color Temperature (CCT) 4756 (Daylight)</p> <p>Warm White      Bright White      Daylight</p> <p>2700K      3000K      4000K      6500K</p> <p><small>All results are according to IESNA LM-79-2009. Approved Method for the Electrical and Photometric Testing of Solid State Lighting. The U.S. Department of Energy (DOE) releases product test data and results.</small></p> <p>Visit <a href="http://www.lightingfacts.com">www.lightingfacts.com</a> for the Label Reference Guide.</p> <p>Registration Number: NLSM-HC17REX (5/8/2013)  Model Number: OLBF 85K DDB  Type: Flood or Spotlight Fixture</p> </div>	
<b>OLBS 830K DDB</b>	<b>OLBS 850K DDB</b>	
<div>  <p><b>Lighting facts®</b> A Program of the U.S. DOE</p> <p><b>Light Output (Lumens)</b> 638  <b>Watts</b> 11.2  <b>Lumens per Watt (Efficacy)</b> 56</p> <p><b>Color Accuracy</b> Color Rendering Index (CRI) 83</p> <p><b>Light Color</b> Correlated Color Temperature (CCT) 2950 (Warm White)</p> <p>Warm White      Bright White      Daylight</p> <p>2700K      3000K      4000K      6500K</p> <p><small>All results are according to IESNA LM-79-2009. Approved Method for the Electrical and Photometric Testing of Solid State Lighting. The U.S. Department of Energy (DOE) releases product test data and results.</small></p> <p>Visit <a href="http://www.lightingfacts.com">www.lightingfacts.com</a> for the Label Reference Guide.</p> <p>Registration Number: NLSM-250260 (5/8/2013)  Model Number: OLBS 83K DDB  Type: Flood or Spotlight Fixture</p> </div>	<div>  <p><b>Lighting facts®</b> A Program of the U.S. DOE</p> <p><b>Light Output (Lumens)</b> 832  <b>Watts</b> 10.9  <b>Lumens per Watt (Efficacy)</b> 76</p> <p><b>Color Accuracy</b> Color Rendering Index (CRI) 86</p> <p><b>Light Color</b> Correlated Color Temperature (CCT) 4688 (Daylight)</p> <p>Warm White      Bright White      Daylight</p> <p>2700K      3000K      4000K      6500K</p> <p><small>All results are according to IESNA LM-79-2009. Approved Method for the Electrical and Photometric Testing of Solid State Lighting. The U.S. Department of Energy (DOE) releases product test data and results.</small></p> <p>Visit <a href="http://www.lightingfacts.com">www.lightingfacts.com</a> for the Label Reference Guide.</p> <p>Registration Number: NLSM-RE177V (5/8/2013)  Model Number: OLBS 85K DDB  Type: Flood or Spotlight Fixture</p> </div>	
		
DEGRADATIVE INDOOR & OUTDOOR. One Lithonia Way, Cary, GA 30013 Phone: 800-748-5070 Fax: 770-860-3963 <a href="http://www.lithonia.com">www.lithonia.com</a> © 2013 2014 Acuity Brands Lighting, Inc. All rights reserved. Rev. 07/15/14		

 **LITHONIA LIGHTING®**  
An Acuity Brands Company

DECORATIVE INDOOR & OUTDOOR: One Lithonia Way, Conyers, GA 30012 Phone: 800-748-3070 Fax: 770-863-3803 [www.lithonia.com](http://www.lithonia.com) © 2013-2014 Acuity Brands Lighting, Inc. All rights reserved. Rev. 07/31/14



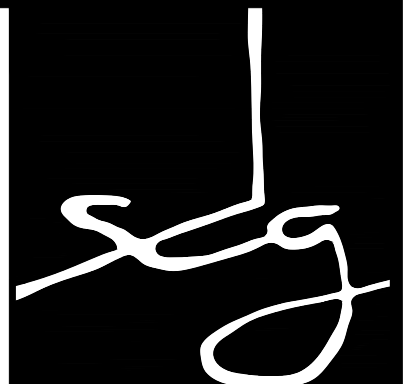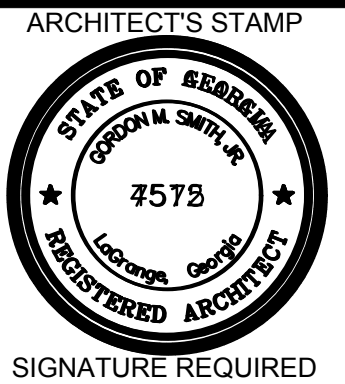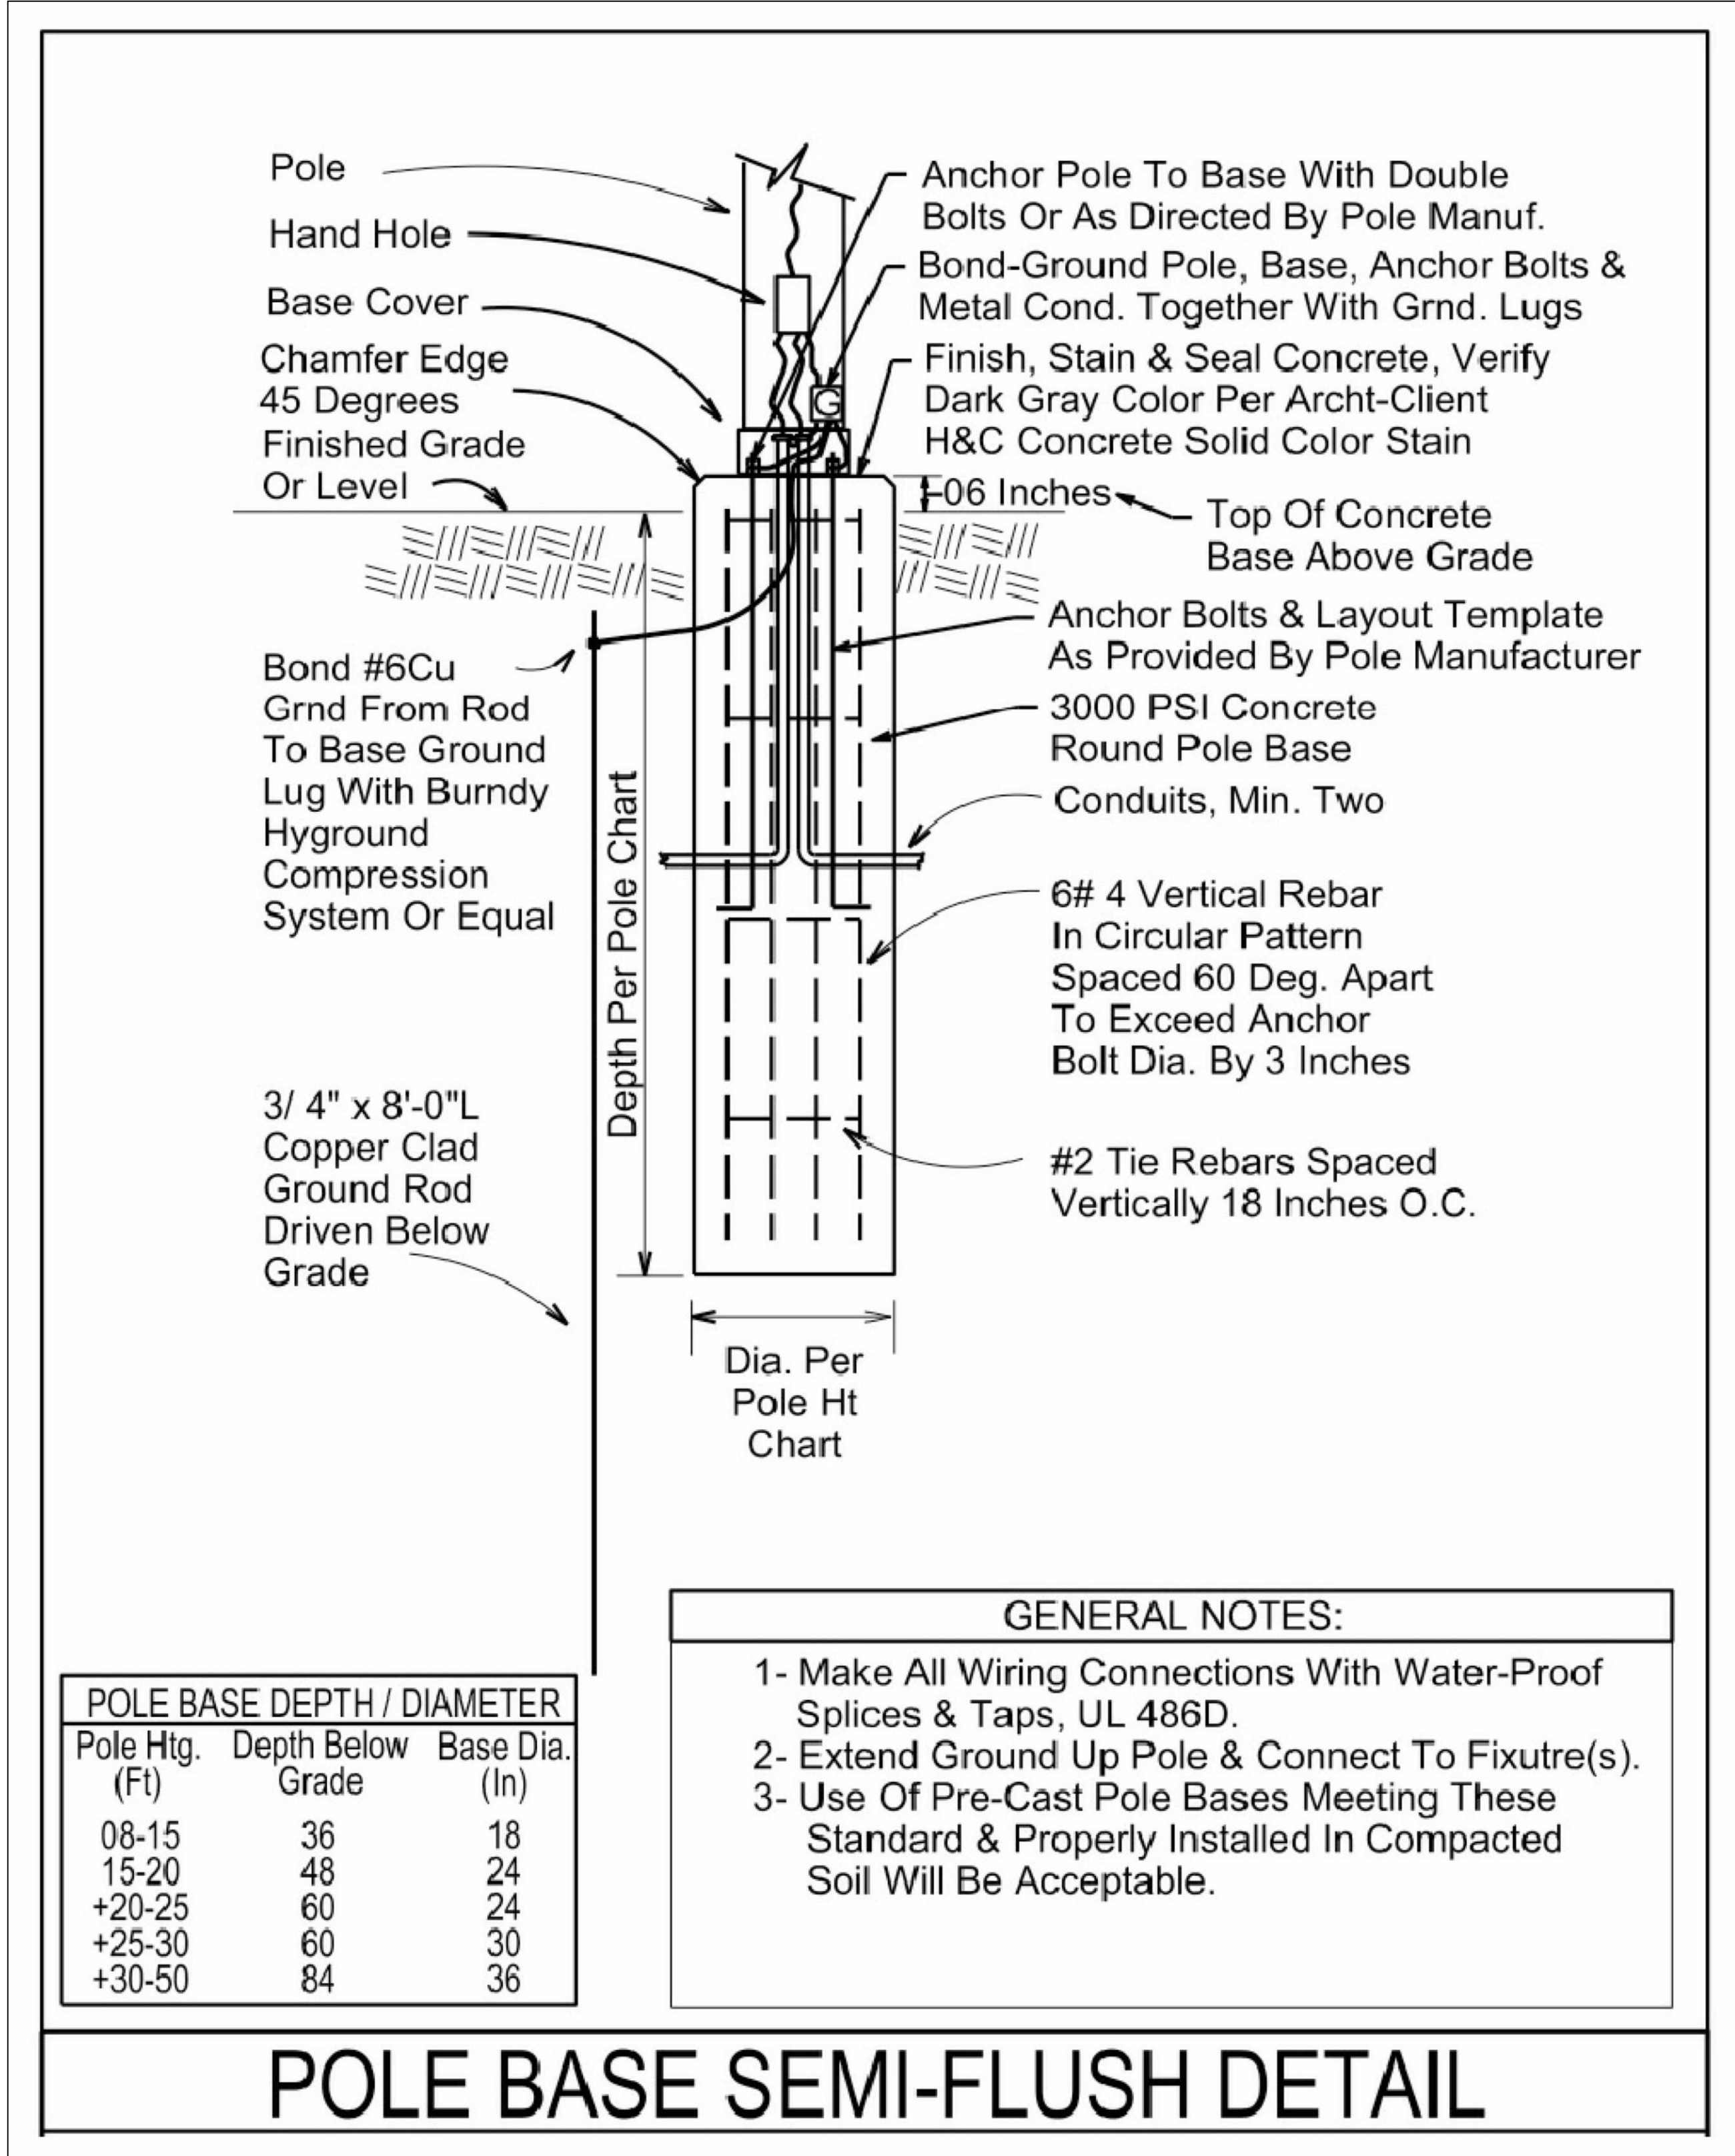

SMITH DESIGN GROUP, INC.  
206 WEST HARALSON STREET  
LAGRANGE, GEORGIA 30240  
706-882-5511

REVISIONS		
Δ	DATE	DESCRIPTION

PROJECT:  
**STREETSCAPE  
ENHANCEMENTS**  
NORTHEAST CORNER OF  
LAFAYETTE SQUARE  
FORMER DAVIS PHARMACY  
  
RIDLEY AVENUE  
LAGRANGE, GEORGIA

TITLE:  
  
**SITE LIGHTING DETAILS**

MODIFIED DATE:	JOB NO: <b>20-22</b>
ISSUED DATE: FOR BID AND PERMIT 09 NOV 2020	SHEET: <b>E-6</b>