





- 1 ALL DIMENSIONS ARE FROM COLUMN REFERENCE LINE TO FACE OF PARTITION, UNLESS NOTED OTHERWISE. 2 REFER TO CODE DRAWINGS (G0 SERIES) FOR LOCATIONS AND EXTENTS OF FIRE RATED ASSEMBLIES. IF PARTITION DISCREPENCY OCCURS BETWEEN CODE PLANS AND FLOOR PLANS, PROVIDE THE PARTITION TYPE INDICATED
- WITH THE MOST STRINGENT REQUIREMENTS.
- 3 REFER TO DRAWING G021 FOR TYPICAL MOUNTING 4 REFER TO DRAWING A421 FOR ALL INTERIOR PARTITION
- 5 ALL MASONARY PARTITIONS ARE TYPE "K8" UNLESS
- NOTED OTHERWISE. 6 ALL GYPSUM PARTITIONS ARE TYPE "C3" UNLESS NOTED
- 7 ALL HOUSE KEEPING PADS INDICATED ARE FOR REFERENCE ONLY, COORDINATE ACTUAL SIZE AND LOCATION WITH APPROVED MECHANICAL AND PLUMBING
- SHOP DRAWINGS. 8 FIRST FLOOR REFERENCE ELEVATION 100'-0" = 902.00' DATUM ON CIVIL DRAWINGS.
- 9 PROVIDE STAINLESS STEEL CORNER GUARDS AT ALL GYP.BD. OUTSIDE CORNERS AT FLOOR LEVEL 10 PROVIDE FIRE RATED CONSTRUCTION AROUND ALL SHAFT ENCLOSURES.

BOARD LEGEND





ROOF PLAN GENERAL NOTES

- 1 REFER TO MEP DRAWINGS FOR ROOF TOP EQUIPMENT NOT SHOWN. MEP EQUIPMENT DEPICTED ON THIS DRAWING IS FOR GENERAL ARCHITECTURAL INFORMATION ONLY. REFER TO MEP DRAWINGS FOR ADDITIONAL REQUIREMENTS AND COORDINATION. REFER TO STRUCTURAL DOCUMENTS FOR EQUIPMENT SUPPORTS.
- 2 PROVIDE WALKWAY PADS AT PIPE SUPPORT LOCATIONS. REFER TO MEP DRAWINGS FOR PIPE SUPPORT LOCATIONS AND TYPE. PAD SHALL BE MINIMUM 2" WIDER THAN SUPPORT IN ALL 3 PROVIDE MANUFACTURER STANDARD WALKWAY
- MECHANICAL EQUIPMENT, WITH 2" SEPARATIONS BETWEEN PADS - REFER TO MEP DRAWINGS FOR NUMBER AND LOCATION OF ROOF TOP MECHANICAL EQUIPMENT. PROVIDE MFR STANDARD WALKWAY PADS AT TOP AND BOTTOM OF ALL ACCESS LADDERS.
- WALLS, CURBS, AND OTHER PROJECTIONS TO FACILITATE PROPER FLASHING. 5 PROVIDE TWO WAY TAPERED INSULATION CRICKETS AT HIGH SIDE OF ALL ROOF CURBS WIDER THAN 4'-0".
- 6 REFER TO DRAWING A341 FOR ROOF ASSEMBLY TYPES AND FLASHING PROFILES.
- 7 REFER TO DRAWING A115B FOR TYPICAL ROOF

+++++++++ +++++++++ ++++++++ +++++++++

TAPERED INSULATION



SLOPE DIRECTION CREATED BY STRUCTURE SLOPE DIRECTION CREATED BY TAPERED



ROOF DRAIN (RD)

ROOF MEMBRANE WALKWAY PAD

CONSTRUCTION KEYNOTES

1 ALUM. DISPLAY CASE SYSTEM

- 2 WALL MOUNTED BARRIER FREE AUTOMATIC DOOR OPENER ACTUATOR SWITCH
- 4 ELECTRIC WATER COOLER WITH BOTTLE FILL STATION, RE: PLUMBING DRAWINGS 5 OWNER PROVIDED, CONTRACTOR INSTALLED ARCHERY
- CURTAIN AND TRACK 6 OPERABLE WALL PARTITION AND TRACK 7 WALL MOUNTED RECESSED KNOX BOX 8 ROOF ACCESS LADDER, RE: DETAILS ON A357
- 9 TOP ROLLING GYM DIVIDER CURTAIN 10 CEILING SUPPORTED FOLDING BASKETBALL BACKSTOP, 11 TELESCOPING BLEACHER SYSTEM
- 12 CORRIDOR METAL LOCKERS, RE: INTERIOR ELEVATIONS FOR TYPE AND CONFIGURATION 13 CONFIRM ELEVATOR ROUGH OPENING REQUIREMENTS WITH APPROVED ELEVATOR SHOP DRAWINGS
- 15 6" DIA. CONC. FILLED STEEL BOLLARD 16 4" HIGH CONC. HOUSE KEEPING PAD TYP. 6" HIGH CONC HOUSE KEEPING PAD AT AHU'S, RE: STRUCTURAL AND
- MECHANICAL DRAWINGS 17 4" HIGH CONC. CURB AROUND PERIMETER OF SPACE AND ALL FLOOR PENETRATIONS.
- DETAILS ON A357 19 PRE-FINISHED METAL GATE WITH LATCHING HARDWARE 20 WRESTLING MAT HOIST
- 21 PROVIDE 20'x20' NEOPRENE MEMBRANE OVER ROOF MEMBRANE AT KITCHEN EXHAUST HOODS, ADHERE AND FLASH NEOPRENE TO ROOF MEMBRANE PER ROOF MANUF RECOMENDATIONS.
- 22 LOCKER ADA BENCH WALL MOUNTED; 20" MIN. DEPTH 23 LOCKER ROOM FREESTANDING BENCH
- 24 STOP MASONRY AT FIRST FULL COURSE BELOW JOISTS. FINISH WALL WITH DRYWALL TO DECK. MAINTAIN ANY
- ACOUSTICAL, FIRE, AND SMOKE RATINGS AS REQUIRED.



2338 COOLIDGE BERKLEY, MICHIGAN 48072 P 248.336.4700 F 248.336.4701

PORTAGE PUBLIC

SCHOOLS

Final Plans for Bidding and Construction




NORTH MIDDLE SCHOOL PORTAGE, MICHIGAN


UNLESS NOTED OTHERWISE

)		
	DRAWN:	Author
	CHECKED:	Checker
	SCALE:	As indicated

ISSUE:

2017.03.24	CONSTRUCTION
2017.06.12	PR 01
2017.08.11	PR 03
2018.06.14	PR 11
2018.10.16	PR 13
2018.12.07	PR 15
2019.04.05	PR 17

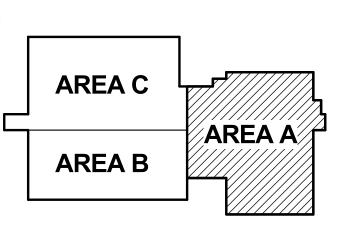



KEY PLAN (NTS) SHEET TITLE: SECOND LEVEL FLOOR PLAN - AREA A