



PLAN VIEW

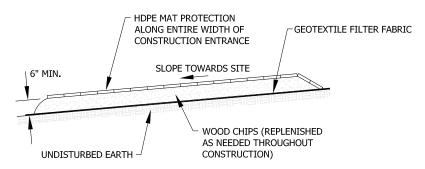

SECTION A-A'

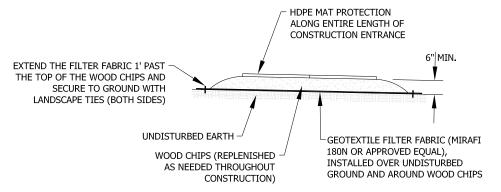

SECTION B-B'

NOTES:

- 1. CONTRACTOR SHALL SEQUENCE CONSTRUCTION SUCH THAT EQUIPMENT WILL NOT IMPACT AREAS PRIOR TO PLACEMENT OF MULCH.
- 2. CONTRACTOR SHALL MAINTAIN WOOD CHIP MAT THROUGHOUT CONSTRUCTION.
- 3. CONTRACTOR SHALL LAY ALTURNAMATS OR APPROVED EQUAL OVER WOOD CHIP MAT TO PROVIDE GROUND COVER PROTECTION ALONG THE LENGTH OF THE CONSTRUCTION ENTRANCE TO PROVIDE IMPACT PROTECTION AND WEIGHT DISTRIBUTION.
- WOOD CHIPS SHALL BE DISPOSED OF OFF-SITE UNLESS OTHERWISE APPROVED.
- 5. FILTER FABRIC SHALL BE A SINGLE PIECE ACROSS WIDTH. OVERLAP FABRIC BY 18" MIN. ALONG LENGTH OF ROUTE.

MULCH AND MAT CONSTRUCTION ENTRANCE

N.T.S.