

ATTACHMENT ONE

Robertson County

Local Road Name

Termini From

Type of Work

Project Length 2.97 mi.


Project No.

Old Washington Road

Kinneys Road

To Flewellyn Road

(BPMB-HM) Resurface

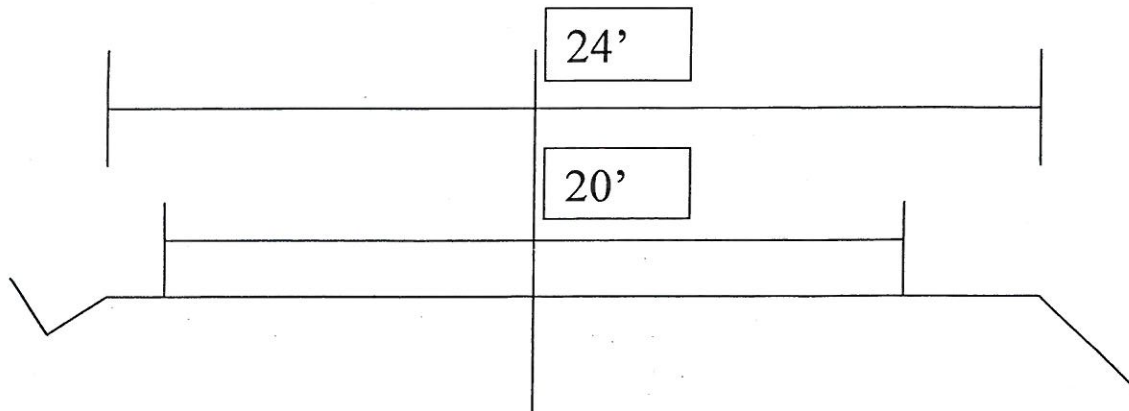

PROPOSED PAVEMENT SCHEDULE

Tack Coat: SS-1 @ 0.05 gal/sq. yd.

Leveling: LM 0.000 to LM 1.718 and LM 2.497 to LM 2.970
 $\frac{3}{4}$ " (Approx. 82.5 lbs. /sq. yd.) BPMB-HM Grade "CW"

Surface: LM 0.000 to LM 1.718 and LM 2.497 to LM 2.970
 $1\frac{1}{4}$ " (Approx. 137.5 lbs. /sq. yd.) BPMB-HM Grade "CW"
 LM 1.773 to LM 2.497
 $1\frac{1}{2}$ " (Approx. 165.0 lbs. /sq. yd.) BPMB-HM Grade "CW"

Shoulders: 303-01 Min. Aggr. Type "A" Base Grade "D"

Striping: Painted Pavement Marking (Centerline and Edgeline)

