

# Neese Road Water Tower Drainage Improvements

**PW – 21 456**

## **Introduction**

The City of Woodstock Georgia, herein referred to as the City, is accepting bids from qualified contractors for the purpose of installing stormwater infrastructure at the Neese Rd Water Tower site to address runoff issues affecting the area.

**Scope of Work:** Goods and services shall meet or exceed the following guidelines:

- Remove existing headwall and tie in 4" & 6" PVC Pipes and Install storm sewer manhole TP 1 GA STD 1011A.
- Install 150 linear feet of 18" HDPE storm drain
- Tie pipe into existing pedestal style inlet in the Evelyn Farms neighborhood.
- Any concrete or asphalt removed by pipe trench to be capped with 6" of gravel. Cost to be included in lump sum price of project.
- Any fence or curbing removed or damaged shall be replaced with the same material, and styling.
- Contractor to grass seed and mulch any disturbed grass areas. Cost included in lump sum price of project.


## **DELIVERY**

30 Days



# Neese Road Water Tower Drainage Improvements

PW-21 456

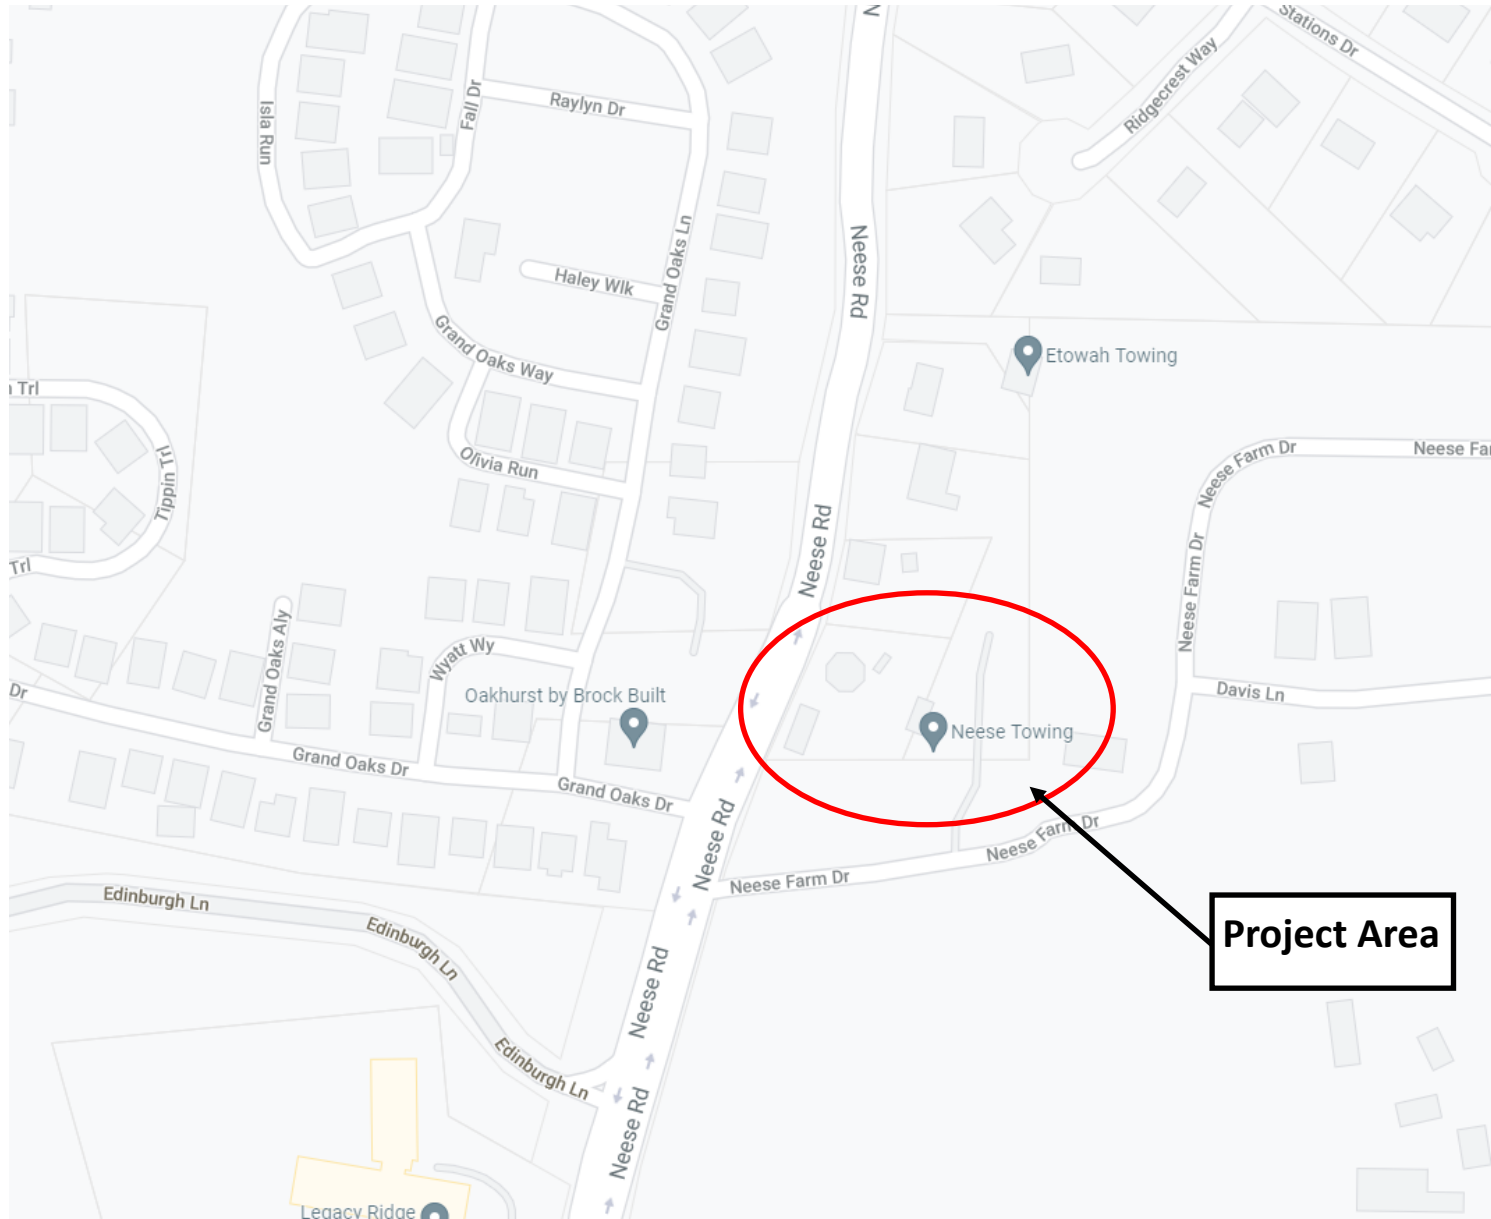






# Neese Road Water Tower Drainage Improvements

PW-21 456

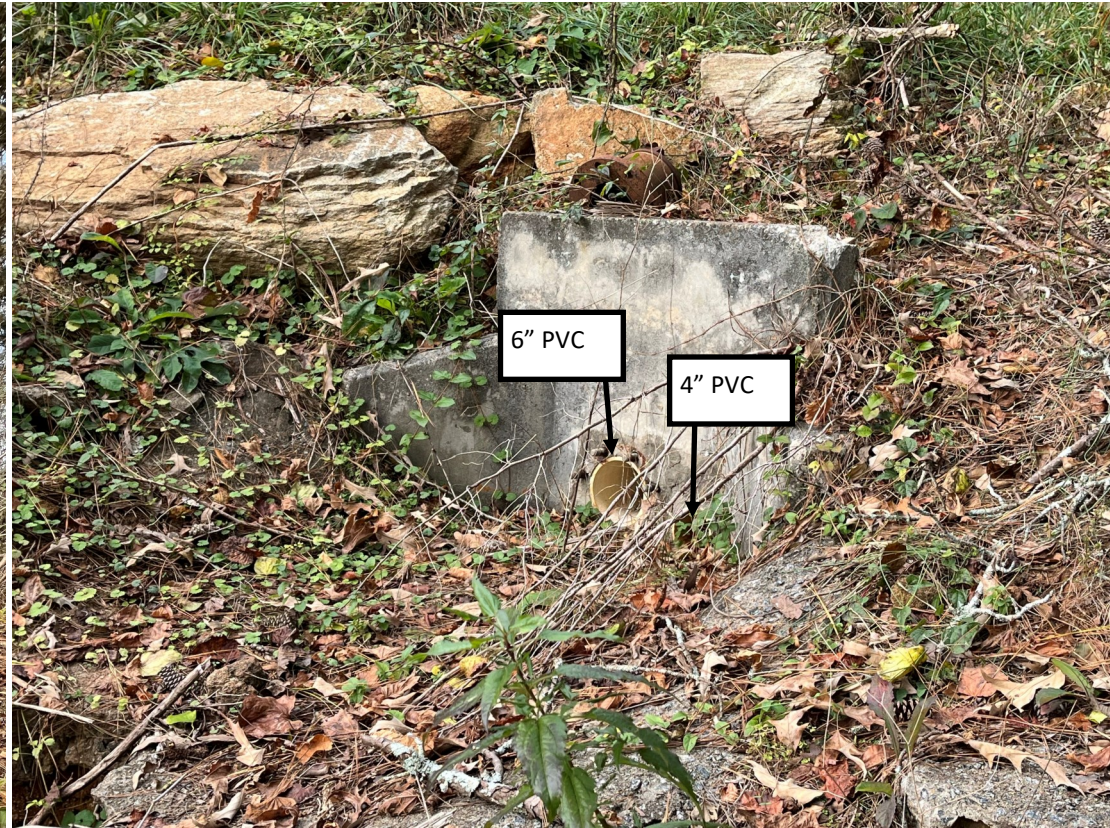

- Headwall pictured above, to be removed and replaced with a manhole GA STD 1011A
- 6" & 4" PVC Pipes will tie into new piping



# Neese Road Water Tower Drainage Improvements

PW-21 456



Tie in will occur at the second Pedestal Inlet