NOTES

1. AT PLANTING PRUNE ONLY CROSSING LIMBS, BROKEN OR DEAD BRANCHES, AND ANY BRANCHES THAT POSE A HAZARD TO PEDESTRIANS per ANSI STANDARD A300. DO NOT PRUNE INTO OLD WOOD ON EVERGREENS.

2. CONTRACTOR SHALL MAXIMIZE EXCAVATED AREA FOR TREE PIT WITHOUT ADVERSELY IMPACTING ADJACENT SITE FEATURES.

3. UNLESS OTHERWISE DIRECTED BY ARLINGTON COUNTY URBAN FORESTER, BACKFILL SOIL MIXTURE WILL BE 3/4 EXISTING SOIL CLEANED OF DEBRIS (GRAVEL, ROCKS, STICKS, TRASH, ETC.) AND MIXED WITH 1/4 ORGANIC MATERIAL (COMPOSTED BARK, LEAF MOLD, OR OTHER PLANT DEBRIS PROCESSED TO A POINT OF DECAY AND APPROVED BY THE URBAN FORESTER; PEAT MOSS SHALL NOT BE USED).

4. CONTRACTOR SHALL LEGALLY REMOVE EXCESS SOIL & DEBRIS FROM SITE.

5. TREES PLANTED WITHOUT THE TRUNK FLARE VISIBLE WILL BE REJECTED.

6. TREES MAY ONLY BE STAKED IF REQUIRED BY THE COUNTY URBAN FORESTER. REFER TO STAKING DETAILS.

ALL PLANTS MUST BE WATERED TWICE: ONCE AT INSTALLATION AND AGAIN WITHIN 48-HOURS OF INSTALLATION, PER THE SPECIFICATIONS.

THIS DETAIL SUPERSEDES ALL OTHER TREE PLANTING DETAILS IN ARLINGTON COUNTY.



TREE PLANTING DETAIL

FOR OPEN PLANTING AREAS FREE OF PAVING OR GRATES

329300.1 (2021)

NOT TO SCALE

ARLINGTON VIRGINIA DPR

NOTES

1. AT PLANTING PRUNE ONLY BROKEN OR DEAD BRANCHES PER ANSI 300 STANDARD.

2. PLANTING PIT/TRENCH SHALL BE DUG DEEP ENOUGH TO ALLOW AT LEAST 1/8TH OF ROOT BALL TO SET ABOVE EXISTING GRADE.

3. SET PLANTS IN ERECT, STABLE, AND UNIFORM POSITIONS IN THE CENTER OF THE PLANTING PIT. ORIENT BEST FACE OF PLANT TO BE THE MOST VISIBLE.

4. UNLESS OTHERWISE DIRECTED BY COUNTY URBAN FORESTER, BACKFILL SOIL MIXTURE WILL BE 3/4 EXISTING SOIL CLEANED OF DEBRIS (GRAVEL, ROCKS, STICKS, TRASH, ETC.) AND MIXED WITH 1/4 ORGANIC MATERIAL(COMPOSTED BARK, LEAF MOLD, OR OTHER PLANT DEBRIS PROCESSED TO A POINT OF DECAY AND APPROVED BY THE COUNTY URBAN FORESTER. PEAT MOSS MAY NOT BE USED).

5. CONTRACTOR SHALL REMOVE EXCESS SOIL & DEBRIS FROM SITE.

6. DO NOT PLACE MULCH IN CONTACT WITH STEM OF SHRUBS

THIS DETAIL SUPERSEDES ALL OTHER SHRUB PLANTING DETAILS IN ARLINGTON COUNTY.

ALL PLANTS MUST BE WATERED TWICE: ONCE AT INSTALLATION AND AGAIN WITHIN 48-HOURS OF INSTALLATION, PER THE SPECIFICATIONS.



TYPICAL SHRUB PLACEMENT NEAR PARKING LOTS
NOT TO SCALE

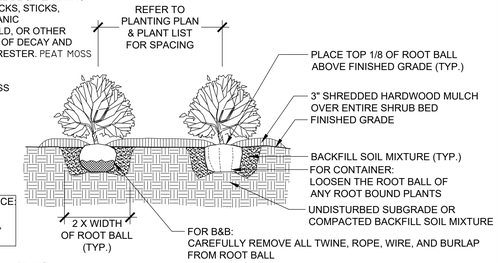

SHRUB PLANTING

ELEVATION

329300.8 (2021)

NOT TO SCALE

ARLINGTON VIRGINIA DPR

NOTES

1. AT PLANTING PRUNE ONLY BROKEN OR DEAD BRANCHES PER ANSI 300 STANDARD.

2. PLANTING PIT/TRENCH SHALL BE DUG DEEP ENOUGH TO ALLOW AT LEAST 1/8TH OF ROOT BALL TO SET ABOVE EXISTING GRADE.

3. SET PLANTS IN ERECT, STABLE, AND UNIFORM POSITIONS. ORIENT BEST FACE OF PLANT TO BE THE MOST VISIBLE.

4. GROUND COVERS AND PERENNIALS SHALL BE INSTALLED WITH TRIANGULAR SPACING. REFER TO CHART.

4. UNLESS OTHERWISE DIRECTED BY PROJECT SPECIFICATIONS OR COUNTY URBAN FORESTER, BACKFILL SOIL MIXTURE WILL BE 3/4 EXISTING SOIL CLEANED OF DEBRIS (GRAVEL, ROCKS, STICKS, TRASH, ETC.) AND MIXED WITH 1/4 ORGANIC MATERIAL (COMPOSTED BARK, LEAF MOLD, OR OTHER PLANT DEBRIS PROCESSED TO A POINT OF DECAY AND APPROVED BY THE COUNTY URBAN FORESTER; PEAT MOSS SHALL NOT BE USED).

5. CONTRACTOR SHALL REMOVE EXCESS SOIL & DEBRIS FROM SITE.

6. DO NOT PLACE MULCH IN CONTACT WITH STEM OF PLANTS.

ALL PLANTS MUST BE WATERED TWICE: ONCE AT INSTALLATION AND AGAIN WITHIN 48-HOURS OF INSTALLATION, PER THE SPECIFICATIONS.



PLANT SPACING "D" O.C.	ROW "A" O.C.	PLANTS PER S.F.
6"	5"	4.00
8"	7"	2.25
9"	8"	1.77
12"	10"	1.00
15"	13"	0.77
18"	16"	0.44

TRIANGULAR SPACING PLAN & CHART
NOT TO SCALE

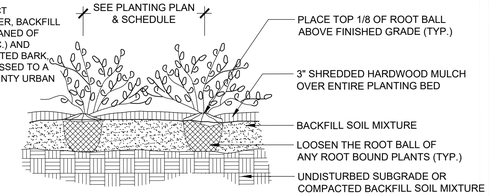

THIS DETAIL SUPERSEDES ALL OTHER GROUND COVER PLANTING DETAILS IN ARLINGTON COUNTY.

GROUND COVERS & PERENNIAL PLANTING

ELEVATION

329300.10 (2019)

NOT TO SCALE

ARLINGTON VIRGINIA DPR

NOTES

1. PLANTS SHALL BE FURNISHED AND INSTALLED AS INDICATED ON THE APPROVED LANDSCAPE PLAN.

2. PLANTS SHALL BE TYPICAL OF SPECIES AND VARIETY, AND COMPLY WITH THE MOST RECENT ANSI Z60.1 STANDARDS.

3. TREES SHALL BE NURSERY GROWN SPECIMENS THAT MEET THE LATEST EDITION OF THE AMERICAN STANDARDS FOR NURSERY STOCK (ANSI Z60). BALLED AND BURLAPPED TREES SHALL BE SECURELY HELD IN PLACE BY UNTREATED BURLAP AND STOUT ROPE (NYLON ROPE IS NOT ACCEPTABLE). LOOSE, BROKEN OR MANUFACTURED BALLS ARE UNACCEPTABLE.

4. CALL MISS UTILITY AT (800) 552-7001 FOR UTILITY LOCATIONS PRIOR TO EXCAVATION.

5. AT TIME OF PLANTING PRUNE ONLY CROSSING LIMBS, BROKEN OR DEAD BRANCHES, AND ANY BRANCHES THAT POSE A HAZARD TO PEDESTRIANS. THE LEADER OF THE TREE SHALL NOT BE CUT BACK. DO NOT PRUNE INTO OLD WOOD ON EVERGREENS. INURED ROOTS SHALL BE PRUNED TO CLEAN ENDS WITH CLEAN, SHARP TOOLS PRIOR TO PLANTING.

6. PLANTS SHALL BE PLANTED ON THE DAY OF DELIVERY. IF THIS IS NOT POSSIBLE, THE CONTRACTOR SHALL PROTECT STOCK NOT PLANTED AND NOTIFY PROJECT OFFICER. PLANTS SHALL NOT REMAIN UNPLANTED FOR LONGER THAN A THREE-DAY PERIOD AFTER DELIVERY, ANY PLANTS NOT INSTALLED DURING THIS PERIOD SHALL BE REJECTED. ALL PLANTS KEPT ON SITE FOR ANY PERIOD SHOULD BE WATERED AND CARED FOR USING ANSI A300 STANDARDS.

7. PLANTS SHALL NOT BE BOUND WITH WIRE OR ROPE AT ANY TIME. PLANTS SHALL BE HANDLED FROM THE BOTTOM OF THE ROOT BALL ONLY. REMOVE ALL TAGS AND TAPE FROM THE PLANTS AFTER PLANTING.

8. SITE CHARACTERISTICS, SUCH AS OVERHEAD POWER LINES, EXISTING VEGETATION, AND INFRASTRUCTURE ITEMS SUCH AS CURBS, SIDEWALKS AND UTILITIES SHALL BE CONSIDERED. TREES THAT GROW TALLER THAN 25 FEET SHOULD NOT BE PLANTED DIRECTLY UNDER POWER LINES. WHEN POSSIBLE THE TREE LEADER SHALL BE OFFSET FROM POWER LINES. PLANTS, OTHER THAN GROUNDCOVER, SHALL NOT BE PLANTED WITHIN 2 FT OF A SIDEWALK. TREE SHALL NOT BE PLANTED WITHIN 5 FT OF A FENCE OR 10 FT OF A BUILDING.

9. BACKFILL SOIL MIXTURE SHALL BE 3/4 EXISTING SOIL CLEANED OF DEBRIS (GRAVEL, ROCKS, STICKS, TRASH, ETC.) AND MIXED WITH 1/4 ORGANIC MATERIAL(COMPOSTED BARK, LEAF MOLD, OR OTHER PLANT DEBRIS PROCESSED TO A POINT OF DECAY AND APPROVED BY THE COUNTY URBAN FORESTER. PEAT MOSS MAY NOT BE USED. PLANTS SHALL BE PLANTED IN HEALTHY, UNCOMPACTED SOIL.

10. REFER TO PLANTING DETAILS AND SPECIFICATIONS FOR SPECIFIC INSTRUCTIONS. PLANTING OPERATIONS SHALL BE PERFORMED DURING PERIODS WITHIN THE PLANTING SEASON WHEN WEATHER AND SOIL CONDITIONS ARE SUITABLE AND IN ACCORDANCE WITH LOCAL ACCEPTED PRACTICE. PLANTS SHALL NOT BE INSTALLED IN TOP SOIL THAT IS MUDDY OR IN FROZEN CONDITION. TREES AND SHRUBS SHALL BE INSTALLED BETWEEN SEPTEMBER 15TH AND DECEMBER 15TH OR BETWEEN MARCH 15TH AND JUNE 15TH. CONTACT THE ARLINGTON COUNTY FORESTER TO OBTAIN A DEFERRAL OR APPROVAL FOR PLANTING OUT OF SEASON.

11. TREES PLANTED SHALL RECEIVE A 3-INCH LAYER OF SHREDDED HARDWOOD MULCH, IN A 6-FOOT RING SURROUNDING THE TREES, WITH A 6-INCH CLEAR AREA NEAR THE TRUNK. REFERENCE TREE PLANTING DETAIL.TREES PLANTED WITHOUT THE TRUNK FLARE VISIBLE WILL BE REJECTED.

12. TREES MAY ONLY BE STAKED IF REQUIRED BY THE COUNTY URBAN FORESTER. REFER TO ARLINGTON COUNTY STANDARD STAKING DETAILS.

13. MULCH SHALL BE CLEAN, SCREENED, DOUBLE-HAMMERED HARDWOOD BARK MULCH, UNIFORM IN SIZE AND FREE OF STONES, CLODS, NON-ORGANIC DEBRIS AND OTHER FOREIGN MATERIAL.

14. ALL PLANTS SHALL BE WATERED TWICE: ONCE AT INSTALLATION AND AGAIN WITHIN 48-HOURS OF INSTALLATION. EACH WATERING WILL CONSIST OF 20 GALLONS PER TREE.

15. CONTRACTOR SHALL LEGALLY REMOVE EXCESS SOIL & DEBRIS FROM SITE.

16. AT PROJECT COMPLETION, PRIOR TO FINAL ACCEPTANCE, PRESERVED AND PLANTED TREES SHALL BE INSPECTED BY AN ARLINGTON COUNTY URBAN FORESTER.

GENERAL PLANTING NOTES

329300.14 (2019)

ARLINGTON VIRGINIA DPR

ARLINGTON VIRGINIA

DEPARTMENT OF PARKS AND RECREATION

Park Development Division
2100 Clarendon Boulevard, Suite 414
Arlington, VA 22201
Phone: 703.228.3332
Fax: 703.228.3328

Project Name and Location

11th and Danville Park Renovation

BY-RIGHT

2751 11th St North
Arlington, VA

Sheet Title

Landscape Conservation Notes and Details

LDA-46746
#LDA22032

Approval | Date

Design Supervisor

Revisions	Date
REV 1	REV 1 DATE
REV 2	REV 2 DATE
REV 1	REV 3 DATE
REV 1	REV 4 DATE
REV 5	REV 5 DATE

Designed: kvb
Drawn: kvb
Checked: bg

Filename: DVILLE BASE 2022.05.17
Plotted: May. 18, 22

Scale: As Noted
Date: May. 18, 22

Seal

Sheet

L-04