

## REQUEST FOR QUOTES

### CITY OF MONTGOMERY, ALABAMA

---


Quotes will be received by the City of Montgomery, Alabama at the Office of Inspections, 25 Washington Avenue, Montgomery, AL 36104, Room 107 until 3:00 pm CST Tuesday, July 25, 2023.

The scope of work includes the construction of an outdoor Basketball Half Court (40'x40' overall concrete slab dimension) in Virginia Estates Park, Montgomery, Alabama. ( See Attachment 'A') The work shall be performed according to the following specifications.

#### General Notes:

1. Contractor shall engage the services of a geotechnical engineer, licensed in the State of Alabama, to conduct a subsurface investigation to make a final recommendation for the concrete and soil compaction specifications.
2. The basketball goals will be furnished by the City of Montgomery and installed by the contractor.
3. The basketball court concrete finish shall be a light broom finish.
4. The basketball court lines shall be 2" wide (verify color with City of Montgomery Parks and Recreation).
5. The basketball court concrete shall not be polished.
6. The basketball court concrete shall have no sealers applied until after the line painting is complete.
7. The basketball court concrete shall have no foot traffic for a minimum of 72 hours after painting.
8. Contact David Card, Director Parks and Recreation, for the specific location of the basketball court. He may be contacted at [dcard@montgomeryal.gov](mailto:dcard@montgomeryal.gov)
9. All work shall be complete within 30 calendar days of the Notice To Proceed.


Prepared by:

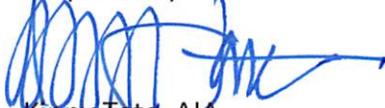

Kippy Tate, AIA  
Chief Building Official  
City of Montgomery


BASKETBALL HALF COURT  
ATTACHMENT 'A'

BASKETBALL COURT LINES  
EDGE OF CONCRETE SLAB

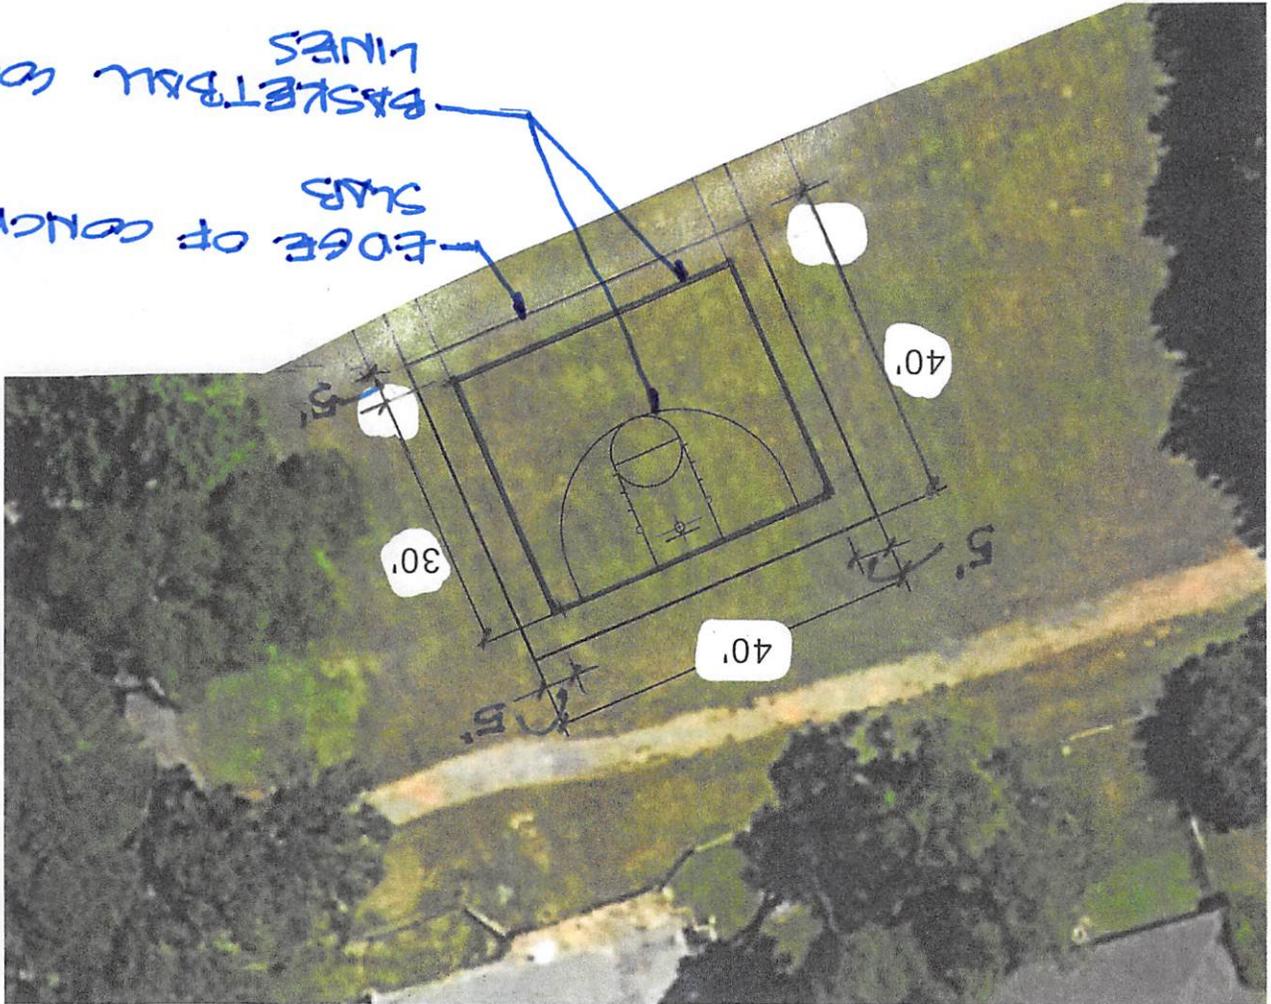

SECTION: CONCRETE

4" THICK CONCRETE w/ WWM, 6X6 - 6 GA @ SLAB CENTER, 3000 PSI @ 28 DAYS  
8 MIL POLYETHYLENE VAPOR BARRIER  
4" THICK CRUSHED STONE BASE DENSE GRADE BASE, COMPACTED TO 95% STANDARD PROCTOR DENSITY.  
SUBGRADE, COMPACTED PER GEOTECH RECOMMENDATIONS.  
NOTE: SUBSURFACE INVESTIGATION TO BE PERFORMED PRIOR TO STARTING CONSTRUCTION TO MAKE SURE CONCRETE SECTION DETAIL PROVIDED MEETS FIELD CONDITIONS.

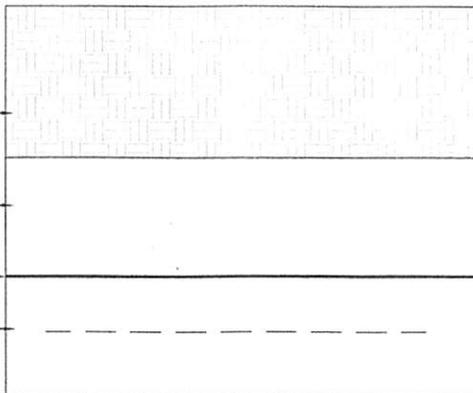

NOTE: DIMENSIONS AND STRIPING TO MEET ALABAMA HIGH SCHOOL ATHLETIC ASSOCIATION GUIDELINES.