
Existing septic system

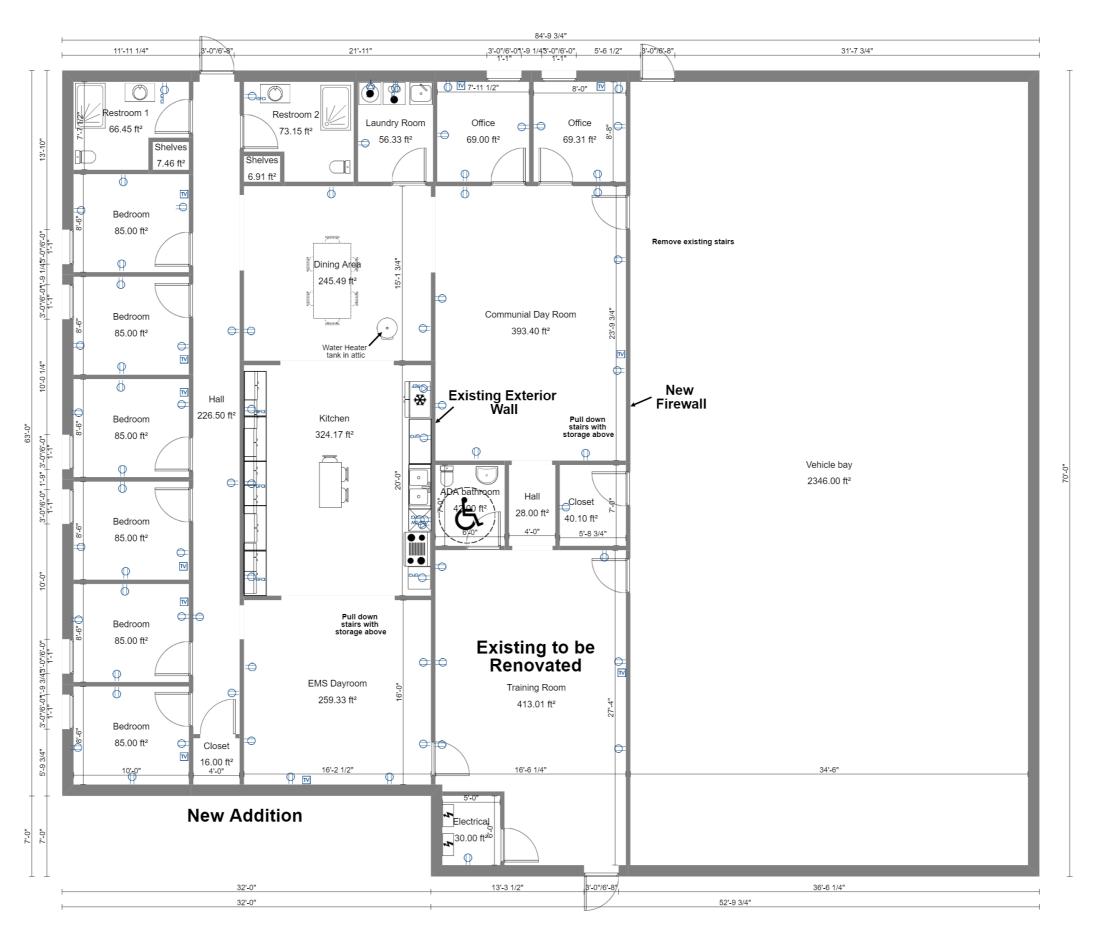

Fire station Register	2023-09-13T13:55			
Ground Floor	PAGE 1 of 2			

Room Finish Schedule

ROOM	FLOOR	CEILING	HEIGHT	WALLS	BASE	DOOR	HARDWARE
DINING ROOM	VP	PGB	9'	PGB	VINYL		
KITCHEN	VP	PGB	9'	PGB	VINYL		
COMM. DAY ROOM	VP	PGB	9'	PGB	VINYL	3X7 FR	LOCKSET
CORRIDOR	VP	PGB	9'	PGB	VINYL	3X7 HM	LOCKSET
SLEEPING ROOMS	VP	PGB	9'	PGB	VINYL	3X7 HM	PRIVACY
OFFICES	VP	PGB	9'	PGB	VINYL	3X7 HM	PRIVACY
RESTROOMS	VP	PGB	9'	PGB	VINYL	3X7 HM	PRIVACY
EMS DAY ROOM	VP	PGB	9'	PGB	VINYL	3X7 HM	PASSAGE
TRAINING ROOM	VP	PGB	9'	PGB	VINYL	3X7 F DR	LOCKSET
BAY CLOSET	CONC	PGB	9'	PGB	VINYL	3X7 F DR	PASSAGE
LAUNDRY ROOM	VP	PGB	9'				
ELECRTICAL ROOM	VP	PGB	9'	PGB	VINYL	3X7 HM	PASSAGE

LEGEND

PGB PAINTED GYPSUM BOARD VP VINYL PLANK FLOORING

HM HOLLOW METAL

F DR FIRE RATED (90 MINUTE) DOOR

RESTROOMS TO HAVE WATERPROOF WAINSCOT MATERIAL TO 4'AFF ALL WALLS

ALL DOORS HAVE A HOLLOW METAL FRAME.

ALL FINISH MATERIAL IS TO BE SELECTED FROM THE MANUFACTURERS STANDARD PRODUCT LINES.

COLORS AND FINISHES ARE TO BE SELECTED WITH OWNER PRIOR TO PROCURING MATERIAL

Fire station Register	2023-09-13T13:55
Ground Floor	PAGE 2 of 2