




**CITY OF CALLAWAY
POLE BARN PROJECT
BID NO.: CM2022-16**

ADDENDUM #1

Date Issued: October 24, 2022

This addendum is being released to amend the Technical Specifications and Bid Certification Form as attached.

1. Minimum Technical Specifications Page.
2. Page 2 of the Bid Certification Page.

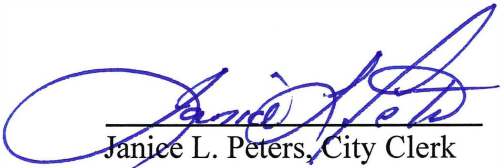

Janice L. Peters, City Clerk

This Addendum must be acknowledged and included with the bid packet submission.

Signature

Company Name

Date

PUBLIC WORKS POLE BARN PROJECT
Bid No.: CM2022-16
TECHNICAL SPECIFICATIONS

POLE BARN PROJECT
Bid No.: CM2022-16

TECHNICAL SPECIFICATIONS

This is a request for bids to install a total of one (1) Pole Barn at 324 S. Berthe, and five (5) at 500 Callaway Park Way, Callaway, FL 32404 as follows:

AG Panel (Tuff Rib) panels or PBR roof material is acceptable, as long as they meet 140 MPH requirements, unless otherwise noted.

One (1) Pole Barn - 324 S. Berthe

- 40'x126'x14' Pole Barn
- 9 – 14' Bays
- 20 -8"x8" poles
- Extra Quikrete per Hole
- 10 - Clear span steel trusses
- 2x8 purlins 24" on center
- Install 26g. Tuff Rib or PBR roof metal (galvalume)
- Permits and architectural drawings

Five (5) Pole Barns - 500 Callaway Park Way

- 5 - 16'x30'x9'
- 8 - 6"x6" poles (pressure treated ground contact)
- Cut existing concrete to set poles
- 4 - Steel clear span trusses
- 2x6 purlin 24" on center
- Install 26g. PBR roof metal (galvalume) **Copper Colored Metallic**
- Permits and architectural drawings

ADDITIONAL REQUIREMENTS

1. Clean up & removal of all debris created by this scope of work
2. Costs to include Permitting
3. Vendor will provide all kits, pick up and deliver all materials associated with the project, however, the City of Callaway will purchase kit materials directly, tax free.

POLE BARN PROJECT
Bid No.: CM2022-16

AG Panel (Tuff Rib) panels or PBR roof material is acceptable, as long as they meet 140 MPH requirements, unless otherwise noted.

Job. #1 - 324 S. Berthe Avenue Public Works

- One (1) - 40' x 126' x 14' Pole Barn
- 9 - 14' Bays
- 20 - 8" x 8" poles
- Extra Quikrete per Hole
- 10 - Clear span steel trusses
- 2 x 8 purlins 24" on center
- Install 26g. Tuff Rib or PBR roof metal (galvalume)
- Permits and architectural drawings

Job #1 SUB TOTAL \$ _____
(Minus taxes for materials.)

Job #2 – 500 Callaway Park Way (Leisure Services)

- Five (5) - 16' x 30' x 9' Pole Barns
- 8 – 6" X 6" Poles (Pressure Treated Ground Contact)
- Cut existing concrete to set poles
- 4- Steel clear span trusses
- 2 x 6 Purlin 24" on Center
- Install 26g. PBR Roof Metal (galvalume) **Copper Colored Metallic**
- Permits and architectural drawings

Job #2 SUB TOTAL \$ _____
(Minus taxes for materials.)

TOTAL JOBS 1 & 2 \$ _____
(Minus taxes for materials.)

Vendor will provide all kits, pick up and deliver all materials associated with the project, however, the City of Callaway will purchase kit materials directly, tax free.

NOTE: The City of Callaway will purchase all kit materials directly, tax exempt.