

MEMORANDUM

NEEL-SCHAFFER, INC.

TO: All bidders

FROM: Bradley E. Bivens, P.E.

DATE: September 12, 2022

SUBJECT: **Addendum # 1**
PW 2022-07 Pipe Lining

This addendum is for construction proposals due on September 15, 2022, at 10:00 A.M. (CST) at the City of Forest Hills, 6300 Hillsboro Pike, Nashville, TN 37215.

This addendum must be signed and submitted with the bid documents for this project. This addendum will revise or clarify the following:

Revision:

Title Sheet: Item SP-4 has been corrected to 36"x58" CMP CEMENTIOUS LINER with a quantity of 1,409 S.F.

Revision:

Sheet 4: Sheet 4 has been corrected to show 36"x58" CMP CEMENTIOUS LINER with a quantity of 754 S.F.

Revision:

Sheet 5: Sheet 5 has been corrected to show 36"x58" CMP CEMENTIOUS LINER with a quantity of 655 S.F.

Clarification:

Sheet 7: The 24" diameter tree on downstream end of culvert will be removed prior to work by the City of Forest Hills.

The following are approved for pipe lining on this project:

Approved Alternates:

- GeoTree Invert Repair Mortar
- GeoPlug Rapid Set Water Stop
- GeoSpray Geopolymer
- Shotcrete MS by Quikrete
- Horizontal Pipe Lining Mortar

The following have not been approved for pipe lining on this project:

Disapproved Alternates:

- Omega UV Liner

DATE

CONTRACTOR SIGNATURE

COMPANY: _____

ADDRESS: _____

*******ADDENDUM TO BE INCLUDED WITH BID FORMS*******

CITY OF FOREST HILLS DAVIDSON COUNTY, TENNESSEE

PW-2022-07

PIPE LINING PROJECT


FY 2022-2023

INDEX OF SHEETS	
1.	LOCATION MAP
2.	GENERAL NOTES
2B.	TRAFFIC CONTROL LAYOUT
3.	1300 BEDDINGTON PARK
4.	4508 ALCOTT DRIVE
5.	1925 CROMWELL DRIVE
6.	1734 KINGSBURY DRIVE
7.	2108 PICCADILLY PLACE

PROJECT QUANTITIES			
ITEM NO.	DESCRIPTION	QUANTITY	UNIT
204-08.01	FLOWABLE FILL	2	C.Y.
209-03.20	FILTER SOCK (8 INCH)	40	L.F.
712-01	TRAFFIC CONTROL	1	L.S.
712-08.01	UNIFORMED POLICE OFFICER	72	H.R.
801-01	SEEDING WITH MULCH	1	UNIT
SP-1	24" CMP FOLDED PVC PIPE LINER	133	L.F.
SP-2	30" CMP FOLDED PVC PIPE LINER	190	L.F.
SP-3	60" CMP CEMENTITIOUS LINER	864	S.F.
SP-4	36" X 58" CMP ARCH CEMENTITIOUS LINER	1,409	S.F.




1 REVISION: UPDATED ITEM NO. AND QUANTITY.
2022-09-12, KDF

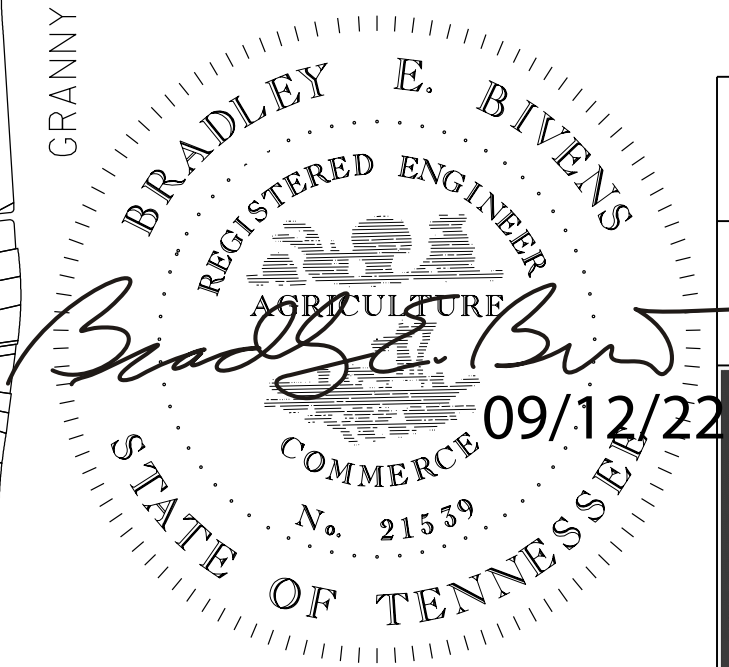

LOCATION MAP	
CITY OF FOREST HILLS DAVIDSON COUNTY, TENNESSEE	
DSGN: KDF 08/01/2022 DRWN: BCW 08/01/2022 CHKD: BEB 08/01/2022 SCALE: NOT TO SCALE PROJ. NO: NS.14615.07	REVISIONS _____ _____ _____
 CITY OF FOREST HILLS	 NEEL-SCHAFFER Solutions you can build upon
DRAWING NO.	
1	



IF YOU DIG TENNESSEE
CALL US FIRST!
811
(1-800-351-1111)
IT'S THE LAW

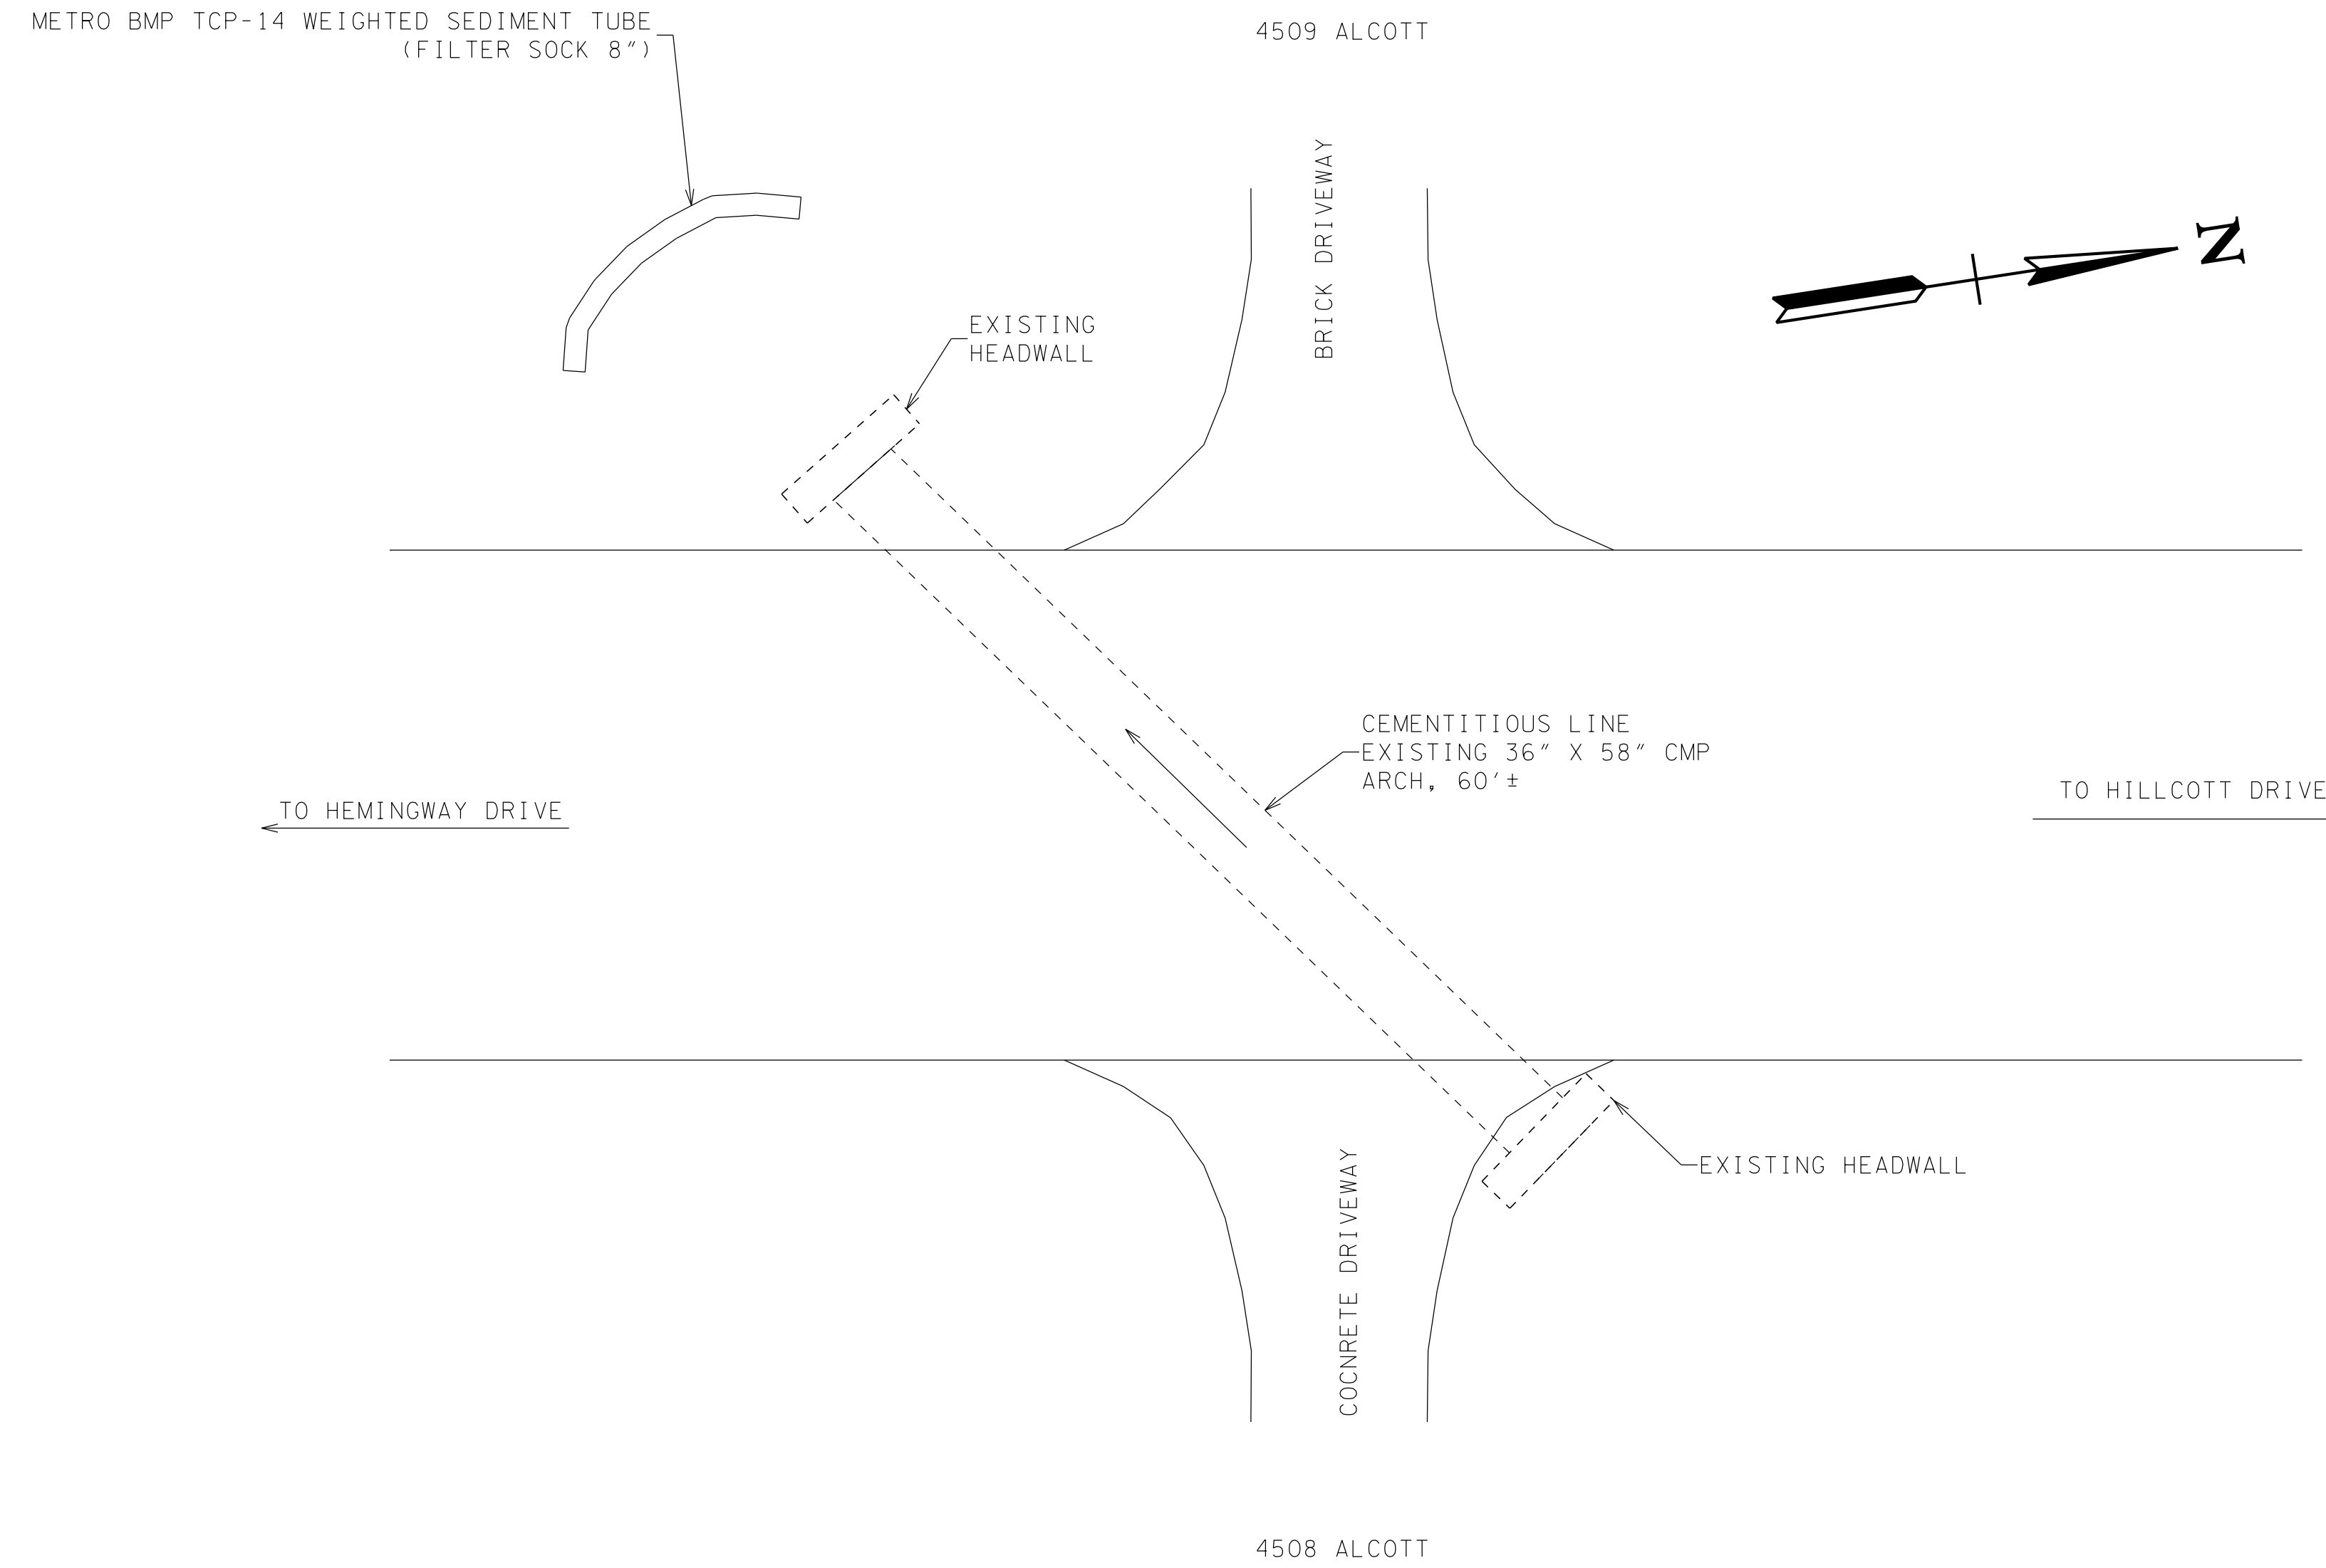

1 PLAN VIEW
NOT TO SCALE


1 REVISION: UPDATED ITEM NO., QUANTITY, AND NOTES. 2022-09-12, KDF

1 SCOPE OF WORK

1. INSTALL EROSION AND SEDIMENT CONTROL DEVICES.
2. CEMENTITIOUS LINE 36" X 58" CMP ARCH.
3. SEED AND MULCH ALL DISTURBED AREAS.

4508 ALCOTT DRIVE QUANTITIES			
ITEM NO.	DESCRIPTION	UNIT	QUANTITY
209-03.20	FILTER SOCK (8 INCH)	L.F.	10
SP-4	36" X 58" CMP ARCH CEMENTITIOUS LINER	S.F.	754


1

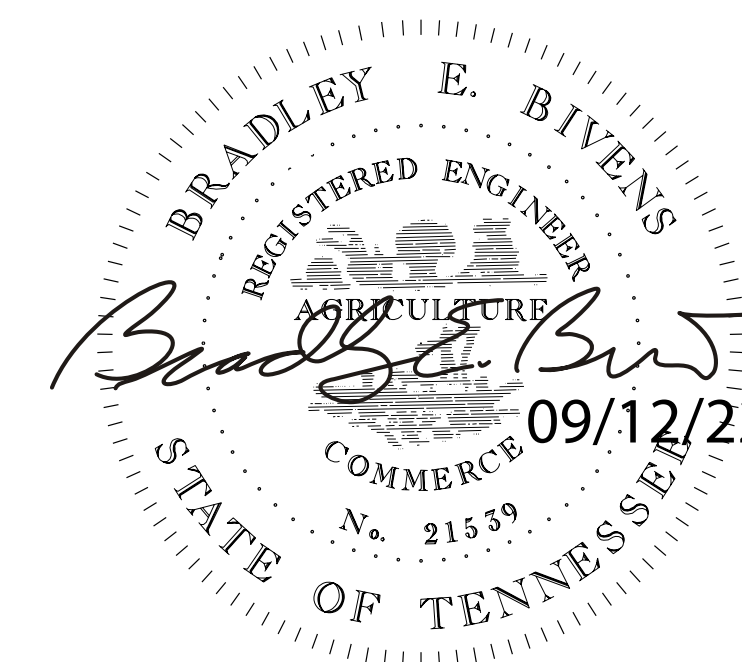

4508 ALCOTT DRIVE		
CITY OF FOREST HILLS DAVIDSON COUNTY, TENNESSEE		
DSGN: KDF	05/02/2017	REVISIONS
DRWN: KDF	05/02/2017	
CHKD: BEB	05/02/2017	
SCALE: NTS		
PROJ. NO: 14615.004		
		DRAWING NO. 4



IF YOU DIG TENNESSEE
CALL US FIRST!
811
(1-800-351-1111)
IT'S THE LAW

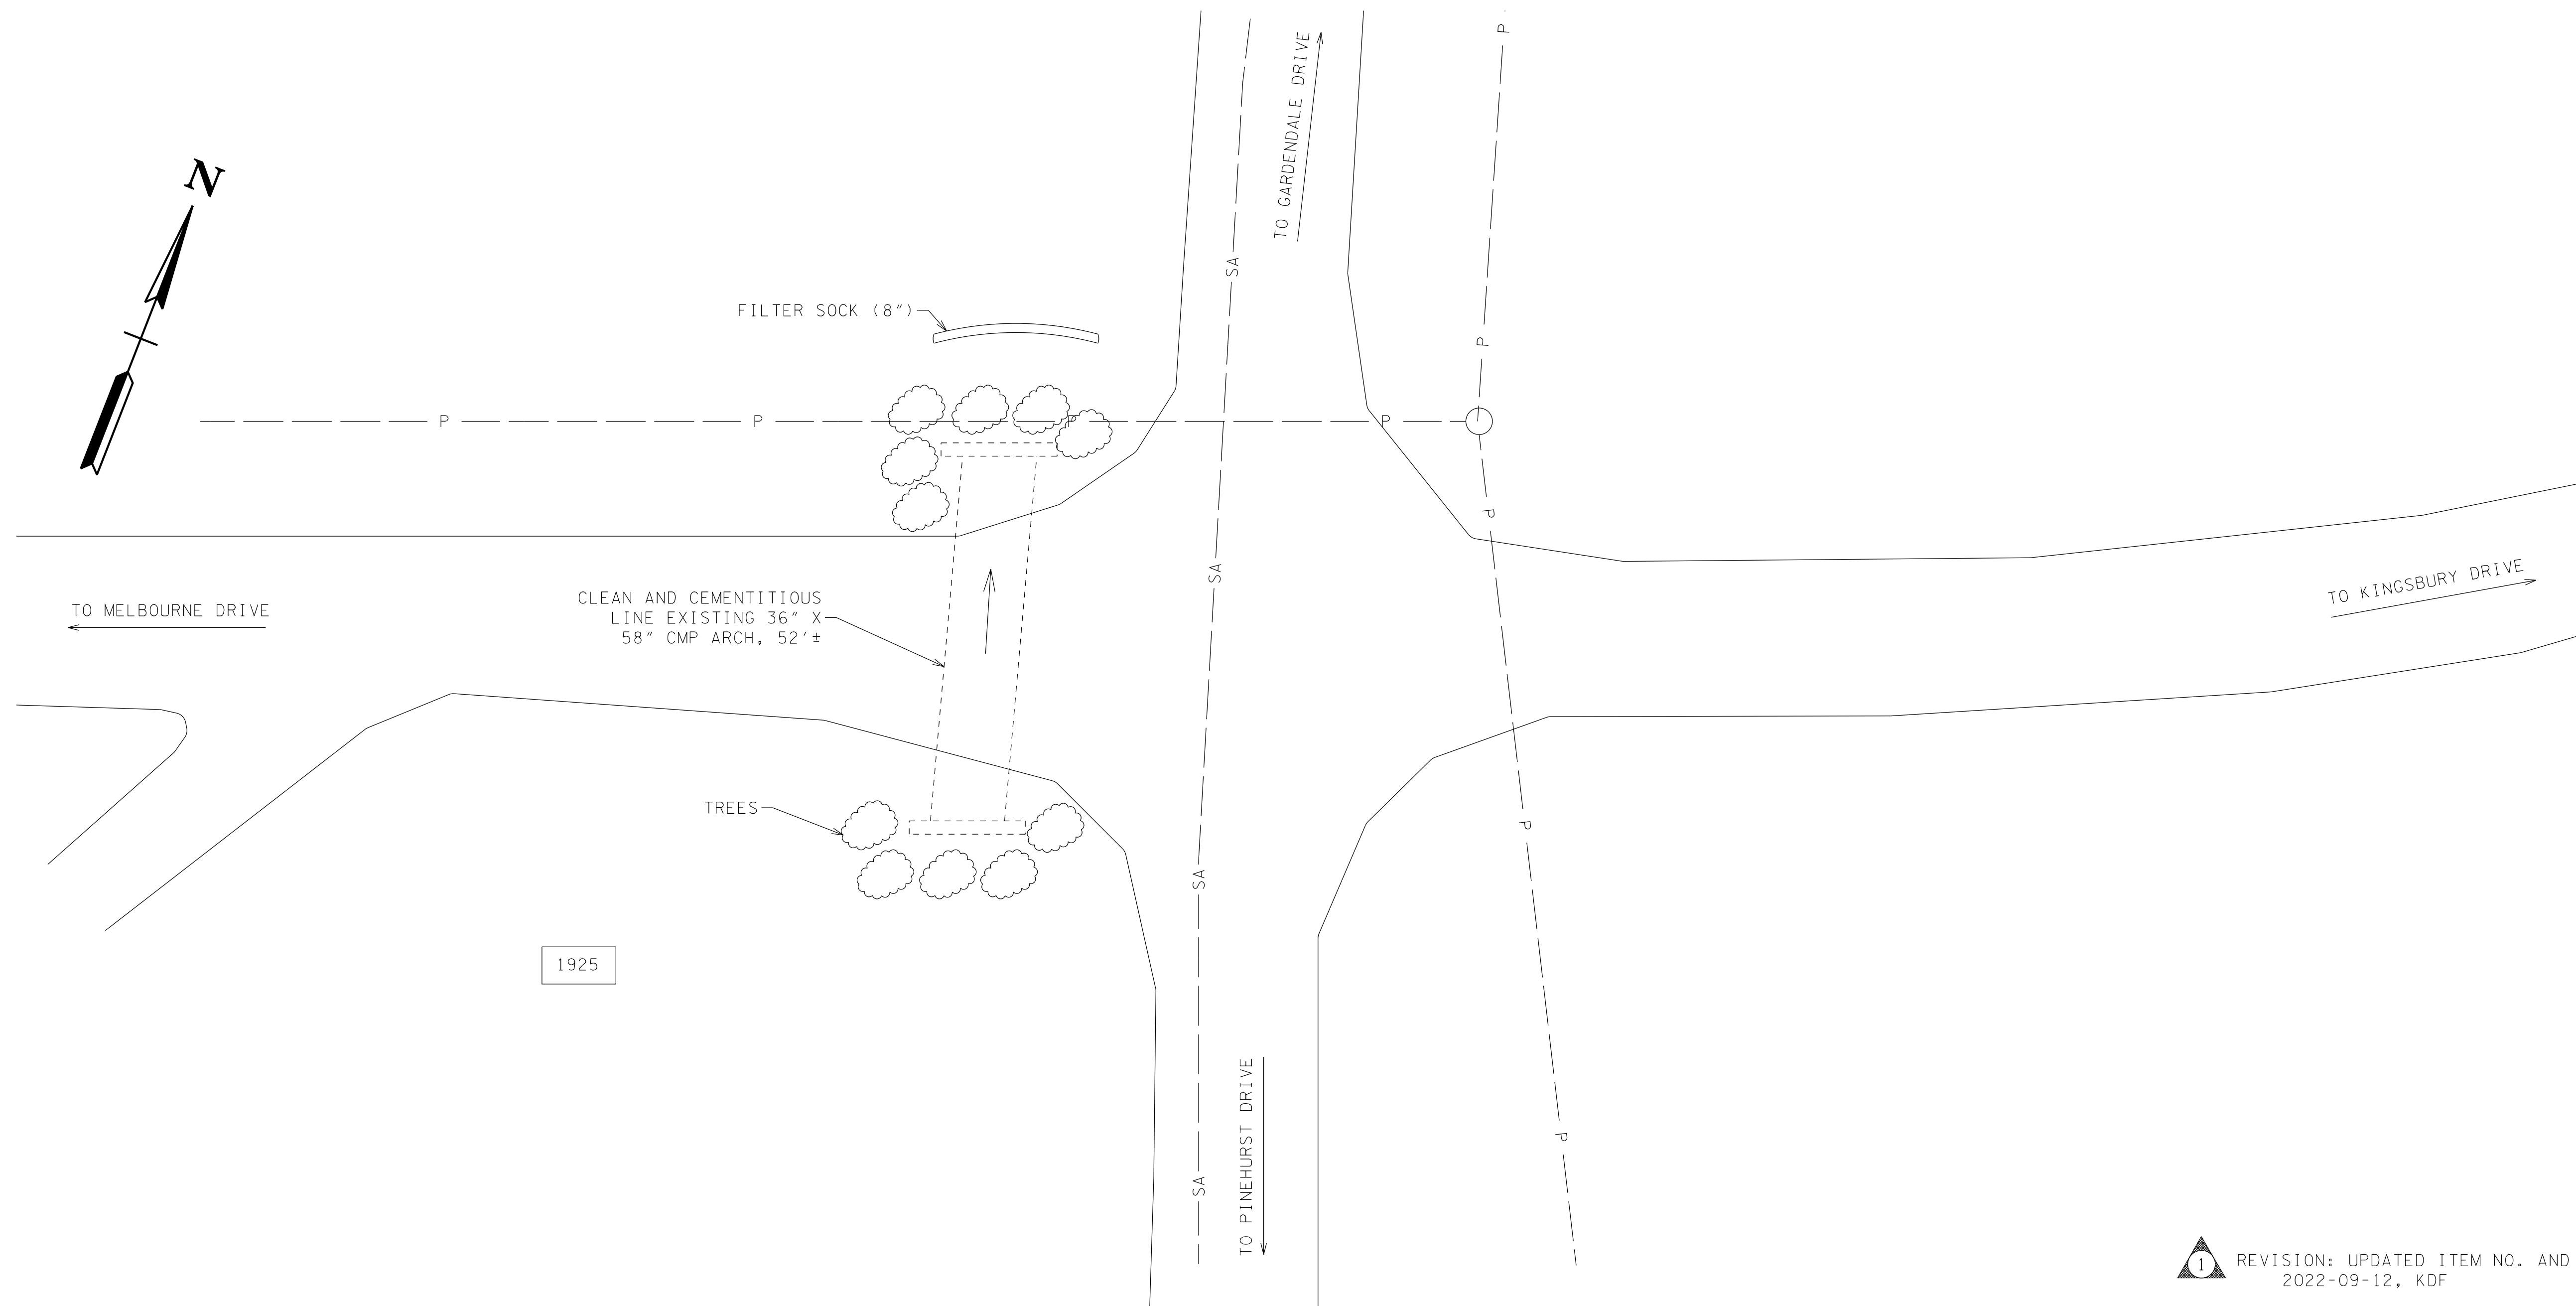

PLAN VIEW
NOT TO SCALE


1 REVISION: UPDATED ITEM NO. AND QUANTITY.
2022-09-12, KDF

- 1 SCOPE OF WORK
1. INSTALL EROSION AND SEDIMENT CONTROL DEVICES.
 2. CEMENTITIOUS LINE EXISTING 36" X 58" CMP ARCH.
 3. SEED AND MULCH ALL DISTURBED AREAS.

1925

1925 CROMWELL DRIVE QUANTITIES			
ITEM NO.	DESCRIPTION	UNIT	QUANTITY
209-03.20	FILTER SOCK (8 INCH)	L.F.	10
SP-4	36" X 58" CMP ARCH CEMENTITIOUS LINER	S.F.	655

1

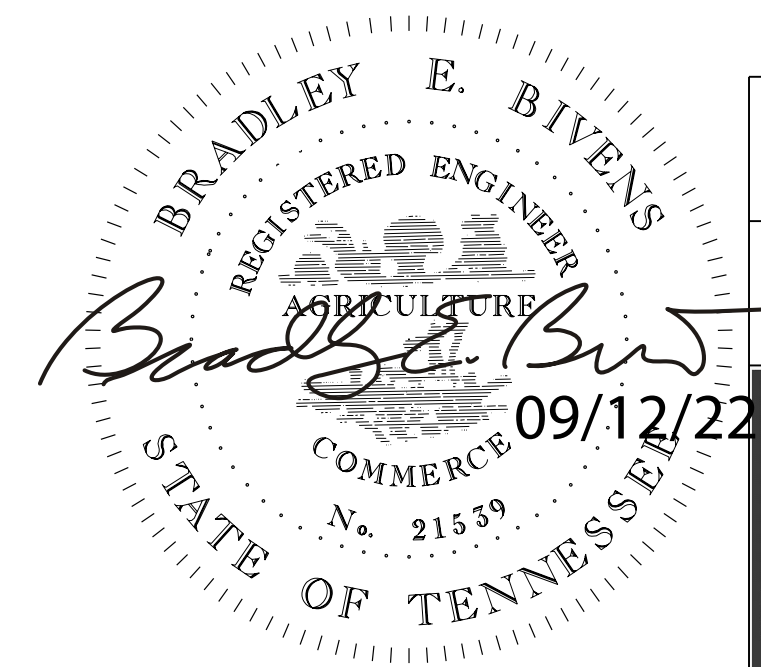

1925 CROMWELL DRIVE

CITY OF FOREST HILLS
DAVIDSON COUNTY, TENNESSEE

DSGN: KDF	08/08/2022	REVISIONS
DRWN: JGC	08/08/2022	
CHKD: BEB	08/08/2022	
SCALE: NTS		
PROJ. NO: 14615.004		

DRAWING NO. 5



IF YOU DIG TENNESSEE
CALL US FIRST!
811
(1-800-351-1111)
IT'S THE LAW