

**SPRINGFIELD ELECTRIC DEPARTMENT  
BID 954**

**LOAD #1**

Six (6) ea., 55', class 2, 12# penta treated wood pole, drilled per specifications  
Seven (7) ea., 60', class 2, 12# penta treated wood pole, drilled per specifications  
One (1) ea., 65', class 2, 12# penta treated wood pole, drilled per specifications  
One (1) ea., 75', class 2, 12# penta treated wood pole, drilled per specifications

Total Cubic Feet: 801.3

**Poles are to be delivered to:**


Mt. Denson Substation  
250 Hwy 161 (Corner of Hwy 161 and Charles Ralph Drive)  
Springfield, TN 37172

**All poles to be unloaded by vendor. Specify expected delivery date with bid. One (1) week advance notice of delivery requested.**

**SEE ATTACHED SPECIFICATIONS**

**Contact Robert Gardner at (615)384-6770 Extn.125 with questions. Bids must be received in the Office of the City Recorder by no later than 10:30 AM, Tuesday, November 10, 2015.**

**\*\*\*The City of Springfield reserves the right to reject any and all bids.\*\*\***

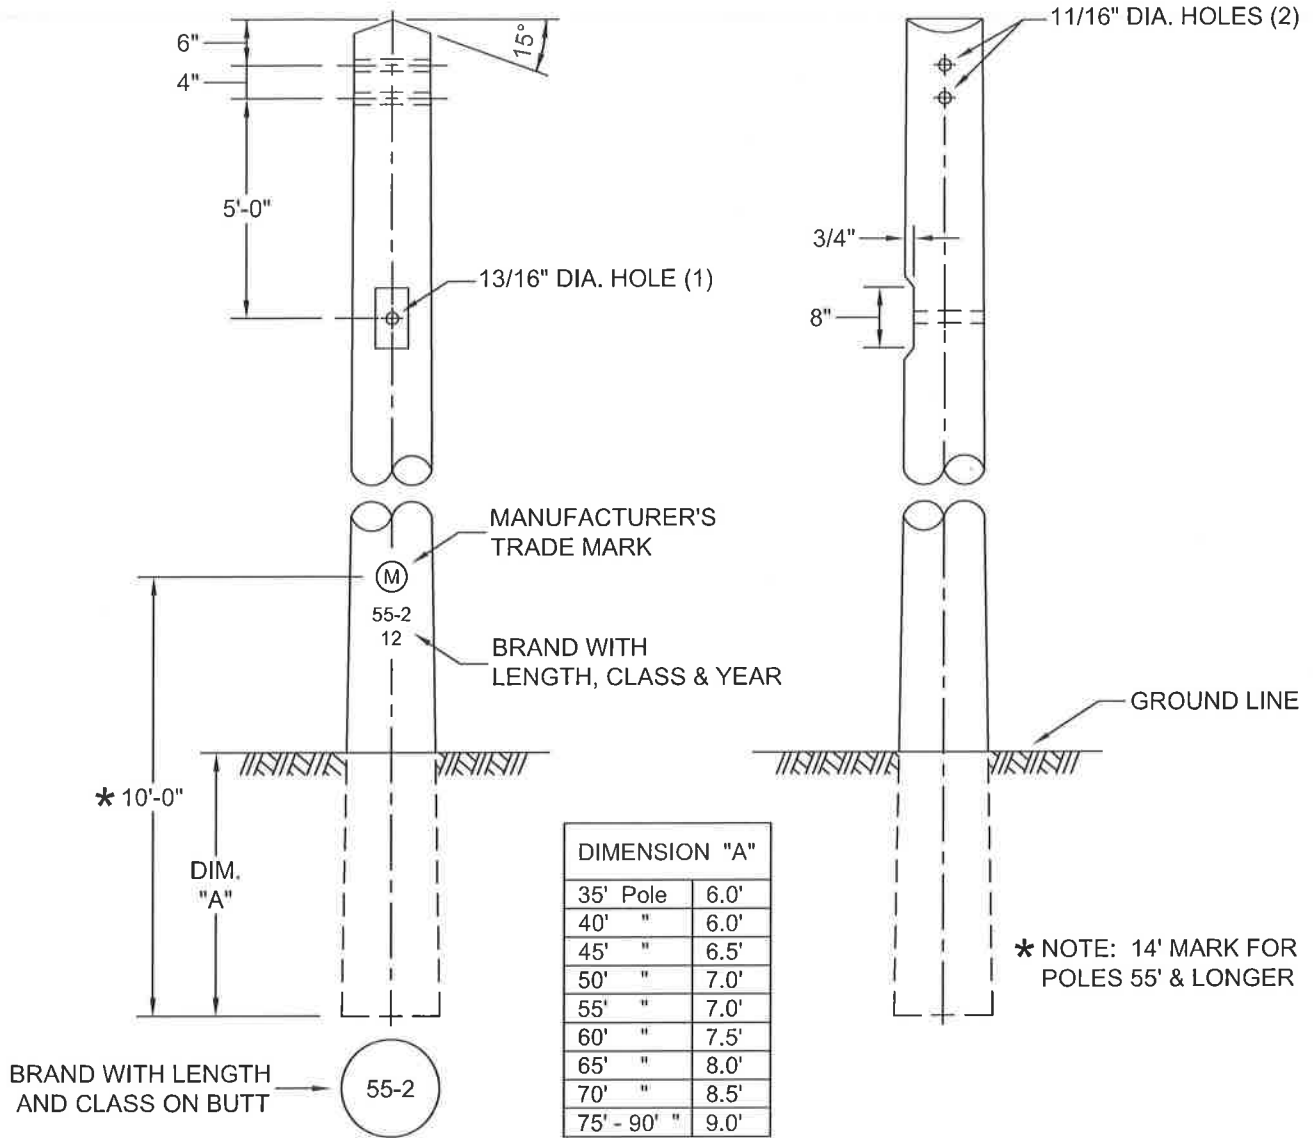

Springfield Electric Department  
Transmission Wood Pole Specification

General Specifications:

- (1) All poles to be Southern yellow pine, ASA Class and length shall be as specified in the accompanying purchase order.
- (2) All poles shall meet the latest revision of ANSI 05.1 and ANPA standards for treatment of .60 lbs/cu.ft.
- (3) All poles shall be treated as specified in bid invitation.
- (4) All poles shall be inspected (unless otherwise specified).
- (5) All poles shall be shipped by truck unless otherwise specified, based on a full truckload of 800 ft<sup>3</sup>. DO NOT ADJUST POLE QUANTITIES OR SIZES.
- (6) Specify delivery date with bid. All vendors are expected to meet delivery date specified. Orders that do not meet delivery will be subject to cancellation.
- (7) Include unloading cost with bid.