

### NUMBERED SHEET NOTES


1. DUPLEX OR DOUBLE DUPLEX RECEPTACLE AND ADJACENT TELEPHONE DATA OUTLET. VERIFY LOCATION WITH ARCHITECT PRIOR TO ROUGH-IN. SEE "T" SERIES TELECOM PLANS FOR TELEPHONE DATA OUTLET. SEE 1/E/01.
2. PROVIDE AND INSTALL RECESSED CONCEALED SERVICE POKE THRU ASSEMBLY, FLUSH WITH FINISHED CONCRETE SLAB. ALL CONDUIT TO FLOOR BOXES SHALL BE ROUTED CONCEALED BELOW FLOOR ABOVE CEILING OF FLOOR BELOW. COORDINATE FLOOR BOX LOCATIONS WITH ARCHITECT AND STRUCTURAL ENGINEER PRIOR TO ROUGH-IN. SEE 10/E/02.
3. ELEVATOR FIRE SMOKE DOOR. CONNECT COMPLETE. VERIFY FULL REQUIREMENTS WITH EQUIPMENT APPROVED SHOP DRAWINGS PRIOR TO ROUGH-IN.
4. HAND DRYERS. CONNECT COMPLETE AS REQUIRED BY APPROVED SHOP DRAWINGS.
5. TELEPHONE/DATA TERMINAL BOARD, 3/4 INCH MARINE GRADE PLYWOOD (FIRE TREATED), INSTALLED THE FULL HEIGHT OF THE WALLS AND PAINTED. SEE SPECIFICATIONS.
6. PROVIDE AND INSTALL ELECTRICAL CONNECTIONS TO SECURITY PANEL. CONNECT COMPLETE. VERIFY LOCATION AND REQUIREMENTS PRIOR TO ROUGH-IN. SEE "T" SERIES TELECOM PLANS.
7. ALL EXTERIOR RECEPTACLES SHALL BE GFI WITH LOCKABLE THIN PROFILE WEATHERPROOF "IN-USE" COVERS. VERIFY LOCATION WITH ARCHITECT PRIOR TO ROUGH-IN.
8. NOTORIZED SCREEN AND CONTROLS. INSTALL AND CONNECT COMPLETE. VERIFY EXACT LOCATION WITH ARCHITECT AND EXACT REQUIREMENTS WITH APPROVED SHOP DRAWINGS PRIOR TO ROUGH-IN. SEE "T" SERIES TELECOM PLANS.
9. FOR FLAT PANEL DISPLAY. VERIFY LOCATION AND REQUIREMENTS PRIOR TO ROUGH-IN. SEE "T" SERIES TELECOM PLANS.
10. WIRE ALL ISLAND MOUNTED OUTLETS FROM LEVEL 2 BELOW.
11. PROVIDE AND INSTALL SPECIAL RECEPTACLE (30A, 250V, TWISTLOCK, NEMA #L6-30R) ABOVE TELECOM RACK #2. COORDINATE WITH TELECOM CONSULTANT PRIOR TO ROUGH-IN.
12. AT TOP OF ELEVATOR HOISTWAY, PROVIDE AND INSTALL 20A, 120VOLT CIRCUITS FOR ELEVATOR LIGHTS, SWITCHES AND GFI RECEPTACLES (ALL NEMA 4 RATED). VERIFY LAYOUT AND REQUIREMENTS WITH APPROVED ELEVATOR SHOP DRAWINGS PRIOR TO ROUGH-IN. SEE 1/E/02.
13. TO HOISTWAY LIGHT FIXTURES. SEE LIGHTING DRAWINGS.

### GENERAL SHEET NOTES

- A. DEDICATED NEUTRALS REQUIRED FOR ALL BRANCH CIRCUITS.
- B. ELECTRICAL DEVICES ON FIRE-RATED WALLS TO BE INSTALLED 24" APART MINIMUM.
- C. SEE MECHANICAL AND PLUMBING PLANS AND SPECIFICATIONS FOR ADDITIONAL ELECTRICAL SCOPE OF WORK.
- D. SEE TELECOM & AUDIO-VISUAL CONSULTANT'S PLANS AND SPECIFICATIONS FOR ADDITIONAL ELECTRICAL SCOPE OF WORK.
- E. CONTROLLED RECEPTACLE MUST BE INSTALLED WITHIN 6 FEET (ALONG WALL LENGTH) OF UNCONTROLLED RECEPTACLE.
- F. ALL ELECTRICAL EQUIPMENT EXPOSED TO THE WEATHER SHALL BE LISTED FOR EXTERIOR USE.
- G. ALL EXTERIOR CONDUITS SHALL BE RIGID GALVANIZED STEEL WITH WATERTIGHT FITTINGS.
- H. ALL EXTERIOR CONDUITS SHALL BE RIGID GALVANIZED STEEL WITH WATERTIGHT FITTINGS.
- I. PROVIDE PANEL & CIRCUIT DESIGNATION LABELS FOR ALL RECEPTACLES & DISCONNECTS ON PROJECT.

### FLOOR PLAN - LEVEL 3 - POWER & SIGNAL


SCALE: 1/8" = 1'-0"



**NOLL & TAM**  
ARCHITECTS

729 Heinz Avenue  
Berkeley, CA 94710  
tel 510.542.2200  
fax 510.542.2201

**CAVAGNERO**  
MARK CAVAGNERO ASSOCIATES ARCHITECTS  
1648 Sacramento Street, Suite 200  
San Francisco, California 94111  
www.cavagnero.com

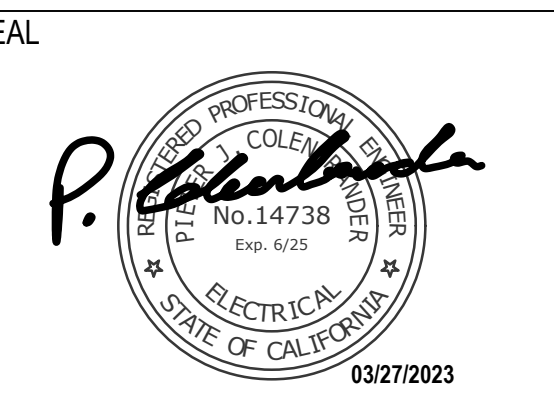

**OMAHONY & MYER**  
REGISTERED PROFESSIONAL ENGINEERS  
4540 BIDWOOD HWY, SUITE 245  
SAN RAMON, CALIFORNIA 94583  
(415) 492-0820 / FAX (415) 479-9602  
www.comconconsulting.com

PROJECT TITLE

Peralta Community College District  
Laney Library & Learning Resource Center (Building 100 Replacement)

900 Fallon Street, Oakland, CA 94607

ISSUE FOR BID

ISSUE DATE	3/31/23
SAT. JOB NUMBER	21942
REVISIONS	
DATE	DESCRIPTION
05/16/2024	ADDENDUM NO. 03

DRAWN BY: \_\_\_\_\_ CHECKED BY: \_\_\_\_\_  
SHEET TITLE

**FLOOR PLAN - LEVEL 3 - POWER & SIGNAL**

SHEET NUMBER

**E3.33**