



Tree Installation Bid Request
Location 1: Olive Road East
Location 2: Oakfield Park
Location 3: Bellview Park
Location 4: John R Jones Park

January 27, 2021

Escambia County, Natural Resources Management
Bid Closes February 10, 2021

The following is a request for proposals for planting at 4 County owned locations. The bid has potential to be awarded to separate contractors, each location should be itemized separately. Bid is to purchase, install and water-in according to ANSI 300 and ISA national standards requested tree species. Trees are to be rated and meet the most recent Florida No. 1 or better standard by the *Florida Department of Agriculture and Consumer Services, Florida Grades and Standards for Nursery Plants*. Rating standards include but not limited to no circling roots, tree height and caliper appropriate for container size. Trees shall be planted per the American National Standard practices for transplanting (ANSI A300 part 6). Including:

- Watering in trees to ensure proper soil settling around root ball with no air pockets using up to 20 gallons of water per tree. (Depending on container size and site conditions)
- Cutting and folding down top 2 tiers of B&B wire basket into the planting hole
- Removing all twine, rope, wire and burlap from the top half of root ball.
- Using weed free pine straw mulch.
- Staking only if necessary
- Minimizing site disturbance

Bid should show break down pricing per species and container size of the tree. Specify approved equal if appropriate. "Tree planting/ installation" will be warranted for survival for 6 months. (County will be responsible for irrigation). Contractor may be requested to add Soil moist or like product to planting area depending on conditions Product and specifications will be supplied by the County.

Contractor should be a member of at least one professional organization. (International Arboriculture Society, Tree Care Industry Association or Florida Nurseryman's Association or similar). Contractor should be prepared to install trees within 2 weeks of bid acceptance. **Please return bids via website or below email prior to February 10, 2021.**

For additional information, please contact:

Jimmie Jarratt, ISA Arborist# FL-5447A
850-554-3071 or ijnjarrat@myescambia.com
Escambia County, Natural Resources Management

Location 1

Olive Road East Stormwater Pond

At Johnson Ave

Planting arrangement is 3 groups of 10 trees placed along interior fence line on Olive Road. Tree location will be flagged by County staff prior to planting.

- Ten Eastern Red Cedars, *Juniperus virginiana* 2.0" to 3.0" caliper. 9 foot or greater with a full canopy to ground.
- Twenty (20) Southern Magnolia, *Magnolia grandiflora* 'Brackens Brown Beauty 2.0" to 3.0" caliper. Trees are to be 9 foot or greater with a full canopy to ground.

Olive Road East, Planting Area



Trees are to be placed approximately 15 feet from fence line in an arrangement marked by County Staff. Planting specifications are on page 1 of 6. Trees are to have a tree well outside of the root ball area as indicated in the Tree w/ berm diagram.

For additional information, please contact:

Jimmie Jarratt, ISA Arborist# FL-5447A

850-554-3071 or ijnjarrat@myescambia.com

Escambia County, Natural Resources Management

**Location 2
Oakcrest Park
220 Topaz Ave
Pensacola FL**

- **Nine (9) Live oaks, *Quercus virginiana* 2.5" to 3.5" caliper**
- **Five (5) Red Maples, *Acer rubrum* 2.5" to 3.0" caliper**
- **Four (4) Willow Oaks, *Quercus phellos* 2.5" to 3.5" caliper**
- **Four (4) Sycamores, *Platanus occidentalis* 2.5" caliper**

Trees are to be placed in an arrangement marked by County Staff.

Planting specifications are on page 1 of 6.

Trees are to have a tree well outside of the root ball area as indicated in the Tree w/ berm diagram.



For additional information, please contact:

Jimmie Jarratt, ISA Arborist# FL-5447A

850-554-3071 or ijnjarrat@myescambia.com

Escambia County, Natural Resources Management

Location 3
Bellview Athletic Park
750 Longleaf Drive
Pensacola FL

Four (4) Sycamores, *Platanus occidentalis* 2.5" to 3.5" caliper



Trees are to be placed in an arrangement marked by County Staff.
Planting specifications are on page 1 of 6.
Trees are to have a tree well outside of the root ball area as indicated in the Tree w/ berm diagram.

For additional information, please contact:
Jimmie Jarratt, ISA Arborist# FL-5447A
850-554-3071 or jjarrat@myescambia.com
Escambia County, Natural Resources Management

Location 4

John R Jones Jr. Athletic Park
501 East Nine Mile Road

One (1) one Sycamore, *Platanus occidentalis* 2.5" to 3.5" caliper




Remove and replace one declining 3" caliper sycamore per planting specifications on page 1 of 6.
Coordinate with County Staff on tree to be removed and replaced.
Trees are to have a tree well outside of the root ball area as indicated in the Tree w/ berm diagram.

For additional information, please contact:

Jimmie Jarratt, ISA Arborist# FL-5447A

850-554-3071 or jnjarrat@myescambia.com

Escambia County, Natural Resources Management

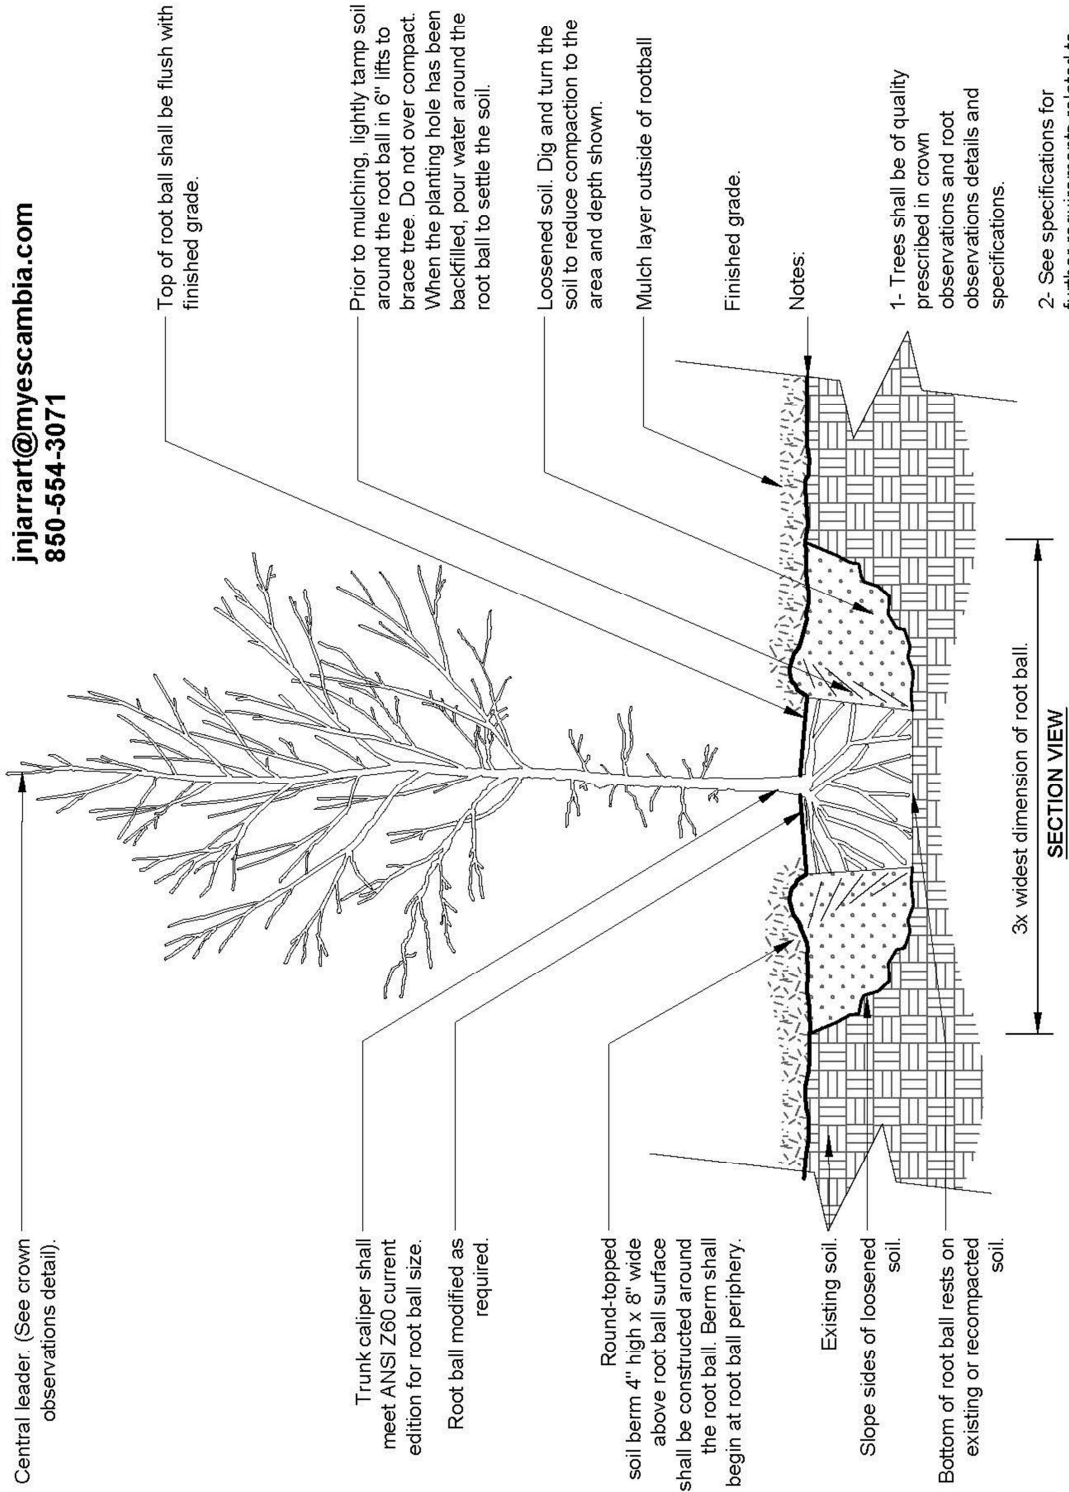

TREE W/ BERM (EXISTING SOIL NOT MODIFIED)

P-X