

# ARLINGTON COUNTY, VIRGINIA OFFICE OF THE PURCHASING AGENT 2100 CLARENDON BOULEVARD, SUITE 500 ARLINGTON, VIRGINIA 22201

#### **CONTRACT AWARD COVERPAGE**

TO: Step 1 Enterprises, LLC DATE ISSUED: February 18, 2023

6207 Kersey Court, CONTRACT NO: 23-DES-ITBPW-448

Burke, Virginia 22015 CONTRACT TITLE: Construction services for 12<sup>TH</sup> floor Interior

renovation of the Arlington County Courthouse

## THIS IS A NOTICE OF AWARD OF CONTRACT AND NOT AN ORDER. NO WORK IS AUTHORIZED UNTIL THE VENDOR RECEIVES A VALID COUNTY PURCHASE ORDER ENCUMBERING CONTRACT FUNDS.

The contract documents consist of the terms and conditions of AGREEMENT No. 23-DES-ITBPW-448 including any attachments or amendments thereto.

**EFFECTIVE DATE**: March 6, 2023 **EXPIRES**: January 31, 2024

RENEWALS: None

**COMMODITY CODE(S)**: 90922

**LIVING WAGE: N** 

**ATTACHMENTS:** 

AGREEMENT No. 23-DES-ITBPW-448

#### **EMPLOYEES NOT TO BENEFIT:**

NO COUNTY EMPLOYEE SHALL RECEIVE ANY SHARE OR BENEFIT OF THIS CONTRACT NOT AVAILABLE TO THE GENERAL PUBLIC.

<u>VENDOR CONTACT:</u> Christopher Smith <u>VENDOR TEL. NO.:</u> (571) 217-0245

EMAIL ADDRESS: christopher.smith@step1enter.com

COUNTY CONTACT: Michael Manos (DES -FD&C) COUNTY TEL. NO.: (703) 228-4437

COUNTY CONTACT EMAIL: ralassaf@ARLINGTONVA.US

#### PURCHASING DIVISION AUTHORIZATION

Sy Gezachew Title: Procurement Officer Date: March 6, 2023



# ARLINGTON COUNTY, VIRGINIA OFFICE OF THE PURCHASING AGENT SUITE 500, 2100 CLARENDON BOULEVARD ARLINGTON, VA 22201

#### **AGREEMENT NO. 23-DES-ITBPW-448**

THIS AGREEMENT is made, on \_\_\_\_\_\_, between **Step 1 Enterprises, LLC, 6207 Kersey Court, Burke, Virginia 22015** ("Contractor") a *Virginia, LLC* authorized to do business in the Commonwealth of Virginia, and the County Board of Arlington County, Virginia ("County"). The County and the Contractor, for the consideration hereinafter specified, agree as follows:

#### 1. CONTRACT DOCUMENTS

The Contract Documents consist of:

- Agreement No. <u>23-DES-ITBPW-448</u>, and all modifications properly incorporated into the Agreement
- Exhibit A Arlington County Invitation to Bid No. 23-DES-ITBPW-448, including DES General Conditions and Special Conditions (incorporated herein by reference)
- Exhibit B Specifications, Drawings and Construction Notes
- Exhibit C Virginia Department Of Labor And Industry Wage Determination Decision
- Exhibit D Price Bid of Contractor
- Exhibit E Contractor Performance Evaluation Form

Where the terms and provisions of this Agreement vary from the terms and provisions of the other Contract Documents, the terms and provisions of this Agreement will prevail over the other Contract Documents, and the remaining Contract Documents will be complementary to each other. If there are any conflicts, the most stringent terms or provisions will prevail.

The Contract Documents set forth the entire agreement between the County and the Contractor. The County and the Contractor agree that no representative or agent of either party has made any representation or promise with respect to the parties' agreement that is not contained in the Contract Documents. The Contract Documents may be referred to below as the "Contract" or the "Agreement".

#### 2. SCOPE OF WORK

The Contractor will furnish all labor, materials, and equipment for the 12<sup>th</sup> floor interior renovation of the Arlington County Courthouse (the "Project") and all other work shown, described, and required by the Contract Documents (hereinafter "the Work").

The Work shall be performed according to the standards established by the Contract Documents read together as a single specification. It shall be the Contractor's responsibility, at solely the Contractor's cost,

to provide sufficient services to fulfill the purposes of the Work. Nothing in the Contract Documents shall be construed to limit the Contractor's responsibility to manage the details and execution of its Work.

#### 3. PROJECT OFFICER

The performance of the Contractor is subject to the review and approval of the County Project Officer identified in Section 53, Notices, unless the Contractor is otherwise notified in writing.

#### 4. TIME FOR COMPLETION

Work under this Agreement shall achieve Substantial Completion no later than Two Hundred Seventy (270) consecutive calendar days after the commencement date given in a Notice to Proceed provided by the County to the Contractor, subject to any modifications made as provided for in the Contract Documents. This Two Hundred Seventy (270) day period shall be the Period of Performance for Substantial Completion. No Work shall be deemed Substantially Complete until it meets the requirements of Substantial Completion set forth in the General Conditions. Final Completion of the Work shall be completed no later than Thirty (30) calendar days after the date of acceptance of Substantial Completion by the County Project Officer. Work will not reach Final Completion until it meets the requirements set forth in the General Conditions.

Unless otherwise provided, no claims for early completion are allowed.

#### 5. **CONTRACT AMOUNT**

The County will pay the Contractor in accordance with the terms of the Progress Payments and Retainage and Payment Terms sections below and at the prices shown in Exhibit D or the Contractor's completion of the Work as required by the Contract Documents provided the Work is performed to the satisfaction of and is accepted by the Project Officer. The Contractor will complete the Work for the total amount specified in this section ("Contract Amount") unless such amount is modified as provided in this Agreement. The Contract Amount includes all of the Contractor's costs and fees (profit) and is inclusive of all anticipated or known site conditions, anticipated or known materials, labor, and equipment costs, or any other costs which should reasonably have been expected by the Contract Documents.

#### 6. PROGRESS PAYMENTS AND RETAINAGE

The County will make monthly progress payments to the Contractor upon written application by the Contractor, on the basis of a written estimate of the work performed during the preceding calendar month as approved by the Project Officer. However, 5% of each progress payment will be retained by the County until Final Completion and acceptance of all Work covered by the Agreement.

All material and work covered by partial payments will become the property solely of the County at the time the partial payment is made. However, the Contractor will have the sole responsibility, care and custody for all materials and work upon which payments have been made until Substantial Completion.

When calculating payment for materials on-site, the County shall not pay for materials which are not scheduled for incorporation into the Work within sixty (60) days from the date of application for payment.

#### 7. PAYMENT TERMS

The Contractor must submit invoices to the County's Project Officer, who will either approve the invoice or require corrections. The County will pay the Contractor within 45 days after approval of an invoice for completed work which is reasonable and allocable to the Contract. All payments will be made from the

County to the Contractor via ACH. The number of the County Purchase Order pursuant to work has been performed must appear on all invoices.

#### 8. PAYMENT OF SUBCONTRACTORS

The Contractor is wholly responsible for the entire amount owed to any subcontractor with which the Contractor contracts in the performance of this Agreement, regardless of whether the Contractor has received payment from the County. The Contractor is not liable for amounts that are not owed as a result of the subcontractor's breach of its agreement with the Contractor, in which case the Contractor must notify the subcontractor in writing of its intention to withhold payment, in full or in part, and the reason for doing so.

The Contractor is obligated to take one of the two following actions within seven days after receipt of payment by the County for work performed by any subcontractor under this Contract:

- a. Pay the subcontractor for the proportionate share of the total payment received from the County attributable to the work performed by the subcontractor under this Contract; or
- b. Notify the County and the subcontractor, in writing, of the Contractor's intention to withhold all or a part of the subcontractor's payment with the reason for nonpayment.

The Contractor is obligated to pay interest to the subcontractor on all amounts owed by the Contractor to the subcontractor that remain unpaid after seven days following receipt by the Contractor of payment from the County for work performed by the subcontractor under this Contract, except for amounts withheld as allowed in subsection b., above. Unless otherwise provided under the terms of this Contract, interest will accrue at the rate of 1% per month.

The Contractor must include in each of its subcontracts, if any are permitted, a provision requiring each subcontractor to include or otherwise be subject to the same payment and interest requirements with respect to each lower-tier subcontractor.

The Contractor's obligation to pay an interest charge to a subcontractor pursuant to this section may not be construed to be an obligation of the County. A Contract modification may not be made for the purpose of providing reimbursement for such interest charge. A cost reimbursement claim may not include any amount for reimbursement for such interest charge.

#### 9. PREVAILING WAGE CONTRACT REQUIREMENTS

A. Section 4-104 of the Arlington County Purchasing Resolution (regarding "Prevailing Wage) applies to this Contract. All employees of the Contractor and any subcontractors shall be paid wages, salaries, benefits, and other remuneration at or above the craft or trade category prevailing wage rate indicated by Virginia Commissioner of Labor and Industry (DOLI) and as listed in the contract.

The Contractor and its subcontractors shall submit all certified payrolls and statements of compliance weekly through the <u>eComply website</u>. If the Contractor or any subcontractor does not have an eComply profile, a one-time registration process immediately following the Notice of Award or Notice of Intent to Award and training on system functionality are required for each non-registered entity. The Contractor shall also be responsible for reviewing subcontractor payrolls and ensuring that contract requirements are met.

In addition to applying the prevailing wage rates to its own employees, the Contractor shall include the provisions of this Article 4-104 in every subcontract so that such provisions will be binding upon each subcontractor. The Contractor agrees to assume the obligation that the wage requirements will be observed in fulfilling the requirements of the Contract. The appropriate enforcement sanctions will be invoked against the Contractor and any such subcontractor in the event of such subcontractor's failure to comply with any of the provisions of this Article 4-104.

All wage rates to be used are listed in this Contract in Exhibit E. While DOLI maintains a list of wage determinations online for reference purposes, only the wage determinations made in an official Wage Determination Decision, sent by DOLI to Arlington County, can be used to ascertain the exact rates to be paid for this Contract.

All rates are determined by DOLI and any appeals of specific classification may be made through the Wage Determination Appeal form available at <a href="http://www.doli.virginia.gov/wp-content/uploads/2021/04/Appeal-for-Wage-Determination-Clarification.pdf">http://www.doli.virginia.gov/wp-content/uploads/2021/04/Appeal-for-Wage-Determination-Clarification.pdf</a>.

- B. Upon award of the Contract, the Contractor shall certify, under oath, to the Virginia Commissioner of Labor and Industry and to the County Prevailing Wage Compliance Manager, the pay scale for each craft and trade to be employed for, or to provide labor for, in the Work by the Contractor and any subcontractors. The Contractor's certification shall include all information required by the Code of Virginia § 2.2-4321.3G.
- C. The Contractor shall ensure that each individual providing labor as a mechanic, laborer, worker or equivalent shall be accurately classified in confirmation with the Wage Determination.
- D. The Contractor shall post the prevailing wage rate for each craft and classification involved as determined by DOLI, including the effective date, in a prominent and easily accessible place at the work site during the time work is being performed. The posting must be in English and any other language that is primarily spoken by the individuals at the work site. Within 10 days of such posting the Contractor shall certify to the County Prevailing Wage Compliance Manager and DOLI its compliance with this subsection at <a href="https://www.doli.virginia.gov/wp-content/uploads/2021/04/PW">https://www.doli.virginia.gov/wp-content/uploads/2021/04/PW</a> Posting Compliance Form.pdf;
- E. The Contractor must fully cooperate with the County Prevailing Wage Compliance Manager to ensure contract compliance requirements ,including but not limited to site visits, wage rate signage, contractor employee interviews, and the submission of certified payroll records.
- F. The Contractor must submit to the County Prevailing Wage Compliance Manager and DOLI, within five (5) working days of the end of each month, certification for each craft or trade employed on the project, specifying the total hourly amount paid to employees, including wages and applicable fringe benefits using the Pay Scale Certification Form at <a href="https://www.doli.virginia.gov/wp-content/uploads/2021/04/DOLI-Pay-Scale-Certification-for-Public-Works-Projects.pdf">https://www.doli.virginia.gov/wp-content/uploads/2021/04/DOLI-Pay-Scale-Certification-for-Public-Works-Projects.pdf</a>. The certification must itemize the amount paid in wages and each applicable benefit and list the names and addresses of any third party fund, plan or program to which benefit payments will be made on behalf of employees.

- G. The Contractor shall indemnify and hold harmless the County from any fines, demands, claims, suits, and damages, including attorney's fees, resulting from the Contractor's or any subcontractor's failure to pay the Prevailing Wage.
- H. The Contractor and its subcontractors shall keep, maintain, and preserve (i) records relating to the wages paid to and hours worked by each individual performing the work of any mechanic, laborer, or worker; and (ii) a schedule of the occupation or work classification at which each individual performing the work of any mechanic, laborer, or worker on the construction project is employed each work day and week. The Contractor and its subcontractors shall make such records available to the Prevailing Wage Compliance Manager within 10 days of a request or per a regular schedule established in the Contract, and shall certify that records reflect the actual hours worked and the amount paid to its workers for whatever time period is requested. The Contractor and its subcontractors must preserve these records for a period of six (6) years after the expiration or earlier termination of the applicable contract.
- I. Any Contractor or subcontractor who pays any mechanic, laborer, or worker for services under this Contract less than the Prevailing Wage shall be liable to such individuals for the payment of all wages due, plus interest at an annual rate of eight percent (8%) from the dates wages were due; and shall be disqualified from bidding on public contracts with any public body until the Contractor or subcontractor has made full restitution. A willful violation of Article 4-104 is a Class I misdemeanor.
- J. For questions regarding Prevailing Wage, please email <a href="mailto:prevailingwage@arlingtonva.us.">prevailingwage@arlingtonva.us.</a>

#### 10. RELEASE AND REQUEST FOR FINAL PAYMENT

In order to receive final payment upon Final Completion of the Project and before Final Acceptance, the Contractor must submit to the Project Officer a signed original notarized copy of the Arlington County Release and Request for Final Payment form per the General Conditions.

#### 11. LIQUIDATED DAMAGES

Time is of the essence under this Contract. The Work must be completed within the Time for Completion. The County and the Contractor agree that damages for failure to achieve Substantial Completion of the Work by the date specified under Time for Completion are not susceptible to exact determination but that \$853.00 per calendar day is in proportion to the actual loss that the County would suffer from such delay. Therefore, the Contractor will pay the County as liquidated damages \$853.00 per day for each and every day beyond the time for Substantial Completion that the County determines Substantial Completion has not achieved. The County and the Contractor also agree that damages for failure to achieve Final Completion of the Work by the date specified under Time for Completion are not susceptible to exact determination but that \$853.00 per calendar day is in proportion to the actual loss the County would suffer from such delay. Therefore, the Contractor will pay the County as liquidated damages \$853.00 per day for each and every day beyond the time for Final Completion until Final Completion is achieved.

The County will be entitled to deduct liquidated damages against any sums owed by the County to the Contractor under this Contract. The Contractor hereby waives any defense as to the validity of any liquidated damages on grounds that such liquidated damages are void as penalties or are not reasonably related to actual damages.

#### 12. BACKGROUND CHECK

All employees or subcontractors whom the Contractor assigns to work on this Contract must pass a County background check. The background check will include fingerprinting by the County Sheriff's Office and a credit check.

#### 13. NON-APPROPRIATION

All payments by the County to the Contractor pursuant to this Contract are subject to the availability of an annual appropriation for this purpose by the County Board of Arlington County, Virginia ("Board"). In the event that the Board does not appropriate funds for the goods or services provided under this Contract, the County will terminate the Contract, without termination charge or other liability to the County, on the last day of the fiscal year or when the previous appropriation has been spent, whichever occurs first.

#### 14. ESTIMATED QUANTITIES/NON-EXCLUSIVITY OF CONTRACTOR

This Contract does not obligate the County to purchase a specific quantity of items or services during Contract Term. Any quantities that are included in the Contract Documents are the present expectations of the County for the period of the Contract; and the County is under no obligation to buy that or any amount as a result of having provided this estimate or of having had any normal or otherwise measurable requirement in the past. The County may require more goods and/or services than the estimated annual quantities, and any such additional quantities will not give rise to any claim for compensation other than at the unit prices and/or rates in the Contract.

The County does not guarantee that the Contractor will be the exclusive provider of the goods or services covered by this Contract. The items or services covered by this Contract may be or become available under other County contract(s), and the County may determine that it is in its best interest to procure the items or services through those contract(s).

#### 15. COUNTY PURCHASE ORDER REQUIREMENT

County purchases are authorized only if the County issues a Purchase Order in advance of the transaction, indicating that the ordering County agency has sufficient funds available to pay for the purchase. If the Contractor provides goods or services without a signed County Purchase Order, it does so at its own risk and expense. The County will not be liable for payment for any purchases made by its employees that are not authorized by the County Purchasing Agent.

#### 16. <u>LIEN</u>

It is expressly agreed that after any payment has been made by the County either to the Contractor for work done, or labor or material supplied under the Contract, the County will have a lien upon all material delivered to the site either by the Contractor, or for the Contractor, which is to be used in the performance of the Contract.

#### 17. VALUE ENGINEERING PROPOSAL (VEP)

Unless otherwise provided, the Contractor may submit to the County a written VEP for modifying the plans, specifications, or other requirements of the Agreement covering the work (Contract) for the purpose of reducing the total cost of the Contract without reducing the design capacity or quality of the finished product. If the VEP is accepted by the County, the net savings will be equally divided by the County and the Contractor.

Each VEP shall result in a net savings over the Contract cost without impairing essential functions and characteristics of the item(s) or of any other part of the project, including, but not limited to, service life, reliability, economy of operation, ease of maintenance, aesthetics, and safety. At least the following information shall be submitted with each VEP:

- (a) a statement that the proposal is submitted as a VEP;
- (b) a statement concerning the basis for the VEP, benefits to the County, and an itemization of the Contract items and requirements affected by the VEP;
- (c) a detailed estimate of the cost under the existing Contract and under the VEP;
- (d) proposed specifications and recommendations as to the manner in which the VEP changes are to be accomplished; and
- (e) a statement as to the time by which a Contract Amendment adopting the VEP must be issued so as to obtain the maximum cost-effectiveness.

The County will process the VEP in the same manner as prescribed for any other proposal that would necessitate issuance of an Amendment. The County may accept a VEP in whole or part by issuing an Amendment that will identify the VEP on which it is based. The County will not be liable to the Contractor for failure to accept or act on any VEP submitted pursuant to these requirements or for delays in the work attributable to any VEP. Until a VEP is put into effect by an Amendment, the Contractor shall remain obligated to the terms and conditions of the existing Agreement. If an executed Amendment has not been issued by the date on which the Contractor's proposal specifies that a decision should be made or such other date as the Contractor may subsequently have specified in writing, the VEP shall be deemed rejected.

The Amendment effecting the necessary modification of the Contract will establish the net savings agreed on, provide for adjustment of the contract prices, and indicate the net savings. The Contractor shall absorb all costs incurred in preparing a VEP. Reasonably incurred costs for reviewing and administering a VEP will be borne by the County. The County may establish any reasonable conditions it deems appropriate for consideration, approval, and implementation of the VEP. The Contractor's 50 percent share of the net savings shall constitute full compensation to it, including by way of illustration and not limitation compensation for time, for effecting all changes pursuant to the Amendment.

Unless specifically provided for in the Amendment authorizing the VEP, acceptance of the VEP and performance of the work thereunder will not change the Contract Term limit.

The County may adopt a VEP for general use in contracts administered by the County if it determines that the VEP is suitable for application to other contracts. A VEP identical with or similar to a previously submitted VEP will be eligible for consideration and compensation under these provisions if it has not been previously adopted for general application to other contracts administered by the County. When a VEP is adopted for general use, compensation pursuant to these requirements will be applied only to those awarded contracts for which the VEP was submitted prior to the date of adoption of the VEP.

If a VEP is based on or is similar to a change in the plans, specifications, or special provisions adopted by the County prior to submission of the VEP, as determined by the County, the County will not accept the VEP.

ITB No. 23-DES-ITBPW-448

The County will be the sole judge of the acceptability of a VEP. The requirements herein apply to each VEP initiated, developed, and identified as such by the Contractor at the time of its submission to the County. However, nothing herein shall be construed as requiring the County to consider or approve a VEP, and the decision to enter into an Amendment to the contract to accommodate a VEP shall be in the County's sole discretion.

Subject to the provisions contained herein, the County, or any other public agency with the County's permission, shall have the right to use all or part of an accepted VEP without obligation or compensation of any kind to the Contractor.

If a VEP is accepted by the County, any provisions herein that pertain to the adjustment of contract unit prices attributable to alterations of contract quantities will not apply to the items adjusted or deleted as a result of putting the VEP into effect by an Amendment.

#### 18. EMPLOYMENT DISCRIMINATION BY CONTRACTOR PROHIBITED

During the performance of its work pursuant to this Contract:

- A. The Contractor will not discriminate against any employee or applicant for employment because of race, religion, color, sex, sexual orientation, gender identity, national origin, age, disability or on any other basis prohibited by state law. The Contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices setting forth the provisions of this nondiscrimination clause.
- B. Notices, advertisements and solicitations placed in accordance with federal law, rule or regulation will be deemed sufficient for meeting the requirements of this section.
- C. The Contractor will state in all solicitations or advertisements for employees that it places or causes to be placed that such Contractor is an Equal Opportunity Employer.
- D. The Contractor will comply with the provisions of the Americans with Disabilities Act of 1990 ("ADA"), which prohibits discrimination against individuals with disabilities in employment and mandates that disabled individuals be provided access to publicly and privately provided services and activities.
- E. The Contractor must include the provisions of the foregoing paragraphs in every subcontract or purchase order of more than \$10,000.00 relating to this Contract so that the provisions will be binding upon each subcontractor or vendor.

#### 19. <u>EMPLOYMENT OF UNAUTHORIZED ALIENS PROHIBITED</u>

In accordance with §2.2-4311.1 of the Code of Virginia, as amended, the Contractor must not during the performance of this Contract knowingly employ an unauthorized alien, as that term is defined in the federal Immigration Reform and Control Act of 1986.

#### 20. DRUG-FREE WORKPLACE TO BE MAINTAINED BY CONTRACTOR

During the performance of this Contract, the Contractor must: (i) provide a drug-free workplace for its employees; (ii) post in conspicuous places, available to employees and applicants for employment, a statement notifying employees that the unlawful manufacture, sale, distribution, dispensation, possession, or use of a controlled substance or marijuana is prohibited in the Contractor's workplace and specifying the actions that will be taken against employees for violating such prohibition; (iii) state in all

solicitations or advertisements for employees placed by or on behalf of the Contractor that the Contractor maintains a drug-free workplace; and (iv) include the provisions of the foregoing clauses in every subcontract or purchase order of more than \$10,000.00 relating to this Contract so that the provisions will be binding upon each subcontractor or vendor.

For the purposes of this section, "workplace" means the site(s) for the performance of the work required by this Contract.

#### 21. \*SEXUAL HARASSMENT POLICY

If the Contractor employs more than five employees, the Contractor shall (i) provide annual training on the Contractor's sexual harassment policy to all supervisors and employees providing services in the Commonwealth, except such supervisors or employees that are required to complete sexual harassment training provided by the Department of Human Resource Management, and (ii) post the Contractor's sexual harassment policy in (a) a conspicuous public place in each building located in the Commonwealth that the Contractor owns or leases for business purposes and (b) the Contractor's employee handbook.

#### 22. COVID-19 VACCINATION POLICY FOR CONTRACTORS

Due to the ongoing COVID-19 pandemic, the County has taken various steps to protect the welfare, health, safety, and comfort of the workforce and public at large. As part of these steps, the County has implemented various requirements with respect to health and safety including policies with respect to social distancing, the use of face-coverings and vaccine mandates. To protect the County's workforce and the public at large, all employees and subcontractors of the Contractor who are assigned to this Contract, should be fully vaccinated against COVID-19. Any contractor employee or subcontractor who is not fully vaccinated should be following a weekly testing protocol as established by the Contractor, unless exempt pursuant to a valid reasonable accommodation under state or federal law.

#### 23. PROJECT STAFF

The County has the right to reasonably reject staff or subcontractors whom the Contractor assigns to the Project. The Contractor must then provide replacement staff or subcontractors satisfactory to the County in a timely manner and at no additional cost to the County. The day-to-day supervision and control of the Contractor's employees and its subcontractors is the sole responsibility of the Contractor.

#### 24. FAILURE TO DELIVER

If the Contractor fails to deliver goods or services in accordance with the Contract terms and conditions, the County, after notice to the Contractor, may procure the goods or services from other sources and hold the Contractor responsible for any resulting additional purchase and administrative costs. The County shall be entitled to offset such costs against any sums owed by the County to the Contractor. However, if public necessity requires the use of nonconforming materials or supplies, they may be accepted at a reduction in price to be determined solely by the County.

#### 25. UNSATISFACTORY WORK

If any of the work done, or material, goods, or equipment provided by the Contractor, is unsatisfactory to the County the Contractor must, upon notice from the County, immediately remove at the Contractor's expense such unsatisfactory work, material, goods, or equipment and replace the same with work, material, goods, or equipment satisfactory to the County. If the Contractor fails to do so after fifteen (15) days the County shall have the right to remove or replace the rejected work, material, goods, or equipment at the expense of the Contractor and offset the expense and administrative costs against any

sums owed to the Contractor. This provision applies during the Contract term and during any warranty or guarantee period. At the Project Officer's discretion, rather than correction or replacement of the work, an appropriate adjustment to the Contract Amount may be made.

#### 26. TERMINATION

The County may terminate this Contract at any time as follows: (1) for cause, if, as determined by the County, the Contractor is in breach or default or has failed to perform the Work satisfactorily; or (2) for the convenience of the County.

Upon receipt of a notice of termination, the Contractor must not place any further orders or subcontracts for materials, services or facilities; must terminate all vendors and subcontracts, except as are necessary for the completion of any portion of the Work that the County did not terminate; and must immediately deliver all documents related to the terminated Work to the County.

Any purchases that the Contractor makes after the notice of termination will be the sole responsibility of the Contractor, unless the County has approved the purchases in writing as necessary for completion of any portion of the Work that the County did not terminate.

If any court of competent jurisdiction finds a termination for cause by the County to be improper, then the termination will be deemed a termination for convenience.

#### A. TERMINATION FOR CAUSE, INCLUDING BREACH AND DEFAULT; CURE

1. Termination for Unsatisfactory Performance. If the County determines that the Contractor has failed to perform satisfactorily, then the County will give the Contractor written notice of such failure(s) and the opportunity to cure them within 15 days or any other period specified by the County ("Cure Period"). If the Contractor fails to cure within the Cure Period, the County may terminate the Contract for failure to provide satisfactory performance by providing written notice with a termination date. Upon such termination, the Contractor may apply for compensation for Contract services that the County previously accepted ("Termination Costs"), unless payment is otherwise barred by the Contract. The Contractor must submit any request for Termination Costs, with all supporting documentation, to the County Project Officer within 30 days after the expiration of the Cure Period. The County may accept or reject the request for Termination Costs, in whole or in part, and may notify the Contractor of its decision within a reasonable time.

In the event of termination by the County for failure to perform satisfactorily, the Contractor must continue to provide its services as previously scheduled through the termination date, and the County must continue to pay all fees and charges incurred through the termination date.

 Termination for Breach or Default. If the County terminates the Contract for default or breach of any Contract provision or condition, then the termination will be immediate after notice of termination to the Contractor (unless the County provides for an opportunity to cure), and the Contractor will not be permitted to seek Termination Costs.

Upon any termination pursuant to this section, the Contractor will be liable to the County for costs that the County must expend to complete the Work, including costs resulting from any related delays and from unsatisfactory or non-compliant work performed by the Contractor or its subcontractors. The County will deduct such costs from any amount due

to the Contractor; or if the County does not owe the Contractor, the Contractor must promptly pay the costs within 15 days of a demand by the County. This section does not limit the County's recovery of any other damages to which it is entitled by law.

Except as otherwise directed by the County, the Contractor must stop work on the date of receipt the notice of the termination.

#### B. TERMINATION FOR THE CONVENIENCE OF THE COUNTY

The County may terminate this Contract in whole or in part whenever the Purchasing Agent determines that termination is in the County's best interest. The County will give the Contractor at least 15 days' notice in writing. The notice must specify the extent to which the Contract is terminated and the effective termination date. The Contractor will be entitled to Termination Costs, as defined above, plus any other reasonable amounts that the parties might negotiate; but no amount will be allowed for anticipatory profits.

Except as otherwise directed by the County, the Contractor must stop work on the date of receipt of the notice of the termination.

#### 27. <u>INDEMNIFICATION</u>

The Contractor covenants for itself, its employees and its subcontractors to save, defend, hold harmless and indemnify the County and all of its elected and appointed officials, officers, current and former employees, agents, departments, agencies, boards and commissions (collectively the "County Indemnitees") from and against any and all claims made by third parties for any and all losses, damages, injuries, fines, penalties, costs (including court costs and attorneys' fees), charges, liability, demands or exposure resulting from, arising out of or in any way connected with the Contractor's acts or omissions, including the acts or omissions of its employees, vendors, delivery drivers and/or subcontractors, in performance or nonperformance of the Contract. This duty to save, defend, hold harmless and indemnify will survive the termination of this Contract. If the Contractor fails or refuses to fulfill its obligations contained in this section, the Contractor must reimburse the County for any and all resulting payments and expenses, including reasonable attorneys' fees. The Contractor must pay such expenses upon demand by the County, and failure to do so may result in the County withholding such amounts from any payments to the Contractor under this Contract.

#### 28. <u>INTELLECTUAL PROPERTY INDEMNIFICATION</u>

The Contractor warrants and guarantees that in providing services under this Contract neither the Contractor nor any subcontractor is infringing on the intellectual property rights (including, but not limited to, copyright, patent, mask and trademark) of third parties.

If the Contractor or any of its employees or subcontractors uses any design, device, work or material that is covered by patent or copyright, it is understood that the Contract Amount includes all royalties, licensing fees, and any other costs arising from such use in connection with the Work under this Contract.

The Contractor covenants for itself, its employees and its subcontractors to save, defend, hold harmless, and indemnify the County Indemnitees, as defined above, from and against any and all claims, losses, damages, injuries, fines, penalties, costs (including court costs and attorneys' fees), charges, liability or exposure for infringement of or on account of any trademark, copyright, patented or unpatented invention, process or article manufactured or used in the performance of this Contract. This duty to save, defend, hold harmless and indemnify will survive the termination of this Contract. If the Contractor fails

or refuses to fulfill its obligations contained in this section, the Contractor must reimburse the County for any and all resulting payments and expenses, including reasonable attorneys' fees. The Contractor must pay such expenses upon demand by the County, and failure to do so may result in the County withholding such amounts from any payments to the Contractor under this Contract.

#### 29. COPYRIGHT

By this Contract, the Contractor irrevocably transfers, assigns, sets over and conveys to the County all rights, title and interest, including the sole exclusive and complete copyright interest, in any and all copyrightable works created pursuant to this Contract. The Contractor will execute any documents that the County requests to formalize such transfer or assignment.

The rights granted to the County by this section are irrevocable and may not be rescinded or modified, including in connection with or as a result of the termination of or a dispute concerning this Contract. The Contractor may not use subcontractors or third parties to develop or provide input into any copyrightable materials produced pursuant to this Contract without the County's advance written approval and unless the Contractor includes this Copyright provision in any contract or agreement with such subcontractors or third parties related to this Contract.

#### 30. OWNERSHIP AND RETURN OF RECORDS

This Contract does not confer on the Contractor any ownership rights or rights to use or disclose the County's data or inputs.

All drawings, specifications, blueprints, data, information, findings, memoranda, correspondence, documents or records of any type, whether written, oral or electronic, and all documents generated by the Contractor or its subcontractors as a result of this Contract (collectively "Records") are the exclusive property of the County and must be provided or returned to the County upon completion, termination, or cancellation of this Contract. The Contractor will not use or willingly cause or allow such materials to be used for any purpose other than performance of this Contract without the written consent of the County.

The Records are confidential, and the Contractor will neither release the Records nor share their contents. The Contractor will refer all inquiries regarding the status of any Record to the Project Officer or to his or her designee. At the County's request, the Contractor will deliver all Records, including hard copies of electronic records, to the Project Officer and will destroy all electronic Records.

The Contractor agrees to include the provisions of this section as part of any contract or agreement related to this Contract into which it enters with subcontractors or other third parties.

The provisions of this section will survive any termination or cancellation of this Contract.

#### 31. CONFIDENTIAL INFORMATION

The Contractor and its employees, agents and subcontractors will hold as confidential all County information obtained under this Contract. Confidential information includes, but is not limited to, nonpublic personal information; personal health information (PHI); social security numbers; addresses; dates of birth; other contact information or medical information about a person; and information pertaining to products, operations, systems, customers, prospective customers, techniques, intentions, processes, plans and expertise. The Contractor must take reasonable measures to ensure that all of its employees, agents and subcontractors are informed of and abide by this requirement.

#### 32. ETHICS IN PUBLIC CONTRACTING

This Contract incorporates by reference Article 9 of the Arlington County Purchasing Resolution, as well as all state and federal laws related to ethics, conflicts of interest or bribery, including the State and Local Government Conflict of Interests Act (Code of Virginia § 2.2-3100 et seq.), the Virginia Governmental Frauds Act (Code of Virginia § 18.2-498.1 et seq.) and Articles 2 and 3 of Chapter 10 of Title 18.2 of the Code of Virginia, as amended (§ 18.2-438 et seq.). The Contractor certifies that its bid was made without

collusion or fraud; that it has not offered or received any kickbacks or inducements from any other offeror, supplier, manufacturer or subcontractor; and that it has not conferred on any public employee having official responsibility for this procurement any payment, loan, subscription, advance, deposit of money, services or anything of more than nominal value, present or promised, unless consideration of substantially equal or greater value was exchanged.

#### 33. COUNTY EMPLOYEES

No Arlington County employee may share in any part of this Contract or receive any benefit from the Contract that is not available to the general public.

#### 34. FORCE MAJEURE

Neither party will be held responsible for failure to perform the duties and responsibilities imposed by this Contract if such failure is due to a fire, riot, rebellion, natural disaster, war, act of terrorism or act of God that is beyond the control of the party and that makes performance impossible or illegal, unless otherwise specified in the Contract, provided that the affected party gives notice to the other party as soon as practicable after the force majeure event, including reasonable detail and the expected duration of the event's effect on the party.

#### 35. AUTHORITY TO TRANSACT BUSINESS

The Contractor must, pursuant to Code of Virginia § 2.2-4311.2, be and remain authorized to transact business in the Commonwealth of Virginia during the entire term of this Contract. Otherwise, the Contract is voidable at the sole option of and with no expense to the County.

#### 36. RELATION TO THE COUNTY

The Contractor is an independent contractor, and neither the Contractor nor its employees or subcontractors will be considered employees, servants or agents of the County. The County will not be responsible for any negligence or other wrongdoing by the Contractor or its employees, servants or agents. The County will not withhold payments to the Contractor for any federal or state unemployment taxes, federal or state income taxes or Social Security tax or for any other benefits. The County will not provide to the Contractor any insurance coverage or other benefits, including workers' compensation.

#### 37. ANTITRUST

The Contractor conveys, sells, assigns and transfers to the County all rights, title and interest in and to all causes of action under state or federal antitrust laws that the Contractor may have relating to this Contract.

#### 38. REPORT STANDARDS

The Contractor must submit all written reports required by this Contract for advance review in a format approved by the Project Officer. Reports must be accurate and grammatically correct and should not contain spelling errors. The Contractor will bear the cost of correcting grammatical or spelling errors and

inaccurate report data and of other revisions that are required to bring the report(s) into compliance with this section.

Whenever possible, proposals must comply with the following guidelines:

- printed double-sided on at least 30% recycled-content and/or tree-free paper
- recyclable and/or easily removable covers or binders made from recycled materials (proposals with glued bindings that meet all other requirements are acceptable)
- avoid use of plastic covers or dividers
- avoid unnecessary attachments or documents or superfluous use of paper (e.g. separate title sheets or chapter dividers)

#### 39. AUDIT

The Contractor must retain all books, records and other documents related to this Contract for at least five (5) years, unless otherwise specified in the Contract, or such period of time required by the County's funding partner(s), if any, whichever is greater, after the final payment and must allow the County or its authorized agents to examine the documents during this period and during the Contract Term. The Contractor must provide any requested documents to the County for examination within 15 days of the request, at the Contractor's expense. Should the County's examination reveal any overcharging by the Contractor, the Contractor must, within 30 days of County's request, reimburse the County for the overcharges and for the reasonable costs of the County's examination, including, but not limited to, the services of external audit firm and attorney's fees; or the County may deduct the overcharges and examination costs from any amount that the County owes to the Contractor. If the Contractor wishes to destroy or dispose of any records related to this Contract (including confidential records to which the County does not have ready access) within five (5) years after the final payment, unless otherwise specified in the Contract, or such period of time required by the County's funding partner(s), if any, whichever is greater, the Contractor must give the County at least 30 days' notice and must not dispose of the documents if the County objects.

The Purchasing Agent may require the Contractor to demonstrate that it has the necessary facilities, ability, and financial resources to comply with the Contract and furnish the service, material or goods specified herein in a satisfactory manner at any time during the term of this Contract.

#### 40. ASSIGNMENT

The Contractor may not assign, transfer, convey or otherwise dispose of any award or any of its rights, obligations or interests under this Contract without the prior written consent of the County.

#### 41. AMENDMENTS

This Contract may not be modified except by written amendment executed by persons duly authorized to bind the Contractor and the County.

#### 42. ARLINGTON COUNTY PURCHASING RESOLUTION AND COUNTY POLICIES

Nothing in this Contract waives any provision of the Arlington County Purchasing Resolution, which is incorporated herein by reference, or any applicable County policy.

#### 43. DISPUTE RESOLUTION

All disputes arising under this Agreement or concerning its interpretation, whether involving law or fact and including but not limited to claims for additional work, compensation or time, and all claims for

alleged breach of contract must be submitted in writing to the Project Officer as soon as the basis for the claim arises. In accordance with the Arlington County Purchasing Resolution, claims denied by the Project Officer may be submitted to the County Manager in writing no later than 60 days after the final payment. The time limit for a final written decision by the County Manager is 30 days. Procedures concerning contractual claims, disputes, administrative appeals and protests are contained in the Arlington County Purchasing Resolution. The Contractor must continue to work as scheduled pending a decision of the Project Officer, County Manager, County Board or a court of law.

#### 44. <u>APPLICABLE LAW, FORUM, VENUE, AND JURISDICTION</u>

This Contract is governed in all respects by the laws of the Commonwealth of Virginia; and the jurisdiction, forum and venue for any litigation concerning the Contract or the Work is in the Circuit Court for Arlington County, Virginia, and in no other court.

#### 45. ARBITRATION

No claim arising under or related to this Contract may be subject to arbitration.

#### 46. **NONEXCLUSIVITY OF REMEDIES**

All remedies available to the County under this Contract are cumulative, and no remedy will be exclusive of any other at law or in equity.

#### 47. NO WAIVER

The failure to exercise a right provided for in this Contract will not be a subsequent waiver of the same right or of any other right.

#### 48. SEVERABILITY

The sections, paragraphs, clauses, sentences, and phrases of this Contract are severable; and if any section, paragraph, clause, sentence or phrase of this Contract is declared invalid by a court of competent jurisdiction, the rest of the Contract will remain in effect.

#### **49. ATTORNEY'S FEES**

In the event that the County prevails in any legal action or proceeding brought by the County to enforce any provision of this Contract, the Contractor will pay the County's reasonable attorney's fees and expenses.

#### **50. SURVIVAL OF TERMS**

In addition to any statement that a specific term or paragraph survives the expiration or termination of this Contract, the following sections also survive: INDEMNIFICATION; INTELLECTUAL PROPERTY INDEMNIFICATION; RELATION TO COUNTY; OWNERSHIP AND RETURN OF RECORDS; AUDIT; COPYRIGHT; DISPUTE RESOLUTION; APPLICABLE LAW AND JURISDICTION; ATTORNEY'S FEES, AND CONFIDENTIAL INFORMATION.

#### **51. HEADINGS**

The section headings in this Contract are inserted only for convenience and do not affect the substance of the Contract or limit the sections' scope.

#### **52. AMBIGUITIES**

The parties and their counsel have participated fully in the drafting of this Agreement; and any rule that ambiguities are to be resolved against the drafting party does not apply. The language in this Agreement is to be interpreted as to its plain meaning and not strictly for or against any party.

#### 53. NOTICES

Unless otherwise provided in writing, all legal notices and other formal communications required by this Contract are deemed to have been given when either (a) delivered in person; (b) delivered by an agent, such as a delivery service; or (c) deposited in the United States mail, postage prepaid, certified or registered and addressed as follows:

#### TO THE CONTRACTOR:

Christopher Smith P.O. Box 10651 Burke, Virginia 22009

Phone: (571) 217-0245

Email: christopher.smith@step1enter.com

#### TO THE COUNTY:

Michael Manos, Project Officer DES – Facilities Design & Construction 1400 N Uhle Street, Suite 403 Arlington, Virginia 22201

Phone: (703) 228-4437

Email: mmanos@arlingtonva.us

#### <u>AND</u>

Dr. Sharon T. Lewis, LL.M, MPS, VCO, CPPB Purchasing Agent Arlington County, Virginia 2100 Clarendon Boulevard, Suite 500 Arlington, Virginia 22201

Phone: (703) 228-3294

Email: <a href="mailto:slewis1@arlingtonva.us">slewis1@arlingtonva.us</a>

#### TO COUNTY MANAGER'S OFFICE (FOR PROJECT CLAIMS):

County Manager Arlington County, Virginia 2100 Clarendon Boulevard, Suite 318 Arlington, Virginia 22201

#### **54. NON-DISCRIMINATION NOTICE**

Arlington County does not discriminate against faith-based organizations.

#### 55. INSURANCE, PAYMENT AND PERFORMANCE BONDS

The Contractor shall maintain the required insurance coverage and payment and performance bonds as set forth in the Invitation to Bid through completion of the Contract, including all warranty and guarantee periods.

#### **56. MATERIAL CHANGES**

The Contractor shall notify Purchasing Agent within seven days of any material changes in its operation that relate to any matter attested regarding certifications on its bid form.

#### **57. CONTRACTOR PERFORMANCE EVALUATION**

Arlington County will perform written evaluations of the Contractor's performance at various intervals throughout the term of this Contract. The evaluations will address, at a minimum, the Contractor's work/performance, quality, cost controls, schedule, timeliness and sub-contractor management. The Project Officer shall be responsible for completing the evaluations and providing a copy to the Contractor and County Procurement Officer.

#### **58. COUNTERPARTS**

This Agreement may be executed in one or more counterparts and all of such counterparts shall together constitute one and the same instrument. Original signatures transmitted and received via facsimile or other electronic transmission (e.g., PDF or similar format) are true and valid signatures for all purposes hereunder and shall be effective as delivery of a manually executed original counterpart.

WITNESS these signatures:

THE COUNTY BOARD OF ARLINGTON COUNTY, VIRGINIA	STEP 1 ENTERPRISES, LLC
AUTHORIZED Docusigned by: SIGNATURE: Sy Gramm	AUTHORIZED Docusigned by: SIGNATURE: Christopher Smith
NAME Sy Gezachew	NAME: Christopher Smith
TITLE: PROCUREMENT OFFICER	TITLE: CFO
DATE: 3/6/2023	DATE:2/27/2023

**VICINITY MAP** 

# PERMIT SET

# ARLINGTON COUNTY COURTHOUSE 12TH FLOOR RENOVATION


# ARLINGTON COUNTY, VIRGINIA

563007

# 1425 NORTH COURTHOUSE ROAD ARLINGTON, VA

# MOSELEYARCHITECTS

3200 NORFOLK STREET, RICHMOND, VA 23230 PHONE (804) 794-7555 FAX (804) 355-5690 MOSELEYARCHITECTS.COM

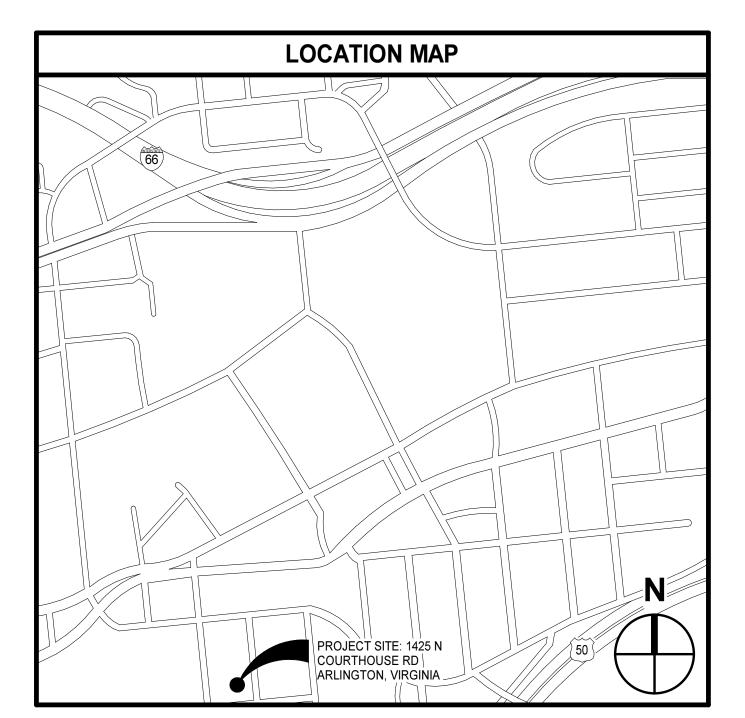

### CODE AND BUILDING DATA **EXISTING BUILDING INFORMATION:**

BUILDING WAS CONSTRUCTED UNDER THE BOCA BASIC NATIONAL BUILDING CODE, 1990 EDITION, AND ANSI A117 FOR HANDICAP-ACCESSIBLE AREAS. CONSTRUCTED AS TYPE 2A (MODIFIED 1B IN ACCORDANCE WITH SECTION

• OCCUPANCY USE GROUP ON TWELFTH FLOOR IS B - OFFICE.

TWELFTH FLOOR FOOTPRINT IS 17,869 GSF.

 THE BUILDING IS FULLY SPRINKLERED. THE BUILDING HAS AN EXISTING FIRE ALARM SYSTEM.


THE NEW WORK WILL BE CONSTRUCTED UNDER THE 2018 VIRGINIA EXISTING BUILDING CODE (VEBC), LEVEL 1 AND LEVEL 2 ALTERATIONS, AND THE 2009 ICC

• OCCUPANCY USE GROUP OF NEW WORK IS B - OFFICE. THERE IS NO CHANGE IN OCCUPANCY.

GROSS RENOVATED AREA IS 6,429 GSF.

 LEVEL 1 RENOVATION = 6,107 GSF LEVEL 2 RENOVATION = 322 GSF


USE ELEVATOR ONE FOR CONSTRUCTION. PROTECT INTERIOR WALLS AND

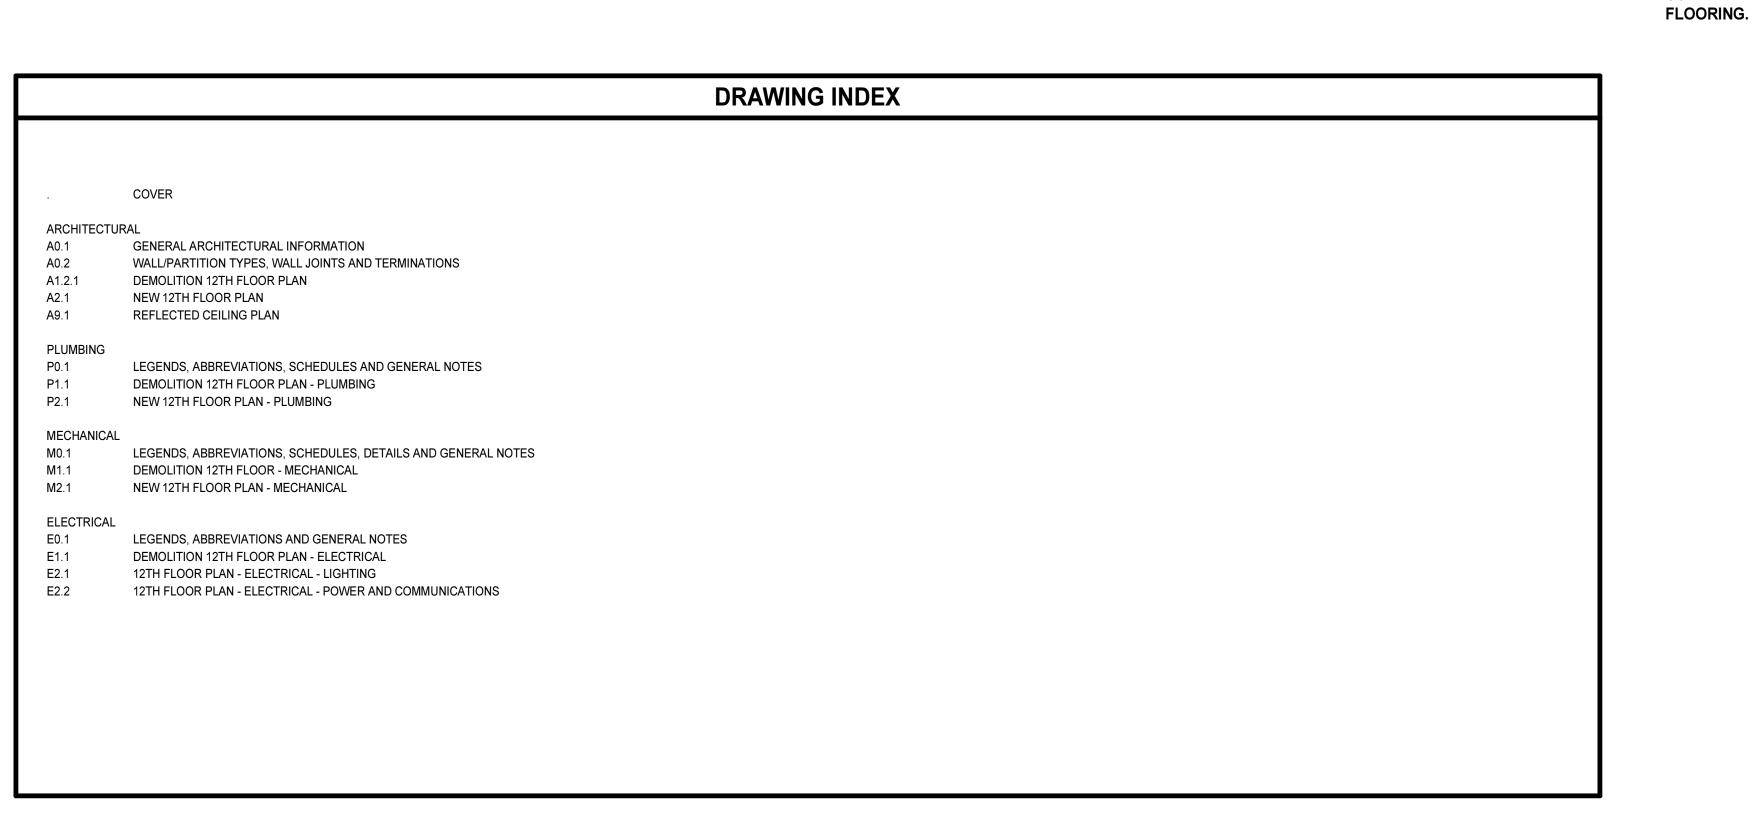


ARLINGTON

**GENERAL** ARCHITECTURAL

INFORMATION

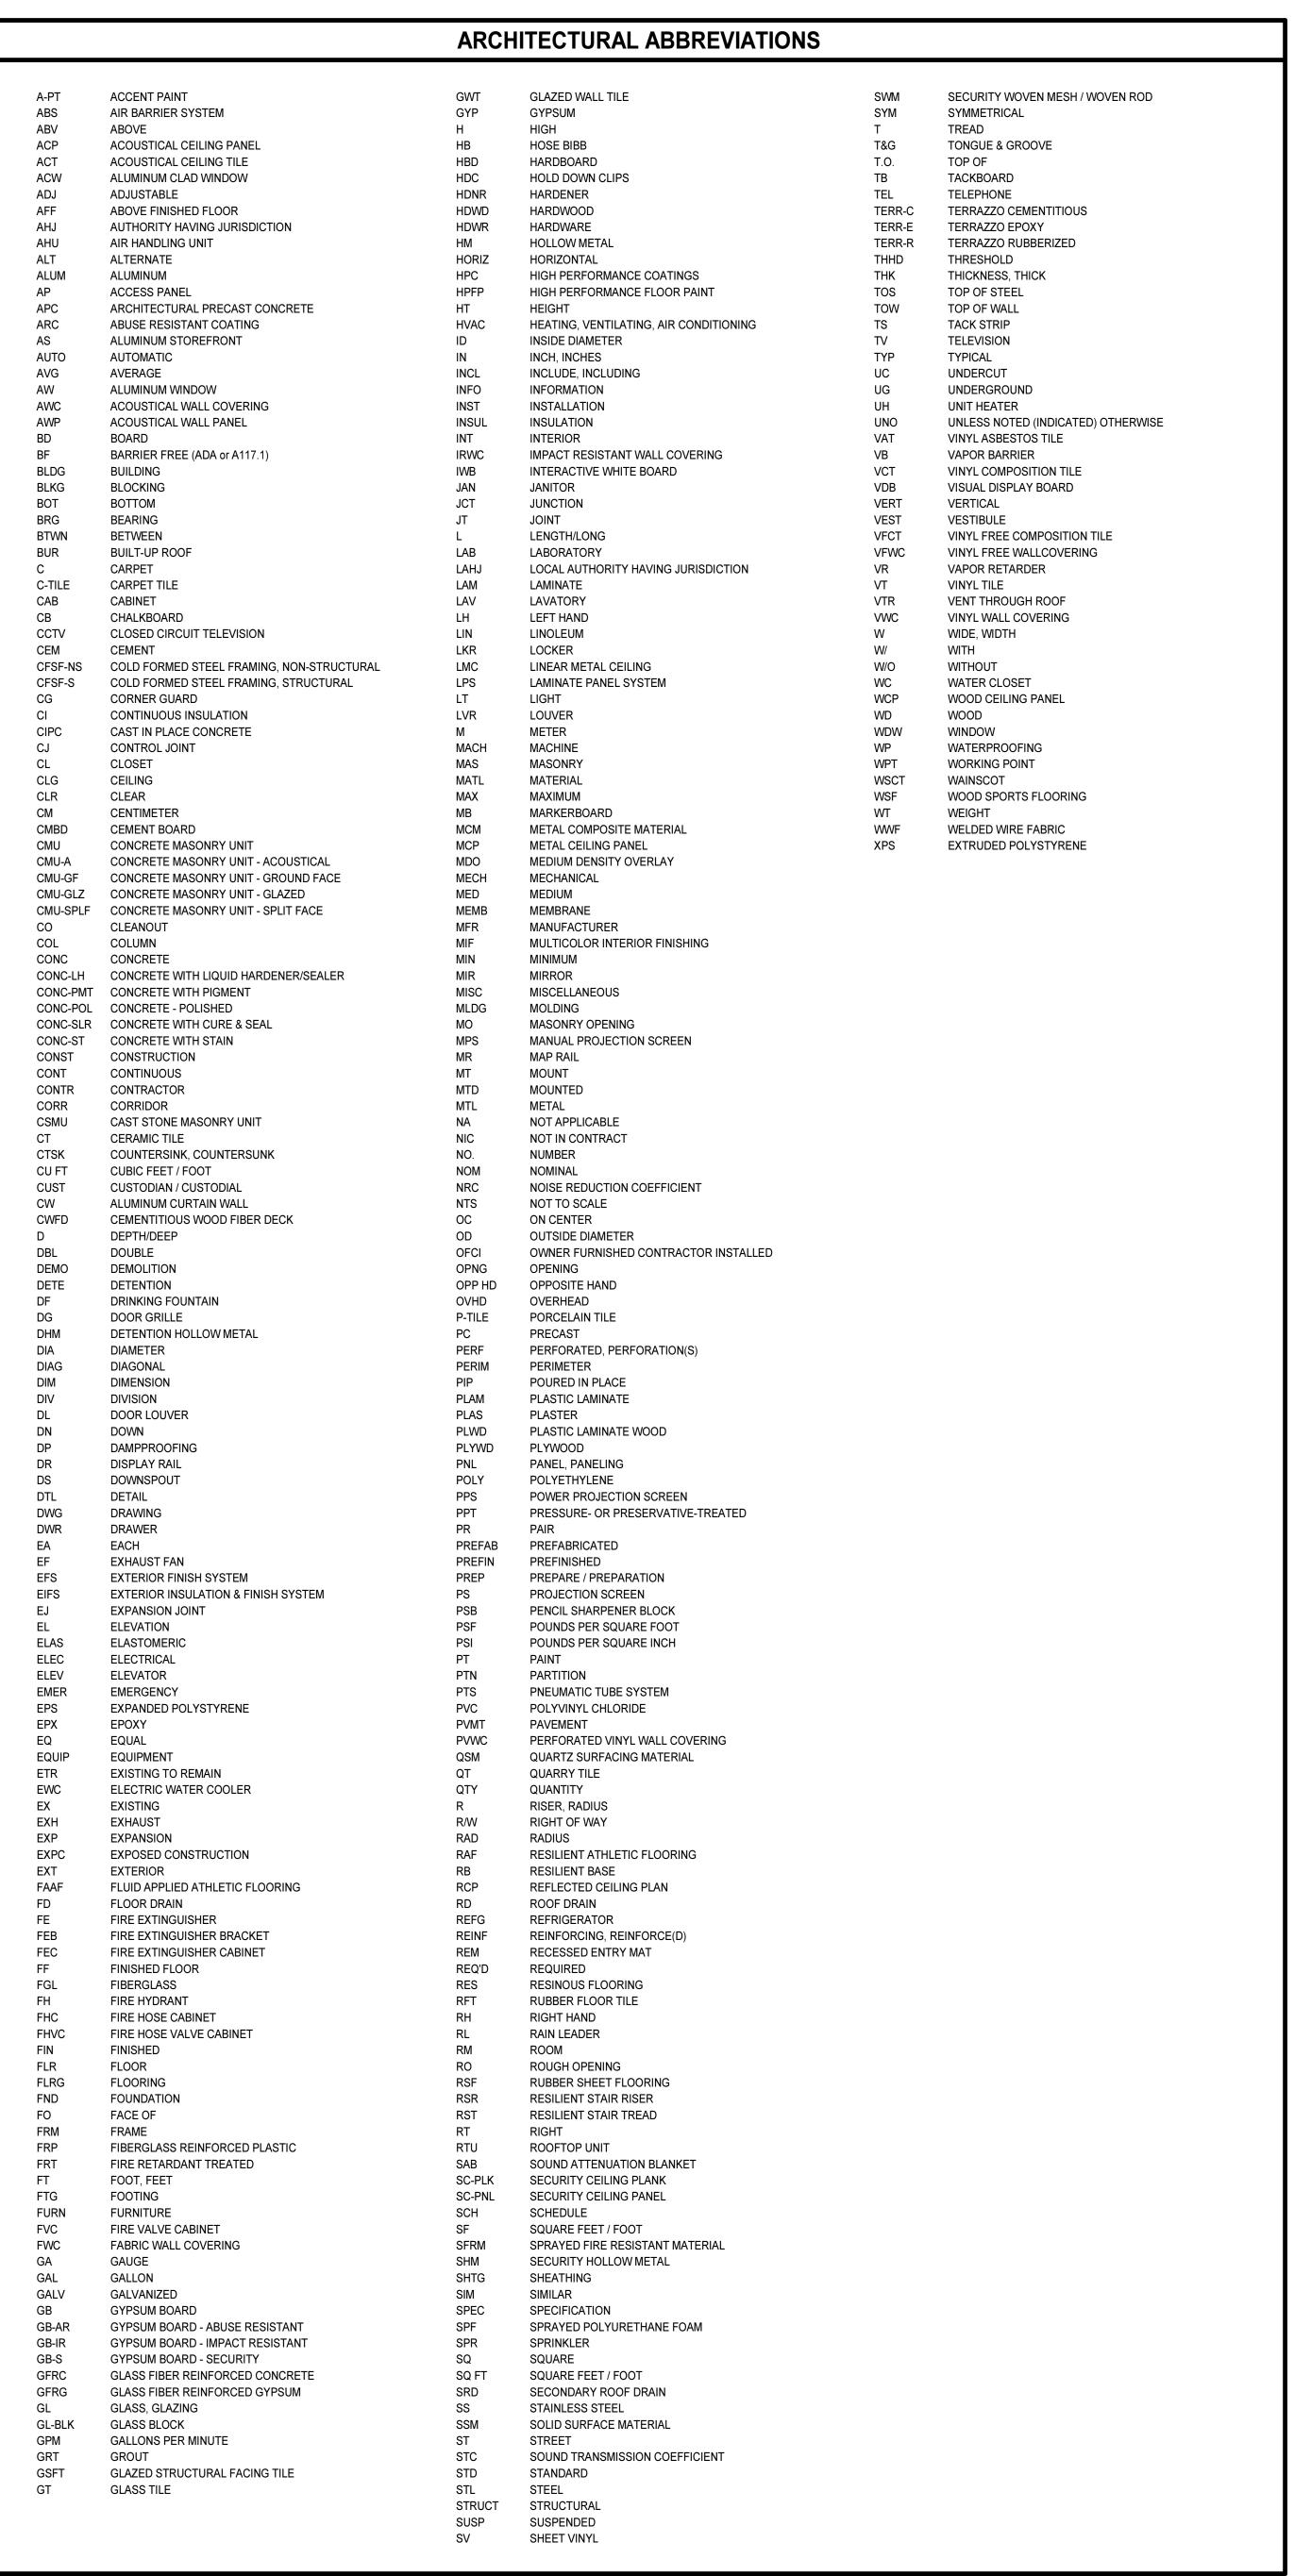

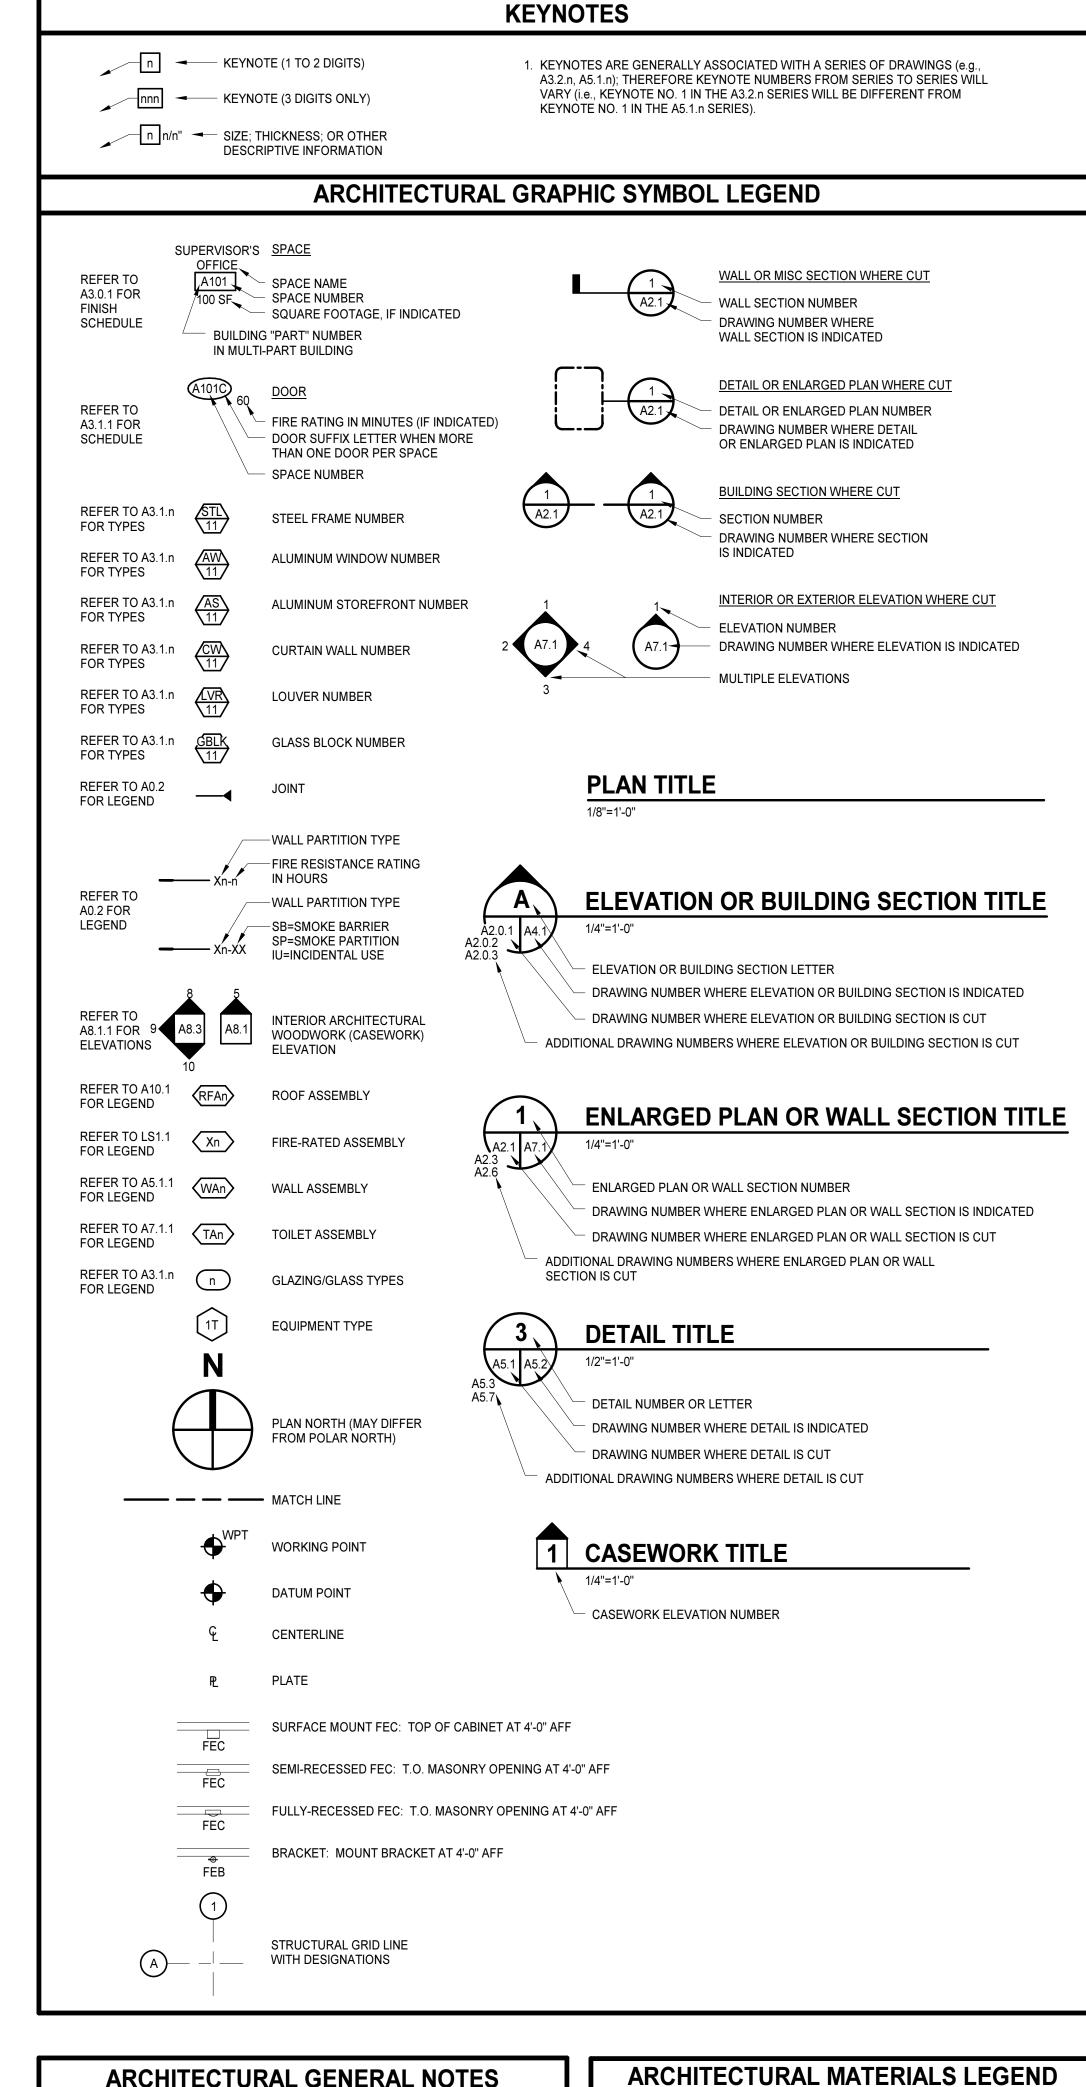

	ARCHITECTURAL GENERAL NOTES
۹.	THE CONTRACT DOCUMENTS ARE COMPLEMENTARY AND WHAT IS REQUIRED BY ONE SHALL BE AS BINDING AS IF REQUIRED BY ALL. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE THE BETTER QUALITY. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE THE GREATER QUANTITY OF WORK.
3.	ELEMENTS THAT ARE IDENTIFIED BY OTHER DISCIPLINES (e.g., CIVIL, STRUCTURAL, PLUMBING, FIRE PROTECTION, MECHANICAL, ELECTRICAL) ELSEWHERE WITHIN THE ARCHITECTURAL SERIES OF DRAWINGS AND/OR SPECIFICATIONS, OR IDENTIFIED OR COVERED BY DEFAULTS (e.g., SIZES, THICKNESS, SPACING, MATERIALS) IN THE SPECIFICATIONS MAY NOT BE ANNOTATED (NOTE OR KEYNOTED) ON THESE DRAWINGS.

. ELEMENTS IDENTIFIED IN "LEGENDS" AND/OR "GENERAL NOTES" MAY NOT BE NOTED IN DETAILS, OR SECTIONS, AS THESE ELEMENTS ARE IDENTIFIED IN THE LEGENDS (e.g. FACE BRICK, CMU, WINDOWS) D. REFER TO "ASSEMBLIES" FOR MATERIALS AND COMPONENTS THAT MAKE UP THAT PARTICULAR ASSEMBLY (e.g., EXTERIOR WALL ASSEMBLIES, ROOF ASSEMBLIES, AND FIRE-RATED ASSEMBLIES). ONCE A PARTICULAR ASSEMBLY HAS BEEN IDENTIFIED ON ONE DRAWING, THAT SAME ASSEMBLY GRAPHIC SHALL APPLY TO ALL OTHER SIMILAR LOCATIONS UNLESS SPECIFICALLY INDICATED OTHERWISE. PROVIDE THAT

E. VERIFY ALL DIMENSIONS, INCLUDING DIMENSIONS ON STRUCTURAL DRAWINGS AND OTHER ARCHITECTURAL DRAWINGS. IMMEDIATELY NOTIFY ARCHITECT OF ANY DISCREPANCIES.

SAME ASSEMBLY AT THE SIMILAR LOCATION WHETHER THE ASSEMBLY GRAPHIC

PROVIDE CONCRETE HOUSEKEEPING PADS FOR ALL EQUIPMENT INDICATED TO BE MOUNTED OR OTHERWISE REQUIRED TO BE MOUNTED TO THE FLOOR. WHERE PADS ARE NOT SHOWN, PROVIDE 6" THICK CONCRETE PADS W/ 3/4" CHAMFERED EDGES (ALL SIDES). REINFORCE WITH MESH EQUIVALENT TO FLOOR SLAB REINFORCING REQUIREMENTS.

POROUS FILL BATT INSULATION CONCRETE / FACE BRICK SPLIT-FACE BLOCK CONCRETE CONCRETE MASONRY UNIT GROUTED SOLID CONCRETE MASONRY UNIT

SPACE (E.G., WINDOW SILLS)

SYMBOL IS SHOWN OR NOT.

WOOD BLOCKING -FINISHED WOOD ₩ PLYWOOD NOTE: PROVIDE 100% SOLID, PLANT-GYPSUM BOARD / CAST UNITS WHERE CORE HOLES SHEATHING WOULD BE VISIBLE WITHIN FINISH ARCHITECTURAL PRECAST CONCRETE CAST STONE MASONRY

RIGID INSULATION

2 POLYURETHANE

WOOD SHIM

JOINT SYSTEM AT RATED

PANEL CONSTRUCTION

WHERE OCCURS

C. WHEN USED HEREIN "RATED" MEANS: FIRE, SMOKE, AND/OR ACOUSTICAL. D. REFER TO SPECIFICATIONS FOR ADDITIONAL WALL JOINT REQUIREMENTS.

**WALL JOINTS** - PANEL JOINT OR RATED JOINT SYSTEM AT RATED PANEL CONSTRUCTION WHERE OCCURS - SHEATHING WHERE INDICATED **PANELS**  PANEL WALL - PANEL JOINT OR RATED JOINT SYSTEM AT RATED PANEL CONSTRUCTION WHERE OCCURS - SUBSTRATE JOINT WHERE OCCURS FACE OF BACKUP WALL TYPE VARIES - PANEL JOINT OR RATED

A. PLAN DIMENSIONS ARE TO FACE OF WALL OR PARTITION. WHERE APPLIED FINISHES OCCUR-SUCH AS CERAMIC TILE-DIMENSIONS ARE TO FACE OF APPLIED FINISH. FOR WAINSCOTS, FLOOR PLAN DIMENSIONS ARE TO FACE OF WAINSCOT MATERIAL. APPLIED FINISHES ARE NOT ALLOWED TO REDUCE CLEAR DIMENSIONS. "APPLIED FINISHES" IN THIS CASE DO NOT INCLUDE TRIM, BASE, AND ACOUSTIC WALL PANELS.

**WALL/PARTITION TYPE GENERAL NOTES** 

B. EXTEND WALL/PARTITION ASSEMBLY COMPONENTS FULL HEIGHT OF ASSEMBLY.

C. ALL INTERIOR CFSF PANEL PARTITIONS: P1 UNLESS INDICATED OTHERWISE. D. THE TERMS "WALL" AND "PARTITION" MAY BE USED INTERCHANGEABLY THROUGHOUT THE CONTRACT DOCUMENTS.

E. EXTEND ALL FIRE-, SMOKE-, INCIDENTAL USE-, AND ACOUSTICAL-RATED WALLS/PARTITIONS TO UNDERSIDE OF FLOOR DECK, ROOF DECK, STRUCTURAL ELEMENT ENCASEMENT OR SOLID CAP ABOVE.

 SEAL AND TERMINATE IN ACCORDANCE WITH JOINT SYSTEM TESTED ASSEMBLIES FOR RESPECTIVE TYPE OF WALLS/PARTITIONS.

H. PARTITIONS THAT DO NOT EXTEND TO UNDERSIDE OF DECK OR CAP ABOVE:

• EXTEND 4 INCHES MINIMUM ABOVE HIGHEST ADJACENT FINISH CEILING UNLESS INDICATED OTHERWISE.

I. DO NOT CONNECT TIES, ANCHORS, OR REINFORCING TO SINGLE CANTILEVERED FIRE WALL OR BETWEEN

DOUBLE FIRE WALLS. J. SEAL AROUND ALL PENETRATIONS.

K. COMPLY WITH TERMINATION, WALL JOINT, AND MISCELLANEOUS DETAILS FOR THOSE CONDITIONS WHERE APPLICABLE. COMPLY WITH REFERENCED STANDARDS WHERE DETAILS ARE NOT IDENTIFIED IN THE

L. WALL/PARTITION TYPES DO NOT ADDRESS WALL FINISHES. REFER TO FINISH SCHEDULE.

M. FINISHED SPACES: PROVIDE CHASES AROUND ALL EXPOSED VERTICAL COMPONENTS, INCLUDING BUT NOT LIMITED TO: DUCTWORK, PIPING, AND CONDUIT, UNLESS COMPONENTS ARE SPECIFICALLY INDICATED TO REMAIN EXPOSED. IF NOT OTHERWISE INDICATED, PROVIDE CHASE CONSTRUCTION.


 HOLD CHASES TIGHT TO COMPONENTS ALLOWING FOR ACCESS, INSULATION, AND TOLERANCES. EXTEND CHASES FROM FLOOR TO 4 INCHES MINIMUM ABOVE FINISH CEILING OR IF NO CEILING IS INDICATED, EXTEND CHASES TO UNDERSIDE OF FLOOR DECK, ROOF DECK, OR SOLID CAP ABOVE AND TERMINATE ACCORDINGLY.

PANEL WALL/PARTITION TYPES  REPRESENTED BY Xnn ———							
MARK	FIRE RATED ASSEMBLY	REMARKS	INFORMATION				
P1		STC 44	4 7/8"  5/8" GYP BD  3 5/8" CFSF-NS  2 1/2" SOUND ATTENUATION BATTS				
<b>P2</b>	<u>x1</u>		1" GYP BD 2 1/2" STEEL STUD 5/8" GYP BD				

Mithing Bell III ANTHONY J. BELL III Lic. No. 009147 10.28.22

COURTHOUSE

563007 ARLINGTON COUNTY, VIRGINIA 1425 N COURTHOUSE RD, ARLINGTON,

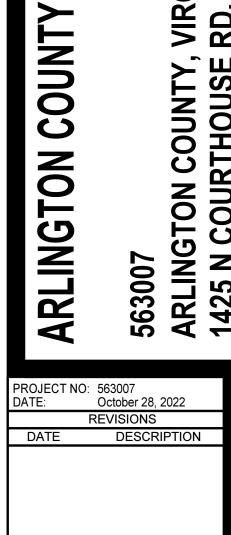

**WALL/PARTITION TYPES, WALL JOINTS AND TERMINATIONS** 

**TERMINATION GENERAL NOTES** 

A. AT FIRE-, SMOKE-, AND ACOUSTICALLY RATED WALLS: SEAL ALL NON-OBSTRUCTED HEAD-OF-WALL CONDITIONS IN ACCORDANCE WITH JOINT SYSTEM MANUFACTURER'S RECOMMENDATIONS BASED ON CONDITION ENCOUNTERED (E.G., CMU-TO-DECK (PARALLEL OR PERPENDICULAR TO FLUTES); OR CFSF-TO-DECK (PARALLEL OR PERPENDICULAR TO FLUTES) TO MAINTAIN ASSEMBLY RATING CONSISTENT WITH WALL/PARTITION REQUIREMENTS. BRACE WALL AS INDICATED OR REQUIRED.

B. AT ALL OTHER WALLS INDICATED TO EXTEND TO UNDERSIDE OF FLOOR/ROOF DECK/CAP: SEAL ALL NON-OBSTRUCTED HEAD-OF-WALL CONDITIONS IN ACCORDANCE WITH JOINT SYSTEM MANUFACTURER'S RECOMMENDATIONS BASED ON CONDITION ENCOUNTERED ( E.G., CMU-TO-DECK (PARALLEL OR PERPENDICULAR TO FLUTES); OR CFSF-TO-DECK (PARALLEL OR PERPENDICULAR TO FLUTES). BRACE WALL AS INDICATED OR REQUIRED.

C. AT ALL WALLS PREVENTED FROM TERMINATING AT THE UNDERSIDE OF FLOOR/ROOF DECK BY OBSTRUCTIONS, COMPLY WITH THE FOLLOWING:


 AT FIRE-, SMOKE-, AND ACOUSTICALLY-RATED WALLS: ENCASE OBSTRUCTION(S) TO MAINTAIN ASSEMBLY RATING CONSISTENT WITH WALL/PARTITION REQUIREMENTS. AT SECURITY WALLS: TERMINATE IN ACCORDANCE WITH SECURITY PARTITION REQUIREMENTS.

 AT OTHER WALLS: ENCASE OBSTRUCTION(S) ON ONE SIDE. SEAL ENCASEMENT TO WALL AND SEAL ENCASEMENT TO DECK IN ACCORDANCE WITH JOINT SYSTEM MANUFACTURER'S RECOMMENDATIONS AND TO MAINTAIN ASSEMBLY RATING CONSISTENT WITH WALL/PARTITION REQUIREMENTS.

**TERMINATIONS** — REFER TO GENERAL NOTE 'C' ——— **Ç** OF OBSTRUCTION OF DECK - CFSF-S W/ GYP BD IN LAYERS AS REQUIRED TO MAINTAIN ASSEMBLY RATING CONSISTENT WITH WALL/PARTITION REQUIREMENTS —— BRACE WALL AS - ENCASEMENT: INDICATED, OR WHERE REFER TO GENERAL NOTE 'C' — NOT INDICATED, AS APPROVED — **-----**DO NOT SECURE **ENCASEMENT TO** SEALANT SYSTEM: REFER TO GENERAL NOTE 'C' ---MAY MAY VARY

# **HEAD-OF-WALL TERMINATION @ OBSTRUCTION**

OBSTRUCTION MAY VARY (BEAM, JOIST, GIRDER, CHANNEL, DUCTWORK, PIPING)

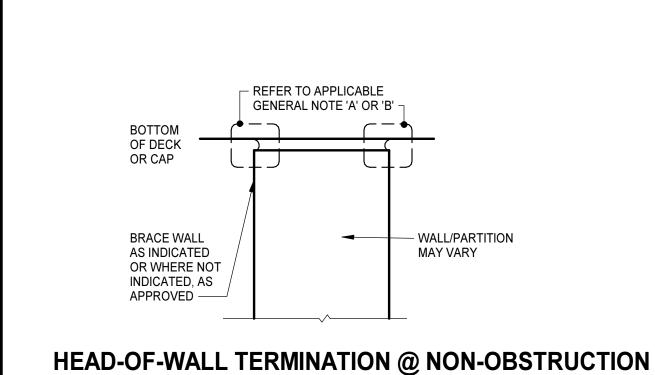

DEMOLITION PLAN KEYNOTES

REPRESENTED BY 

APPLIES TO DRAWING A1.2.1

2 REMOVE DUMBWAITER ACCESS PANEL AND HARDWARE

7 REMOVE CHAIR RAIL AND WALL COVERING BELOW CHAIR RAIL

DEMOLITION PLAN LEGEND
APPLIES TO DRAWINGS A1.2.1 - A1.2.n

REMOVE EXISTING PARTITION/WALL/ITEM

INFORMATION.

BASE IN AREA

EXISTING PARTITION/ WALL/ ITEM TO REMAIN

REMOVE EXISTING DOOR AND FRAME ASSEMBLY INCLUDING DOOR HARDWARE, ANCHORS, AND THRESHOLD (WHERE OCCURS).

REMOVE EXISTING PLUMBING FIXTURE. REFER TO PLUMBING DEMOLITION PLAN FOR ADDITIONAL

REMOVE ALL EXISTING FINISH FLOORING AND

REMOVE ALL EXISTING FINISH FLOORING, BASE, AND SUSPENDED CEILINGS IN AREA

4 SALVAGE BOOKCASE, RETURN TO COUNTY

6 SALVAGE CASEWORK, RETURN TO COUNTY

1 REMOVE WALLCOVERING

3 REMOVE CASEWORK


8 REMOVE PICTURE RAIL

263007 October 28, 2022

PROJECT NO: 563007
DATE: October 28, 2022
REVISIONS
DATE DESCRIPTION

DEMOLITION 12TH FLOOR PLAN

A1.2.

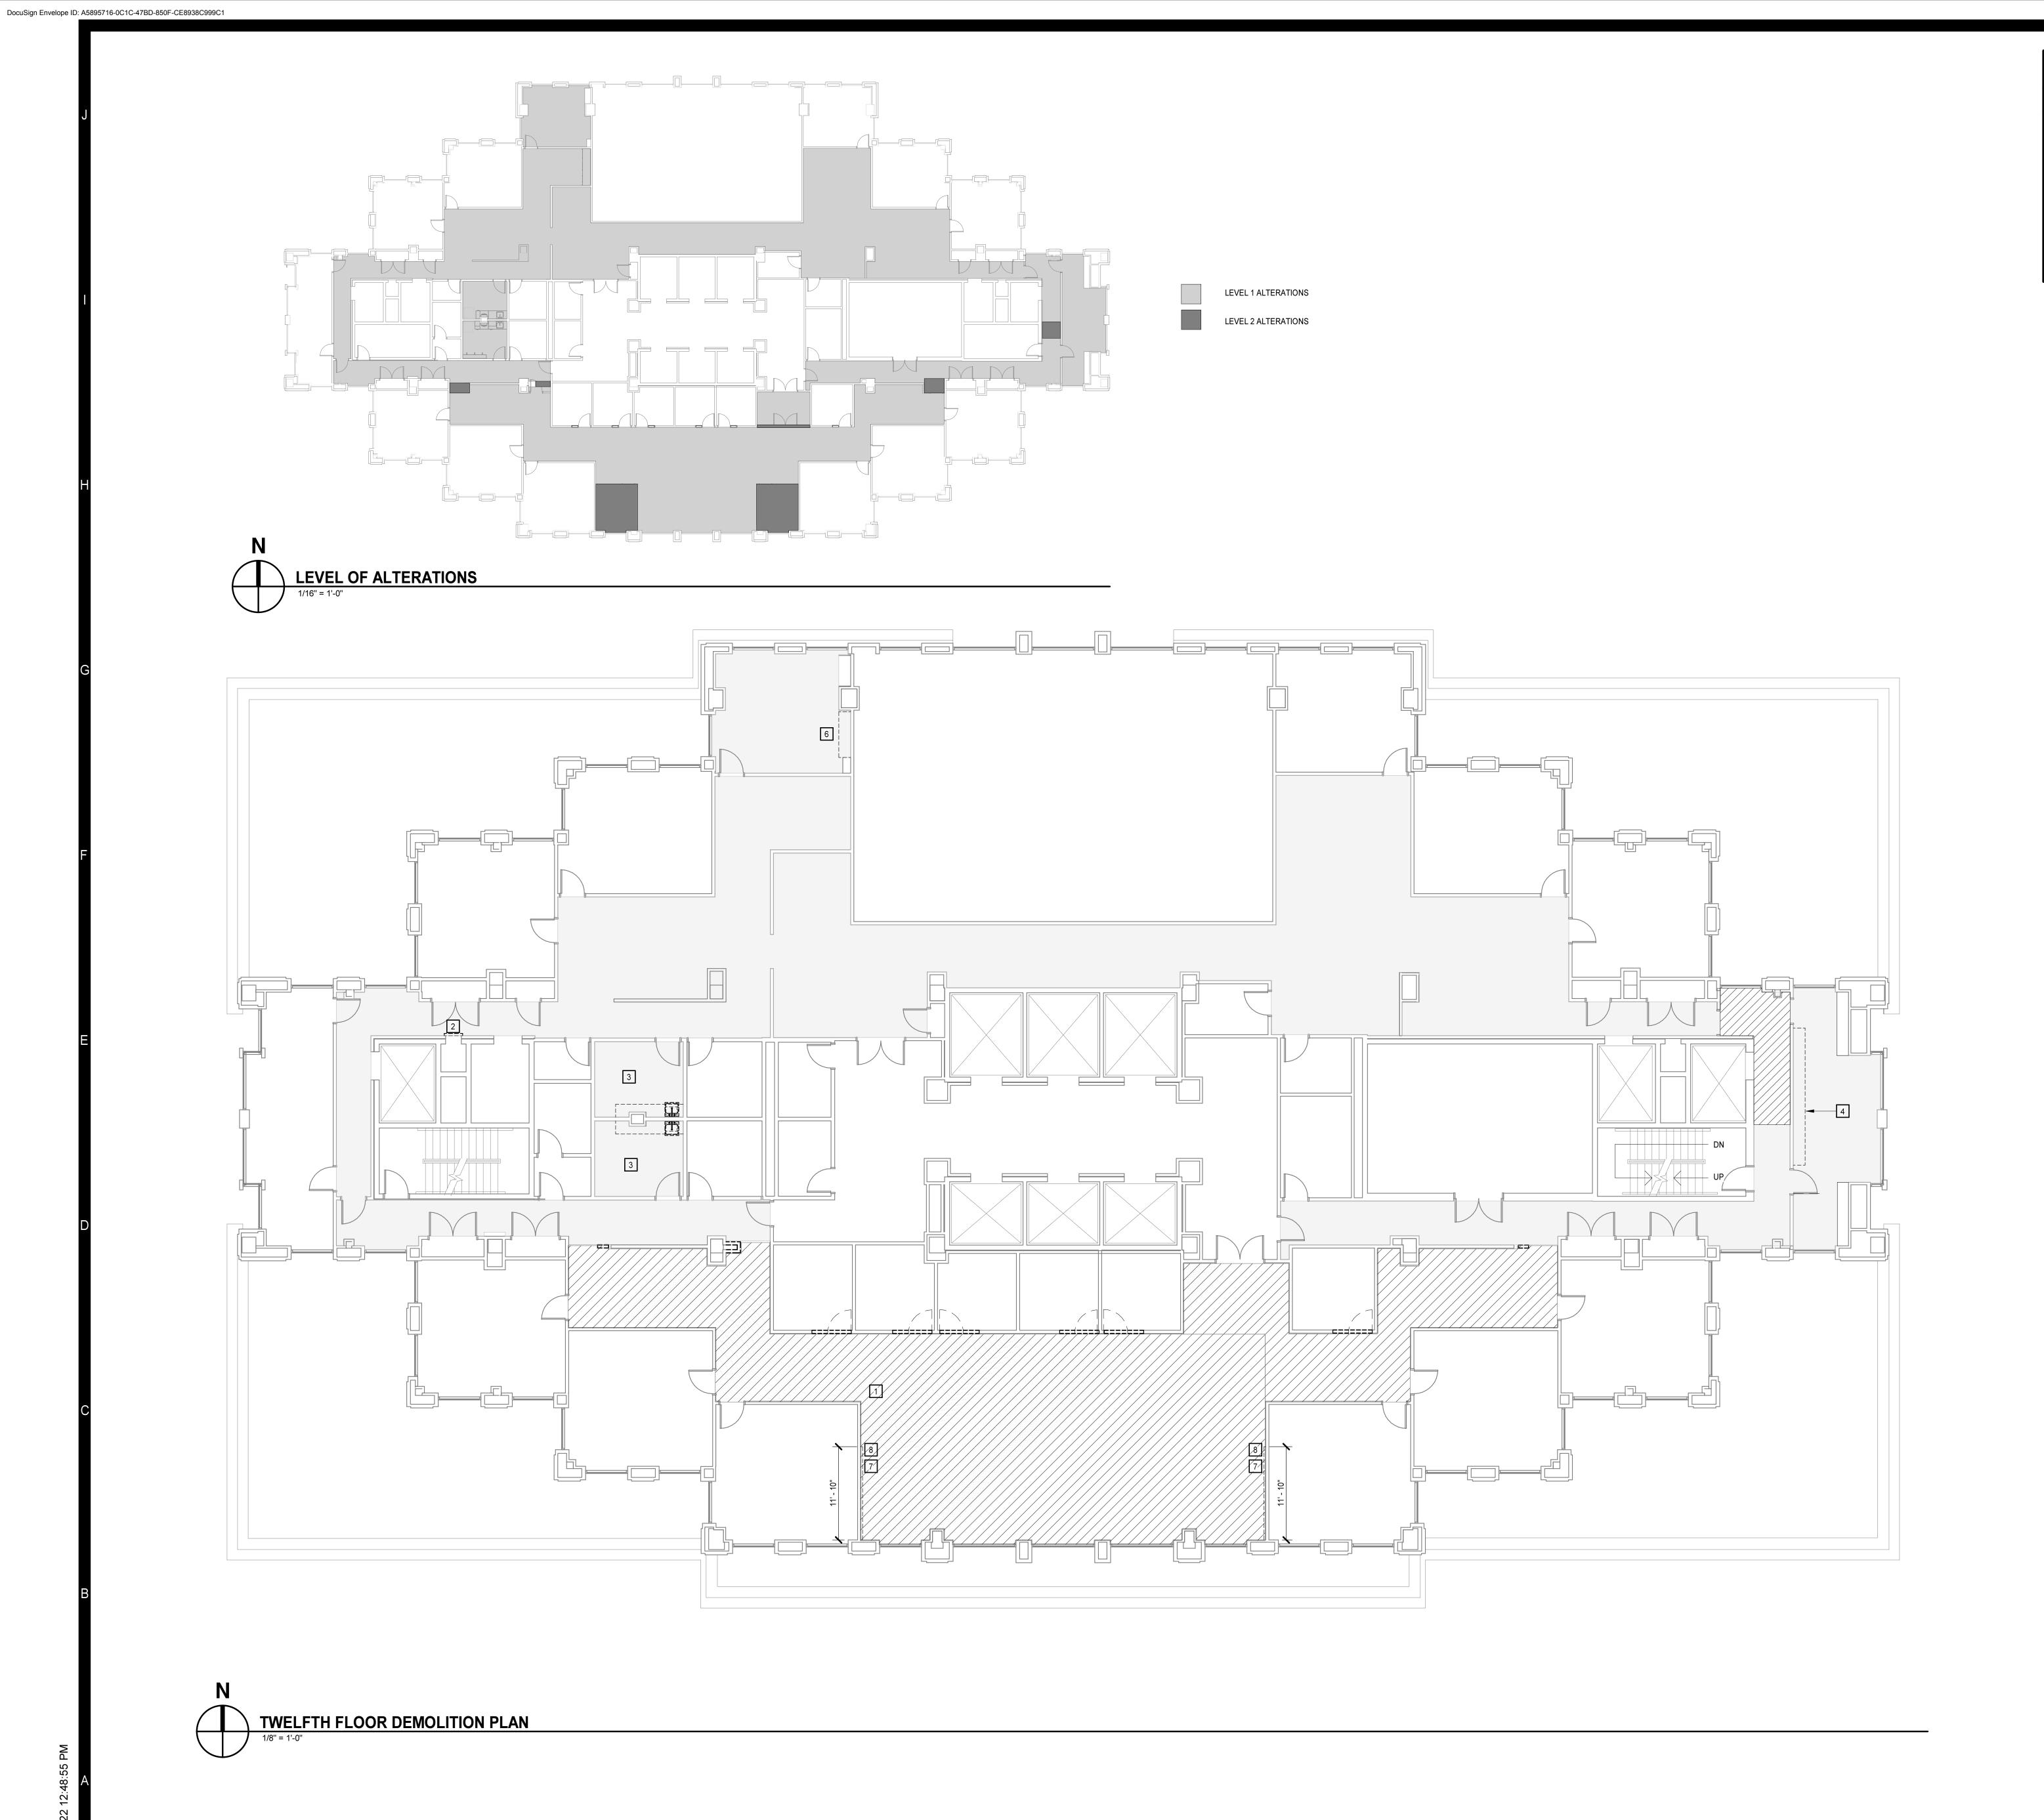

OPEN 01

14


2 3

01

CLERK 02


ELEV 09

CONFERENCE 07

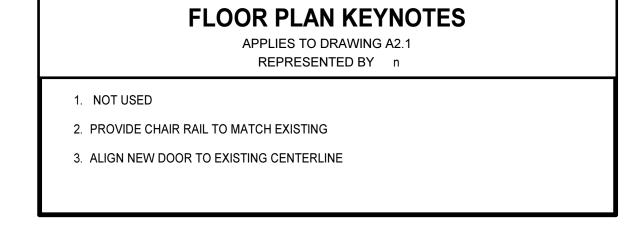

6" = 1'-0"

			FIN	ISH SO	CHED	ULE				
				WALLS					T	
NUMBER	NAME	FLOOR	BASE	NORTH	EAST	SOUTH	WEST	WAINSCOT	CEILING	NOTI
01	OPEN	C-TILE	RB	PT	PT	PT	PT	WD-PT/A-PT	ACP/GB PT	
02	CLERK	C-TILE	RB	PT	PT	PT	A-PT		ACP	
03	CLERK	C-TILE	PT	PT	A-PT	PT	PT		ACP	
04	CIRCUIT WAITING	C-TILE	RB	PT	PT	PT	PT		ACP/GB PT	
05	BREAK	VT	RB	PT	PT	PT	PT		ETR	
06	BREAK	VT	RB	PT	PT	PT	PT		ETR	
07	CONFERENCE	C-TILE	RB	PT	PT	PT	PT		ETR	
08	CONFERENCE	C-TILE	ETR	PT	PT	PT	PT		ETR	
09	LAW CLERK	C-TILE	RB	A-PT	PT	PT	PT		ETR	
10	LAW CLERK	C-TILE	RB	A-PT	PT	PT	PT		ETR	
11	LAW CLERK	C-TILE	RB	A-PT	PT	PT	PT		ETR	
12	LAW CLERK	C-TILE	RB	A-PT	PT	PT	PT		ETR	
13	LAW CLERK	C-TILE	RB	A-PT	PT	PT	PT		ETR	
14	LAW CLERK	C-TILE	RB	A-PT	PT	PT	PT		ETR	
16	CORRIDOR	C-TILE	RB	PT	PT	PT	PT		ETR	
17	CORRIDOR	C-TILE	RB	PT	PT	PT	PT		ETR	
18	CORRIDOR	C-TILE	RB	PT	PT	PT	PT		ETR	
19	GD WAITING	C-TILE	RB	ETR	ETR	ETR	ETR		ETR	
20	SUPPORT	C-TILE	RB	PT	PT	PT	PT		ETR	
21	SUPPORT	C-TILF	RB	PT	PT	PT	PT		FTR	

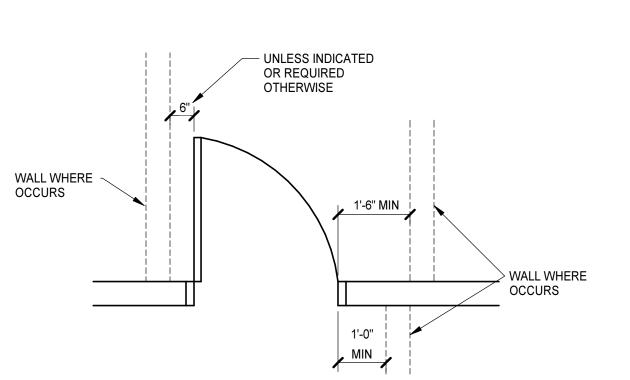

**MANUVERING CLEARANCE AT DOOR** 

TWELFTH FLOOR PLAN

CONFERENCE 08

GD WAITING 19

SUPPORT 20

**NEW 12TH FLOOR PLAN** 

563007 ARLINGTON COUNTY, VIRGINIA 1425 N COURTHOUSE RD, ARLINGTON PROJECT NO: 563007 DATE: October 28, 2022 REVISIONS

Mithing Bell III

ANTHONY J. BELL III

Lic. No. 009147

10.28.22

12TH FLOOR RENOVATION

COURTHOUSE

ARLINGTON

DATE DESCRIPTION

563007 ARLINGTON COUNTY, VIRGINIA 1425 N COURTHOUSE RD, ARLINGTON,

PROJECT NO: 563007
DATE: October 28, 2022
REVISIONS
DATE DESCRIPTION

REFLECTED CEILING


REFLECTED CEILING PLAN KEYNOTES APPLIES TO DRAWINGS A9.1 REPRESENTED BY n 1. BULKHEAD, REFER TO BULKHEAD DETAILS 2. CFSF - S 3. 5/8" GYP BD. TERMINATE 4" ABV FIN CLG 4. FIN CLG: FINISH AND/OR HEIGHT AFF VARIES 5. GYP BD: EXTEND FULL HEIGHT, UNLESS INDICATED OTHERWISE REFLECTED CEILING PLAN LEGEND APPLIES TO DRAWINGS A9.1.n - A9.1.n


REFER TO M, E & FP DRAWINGS FOR REFLECTED CEILING PLAN SYMBOLS NOT INDICATED BELOW A101 SPACE NUMBER


nn'-nn" CEILING HEIGHT, AFF UNO INTERIOR APPLICATIONS: GYPSUM BOARD CEILING EXTERIOR APPLICATIONS: GYPSUM SOFFIT BOARD OR GYPSUM SHEATHING 2'-0" x 2'-0" LAY-IN ACOUSTICAL CEILING PANELS IN SUSPENDED GRID INTERIOR WALL/PARTITION TO UNDERSIDE OF DECK WITH OPENING EXISTING TO REMAIN, VERIFY VERTICAL EXTENTS WHERE THE HEIGHT IMPACTS THE WORK

# REFLECTED CEILING PLAN/DETAIL GENERAL NOTES

- A. ALL CEILING HEIGHTS SHALL BE 9'-0" AFF UNLESS INDICATED OTHERWISE.
- B. DRAWINGS INDICATE GRID LAYOUT DIAGRAMMATICALLY. REFER TO SPECIFICATIONS FOR SPECIFIC GRID LAYOUT CRITERIA AT PERIMETER CONDITIONS THAT MAY DIFFER FROM GRID LAYOUT INDICATED ON DRAWINGS.
- C. CENTER CEILING MOUNTED ITEMS WITHIN CEILING PANELS, UNLESS INDICATED OTHERWISE.
- D. IF ADDITIONAL SPRINKLER HEADS ARE REQUIRED TO SATISFY CODE OR COVERAGE DENSITIES (OTHER THAN THOSE THAT MAY BE INDICATED), PROVIDE ADDITIONAL SPRINKLER HEADS AT NO ADDITIONAL COST AND OBTAIN APPROVAL OF ARCHITECT FOR LOCATION OF SUCH HEADS, IF ANY.

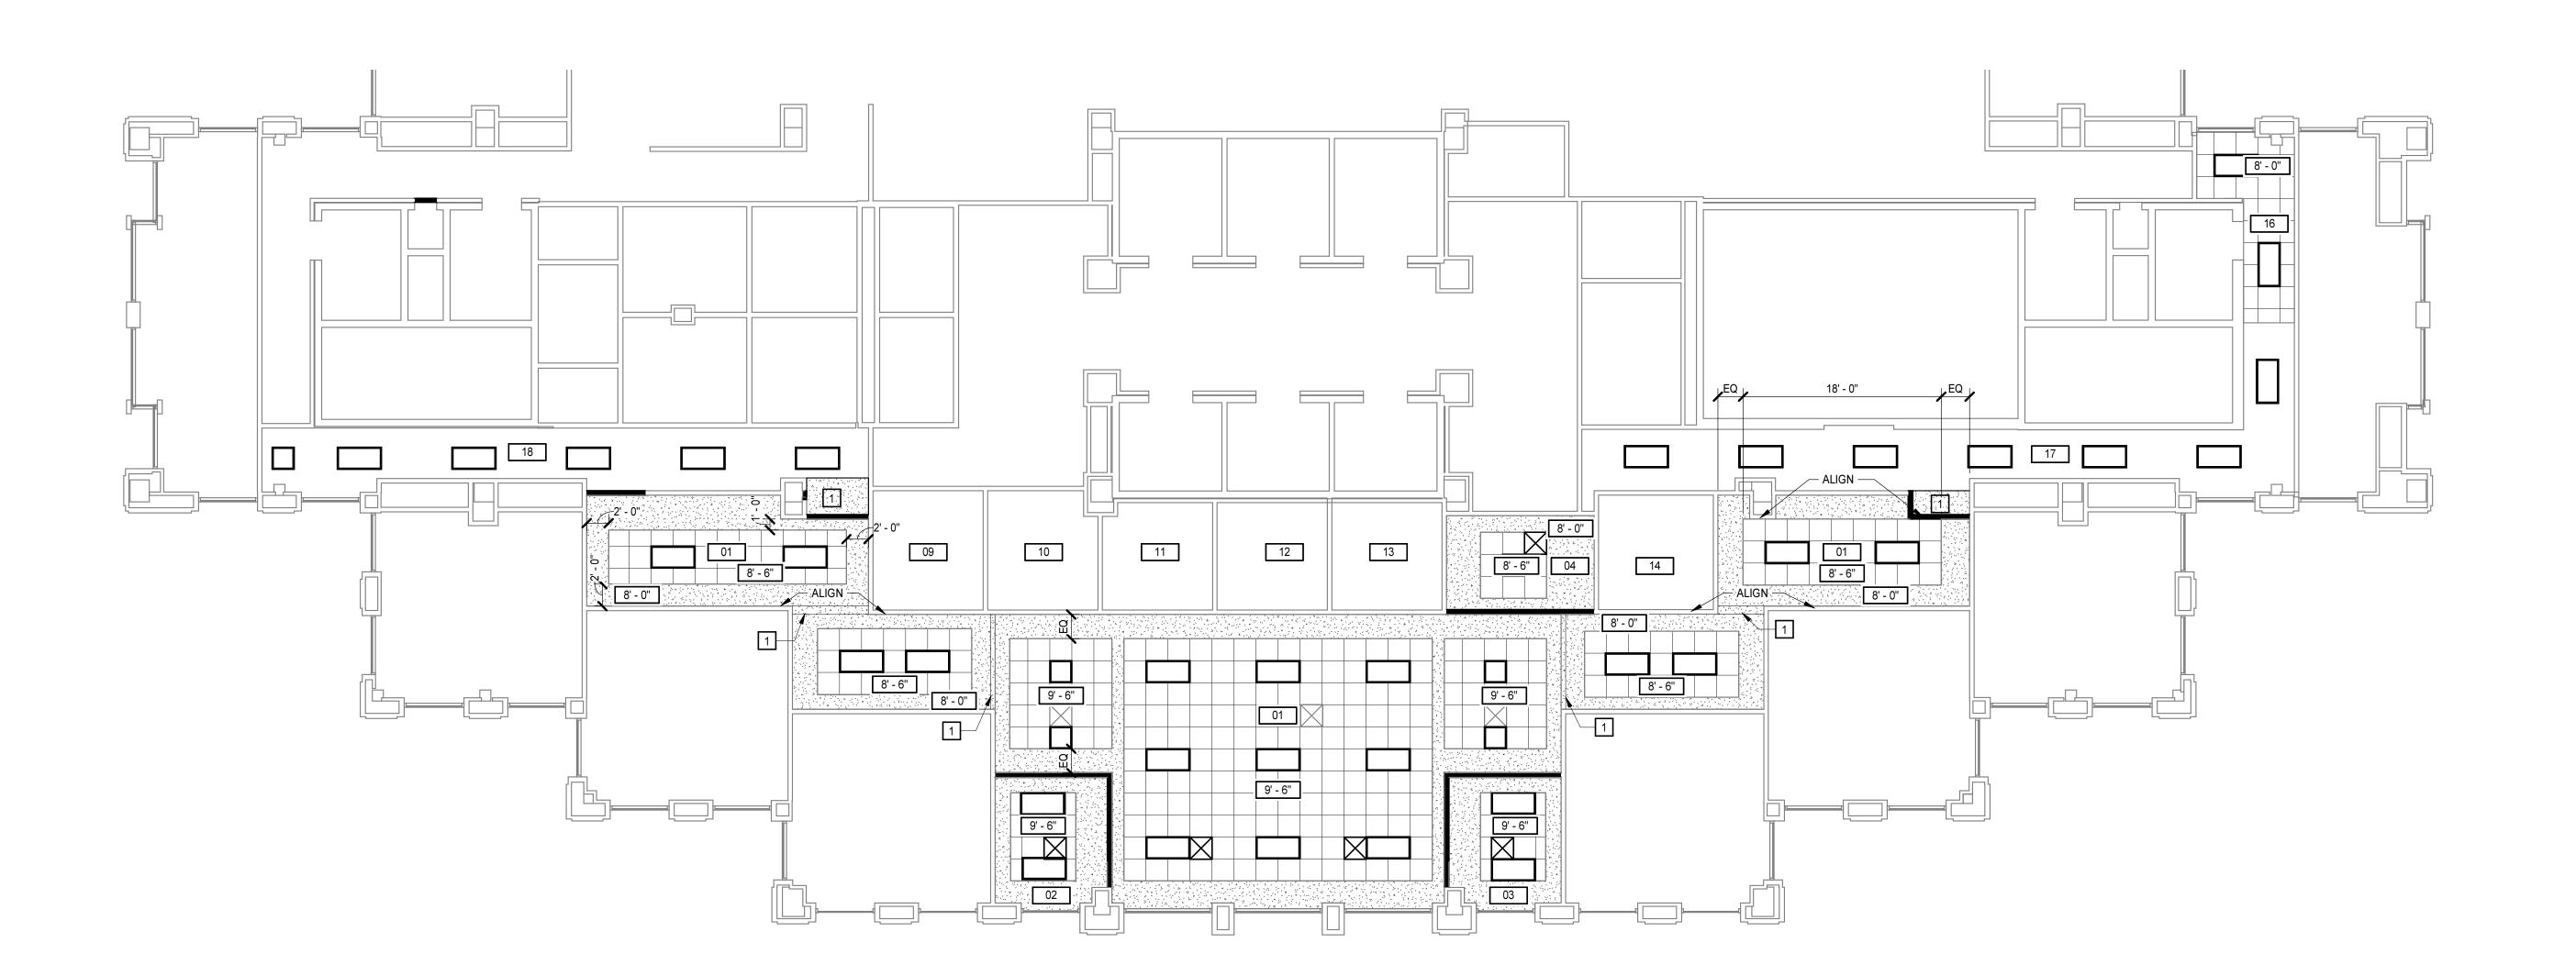

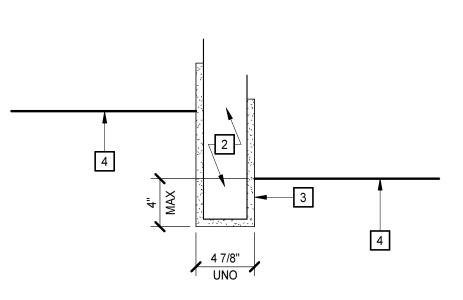



BULKHEAD DETAILS
1 1/2" = 1'-0"

DocuSign Envelope ID: A5895716-0C1C-47BD-850F-CE8938C999C1

TWELFTH FLOOR REFLECTED CEILING PLAN

ALUM

APPR

ARCH

AUTO

BLDG

BTWN

CLG

CLR

CMP

CNTR

COL

CONC

CONDS

CONT

CORR

CU FT

CU YD

CW

DCW

DHR

DHW

DR-X

DTW DWG DWP

ELEV

EPBD

EQUIP

DHR(140)

DHW(140)

DEMO

CONTR

CONSTR

LEGENDS, ABBREVIATIONS, **SCHEDULES AND GENERAL NOTES** 

AT AIR ADMITTANCE VALVE ABOVE AIR COMPRESSOR DESIGNATION ADJUSTABLE ADDITIONAL ABOVE FINISHED FLOOR ABOVE FINISHED GRADE AIR HANDLING UNIT ALTERNATE ALUMINUM ACCESS PANEL APPROXIMATE ARCHITECTURAL AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT BETWEEN	EWC EWH EX EXP FCO FD FDC FDN FF FFE FG FH FHC FHS FHVC FIX FLR FLSHG FOR FOS FOV FS	ELECTRIC WATER COOLER ELECTRIC WATER HEATER EXISTING EXPANSION FLOOR CLEANOUT FLOOR DRAIN FIRE DEPARTMENT CONNECTION FOUNDATION DRAIN FINISHED FLOOR FINISHED FLOOR FINISHED GRADE FIRE HYDRANT FIRE HOSE CABINET FIRE HOSE STATION FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	OSD PC PCF PD PLUMB PLYWD POLY PPT PREFAB PROJ PSF PSI PV PVC PVMT R RAD RCP-X	OPEN SITE DRAIN PRECAST POUNDS PER CUBIC FOOT PUMP DISCHARGE PLUMBING PLYWOOD POLYETHYLENE PRESSURE PRESERVATIVE TREATED PREFABRICATE(D) PROJECT POUNDS PER SQUARE FOOT POUNDS PER SQUARE INCH PROPANE VENT POLYVINYL CHLORIDE PAVEMENT RISER	POINT OF CONNECTION TO E  PIPE WITH SIZE AND SERVICE  FLOW IN DIRECTION OF ARROW  PITCH DOWN IN DIRECTION OF ARROW AT INDICATED SLOPE  PIPE CAP  PIPE TURNED DOWN  PIPE TURNED UP  PIPE TEE UP  PIPE TEE UP  POINT OF CONNECTION TO E  LIMIT OF DEMOLITION  KEYNOTE  30  STRUCTURAL GRID LINE WIT  SPACE IDENTIFICATION TAG	TH DESIGNATION
ABOVE AIR COMPRESSOR DESIGNATION ADJUSTABLE ADDITIONAL ABOVE FINISHED FLOOR ABOVE FINISHED GRADE AIR HANDLING UNIT ALTERNATE ALUMINUM ACCESS PANEL APPROXIMATE ARCHITECTURAL AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	EWH EX EXP FCO FD FDC FDN FF FFE FG FH FHC FHS FHVC FIX FLR FLSHG FOR FOS FOV	ELECTRIC WATER HEATER EXISTING EXPANSION FLOOR CLEANOUT FLOOR DRAIN FIRE DEPARTMENT CONNECTION FOUNDATION DRAIN FINISHED FLOOR FINISHED FLOOR ELEVATION FINISHED GRADE FIRE HYDRANT FIRE HOSE CABINET FIRE HOSE STATION FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	PC PCF PD PLUMB PLYWD POLY PPT PREFAB PROJ PSF PSI PV PVC PVMT R RAD	PRECAST POUNDS PER CUBIC FOOT PUMP DISCHARGE PLUMBING PLYWOOD POLYETHYLENE PRESSURE PRESERVATIVE TREATED PREFABRICATE(D) PROJECT POUNDS PER SQUARE FOOT POUNDS PER SQUARE INCH PROPANE VENT POLYVINYL CHLORIDE PAVEMENT RISER	PIPE WITH SIZE AND SERVICE  FLOW IN DIRECTION OF ARROW  PIPE CAP  PIPE TURNED DOWN  PIPE TURNED UP  PIPE TEE UP  POINT OF CONNECTION TO BE POINT OF	TH DESIGNATION
AIR COMPRESSOR DESIGNATION ADJUSTABLE ADDITIONAL ABOVE FINISHED FLOOR ABOVE FINISHED GRADE AIR HANDLING UNIT ALTERNATE ALUMINUM ACCESS PANEL APPROXIMATE ARCHITECTURAL AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	EXP FCO FD FDC FDN FF FFE FG FH FHC FHS FHVC FIX FLR FLSHG FOR FOS FOV	EXPANSION FLOOR CLEANOUT FLOOR DRAIN FIRE DEPARTMENT CONNECTION FOUNDATION DRAIN FINISHED FLOOR FINISHED FLOOR ELEVATION FINISHED GRADE FIRE HYDRANT FIRE HOSE CABINET FIRE HOSE STATION FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	PD PLUMB PLYWD POLY PPT PREFAB PROJ PSF PSI PV PVC PVMT R RAD	PUMP DISCHARGE PLUMBING PLYWOOD POLYETHYLENE PRESSURE PRESERVATIVE TREATED PREFABRICATE(D) PROJECT POUNDS PER SQUARE FOOT POUNDS PER SQUARE INCH PROPANE VENT POLYVINYL CHLORIDE PAVEMENT RISER	FLOW IN DIRECTION OF ARROW  PITCH DOWN IN DIRECTION OF ARROW AT INDICATED SLOPE  PIPE CAP  PIPE TURNED DOWN  PIPE TURNED UP  PIPE TEE UP  LIMIT OF DEMOLITION  KEYNOTE  30  KEYNOTE  STRUCTURAL GRID LINE WIT  A123  SPACE IDENTIFICATION TAG	
ADJUSTABLE ADDITIONAL ABOVE FINISHED FLOOR ABOVE FINISHED GRADE AIR HANDLING UNIT ALTERNATE ALUMINUM ACCESS PANEL APPROXIMATE ARCHITECTURAL AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	FCO FD FDC FDN FF FFE FG FH FHC FHS FHVC FIX FLR FLSHG FOR FOS FOV	FLOOR CLEANOUT FLOOR DRAIN FIRE DEPARTMENT CONNECTION FOUNDATION DRAIN FINISHED FLOOR FINISHED FLOOR ELEVATION FINISHED GRADE FIRE HYDRANT FIRE HOSE CABINET FIRE HOSE STATION FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	PLUMB PLYWD POLY PPT PREFAB PROJ PSF PSI PV PVC PVMT R RAD	PLUMBING PLYWOOD POLYETHYLENE PRESSURE PRESERVATIVE TREATED PREFABRICATE(D) PROJECT POUNDS PER SQUARE FOOT POUNDS PER SQUARE INCH PROPANE VENT POLYVINYL CHLORIDE PAVEMENT RISER	FLOW IN DIRECTION OF ARROW  PITCH DOWN IN DIRECTION OF ARROW AT INDICATED SLOPE  PIPE CAP  PIPE TURNED DOWN  PIPE TURNED UP  PIPE TEE UP  SPACE IDENTIFICATION TAG	
ADDITIONAL ABOVE FINISHED FLOOR ABOVE FINISHED GRADE AIR HANDLING UNIT ALTERNATE ALUMINUM ACCESS PANEL APPROXIMATE ARCHITECTURAL AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	FD FDC FDN FF FFE FG FH FHC FHS FHVC FIX FLR FLSHG FOR FOS FOV	FLOOR DRAIN FIRE DEPARTMENT CONNECTION FOUNDATION DRAIN FINISHED FLOOR FINISHED FLOOR ELEVATION FINISHED GRADE FIRE HYDRANT FIRE HOSE CABINET FIRE HOSE STATION FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	PLYWD POLY PPT PREFAB PROJ PSF PSI PV PVC PVMT R RAD	PLYWOOD POLYETHYLENE PRESSURE PRESERVATIVE TREATED PREFABRICATE(D) PROJECT POUNDS PER SQUARE FOOT POUNDS PER SQUARE INCH PROPANE VENT POLYVINYL CHLORIDE PAVEMENT RISER	PITCH DOWN IN DIRECTION OF ARROW AT INDICATED SLOPE  PIPE CAP  PIPE TURNED DOWN  O PIPE TURNED UP  O PIPE TEE UP  SPACE IDENTIFICATION TAG	
ABOVE FINISHED FLOOR ABOVE FINISHED GRADE AIR HANDLING UNIT ALTERNATE ALUMINUM ACCESS PANEL APPROXIMATE ARCHITECTURAL AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	FDC FDN FF FFE FG FH FHC FHS FHVC FIX FLR FLSHG FOR FOS FOV	FIRE DEPARTMENT CONNECTION FOUNDATION DRAIN FINISHED FLOOR FINISHED FLOOR ELEVATION FINISHED GRADE FIRE HYDRANT FIRE HOSE CABINET FIRE HOSE STATION FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	POLY PPT PREFAB PROJ PSF PSI PV PVC PVMT R RAD	POLYETHYLENE PRESSURE PRESERVATIVE TREATED PREFABRICATE(D) PROJECT POUNDS PER SQUARE FOOT POUNDS PER SQUARE INCH PROPANE VENT POLYVINYL CHLORIDE PAVEMENT RISER	PIPE CAP  PIPE TURNED DOWN  PIPE TURNED UP  PIPE TEE UP  STRUCTURAL GRID LINE WIT  A123  SPACE IDENTIFICATION TAG	
ABOVE FINISHED GRADE AIR HANDLING UNIT ALTERNATE ALUMINUM ACCESS PANEL APPROXIMATE ARCHITECTURAL AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	FDN FF FFE FG FH FHC FHS FHVC FIX FLR FLSHG FOR FOS FOV	FOUNDATION DRAIN FINISHED FLOOR FINISHED FLOOR ELEVATION FINISHED GRADE FIRE HYDRANT FIRE HOSE CABINET FIRE HOSE STATION FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	PPT PREFAB PROJ PSF PSI PV PVC PVMT R RAD	PRESSURE PRESERVATIVE TREATED PREFABRICATE(D) PROJECT POUNDS PER SQUARE FOOT POUNDS PER SQUARE INCH PROPANE VENT POLYVINYL CHLORIDE PAVEMENT RISER	——————————————————————————————————————	
ALTERNATE ALUMINUM ACCESS PANEL APPROXIMATE ARCHITECTURAL AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	FFE FG FH FHC FHS FHVC FIX FLR FLSHG FOR FOS	FINISHED FLOOR ELEVATION FINISHED GRADE FIRE HYDRANT FIRE HOSE CABINET FIRE HOSE STATION FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	PROJ PSF PSI PV PVC PVMT R RAD	PROJECT POUNDS PER SQUARE FOOT POUNDS PER SQUARE INCH PROPANE VENT POLYVINYL CHLORIDE PAVEMENT RISER	——————————————————————————————————————	
ALUMINUM ACCESS PANEL APPROXIMATE ARCHITECTURAL AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	FG FH FHC FHS FHVC FIX FLR FLSHG FOR FOS	FINISHED GRADE FIRE HYDRANT FIRE HOSE CABINET FIRE HOSE STATION FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	PSF PSI PV PVC PVMT R RAD	POUNDS PER SQUARE FOOT POUNDS PER SQUARE INCH PROPANE VENT POLYVINYL CHLORIDE PAVEMENT RISER	——————————————————————————————————————	
ACCESS PANEL APPROXIMATE ARCHITECTURAL AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	FH FHC FHS FHVC FIX FLR FLSHG FOR FOS FOV	FIRE HYDRANT FIRE HOSE CABINET FIRE HOSE STATION FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	PSI PV PVC PVMT R RAD	POUNDS PER SQUARE INCH PROPANE VENT POLYVINYL CHLORIDE PAVEMENT RISER	PIPE TEE UP  SPACE IDENTIFICATION TAG	
APPROXIMATE ARCHITECTURAL AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	FHC FHS FHVC FIX FLR FLSHG FOR FOS FOV	FIRE HOSE CABINET FIRE HOSE STATION FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	PV PVC PVMT R RAD	PROPANE VENT POLYVINYL CHLORIDE PAVEMENT RISER	SPACE IDENTIFICATION TAG	
ARCHITECTURAL AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	FHS FHVC FIX FLR FLSHG FOR FOS FOV	FIRE HOSE STATION FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	PVC PVMT R RAD	POLYVINYL CHLORIDE PAVEMENT RISER	SI AGE IDENTIFICATION TAG	<b>,</b>
AUTOMATIC AVERAGE BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	FHVC FIX FLR FLSHG FOR FOS FOV	FIRE HOSE VALVE CABINET FIXTURE FLOOR FLASHING FUEL OIL RETURN	PVMT R RAD	PAVEMENT RISER	1 \	
BELOW FINISHED FLOOR BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	FLR FLSHG FOR FOS FOV	FLOOR FLASHING FUEL OIL RETURN			———— PIPE TEE DOWN SPACE NUMBER	
BELOW FINISHED GRADE BUILDING BOTTOM OF BOTTOM BASEMENT	FLSHG FOR FOS FOV	FLASHING FUEL OIL RETURN			BUILDING AREA (WHEN USEI	<b>)</b> )
BUILDING BOTTOM OF BOTTOM BASEMENT	FOR FOS FOV	FUEL OIL RETURN	RCP-Y	RADIUS	AUL 02	
BOTTOM OF BOTTOM BASEMENT	FOS FOV			RECIRCULATION PUMP DESIGNATION	CONCENTRIC PIPE REDUCTION  AHU-02  EQUIPMENT IDENTIFICATION	I TAG
BOTTOM BASEMENT	FOV	FUEL OIL OUDDLY	RD	ROOF DRAIN (SIDE OUTLET)	EQUIPMENT NUMBER	
BASEMENT		FUEL OIL SUPPLY FUEL OIL VENT	RDS REF	ROOF DRAIN (SIDE OUTLET) REFERENCE		
	10	FLOOR SINK	REQD	REQUIRED	——————————————————————————————————————	
DETVVEEN	FT	FOOT OR FEET	REQMT	REQUIREMENTS	WCO I. WALL CLEANOUT	
COMPRESSED AIR	FVC	FIRE VALVE CABINET	RL	RAIN LEADER	SECTION WHERE CUT	
CAST IRON	G	GAS	RM	ROOM	CO (GCO) O YARD CLEANOUT (CLEANOUT TO GRADE)	
CAST-IN-PLACE CONCRETE	GCO	GRADE CLEANOUT	RO	ROUGH OPENING	P6 1 4 DPAWING WHERE SECT	ON IS INDICATED
CENTERLINE	GWH	GAS WATER HEATER	RV	RADON VENT	FLOOR DRAIN WITH TAG	E CUT
CEILING	HB	HOSE BIBB	S	SOUTH	FLOOR SINK WITH TAG  FLOOR SINK WITH TAG  FINE ARGED PLAN NUMBER	<u></u>
CLEAR CORRUGATED METAL PIPE	HORIZ HP	HORIZONTAL HORSEPOWER	SAN SCH	SANITARY SCHEDULE		
COUNTER	HR-X	HOSE REEL DESIGNATION	SCH SD	SCHEDULE STORM DRAINAGE PIPING	P6.1 — DRAWING WHERE ENALI	RGED PLAN IS INDICA
CLEANOUT	HTG	HEATING	SDN	STORM DRAIN NOZZLE	PRESSURE GAUGE WITH GAUGE COCK  DETAIL TAG	
COLUMN	HW	HOT WATER	SF	SQUARE FOOT/FEET		
CONCRETE	HWR	HOT WATER RETURN	SHT	SHEET	P6.1 PDPAWING WHERE DETA	IL IS INDICATED
CONDENSATE	HWS	HOT WATER SUPPLY	SIM	SIMILAR	LIQUID FILLED THERMOMETER	LIGINDIONIED
CONSTRUCT(ION)	ID	INSIDE DIAMETER	SLT	SEALANT	SANITARY RISER TAG	
CONTINUATION	IN	INCH	SOG	SLAB ON GRADE	■ A SANITARY RISER IDENTII	FIER
CONTRACT(-OR) CORRIDOR	INSUL INV	INSULATE OR INSULATION INVERT	SP SPEC	SUMP PUMP SPECIFICATION	WATER HAMMER ARRESTOR (PLUMBING & DRAINAGE P6.1 P6.1 DRAWING WHERE SANIT	ARY RISER IS TAGGI
CIRCULATING PUMP	JAN	JANITOR	SPR	SPRINKLER	INSTITUTE SIZE INDICATED)	
CLASSROOM	KIT	KITCHEN	SQ	SQUARE	FS DOMESTIC RISER TAG	
COOLING TOWER	KW	KITCHEN WASTE	SRD	SECONDARY ROOF DRAIN	———— FLOW SWITCH D1—— DOMESTIC RISER IDENT	
COPPER	LAB	LABORATORY	SS	STAINLESS STEEL	P6.1 DRAWING WHERE SANIT	ARY RISER IS TAGGE
CUBIC FEET	LAV	LAVATORY	SSD	SECONDARY STORM DRAINAGE PIPING	TEMPERATURE/PRESSURE PLUG	
CUBIC YARD	LBS	POUNDS	STD	STANDARD	N.4	
COLD WATER	LF	LINEAR FOOT (FEET)	STL	STEEL	The state of the s	
DRY BULB DOMESTIC COLD WATER	LP LPV	PROPANE PROPANE VENT	STOR STRUCT	STORAGE STRUCTURAL	—————————————————————————————————————	
DEMOLISH OR DEMOLITION	MATL	MATERIAL	SUSP	SUSPENDED	VALVE IN RISER  P2.2 P6.2 1/4"=1'-0"  DETAIL NUMBER	
DRINKING FOUNTAIN	MAX	MAXIMUM	TD	TRENCH DRAIN	GAS COCK P2.4  DRAWING WHERE DETAIL IS INDIC	ATED
DOMESTIC HOT WATER RETURN	MECH	MECHANICAL	THK	THICK(-NESS)	DRAWING WHERE DETAIL IS CUT	
DOMESTIC HOT WATER RETURN (140°)	MED	MEDIUM	TLT	TOILET	ADDITIONAL DRAWING REFERENCE	ES
DOMESTIC HOT WATER	MFR	MANUFACTURER	TMV	THERMSTATIC MIXING VALVE	——————————————————————————————————————	
DOMESTIC HOT WATER (140°)	MH	MANHOLE	TOSL	TOP OF SLAB	——————————————————————————————————————	AGRAM
DROP INLET	MIN	MINIMUM	TW	DOMESTIC TEMPERED WATER (90° F)		
DIAMETER DUCTILE IRON PIPE	MISC MTD	MISCELLANEOUS MOUNTED	TYP UG	TYPICAL UNDERGROUND	SWING CHECK VALVE  P2.2 P4.2 P4.2 P4.2 P4.2 P4.2 P4.2 P4.	IEIED
DOWN	N N	NORTH	UNO	UNLESS NOTED (INDICATED) OTHERWISE	P2 / SAINTART RISER DIAGRAW IDENTI	FIER RISINDICATED
COMPRESSED AIR DRYER DESIGNATION	N N/A	NOT APPLICABLE/AVAILABLE	V	VENT	DRAWING WHERE SANITARY RISE	R IS TAGGED
DOWNSPOUT	NC	NORMALLY CLOSED	VAC	VACUUM	ADDITIONAL DRAWING REFERENCE	
DRAIN TILE	NG	NATURAL GAS	VB	VACUUM BREAKER	SOLENOID OPERATED VALVE	
DETAIL	NGV	NATURAL GAS VENT	VERT	VERTICAL	D1 DOMESTIC RISER D	IAGRAM
DOMESTIC TEMPERED WATER	NIC	NOT IN CONTRACT	VTR	VENT THROUGH ROOF	TEMPERATURE AND PRECCURE RELIEF VALVE	
DRAWING	NO	NORMALLY OPEN	W	WEST	P2.2 P5.2 P5.2 P5.2 P5.2 P5.2 P5.2 P5.2	
DOMESTIC WATER BOOSTER PUMP	NO., (#)	NUMBER	W/	WITH	DOMESTIC RISER DIAGRAM IDENT	IFIER
EAST EMERGENCY SECONDARY ROOF DRAIN	NOM OC	NOMINAL ON CENTER	W/O WB	WITHOUT WATER HAMMER ARRESTER	BACKWATER VALVE  DRAWING WHERE DOMESTIC RISE  DRAWING WHERE DOMESTIC RISE	INDICATED ER IS TAGGED
ELECTRICAL	OD	OUTSIDE DIAMETER	WC	WATER CLOSET	HOSE BIBB OR WALL HYDRANT ADDITIONAL DRAWING REFERENCE	
ELEVATION	OFCI	OWNER FURNISHED CONTRACTOR INSTALLED	WCO	WALL CLEANOUT		
ELECTRICAL PANELBOARD	OFF	OFFICE	WSHP	WATER SOURCE HEAT PUMP	REDUCED PRESSURE PRINCIPLE BACKFLOW PREVENTER  G1 FUEL GAS RISER DI	AGRAM
EQUAL	ОН	OVERHEAD	WWF	WELDED WIRE FABRIC	<b>→</b> →→	
EQUIPMENT	OPNG	OPENING	WWM	WELDED WIRE MESH	DOUBLE CHECK BACKFLOW PREVENTER  P2.2 P5.2 1/4"=1'-0"	
EXISTING TO REMAIN	OPP	OPPOSITE	XFMR	TRANSFORMER	FUEL GAS RISER DIAGRAM IDENTI	
					PUMP  PUMP  DRAWING WHERE FUEL GAS RISE  DRAWING WHERE FUEL GAS RISE	
					ADDITIONAL DRAWING REFERENCE	

		PLUMBING FIXTURE SCI	HEDULE				
TAG FIXTURE	FIXTURE	LIFICUIT A F F	PIPE SIZE				NOTEC
	HEIGHT A.F.F.	COLD WATER	HOT WATER	VENT	SOIL WASTE	NOTES	
BFS-1	BOTTLE FILLING STATION SURFACE MOUNT	TRAY AT 34 7/16" A.F.F.	1/2"		1 1/2"	1 1/4"	1,2
SK-1	SINK - SINGLE BASIN	COUNTER MOUNTED REFER TO ARCH DWGS	1/2"	1/2"	1 1/2"	1 1/2"	1
WSB-1	WATER SUPPLY BOX	CENTER AT 42'	1/2"				

THIS ACCESSIBLE FIXTURE, ACCESSORIES, AND INSTALLATION SHALL COMPLY TO ANSI A117.1 ACCESSIBLE AND USABLE BUILDING AND FACILITIES STANDARDS. PROVIDE REMOTE CHILLER UNDER COUNTER IN BREAKROOM 6 TO SERVE BOTH BREAKROOM 5 AND 6 BOTTLE FILLING STATIONS.

# **GENERAL NOTES**

- A. THE CONTRACT DOCUMENTS ARE COMPLEMENTARY AND WHAT IS REQUIRED BY ONE SHALL BE AS BINDING AS IF REQUIRED BY ALL. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE THE BETTER QUALITY. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE THE GREATER QUANTITY OF WORK.
- B. COORDINATE PIPING LOCATIONS AND INSTALLATION WITH EACH TRADE TO AVOID
- CONFLICTS WITH OTHER TRADES.
- C. PROVIDE FLOOR CLEANOUTS INDICATED FLUSH WITH FLOOR FINISHES.
- D. PROVIDE CLEANOUTS WHERE INDICATED AND ADDITIONAL CLEANOUTS AS REQUIRED BY LOCAL CODE.
- E. REFER TO DRAWINGS FROM EACH DISCIPLINE BEFORE ROUGHING-IN PLUMBING
- F. OBTAIN DIMENSIONS AND ROUTING IN FIELD BEFORE INSTALLATION OF PLUMBING AND
- G. INSTALL ALL DRAINAGE PATTERN FITTINGS AND PIPING IN ACCORDANCE WITH APPLICABLE FEDERAL, STATE, AND LOCAL CODES.
- H. PROVIDE ISOLATION VALVES IN ACCORDANCE WITH DIAGRAMS, DETAILS, AND DIVISION
- 22 SPECIFICATIONS.


DEMOLITION 12TH FLOOR PLAN -PLUMBING

P1.1

REMOVE EXISTING KITCHEN SINK, FITTINGS AND ALL ACCESSORIES BACK TO WALL OPENING. PREPARE AND TEMPORARILY CAP ALL PIPING FOR NEW SINKS.

EXISTING PIPE TO REMAIN.

**KEYNOTES** 

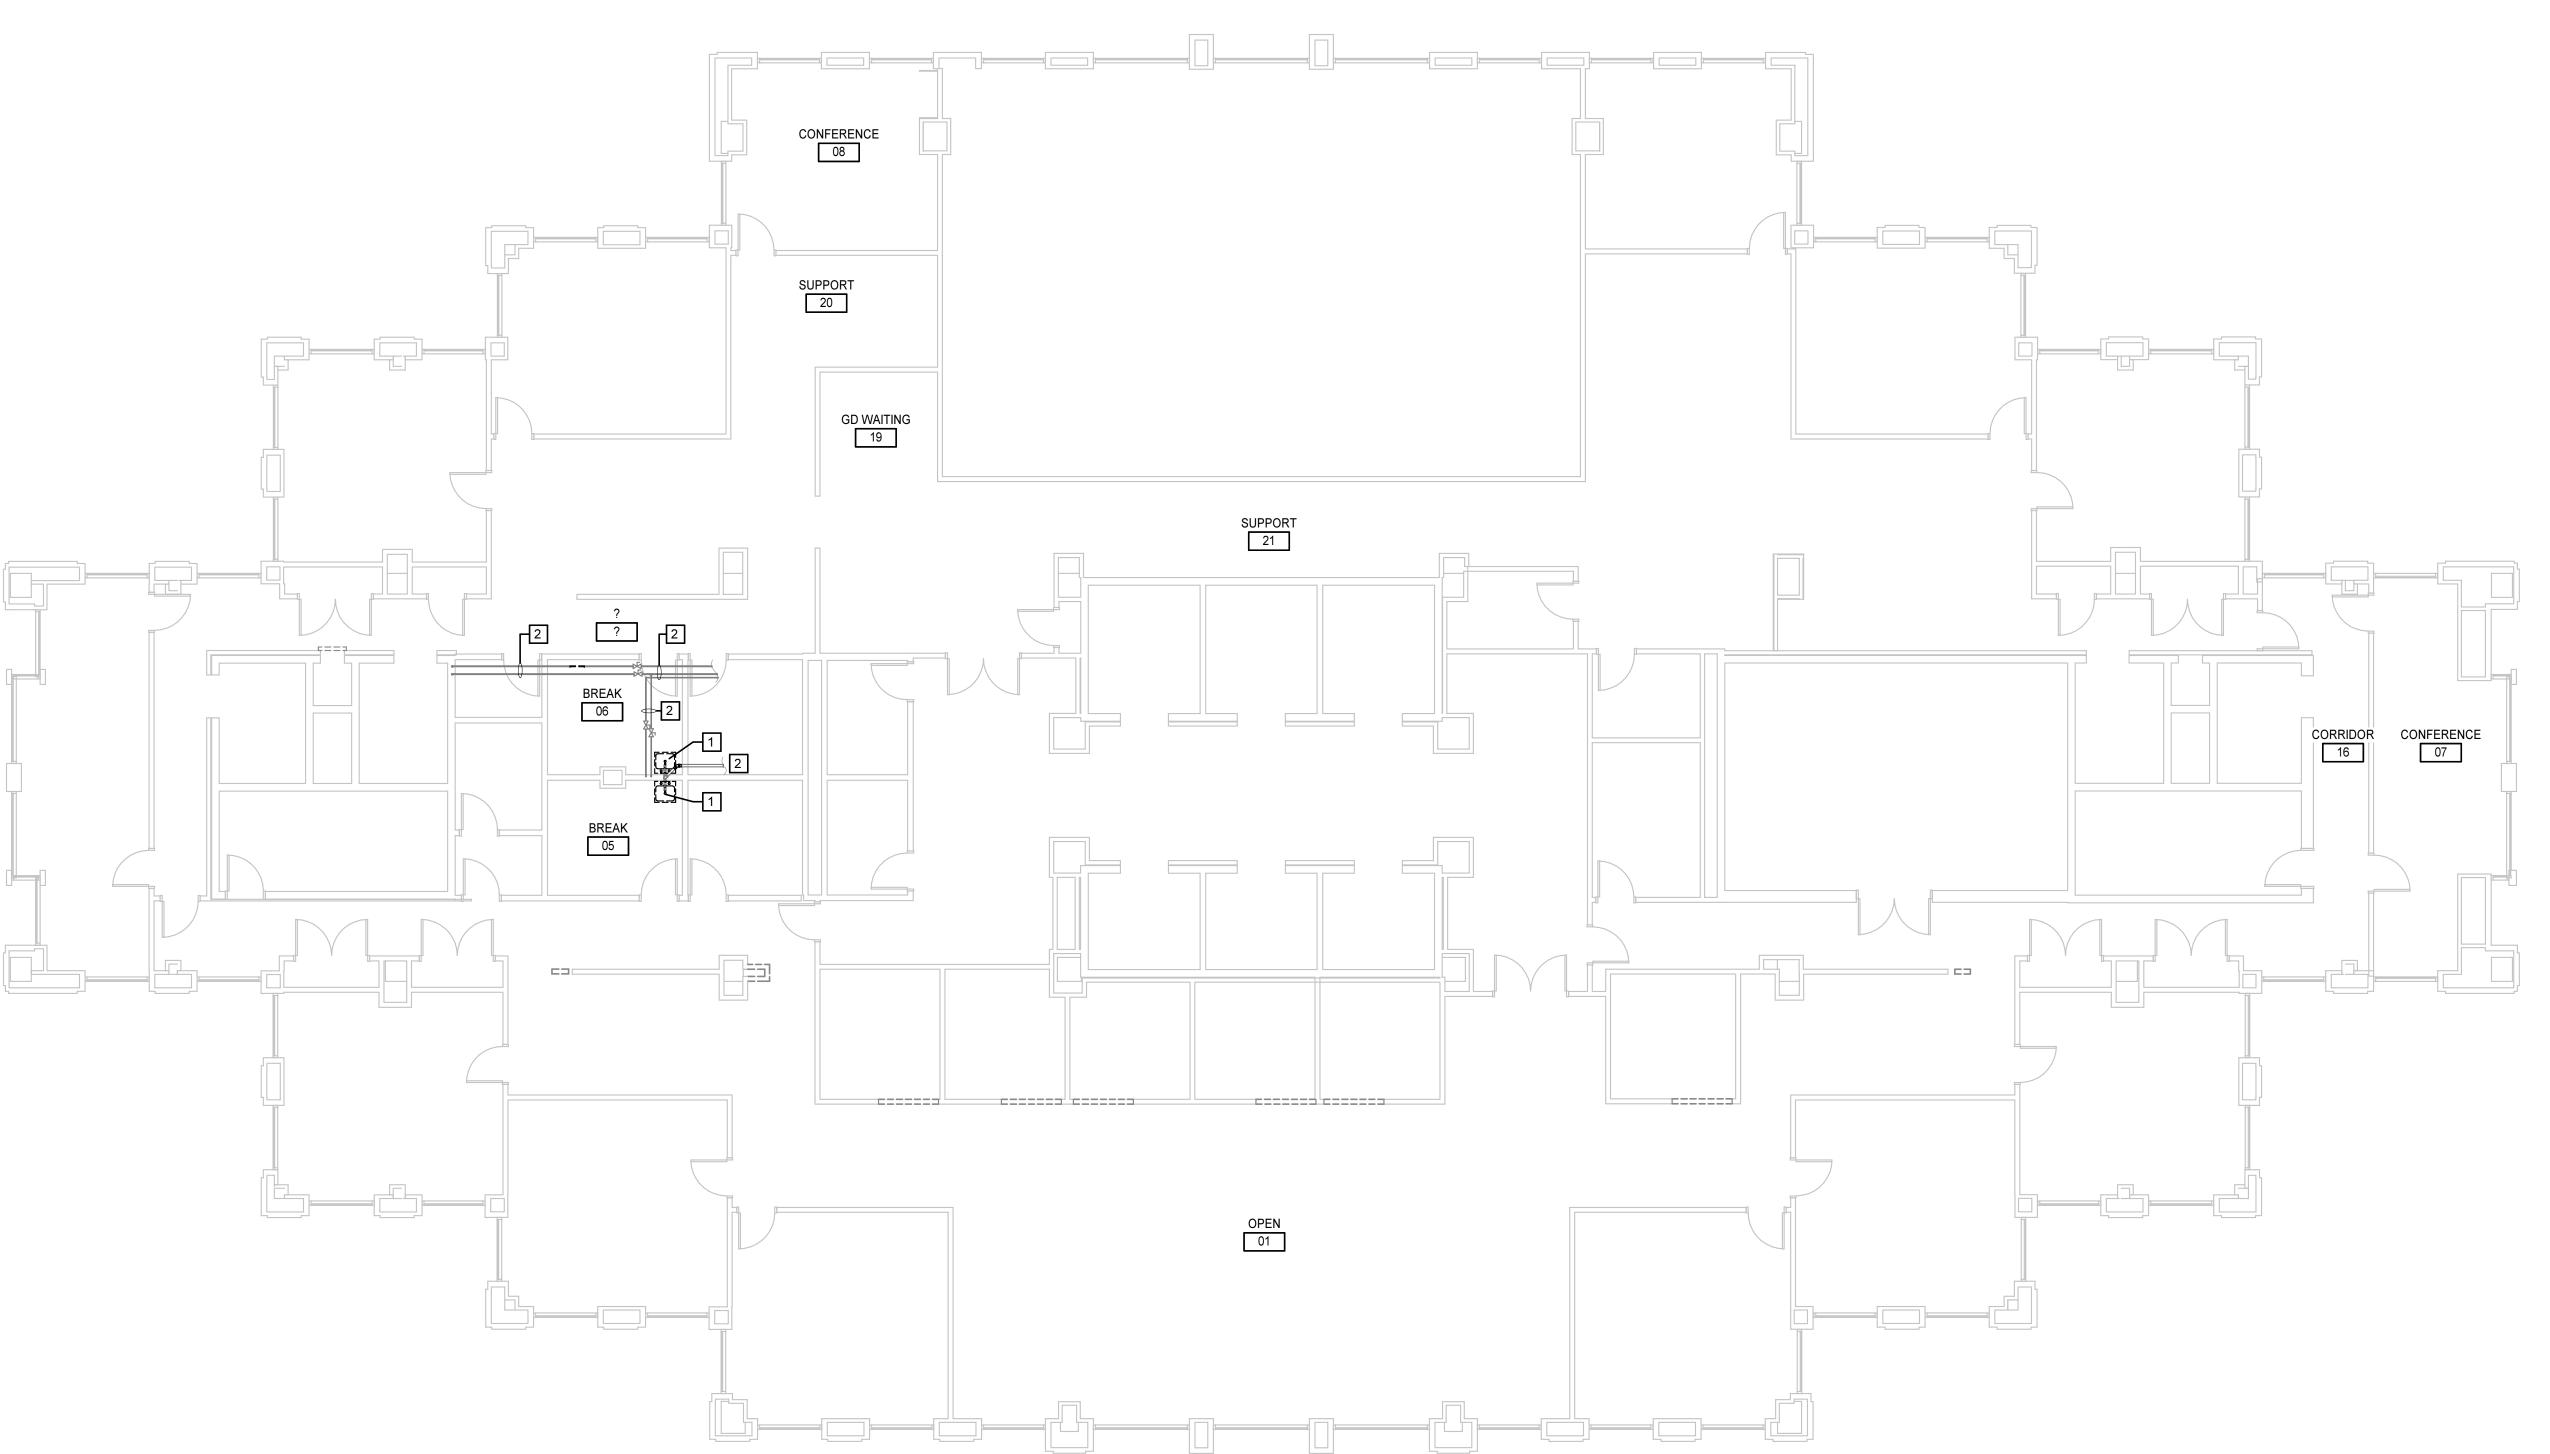

DEMOLITION 12TH FLOOR PLAN - PLUMBING

1/8" = 1'-0"

DocuSign Envelope ID: A5895716-0C1C-47BD-850F-CE8938C999C1

NEW 12TH FLOOR PLAN
- PLUMBING

**GENERAL NOTES** 

EXISTING PIPING IS FROM HANSEN LIND MEYER INC. PERMIT SET 11/18/1991 PLANS. CONTRACTOR SHALL FIELD VERIFY.

FIELD VERIFY.

CONTRACTOR SHALL MAKE ADJUSTMENT TO EXISTING SPRINKLER HEADS IF THEY ARE IN CONFLICT WITH NEW LIGHTING OR NEW DIFFUSERS.

1 EXISTING DCW AND DHW

2 RECONNECT EXISTING 1/2" DCW , 1/2" DHW AND 2" SAN TO NEW SINK.


3 1/2" DCW TO WSB-1.

4 1/2" DCW DN TO REMOTE CHILLER UNDER COUNTER. CHILLER SERVES BOTH BREAKROOM 5 AND 6 BOTTLE FILLER STATIONS. INSTALL PER MANUFACTURER RECOMMENDATIONS.

**KEYNOTES** 

APPLIES TO THIS DRAWING

5 2" SAN TO BFS-1.

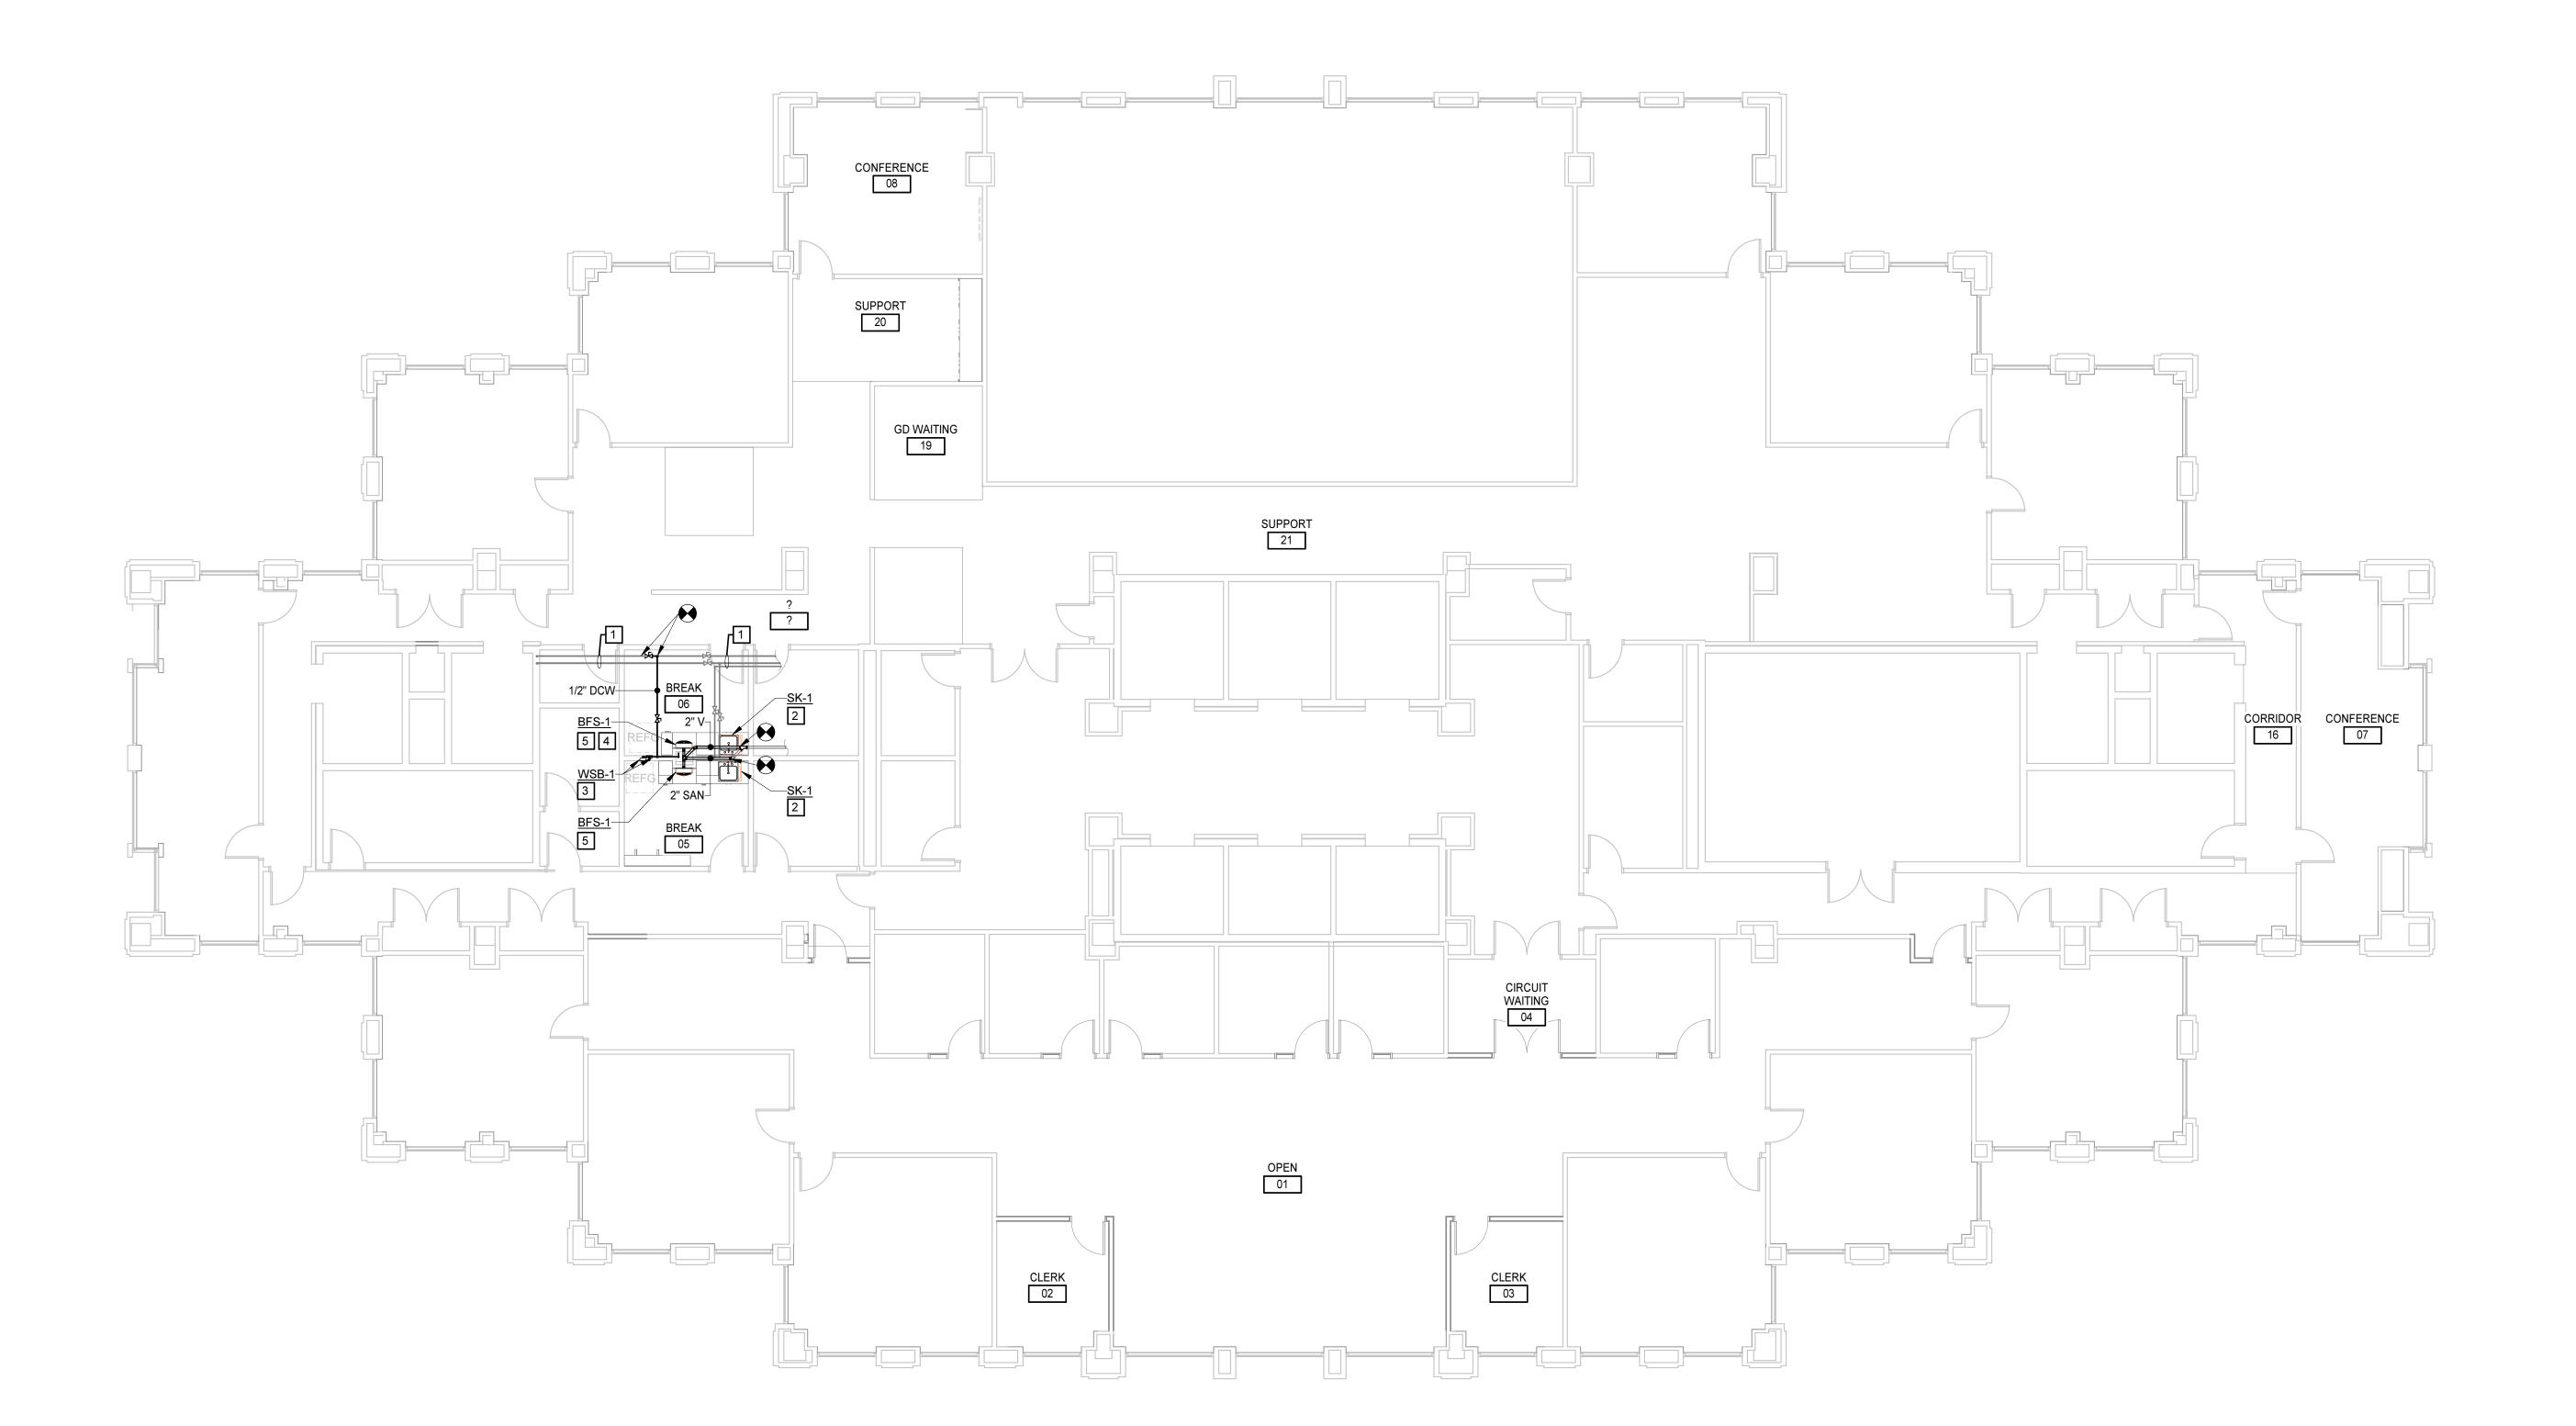

N

NEW 12TH FLOOR PLAN - PLUMBING

/28/2022 1:09:53 PM

DocuSign Envelope ID: A5895716-0C1C-47BD-850F-CE8938C999C1

P2.

WITHOUT WET BULB TEMPERATURE WATER COLUMN WATER PRESSURE DROP WELDED WIRE MESH

CUBIC FEET PER MINUTE CHWR CHILLED WATER RETURN CHWS CHILLED WATER SUPPLY COOLING COMMON COM CWR CONDENSER WATER RETURN CONDENSER WATER SUPPLY CWS DRAIN DRY BULB TEMPERATURE A-WEIGHTED DECIBELS DOMESTIC COLD WATER DIAMETER DRAWING EXHAUST AIR ENTERING AIR TEMPERATURE **ENERGY EFFICIENCY RATIO** EXTERNAL STATIC PRESSURE ENTERING WATER TEMPERATURE **EXISTING** DEGREES FAHRENHEIT FAIL CLOSED FIRE DAMPER FULL LOAD AMPS FAIL OPEN FEET PER MINUTE FOOT, FEET GAUGE GALLON(S) GALLONS PER HOUR GPM GALLONS PER MINUTE HORSEPOWER HEAT PUMP WATER RETURN **HPWR HPWS** HEAT PUMP WATER SUPPLY HEATING HOT WATER RETURN HOT WATER SUPPLY HEAT EXCHANGER HERTZ INCH INTEGRATED PART-LOAD VALUE KILOWATT(S) LEAVING AIR TEMPERATURE POUNDS LEAVING WATER TEMPERATURE MAXIMUM ONE THOUSAND BTUH MINIMUM CIRCUIT AMPACITY MANUFACTURER MINIMUM MOCP MAXIMUM OVERCURRENT PROTECTION MOD MOTOR-OPERATED DAMPER NORMALLY CLOSED (FOR PLANS, DETAILS) NOISE CRITERIA (FOR SCHEDULES) NOT IN CONTRACT NORMALLY OPEN OUTSIDE AIR ON CENTER OWNER FURNISHED CONTRACTOR INSTALLED POUNDS PER SQUARE INCH GAUGE RETURN AIR REFRIGERANT DISCHARGE RELATIVE HUMIDITY REFRIGERANT LIQUID **REVOLUTIONS PER MINUTE** REFRIGERANT SUCTION SUPPLY AIR SEASONAL ENERGY EFFICIENCY RATIO TRANSFER DUCT TYPICAL UNLESS NOTED (INDICATED) OTHERWISE VOLTAGE, VOLTS VARIABLE VOLUME TERMINAL UNIT VARIABLE FREQUENCY DRIVE WITH

RECTANGULAR DUCT (FIRST ROUND DUCT SIZE 18ø 18/12 FLAT OVAL DUCT SIZE 18ø DOUBLE WALL, EXPOSED DUCT **FABRIC DUCT** ×18ø<× LEXIBLE DUCTWORK FLEXIBLE CONNECTOR (SD) DUCT-MOUNTED SMOKE DETECTOR DUCT WITH DUCT LINER \_\_\_\_\_ DUCT ACCESS DOOR DUCT WITH END CAP LINEAR SLOT DIFFUSER, LENGTH AS INDICATED LINEAR BAR GRILLE, LENGTH AS INDICATED SUPPLY DIFFUSER RETURN OR EXHAUST GRILLE SUPPLY DIFFUSER WITH DIRECTIONAL BLOW, SOLID HATCH INDICATES BLANK OFF PANEL POINT OF CONNECTION TO EXISTING

SPACE NUMBER

SCHEDULE

**DETAIL TAG** 

── DETAIL NUMBER

AIRFLOW (CFM)

**GRAPHICS SYMBOLS LEGEND SPACE IDENTIFICATION TAG** BUILDING AREA (WHEN USED) ➤ DETAIL NUMBER ➤ DRAWING WHERE DETAIL IS INDICATED ➤ DRAWING WHERE DETAIL IS REFERENCED — ADDITIONAL DRAWING REFERENCES **EQUIPMENT IDENTIFICATION TAG**  EQUIPMENT NUMBER **SECTION TITLE** UNIT DESIGNATION M2 2 M4 1 1/4"=1'-0" DIFFUSER, GRILLE OR REGISTER TAG SECTION NUMBER TAG, REFER TO DIFFUSER, GRILLE AND REGISTER ➤ DRAWING WHERE SECTION IS INDICATED DRAWING WHERE SECTION IS REFERENCED ADDITIONAL DRAWING REFERENCES SECTION CALLOUT — SECTION NUMBER M4.1 — DRAWING WHERE SECTION IS INDICATED - DRAWING WHERE DETAIL IS INDICATED ENLARGED PLAN CALLOUT ENLARGED PLAN NUMBER - DRAWING WHERE ENLARGED PLAN IS INDICATED STRUCTURAL GRID LINE WITH DESIGNATION ---MECHANICAL EQUIPMENT WITH REQUIRED SERVICE CLEARANCE INDICATED EXISTING TO BE REMOVED **DUCTWORK LEGEND** MANUAL BALANCING DAMPER IN DUCT DIMENSION REFERS TO SIDE VIEWED)

FIRE DAMPER IN DUCT SMOKE DAMPER IN DUCT DAVID T. WHATELY 10|28|2022 OMBINATION FIRE/SMOKE DAMPER IN DUCT MOTORIZED DAMPER IN DUCT SMOKE CONTROL MANUAL BALANCING DAMPER IN DUCT SMOKE CONTROL MOTORIZED DAMPER IN DUCT SECURITY BARS IN DUCT

**DUCT WITH ACCESS PANEL** 

SUPPLY/MAKEUP AIR DUCT SECTIONS

RETURN AIR DUCT SECTIONS

EXHAUST AIR DUCT SECTIONS

THERMOSTAT, LINE VOLTAGE

THERMOSTAT, LOW VOLTAGE

TEMPERATURE SENSOR

CARBON DIOXIDE SENSOR

SENSOR WELL

DOOR UNDERCUT

SWING CHECK VALVE

PRESSURE REDUCING VALVE

PRESSURE-RELIEF VALVE

TWO-WAY CONTROL VALVE

THREE-WAY CONTROL VALVE

DOOR LOUVER

VALVE

CARBON MONOXIDE SENSOR

MANUAL BALANCING VALVE WITH FLOW TAPS

AUTOMATIC BALANCING VALVE WITH FLOW TAPS

SMOKE DETECTOR

**HUMIDITY SENSOR** 

**PIPING LEGEND** 

VATIO RENO 8 


OURTHO OUNT

563007
ARLINGTON COUNTY
1425 COURTHOUSE F

IRGINIA ARLING1


**ARLING** PROJECT NO: 563007 October 28, 2022 REVISIONS DATE DESCRIPTION

> ABBREVIATIONS, **AND GENERAL NOTES**

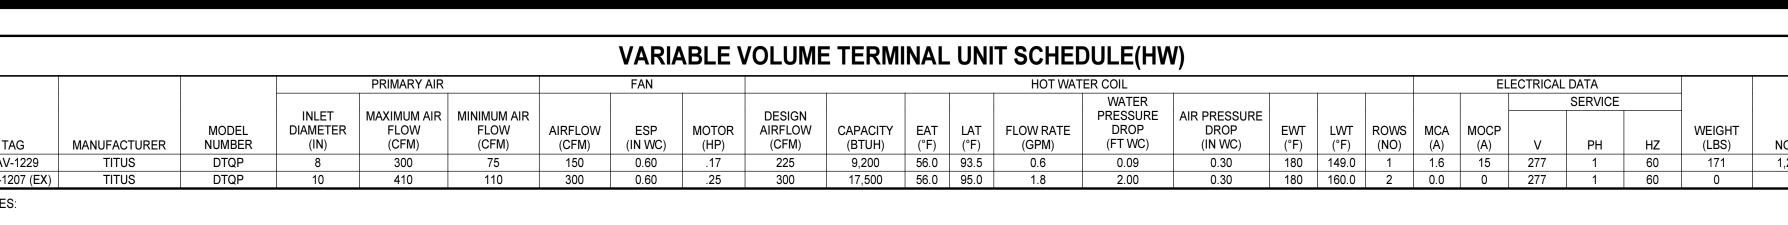

NOTES VAV-1229 110 300 0.60 .25 300 17.500 56.0 95.0 1.8 2.00 0.30 180 160.0 2 0.0 0 277 1 60 0 5 NOTES: PROVIDE ACCESS DOOR THROUGH BOTTOM OF UNIT. 2. PROVIDE INTEGRAL DISCONNECT SWITCH. 3. PROVIDE PRESSURE INDEPENDENT CONTROL VALVE. 4. CONTROLLER SHALL MATCH EXISTING UNIT. 5. VARIABLE VOLUME TERMINAL IS EXISTING TO REMAIN. INFORMATION SHOWN FOR INFORMATIONAL PURPOSES ONLY

> GRILLE, REGISTER, & DIFFUSER SCHEDULE MODEL NUMBER MANUFACTURER MOUNTING STYLE FACE SIZE MAX NC LEVEL NOTES NECK SIZE

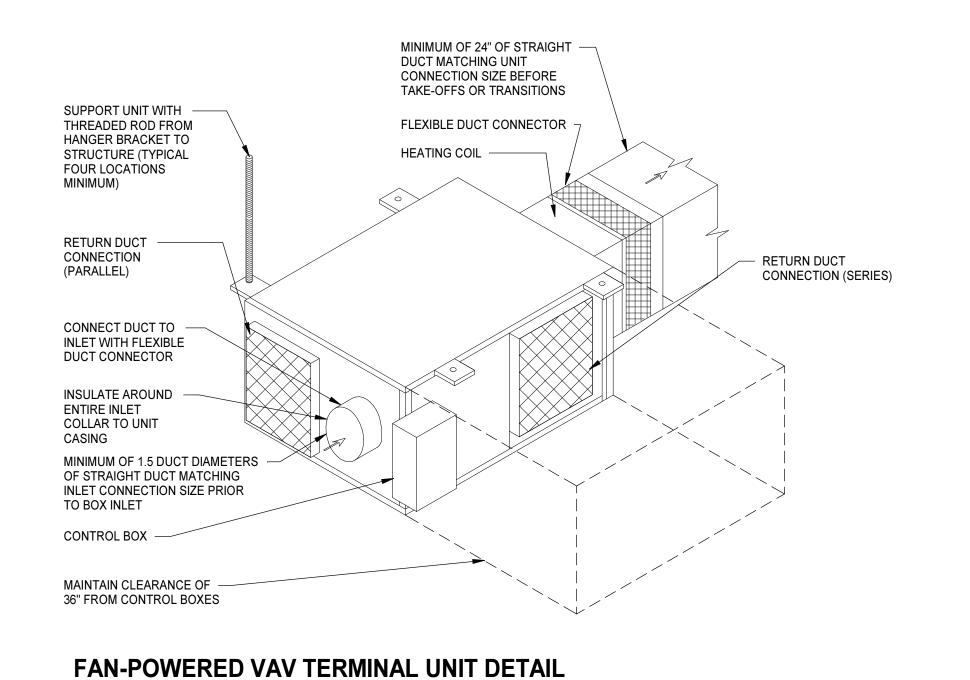

- MAINTAIN AIR TIGHT VAPOR BARRIER

- 1 1/2" WIDE 20 GAGE GALVANIZED

STEEL, SOFT TEMPER WIRE TO

AT TRANSITION FROM INSULATED

DUCT TO FLEXIBLE DUCT

FLEXIBLE DUCT

UNIT CONTROL PANEL - HOT WATER HEATING COIL SPACE TEMPERATURE - PROVIDE TWO (2) SPACE SENSORS AND TWO POSITION AVERAGE FOR CONTROL. CONTROL VALVE PARALLEL FAN POWERED TERMINAL UNIT

WITH ON-OFF HOT WATER HEATING COIL

CONTROL FOR HOT


WATER VALVE

- FAN CONTROL

POS POS SS STS AF AF

INSULATION nmmmmi INSULATION JOINT, PLACE ON SIDE OF DUCT. **VAPOR-RETARDER MASTIC** REFER TO SPECIFICATION SECTION 230700 FOR ADDITIONAL INFORMATION.

**DUCT INSULATION JOINT DETAIL** 

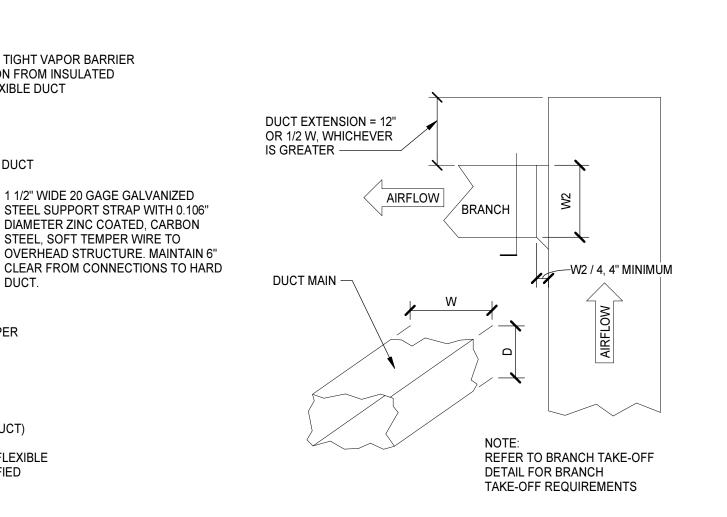

**DUCT EXTENSION = 12"** OR 1/2 W, WHICHEVER IS GREATER -**DUCT MAIN -**REFER TO BRANCH TAKE-OFF DETAIL FOR BRANCH TAKE-OFF REQUIREMENTS **REFER TO BRANCH TAKE-OFF** DETAIL FOR BRANCH **DESIGNER NOTES:** TAKE-OFF REQUIREMENTS **DESIGNER NOTES:** USE WHERE "W" EXCEEDS 24" OR WHEN USE WHERE "W" IS LESS THAN 24", WHEN YOU AIR FLOW IS IN EXCESS OF 1500 CFM. HAVE ROUND DUCT BRANCHES TO DIFFUSERS.

RETURN AIR FROM FILTER GRILLE

**BRANCH TAKEOFF TO DIFFUSER-SIDE DUCT END OF MAIN DETAIL** - 1 1/2" WIDE 10 GAGE GALVANIZED STEEL SUPPORT STRAP TO STRUCTURE ON BOTH SIDES OF DUCT. MAINTAIN 6" CLEAR FROM CONNECTIONS TO HARD DUCT. **GALVANIZED STEEL** DUCT TEE DUCT COLLAR - VOLUME DAMPER PRE-INSULATED FLEXIBLE DUCT - FLEXIBLE DUCT

- DUCT INSULATION, COVER TOP OF DIFFUSER FULL SIZE MODULE - GYPSUM BOARD CEILING - DIFFUSER NOTE: THE DIFFUSER ASSEMBLY MAY BE SUPPORTED FROM THE CEILING FRAMING SYSTEM. THE DIFFUSER SHALL BE INSTALLED

**SUPPLY DIFFUSER CONNECTION GYP** 

- DUCT INSULATION, COVER TOP OF DIFFUSER FULL SIZE OF MODULE SEMI-RIGID ELBOW -SUPPORT TO MAINTAIN 1.5D RADIUS 24x24 CEILING DIFFUSER

PRE-INSULATED FLEXIBLE DUCT PROVIDE 4" DUCT COLLAR. ATTACH WITH MINIMUM OF 4 SHEET METAL SCREWS EVENLY DISTRIBUTED AROUND COLLAR. DIFFUSER INSULATION - LAY-IN ACOUSTICAL PANEL CEILING - 24x24 CEILING DIFFUSER

SUPPLY DIFFUSER CONNECTION LAYIN-COLLAR

**DUCT SPLIT WITH VANES DETAIL** 

MAY BE PROPORTIONAL

GALVANIZED STEEL PLENUM -DUCT COLLAR — PRE-INSULATED — FLEXIBLE DUCT

LAY-IN ACOUSTICAL -PANEL CEILING SUPPLY DIFFUSER CONNECTION LAYIN

**DUCT SPLIT WITHOUT VANES DETAIL** 

OR WHEN AIR FLOW IS EQUAL TO OR LESS THAN

1500 CFM.

- ATTACH TO STRUCTURE

INSTALL ALL EQUIPMENT AND APPURTENANCES IN ACCORDANCE WITH CODES AND REGULATIONS.

THE CONTRACT DOCUMENTS ARE COMPLEMENTARY AND WHAT IS REQUIRED BY ONE G. PROVIDE TRAPPED DRAIN PIPING FROM DRAIN PANS OF ALL COOLING COILS, FANS AND OTHER ACTIVE DRAINS EXPOSED TO SYSTEM AIRSTREAM, PROVIDE SHALL BE AS BINDING AS IF REQUIRED BY ALL. IN THE CASE OF A CONFLICT,

**GENERAL NOTES** 

B. DRAWINGS ARE DIAGRAMMATIC AND INTENDED TO CONVEY SCOPE AND GENERAL ARRANGEMENT ONLY. DO NOT SCALE DRAWINGS. LOCATIONS OF ALL ITEMS NOT DEFINITIVELY FIXED BY DIMENSIONS ARE APPROXIMATE. COORDINATE CONTRACT DOCUMENTS PROJECT REQUIREMENTS, WORK OF OTHERS, AND EQUIPMENT AND MATERIALS PURCHASED WITH FIELD DIMENSIONS. MANUFACTURER'S REQUIREMENTS FOR INSTALLATION, OPERATION, AND MAINTENANCE, CONTRACTOR'S INTENDED MEANS AND METHODS OF INSTALLATION, AND CONTRACTOR'S FABRICATED ITEMS TO ENSURE A PROPER FIT AND INSTALLATION.

MAINTAIN MAXIMUM HEADROOM AND SPACE CONDITIONS AT ALL POINTS. WHERE HEADROOM AND SPACE CONDITIONS APPEAR INADEQUATE, NOTIFY THE ARCHITECTS PRIOR TO PROCEEDING WITH INSTALLATION. MAINTAIN A MINIMUM OF 7'-0" CLEARANCE ABOVE FINISHED FLOOR TO UNDERSIDE OF PIPES, DUCTS, CONDUITS SUSPENDED EQUIPMENT, ETC., THROUGHOUT ACCESS ROUTES IN MECHANICAL

LIMIT OF DEMOLITION

PIPE TURNED DOWN

END OF LINE CLEANOUT PLUG

LIQUID FILLED THERMOMETER

STRAINER WITH BLOWDOWN VALVE

AND 3/4" HOSE END CONNECTION

FLEXIBLE PIPE CONNECTOR

MANUAL AIR VENT

PRESSURE GAUGE WITH GAUGE COCK

CLEANOUT PLUG

SUPPLY AIRFLOW ARROW

RETURN OR EXHAUST AIRFLOW ARROW

D. FIELD VERIFY AND COORDINATE ALL DUCT AND PIPING DIMENSIONS BEFORE FABRICATION. MAKE MODIFICATIONS IN THE LAYOUT AS NEEDED TO PREVENT

F. COORDINATE LOCATIONS AND SIZES OF ALL FLOOR, WALL, AND ROOF OPENINGS WITH ALL OTHER TRADES. COORDINATE ALL PIPING AND EQUIPMENT SUPPORTED FROM

TRAP AT CONNECTION WITH WATER SEAL DEPTH ONE INCH GREATER THAN DISAGREEMENT, OR AMBIGUITY, PROVIDE THE BETTER QUALITY. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE THE GREATER QUANTITY OF SINK, OR OTHER LOCATION APPROVED BY THE ARCHITECT.

CONFLICT WITH WORK OF OTHER TRADES OR FOR PROPER EXECUTION OF THE

MANUFACTURER'S RECOMMENDATIONS, CONTRACT DOCUMENTS, AND APPLICABLE

UNIT OPERATING PRESSURE. DIRECT DRAINS TO NEAREST FLOOR DRAIN, MOP H. INSTALL PIPING, DUCTWORK, AND CONDUIT CONCEALED IN AREAS HAVING CEILINGS AND/OR FURRED SPACES UNLESS OTHERWISE INDICATED. I. ALL EQUIPMENT, VALVES, DAMPERS, DAMPER AND VALVE OPERATORS SHALL BE PROVIDED WITH ADEQUATE ACCESS FOR SERVICING, MAINTENANCE, AND

CONCENTRIC REDUCER

ECCENTRIC REDUCER

REPLACEMENT. J. SIZE ALL SPLIT-SYSTEM REFRIGERANT PIPING IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.

K. DUCT DIMENSIONS MAY BE MODIFIED ONLY WITH PRIOR APPROVAL FROM ARCHITECT. DUCT DIMENSIONS ARE IN INCHES AND INSIDE CLEAR.

OPENINGS IS TO THE TOP OF ROUGH OPENING UNLESS OTHERWISE INDICATED.

L. FOR LOCATION OF REGISTERS, GRILLES, AND DIFFUSERS WITHIN CEILING GRID, REFER TO ARCHITECTURAL REFLECTED CEILING PLANS. M. ELEVATION INDICATED FOR RECTANGULAR DUCT, GRILLE AND LOUVER

O. REFER TO STRUCTURAL DRAWINGS FOR DETAILS AND MAXIMUM SPACING

REQUIREMENTS REGARDING HANGER ATTACHMENTS TO STEEL BAR JOISTS.

ELEVATION INDICATED FOR ROUND DUCTWORK AND PIPING IS TO CENTERLINE. N. BRANCH PIPING RUNOUTS TO TERMINAL UNITS SHALL BE 3/4" DIAMETER UNLESS INDICATED OTHERWISE.

STRUCTURE WITH GENERAL CONSTRUCTION WORK.

INSULATION. INSULATION SHALL NOT BE COMPRESSED AT DAMPER OPERATOR. - FLEXIBLE DUCT SHALL BE INSTALLED OVER METAL DUCT (BEAD/LIP ON METAL DUCT) AND ANCHORED W/ A SINGLE NYLON MECHANICAL BAND. - IN EXPOSED AREAS PROVIDE RIGID GALVANIZED STEEL DUCTWORK IN LIEU OF FLEXIBLE DUCTWORK INDICATED. SUPPORT IN ACCORDANCE WITH REQUIREMENTS SPECIFIED FOR STEEL DUCTWORK. LEVEL AND TIGHT TO THE UNDERSIDE OF THE CEILING.

BRANCH TAKEOFF TO DIFFUSER-BOTTOM

RECTANGULAR TO ROUND EXPANDED —

SIDE TAKEOFF W/ DAMPER. DAMPER

NOT BE COMPRESSED AT DAMPER

FOR STEEL DUCTWORK.

RECTANGULAR TO ROUND EXPANDED

OPERATOR SHALL INCLUDE STANDOFF

TO EXTEND HANDLE BEYOND SURFACE OF

SIDE TAKEOFF W/ DAMPER. DAMPER

OPERATOR SHALL INCLUDE STANDOFF

TO EXTEND HANDLE BEYOND SURFACE OF INSULATION. INSULATION SHALL

- FLEXIBLE DUCT SHALL BE INSTALLED OVER METAL DUCT (BEAD/LIP ON METAL DUCT)

DUCTWORK INDICATED. SUPPORT IN ACCORDANCE WITH REQUIREMENTS SPECIFIED

- IN EXPOSED AREAS PROVIDE RIGID GALVANIZED STEEL DUCTWORK IN LIEU OF FLEXIBLE

AND ANCHORED W/ A SINGLE NYLON MECHANICAL BAND.

**KEYNOTES** APPLIES TO THIS DRAWING

REMOVE, STORE, CLEAN AND PREPARE EXISTING GRILLE FOR REINSTALLATION AT NEW LOCATIONS. REMOVE EXISTING DUCT AS SHOWN AND CAP.

REMOVE, STORE, CLEAN AND PREPARE EXISTING GRILLE FOR REINSTALLATION AT NEW LOCATIONS. REMOVE EXISTING DUCT AS SHOWN AND TEMPORARY CAP AT

3 EXISTING GRILLE TO REMAIN.

4 EXISTING PIPE TO REMAIN.

5 EXISTING DUCTWORK TO REMAIN.

CONFERENCE
08 ? ? ? CORRIDOR 16 OPEN 01

**DEMOLITION 12TH FLOOR PLAN - MECHANICAL** 

DocuSign Envelope ID: A5895716-0C1C-47BD-850F-CE8938C999C1

**NEW 12TH FLOOR PLAN** - MECHANICAL

**KEYNOTES** 


APPLIES TO THIS DRAWING EXISTING PIPING AND DUCTWORK ARE FROM HANSEN LIND MEYER INC. PERMIT SET 11/18/1991 PLANS. CONTRACTOR SHALL FIELD VERIFY.

**GENERAL NOTES** 

EXISTING DUCTWORK.

2 EXISTING GRILLE.

ALL DUCTWORK AND PIPING SHOWN ARE ABOVE CEILING UNLESS OTHERWISE NOTED. CONTRACTOR SHALL VERIFY ALL EXISTING DIFFUSER AND GRILLE LOCATIONS. 3 EXISTING PIPE. 4 RECALIBRATE EX VAV-1207 FLOW RING AND BALANCE TO NEW AIRFLOW PER SCHEDULE.

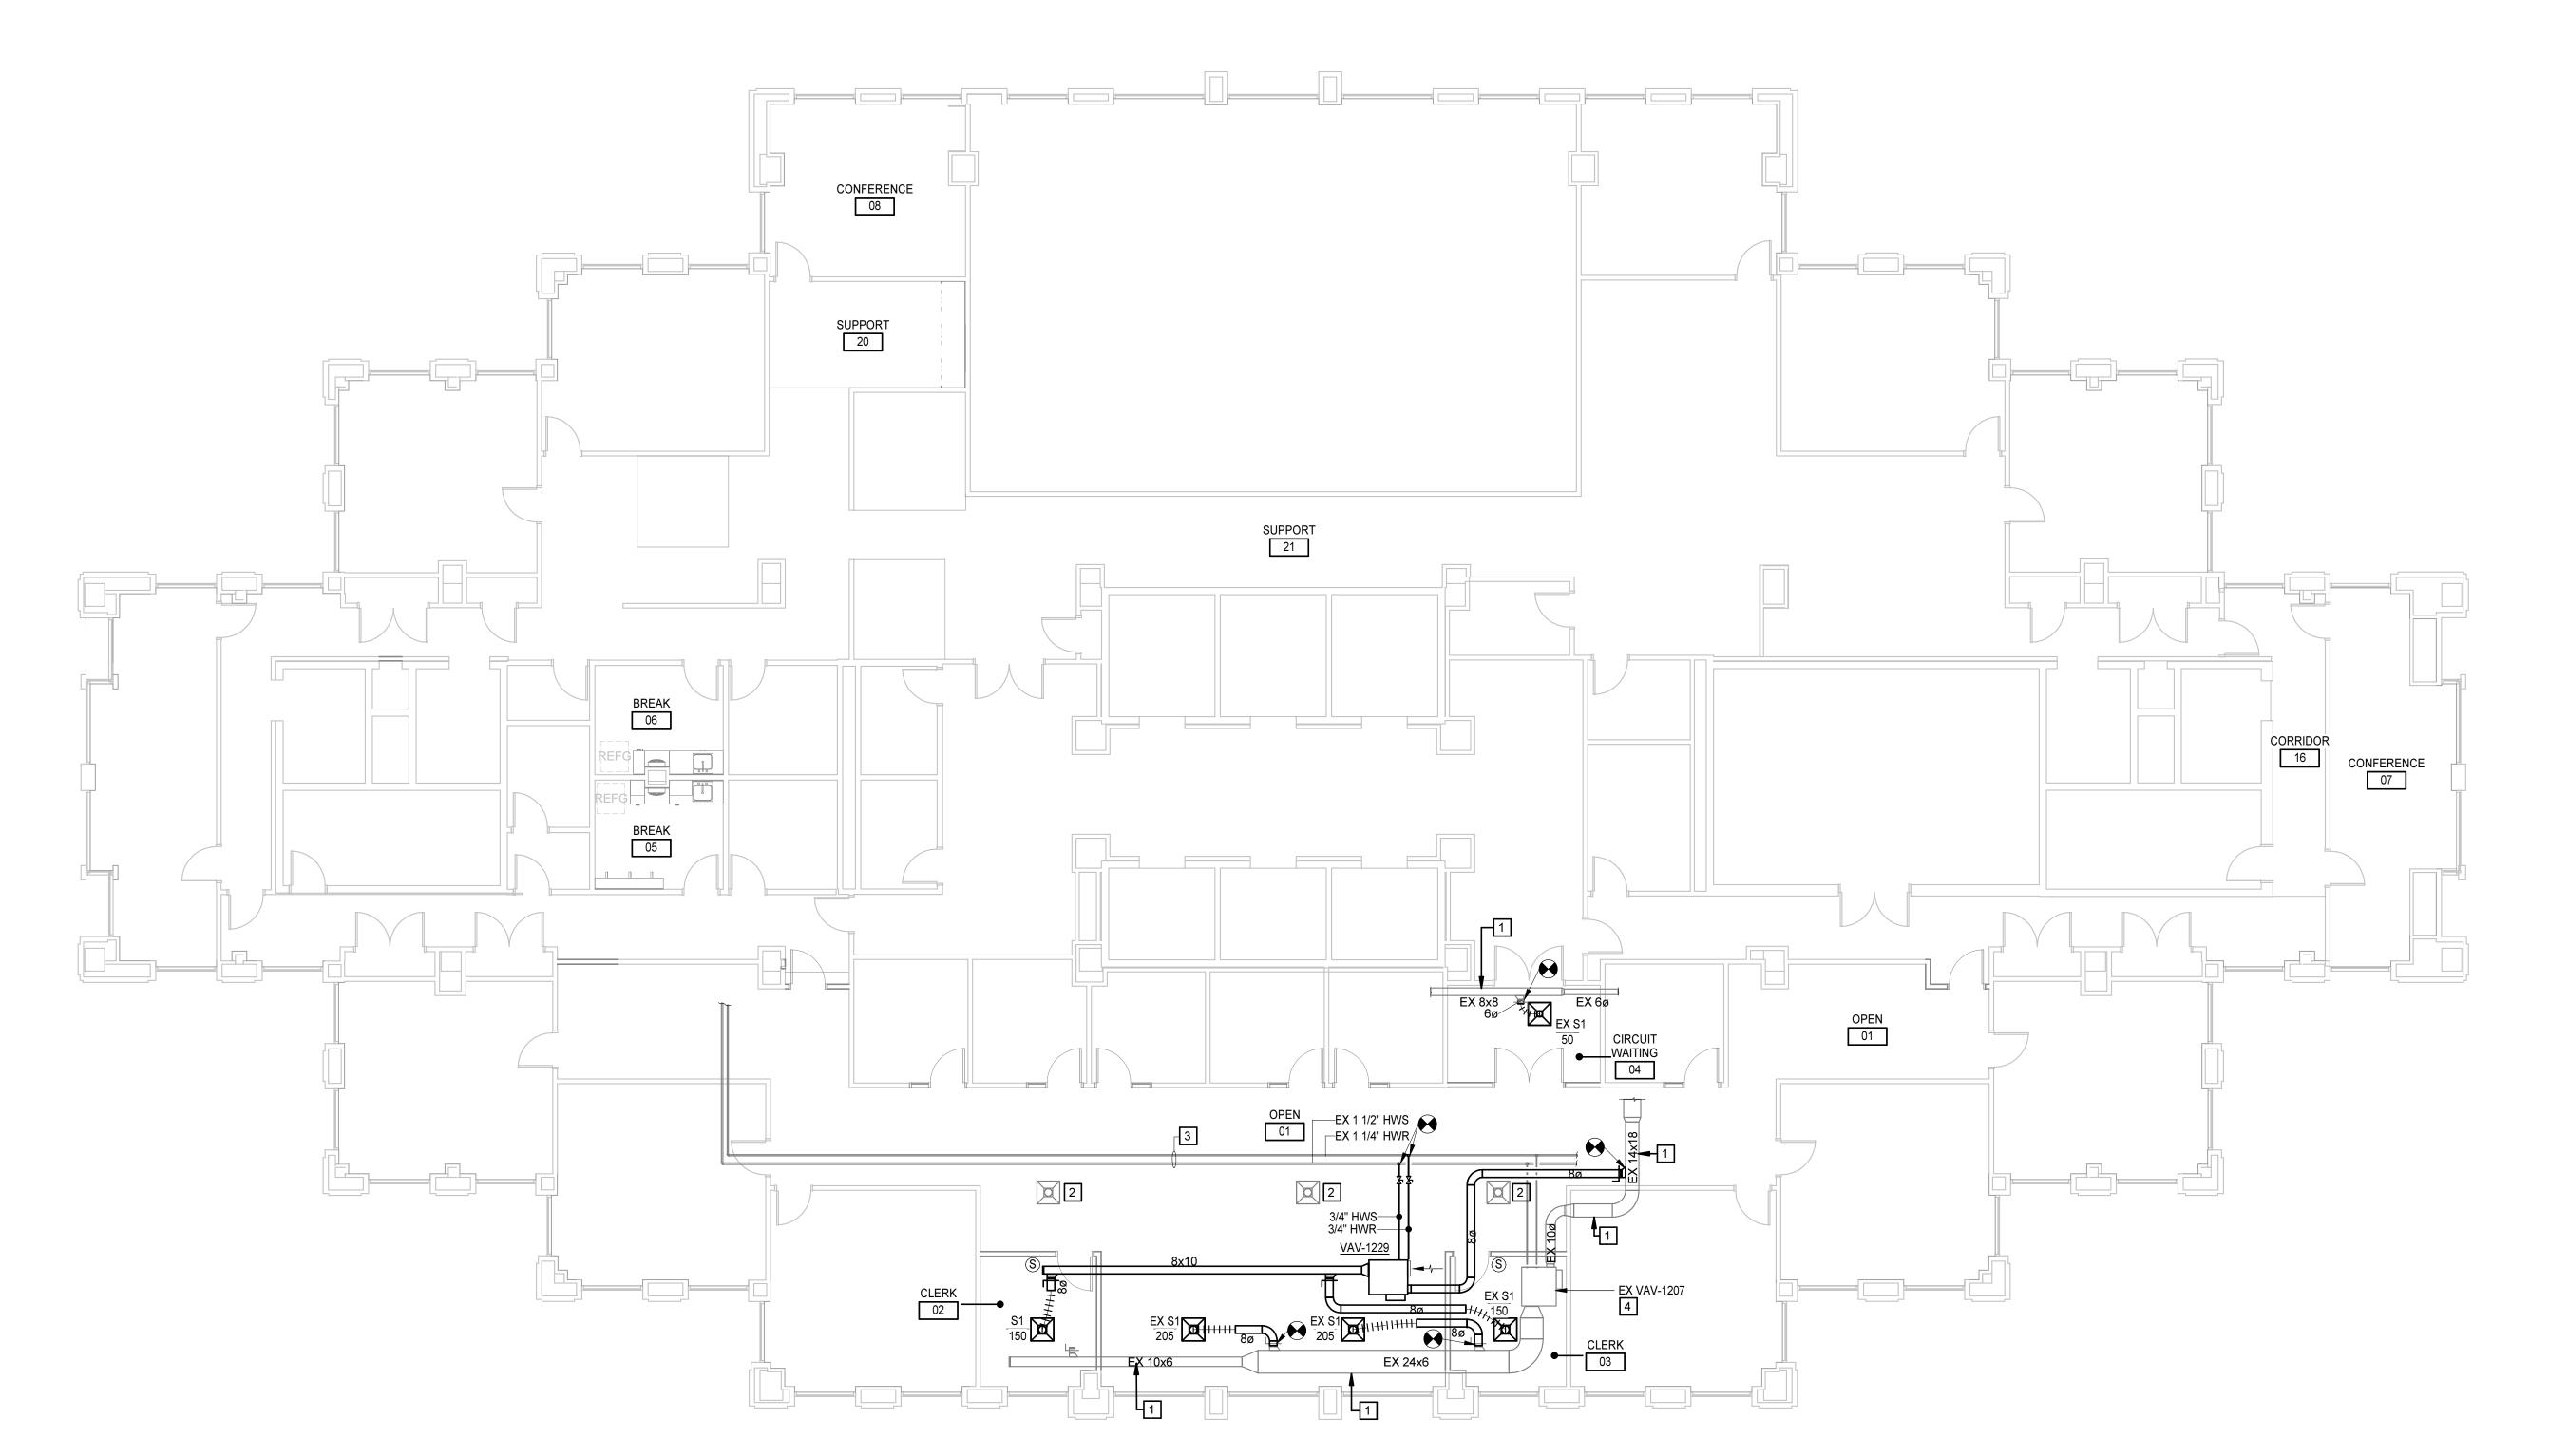

**NEW 12TH FLOOR PLAN - MECHANICAL** 

DocuSign Envelope ID: A5895716-0C1C-47BD-850F-CE8938C999C1

FIRE ALARM LEGEND

SYMBOL DESCRIPTION

FIRE ALARM AUDIO/VISUAL NOTIFICATION DEVICE WITH DEVICE GUARD, 80" AFF AND NOT MORE THAN 96". SUBSCRIPT NUMBER INDICATES STROBE CANDELA RATING. #/# INDICATES STROBE SETTING AND  $oldsymbol{\mathsf{J}}_\mathsf{XX}$  reduced effective output when device guard is present.

FIRE ALARM VISUAL STROBE NOTIFICATION DEVICE, 80" AFF AND NOT MORE THAN 96". SUBSCRIPT

FIRE ALARM VISUAL STROBE NOTIFICATION DEVICE, 80" AFF AND NOT MORE THAN 96". SUBSCRIPT NUMBER INDICATES STROBE CANDELA RATING. # / # INDICATES STROVE SETTING AND REDUCED → XX EFFECTIVE OUTPUT WHEN DEVICE GUARD IS PRESENT.

FIRE ALARM AUDIO/VISUAL NOTIFICATION DEVICE, CEILING MOUNTED. SUBSCRIPT NUMBER INDICATES STROBE CANDELA RATING.

FIRE ALARM VISUAL STROBE NOTIFICATION DEVICE, CEILING MOUNTED. SUBSCRIPT NUMBER INDICATES STROBE CANDELA RATING. FIRE ALARM AUDIO/VISUAL NOTIFICATION DEVICE WITH DEVICE GUARD, CEILING MOUNTED. SUBSCRIPT

NUMBER INDICATES STROBE CANDELA RATING. #/#INDICATES STROBE SETTING AND REDUCED

FIRE ALARM VISUAL STROBE NOTIFICATION DEVICE, CEILING MOUNTED. SUBSCRIPT NUMBER INDICATES STROBE CANDELA RATING. # / # INDICATES STROVE SETTING AND REDUCED EFFECTIVE OUTPUT WHEN DEVICE GUARD IS PRESENT.

F FIRE ALARM MANUAL PULL STATION, MOUNT AT +3'-10"AFF.

EFFECTIVE OUTPUT WHEN DEVICE GUARD IS PRESENT.

XX NUMBER INDICATES STROBE CANDELA RATING.

FK FIRE ALARM KEY OPERATED MANUAL PULL STATION, MOUNT AT +3'-10"AFF.

FIRE ALARM DUCT SMOKE DETECTOR, FURNISH AND CONNECT UNDER DIVISION 28. INSTALL UNDER DIVISION 23. VERIFY LOCATION WITH DIVISION 23 PRIOR TO ROUGH-IN. PROVIDE ACCESSIBLE KEY OPERATED REMOTE TEST SWITCH FOR EACH DETECTOR.

(S) SMOKE DETECTOR, CEILING MOUNT. SUBSCRIPT 'G' WHEN PRESENT INDICATES PROVIDE DEVICE GUARD

(H) HEAT DETECTOR, CEILING MOUNT. SUBSCRIPT 'G' WHEN PRESENT INDICATES PROVIDE DEVICE GUARD

(TS) FIRE ALARM TAMPER SWITCH, PROVIDE UNDER DIVISION 23, MONITOR UNDER DIVISION 28. (FS) FIRE ALARM FLOW SWITCH, PROVIDE UNDER DIVISION 23, MONITOR UNDER DIVISION 28.

POST INDICATOR VALVE SWITCH, PROVIDE UNDER DIVISION 23, MONITOR UNDER DIVISION 28.

(PS) FIRE ALARM PRESSURE SWITCH, PROVIDE UNDER DIVISION 23, MONITOR UNDER DIVISION 28.

(RI) FIRE ALARM REMOTE INDICATOR, CEILING MOUNT. FIRE ALARM MONITOR MODULE. NOT ALL MONITOR MODULES ARE INDICATED ON DRAWINGS. PROVIDE

FIRE ALARM CONTROL MODULE. NOT ALL CONTROL MODULES ARE INDICATED ON DRAWINGS. © PROVIDE QUANTITY AND IN LOCATIONS REQUIRED TO ACCOMPLISH SPECIFIED CONTROL FUNCTIONS.

QUANTITY AND IN LOCATIONS REQUIRED TO ACCOMPLISH SPECIFIED MONITORING FUNCTIONS.

(B) FIRE ALARM SPRINKLER BELL, MOUNT AT +10'-0"AFF.

FIRE ALARM MAGNETIC DOOR HOLDER, WALL MOUNT DEVICE AT 6" BELOW TOP OF DOOR. PROVIDE HINGED MAGNETIC CATCH PLATE ON DOOR TO MATE WITH DEVICE, COORDINATE LOCATION AND LENGTH WITH DIVISION 08. PROVIDE CONCEALED 120-VOLT POWER CONNECTION AND FIRE ALARM CONTROL MODULE IF REQUIRED FOR PROPER OPERATION.

**GRAPHICS SYMBOLS LEGEND** 

SPACE NUMBER

1 SECTION NUMBER

DETAIL NUMBER

**DETAIL TITLE** 

**SECTION TITLE** 

SECTION NUMBER

DETAIL NUMBER

SPACE IDENTIFICATION TAG

BUILDING AREA (WHEN USED)

E4.1 — DRAWING WHERE SECTION IS INDICATED

ENLARGED PLAN WHERE CUT

E5.1 — DRAWING WHERE DETAIL IS INDICATED

E3.1 — DRAWING WHERE ENLARGED PLAN IS INDICATED

SECTION WHERE CUT

ENLARGED PLAN NUMBER

The Drawing where detail is indicated.

ADDITIONAL DRAWING REFERENCES

DRAWING WHERE SECTION IS INDICATED

CLASSROOMS

**BUSINESS** 

SCIENCE LAB

**ELECTRICAL ROOMS** 

COMPUTER LABS

LOCKER ROOMS

MECHANICAL ROOMS

LOBBIES/CORRIDORS

STUDIO

TOILETS

KITCHEN

AUDITORIUM

STOREROOMS WHITEBOARDS

DINING

MEDIA CENTER

**AVERAGE MAINTAINED** 

**ILLUMINATION LEVELS** 

FOOTCANDLES

10-30

DRAWING WHERE SECTION IS CUT

ADDITIONAL DRAWING REFERENCES

─ DRAWING WHERE DETAIL IS CUT

FIRE ALARM DOOR HOLDER/CLOSER HARDWARE UNDER DIVISION 08, MONITOR AND CONTROL INTERFACE WITH FIRE ALARM UNDER DIVISION 28. → FIRE ALARM/POWER CONNECTION TO DIVISION 23 SMOKE OR FIRE/SMOKE DAMPER. COORDINATE.

WITH DIVISION 23. REFER TO TYPICAL FIRE/SMOKE DAMPER DIAGRAM.

## **POWER LEGEND**

SYMBOL DESCRIPTION

APPLIANCE RECEPTACLE, MOUNT AT +1'-6" AFF. PROVIDE NEMA CONFIGURATION TO MATCH PLUG FOR EQUIPMENT SERVED.

APPLIANCE RECEPTACLE, MOUNT AT +1'-6"AFF. PROVIDE NEMA CONFIGURATION TO MATCH PLUG FOR EQUIPMENT SERVED. CONNECT TO EMERGENCY POWER, PROVIDE RED DEVICE.

DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +1'-6"AFF.

DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +1'-6"AFF. CONNECT TO EMERGENCY POWER, PROVIDE

■ DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +3'-10"AFF.

DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +3'-10"AFF. CONNECT TO EMERGENCY POWER, PROVIDE RED DEVICE.

DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +7'-6"AFF. DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +7'-6"AFF. CONNECT TO EMERGENCY POWER, PROVIDE

DUPLEX RECEPTACLE, NEMA 5-20R, RECESS FLOOR MOUNT.

GFCI DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +1'-6"AFF. PROVIDE NEMA 3R "WHILE IN USE"

GFCI DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +1'-6"AFF.

GFCI DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +1'-6"AFF. CONNECT TO EMERGENCY POWER, PROVIDE RED DEVICE.

GFCI DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +3'-10"AFF.

GFCI DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +3'-10"AFF. CONNECT TO EMERGENCY POWER, PROVIDE RED DEVICE.

DOUBLE DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +1'-6"AFF.

DOUBLE DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +1'-6"AFF. CONNECT TO EMERGENCY POWER, PROVIDE RED DEVICE.

DOUBLE DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +3'-10"AFF.

DOUBLE DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +3'-10"AFF. CONNECT TO EMERGENCY POWER,

DOUBLE DUPLEX RECEPTACLE, NEMA 5-20R, RECESS FLOOR MOUNT. SINGLE RECEPTACLE, NEMA 5-20R, MOUNT AT +1'-6"AFF.

 $oxedsymbol{phi}$  SINGLE RECEPTACLE, NEMA 5-20R, MOUNT AT +3'-10"AFF.

SPD DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT AT +1'-6"AFF.

POWER/COMMUNICATIONS RECESSED FLOOR BOX. SUBSCRIPT NUMBER INDICATES OUTLET TYPE. REFER TO DETAIL ON E4 SERIES DRAWINGS.

# POWER/COMMUNICATIONS RECESSED FLOOR BOX. CONNECT TO EMERGENCY POWER, PROVIDE RED DEVICES. SUBSCRIPT NUMBER INDICATES OUTLET TYPE. REFER TO DETAIL ON E4 SERIES DRAWINGS.

POWER/COMMUNICATIONS POKE THRU FLOOR BOX. SUBSCRIPT NUMBER INDICATES OUTLET TYPE. REFER TO DETAIL ON E4 SERIES DRAWINGS. POWER/COMMUNICATIONS POKE THRU FLOOR BOX. CONNECT TO EMERGENCY POWER, PROVIDE RED DEVICES. SUBSCRIPT NUMBER INDICATES OUTLET TYPE. REFER TO DETAIL ON E4 SERIES DRAWINGS.

SYSTEM FURNITURE FLEX POWER CABLE CONNECTION VIA FLOOR BOX. COORDINATE W/ SYSTEM FURNITURE PROVIDER PRIOR TO ROUGH-IN.

SYSTEM FURNITURE FLEX POWER CABLE CONNECTION VIA FLUSH WALL BOX MOUNTED 4" AFF. COORDINATE W/FURNITURE PROVIDER PRIOR TO ROUGH-IN.

POWER/COMMUNICATIONS POWER POLE, FURNISHED WITH (NIC) SYSTEM FURNITURE. PROVIDE J-BOX MTD TO STRUCTURE ABOVE CLG, AND FLEXIBLE CONDUIT CONNECTION TO J-BOX MTD TO TOP OF POLE AND CONNECTED TO PIGTAIL(S) FURNISHED WITH POLE. POLE LOCATION IS APPROXIMATE,

LINE VOLTAGE THERMOSTAT. DIVISION 23 FURNISH, DIVISION 26 INSTALL. REFER TO DIVISION 23 DRAWINGS FOR LOCATIONS AND QUANTITY.

PUSHBUTTON CONTROLLER.

(d) CORD REEL OUTLET, CEILING MOUNT.

[NON-] METALLIC SURFACE RACEWAY, DEVICES AS INDICATED, MOUNT AT +1'-6"AFF, UNO.

( J ) JUNCTION BOX, CONCEALED ABOVE CEILING, UNO. UJ) JUNCTION BOX, UNDER FLOOR MOUNT.

COORDINATE WITH SYSTEM FURNITURE PROVIDER.

CB ENCLOSED CIRCUIT BREAKER, CHARACTERISTICS AS INDICATED.

MUSHROOM SWITCH, HEAVY DUTY WITH LEGEND PLATE. MOUNT W/HANDLE AT +3'-10" AFF, UNO.

MANUAL MOTOR STARTER, OVERLOAD PROTECTION AS REQUIRED PER NAME PLATE RATINGS, WITH 'ON' INDICATOR PILOT LIGHT. FLUSH MOUNT W/HANDLE AT +3'-10"AFF, UNO.

DISCONNECT SWITCH, FUSIBLE OR NON-FUSIBLE AS INDICATED. MOUNT W/HANDLE AT +4'-6"AFF, UNO.

MAGNETIC MOTOR STARTER. WITH OVERLOAD RELAYS AS REQUIRED TO SERVE MANUFACTURER REQUIREMENTS OF EQUIPMENT SERVED. PROVIDE WITH HAND-OFF-AUTOMATIC SELECTOR SWITCH AND INDICATOR LIGHTS.. MOUNT W/HANDLE AT +4'-6"AFF, UNO.

COMBINATION MAGNETIC STARTER AND DISCONNECT SWITCH. WITH OVERLOAD ELEMENTS AND FUSING AS REQUIRED TO SERVE MANUFACTURER REQUIREMENTS OF EQUIPMENT SERVED. PROVIDE WITH HAND-OFF-AUTOMATIC SELECTOR SWITCH AND INDICATOR LIGHTS.. MOUNT W/HANDLE AT +

(E) EQUIPMENT POWER CONNECTION.

MOTOR CONNECTION.

─M CONNECTION TO DIV 23 MOTORIZED DAMPER, VERIFY LOCATION.

EL POWER FOR ELECTRIC DOOR LOCK CONNECTION. POWER FOR ELECTRIC DOOR STRIKE CONNECTION.

EMERGENCY GENERATOR.

NET BRANCH CIRCUIT RUN CONCEALED, UNO. DASHED INDICATES CIRCUITRY REQUIRED TO BE RUN BELOW

STRAIGHT LINEWORK FOR CIRCUITRY INDICATES ON EMERGENCY POWER CIRCUIT. INDICATED FOR CLARITY ONLY, ACTUAL HOMERUN DESIGNATION OVERRIDES THIS SYMBOLOGY. BRANCH CIRCUIT HOME RUN TO PANELBOARD AND CIRCUIT INDICATED.

TRANSFORMER, PROVIDE CONCRETE HOUSEKEEPING PAD UNLESS NOTED OTHERWISE.

(R) RELAY, N/O OR N/C AS INDICATED.

→ FELAY, NORMALLY OPEN.

RELAY, NORMALLY CLOSED. (XXX) FEEDER TAG. REFER TO FEEDER SCHEDULE ON DWG E5.1

# **SECURITY LEGEND**

# SYMBOL DESCRIPTION

DIRECTIONAL SECURITY MOTION DETECTOR, WALL MOUNT 6" BFC.

OMNI-DIRECTIONAL SECURITY MOTION DETECTOR.

FUTURE CCTV MOUNTING LOCATION, CEILING MOUNT. PROVIDE 20' OF COAXIAL CABLE COILED ABOVE CEILING FOR FUTURE INSTALLATION OF SECURITY CAMERA. RUN CABLE TO ROOM XXXX AND COIL 20' OF CABLE INSIDE ROOM.

FUTURE CCTV MOUNTING LOCATION, WALL MOUNT. PROVIDE 20' OF COAXIAL CABLE COILED ABOVE CEILING FOR FUTURE INSTALLATION OF SECURITY CAMERA. RUN CABLE TO ROOM XXXX AND COIL 20' OF CABLE INSIDE ROOM.

DPS DOOR POSITION SWITCH.

C STATUS CONTACT.

CR CARD READER, MOUNT AT 3'-10" AFF

CARD READER WITH KEYPAD, MOUNT AT 3'-10" AFF.

REMOTE KEYPAD FOR SECURITY SYSTEM, MOUNT AT 3'-10" AFF.

ELECTRIC DOOR STRIKE.

ELECTRIC DOOR LOCK.

PNEUMATIC DOOR LOCK.

TALK THROUGH COMMUNICATOR.

DURESS ALARM PUSHBUTTON, MOUNT IN CASEWORK AS INDICATED.

### **COMMUNICATIONS LEGEND**

NOTE: REFER TO 'TYPICAL COMMUNICATION OUTLET DETAIL' FOR BOX & CONDUIT REQUIREMENTS. REFER TO TELECOMMUNICATION DEVICE DETAILS FOR CABLING AND TERMINAL JACK REQUIREMENTS.

SYMBOL DESCRIPTION  $\nabla_{\mathbf{x}}$  TELECOMMUNICATIONS OUTLET, SUBSCRIPT NUMBER INDICATES OUTLET TYPE. MOUNT AT +3'-10"AFF.

WALL CLOCK, CEILING MOUNT. SUBSCRIPT "D" INDICATES DOUBLE FACE CLOCK. ARROWS INDICATE

SOUND SYSTEM SPEAKER, RECESS WALL MOUNT AT +7'-6"AFF. 'WG' WHERE PRESENT INDICATES

SOUND SYSTEM SPEAKER, RECESS CEILING MOUNT. 'WG' WHERE PRESENT INDICATES PROVIDE

REFER TO "TYPICAL COMMUNICATION OUTLET DETAIL" FOR BOX AND CONDUIT REQUIREMENTS.

INDICATES OUTLET TYPE. REFER TO "TYPICAL COMMUNICATION OUTLET DETAIL" FOR BOX AND

POWER/COMMUNICATIONS POKE-THRU FLOOR BOX. SUBSCRIPT LETTER INDICATES OUTLET TYPE. (2)

3/4" CONDUITS, (1) EACH AT OPPOSITE SIDES, TO STUB-UP AT NEAREST COMMUNICATION CROSS-

POWER/COMMUNICATIONS POKE-THRU FLOOR BOX ON EMERGENCY POWER. SUBSCRIPT LETTER

INDICATES OUTLET TYPE. (2) 3/4" CONDUITS, (1) EACH AT OPPOSITE SIDES, TO STUB-UP AT NEAREST

SYSTEM FURNITURE COMMUNICATIONS CONNECTIONS VIA FLOOR BOX. PROVIDE 1.25" CONDUIT BELOW

SYSTEM FURNITURE COMMUNICATIONS CONNECTION VIA FLUSH WALL BOX MOUNTED +4"AFF. PROVIDE

1.25" CONDUIT WITH BUSHING FROM BOX TO ABOVE CEILING. COORDINATE WITH FURNITURE PROVIDER

COMMUNICATION CROSS-CONNECT, UNO. REFER TO 'TYPICAL COMMUNICATION OUTLET DETAIL.'

SLAB TO STUB-UP AT NEAREST COMMUNICATION BACK BOARD. COORDINATE WITH FURNITURE

SYSTEM FURNITURE COMMUNICATIONS CONNECTION VIA POWER POLE FURNISHED WITH SYSTEM

2" EMT CONDUIT SLEEVE WITH NYLON BUSHING EACH END UNO, THRU WALL AT +6" ABOVE FINISHED

LIGHTING LEGEND

LIGHT SWITCH, RATED 120/277 VOLTS, 20-AMPS, MOUNT AT +3'-10"AFF. SUBSCRIPT/SUPERSCRIPT

# POWER/COMMUNICATIONS RECESSED FLOOR BOX. SUBSCRIPT LETTER INDICATES OUTLET TYPE.

# POWER/COMMUNICATIONS RECESSED FLOOR BOX ON EMERGENCY POWER. SUBSCRIPT LETTER

CONNECT, UNO. REFER TO 'TYPICAL COMMUNICATION OUTLET DETAIL.'

FURNITURE. COORDINATE WITH FURNITURE PROVIDER PRIOR TO ROUGH-IN.

⋒∰# MICROPHONE OUTLET, WALL MOUNT AT +1'-6"AFF, FLUSH FLOOR MOUNT. SUBSCRIPT NUMBER

INDICATES NUMBER OF JACKS TO PROVIDE IN OUTLET.

PROVIDE PROTECTIVE WIRE GUARD.

PROTECTIVE WIRE GUARD.

CONDUIT REQUIREMENTS.

PROVIDER PRIOR TO ROUGH-IN.

WIRELESS ACCESS POINT

SYMBOL DESCRIPTION

TELECOMMUNICATIONS EQUIPMENT RACK.

CABLE TRAY, MOUNT AT +6" ABOVE FINISHED CEILING.

TG TELECOMMUNICATIONS GROUND BUS BAR, MOUNT AT +1'-6"AFF.

TELECOMMUNICATIONS MAIN GROUND BUS BAR, MOUNT AT +1'-6"AFF.

LETTERS, NUMBERS, AND SYMBOLS INDICATES SWITCH TYPE AS FOLLOWS:

INDICATES PILOT LIGHT, ON WHEN SWITCH IS ON

INDICATES SWITCH WITH INTEGRAL OCCUPANCY SENSOR

LOWER CASE LETTER INDICATES LIGHT FIXTURE CONTROL DESIGNATION

INDICATES DIMMER SWITCH WITH INTEGRAL OCCUPANCY SENSOR

INDICATES DUAL RELAY INTEGRAL OCCUPANCY SENSOR, WIRED

INDICATES KEY OPERATED LIGHT SWITCH

OMNI-DIRECTIONAL LIGHTING CONTROL OCCUPANCY DETECTOR, CEILING MOUNT.

(PE) PHOTOELECTRIC CELL FOR LIGHTING CONTROL. WALL MOUNT AT +10-0"AFF. AIM NORTH.

EMERGENCY EGRESS LIGHTING FIXTURE, WITH BATTERY PACK, WALL MOUNT AT +8'-0"AFF.

INDICATES 3-WAY LIGHT SWITCH

INDICATES 4-WAY LIGHT SWITCH

INDICATES DIMMER SWITCH

FOR MULTI-LEVEL SWITCHING

\$\$ INDICATES SWITCHES WIRED FOR INBOARD/OUTBOARD SWITCHING.

LIGHT FIXTURE ON EMERGENCY POWER, CEILING MOUNT

TELECOMMUNICATIONS OUTLET, SUBSCRIPT NUMBER INDICATES OUTLET TYPE. MOUNT AT +1'-6"AFF.

[MISC COMMUNICATIONS OUTLET], MOUNT AT +1'-6"AFF.

RECESSED FLOOR MOUNT DEVICE COMPLETE WITH FITTINGS FOR FLOOR COVERING.

INTERCOM STATION WITH PUSHBUTTON, MOUNT AT +4'-6"AFF.

[MISC COMMUNICATIONS OUTLET], MOUNT AT +4'-6"AFF.

. PROVIDE SPECIFIC BREAKER ARRANGEMENT FOR THE PANEL BOARDS WHEREVER PHYSICALLY POSSIBLE. PUSHBUTTON SWITCH, MOUNT AT +4'-6"AFF. SUBSCRIPT "E" INDICATES EMERGENCY FUNCTIONS. PROVIDE AS-BUILT DRAWINGS INDICATING ACTUAL BRANCH CIRCUIT ARRANGEMENT. PROVIDE TYPE WRITTEN PANELBOARD DIRECTORIES INDICATING ACTUAL BRANCH CIRCUIT ARRANGEMENT. CATV OUTLET, MOUNT AT +[1'-6"] [7'-6"]AFF. G. PROVIDE AS-BUILT DRAWINGS INDICATING ACTUAL BRANCH CIRCUIT ARRANGEMENT. PROVIDE WALL CLOCK, MOUNT AT +7'-6"AFF. SUBSCRIPT "D" INDICATES DOUBLE FACE CLOCK. TYPEWRITTEN PANELBOARD DIRECTORIES INDICATING ACTUAL BRANCH CIRCUIT ARRANGEMENT. HAND

> WRITTEN SCHEDULES ARE NOT ACCEPTABLE. H. ALL CONDUIT RUNS INDICATED ARE DIAGRAMMATIC, COORDINATE ROUTING IN ALL SPACES WITH OTHER

ALL PANELBOARDS INDICATED ARE HOUSED IN A SINGLE WIDTH ENCLOSURE, UNO. THE CONTRACTOR SHALL FIELD VERIFY ROOM LAYOUT AND ADJUST ACCORDINGLY, AT NO COST TO THE OWNER, IF PROVIDING ANY

**GENERAL NOTES** 

A. THE CONTRACT DOCUMENTS ARE COMPLEMENTARY AND WHAT IS REQUIRED BY ONE SHALL BE AS BINDING AS IF REQUIRED BY ALL. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE THE BETTER

QUALITY. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE THE GREATER QUANTITY

B. FOLLOW MOUNTING HEIGHTS INDICATED IN THE ELECTRICAL LEGEND UNLESS OTHERWISE INDICATED.

C. FIELD VERIFY EXACT FEEDER LOCATIONS FOR MECHANICAL EQUIPMENT PRIOR TO ROUGH-IN.

MEASURE ALL MOUNTING HEIGHTS FROM THE DEVICE CENTER LINE UNLESS OTHERWISE INDICATED.

D. EQUIPMENT CONNECTIONS ARE INDICATED IN THEIR APPROXIMATE LOCATIONS, VERIFY EXACT LOCATIONS

E. LOCATED ALL SWITCHES FOR LOCAL CONTROL OF LIGHTING ON STRIKE SIDE OF SINGLE DOORS UNLESS

OF ALL CONNECTIONS WITH OTHER TRADES SUPPLYING EQUIPMENT TO AVOID CONFLICTS AT INSTALLATION.

PANELBOARD ENCLOSURES. . WHERE POWER AND COMMUNICATION OUTLETS ARE INDICATED IN CLOSE PROXIMITY ON THE DRAWINGS.

FIELD COORDINATE THE LOCATIONS TO PLACE THE OUTLETS ADJACENT TO EACH OTHER. K. ALL EXTERIOR RECEPTACLES SHALL BE LABELED "WR" - WEATHER RESISTANT.

.. WHEN GROUPING MULTIPLE LINE TO NEUTRAL BRANCH CIRCUITS IN A CONDUIT, PROVIDE DEDICATED COLOR CODED NEUTRAL CONDUCTORS FOR EACH CIRCUIT. DO NOT USE BREAKER TIES AND SHARED NEUTRALS EVEN THOUGH PERMITTED BY NEC.

M. PROVIDE A 2" WIDE YELLOW LINE PAINTED ON THE FLOOR INDICATING THE ELECTRICAL WORKING SPACE. IN FRONT OF ALL ELECTRICAL PANELS IN ELECTRICAL ROOMS. REFER TO PLANS FOR ELECTRICAL WORKING SPACE DETAILS. STENCIL "NO STORAGE" IN 2" HIGH, YELLOW LETTERS CENTERED IN THE OUTLINED AREA.

## **ABBREVIATIONS**

SINGLE PHASE THREE PHASE WEATHERPROOF (NEMA 3R) ABOVE FINISHED FLOOR ALUMINUM

AUTOMATIC TRANSFER SWITCH BELOW FINISHED CEILING BELOW FINISHED GRADE BREAKER CONDUIT

COMMUNITY ANTENNA TELEVISION (CABLE) CIRCUIT BREAKER

CIRCUIT CEILING CLEAR

> COMMUNICATIONS COMM

DRAWING ELECTRIC BASEBOARD HEATER EMPTY CONDUIT

EMERGENCY POWER OFF

**EXTERIOR** FIRE ALARM

DIRECTIONAL LIGHTING CONTROL OCCUPANCY DETECTOR, WALL MOUNT AT 6" BELOW FINISHED CEILING. FAGP FAXP

FIRE FIGHTER'S SMOKE CONTROL PANEL FULL LOAD AMPS

FUSE PER NAMEPLATE DATA GROUND FAULT PROTECTION FOR EQUIPMENT, 6-50mA PER NEC 427.22 (PROVIDE ACCESSORY FOR

GROUND FAULT CIRCUIT INTERRUPT GROUND FAULT PROTECTION FOR PERSONNEL, 4-6mA (PROVIDE ACCESSORY FOR INDICATED

HOUSEKEEPING PAD HORSEPOWER

HIGH PRESSURE SODIUM 🛇 😝 EXIT SIGN, CEILING MOUNT. DIRECTIONAL ARROWS AS INDICATED. SHADING INDICATES FACE(S) OF SIGN IN ACCORDANCE WITH

EXIT SIGN, WALL MOUNT. DIRECTIONAL ARROWS AS INDICATED. SHADING INDICATES FACE(S) OF SIGN. ISOLATED GROUND JUNCTION BOX

# **DEMOLITION LEGEND**

## SYMBOL DESCRIPTION

DEMOLITION WORK.

■ LIGHT FIXTURE, POLE MOUNT.

SPORTS LIGHTING POLE

TRACK LIGHTS.

LIGHT FIXTURE, CEILING MOUNT.

LIGHTING FIXTURE ON EMERGENCY POWER.

Q LIGHT FIXTURE, WALL MOUNT, HEIGHT AS INDICATED.

WALL WASHER LIGHTING FIXTURE.

○ ☐ LIGHTING FIXTURE.

REMOVE DEVICES, EQUIPMENT, IN ACCORDANCE ₩ 5.7 WITH THE GENERAL DEMOLITION NOTES.



WITHIN HATCHED AREAS, DISCONNECT AND REMOVE ALL ELECTRICAL MATERIALS INCLUDING BUT NOT LIMITED TO LIGHTS, DEVICES, EQUIPMENT, SPEAKERS, FIRE ALARM,

# **GENERAL DEMOLITION NOTES**

 PROVIDE ALL ELECTRICAL DEMOLITION WORK REQUIRED TO INSTALL THE WORK INDICATED. REMOVE REROUTE, AND RECONNECT ALL BRANCH CIRCUITS THAT WILL REMAIN IN USE BUT INTERFERES WITH THE

CONDUITS AND PROVIDE BLANK COVER PLATES FOR BOXES NOT UTILIZED FOR THE WORK.

B. REMOVE ALL EXISTING CONDUITS THAT WILL NOT BE REUSED AND WHERE THEY WILL BE EXPOSED AFTER OMPLETION. ABANDON ALL OTHERS IN THE WALLS ONLY. DISCONNECT ALL WIRING INDICATED AND/OR REQUIRED TO BE REMOVED FROM ALL POWER SOURCES. REMOVE ALL WIRING FROM ABANDONED

: MAINTAIN CONTINUITY OF ALL EXISTING CIRCUITS TO REMAIN OR PORTIONS THEREOF AFFECTED BY THE

D. BEFORE DEMOLITION, VERIFY WITH THE OWNER ALL EQUIPMENT TO BE SALVAGED TO OWNER AND NOT REMOVED FROM THE SITE. FOR ALL REMAINING EQUIPMENT INDICATED FOR REMOVAL (AND NOT RELOCATED), REMOVE AND DISPOSE IN A LEGAL MANNER.

E. EXERCISE CARE IN REMOVING DEMOLITION ITEMS. REPAIR OR REPLACE ALL DAMAGE CAUSED TO EXISTING CONSTRUCTION AND EQUIPMENT TO REMAIN. DRAWINGS ARE BASED UPON EXISTING PLANS AND FIELD INVESTIGATION WITHOUT DEMOLITION. VISIT THE

EXISTING BUILDING AND BECOME FAMILIAR WITH ALL EXISTING CONDITIONS AND EXAMINE ALL DRAWINGS

G. WHERE DEMOLITION OF TELECOMMUNICATIONS DEVICES OCCUR, REMOVE CABLING NOT INDICATED TO REMAIN BACK TO POINT OF ORIGIN.

H. DEMOLITION FLOOR PLANS ARE PROVIDED FOR REFERENCE ONLY TO AID IN DEFINING THE SCOPE OF

CLOSED CIRCUIT TELEVISION

COMPANY

OTHERWISE INDICATED.

DISCONNEC DIVISION

**EMERGENCY COMMUNICATIONS STATION** ELECTRICAL ELEV ELEVATOR

EXISTING TO REMAIN ELECTRIC WATER COOLER

FIRE ALARM ANNUNCIATOR PANEL FIRE ALARM CONTROL PANEL FIRE ALARM GRAPHIC PANEL FIRE ALARM EXTENDER PANEL

FUSE PER MANUFACTURERS REQUIREMENTS/RECOMMENDATIONS

KITCHEN HOOD FIRE SUPPRESSION SYSTEM KILOHERTZ

KILOVOLT AMPS KILOWATTS KILOWATT HOURS LOCKOUT TO PREVENT UNAUTHORIZED SWITCHING (PROVIDE ACCESSORY FOR INDICATED BREAKER) ROUTE CIRCUIT TO LOAD VIA LIGHTING CONTACTOR, REFER TO LC SCHEDULE

MINIMUM CIRCUIT AMPACITY MAIN CIRCUIT BREAKER MOTOR CONTROL CENTER

METAL HALIDE MEGAHERTZ MAINTENANCE LOCK (PROVIDE ACCESSORY FOR INDICATED BREAKER)

MAIN LUG ONLY MASS NOTIFICATION SYSTEM MOCP MAXIMUM OVER CURRENT PROTECTION. MOUNTED

NORMALLY CLOSED NORMALLY OPEN OWNER FURNISHED CONTRACTOR INSTALLED PILOT LIGHT (AT THE SWITCH HANDLE) PANELBOARD

PROTECTIVE DEVICE

REC RECEPTACLE SECURITY SURGE PROTECTIVE DEVICE SPECIFICATION(S)

SHUNT TRIP, 120V COIL (PROVIDE ACCESSORY FOR INDICATED BREAKER) SWITCH SWBD SWITCHBOARD TELECOMMUNICATIONS BONDING BACKBONE

TELECOMMUNICATIONS CLOSET TELECOM TELECOMMUNICATIONS TGB TELECOMMUNICATIONS GROUNDING BUS BAR TELECOMMUNICATIONS MAIN GROUNDING BUS BAR

UNO UNLESS NOTED (INDICATED) OTHERWISE VOLTS VARIABLE FREQUENCY DRIVE

WITH WIRE GUARD WEATHERPROOF

TRANSFER

TRANSFORMER

XFER

XFMR

ABBREVIATIONS AND

0

9

9

PROJECT NO: 563007

DATE DESCRIPTION

IRGINIA ARLING

563007 ARLINGTON COUNTY 1425 COURTHOUSE F

HED)

BRIAN C. WELLS

Lic. No. 046269

**GENERAL NOTES** 

**GENERAL NOTES** APPLIES TO DRAWING E1.1 REPRESENTED BY n

ARLINGTON COUNTY COURTHOUSE 12TH FLOOR RENOVATION


PROJECT NO: 563007
DATE: October 28, 2022
REVISIONS
DATE DESCRIPTION

**DEMOLITION 12TH** FLOOR PLAN -**ELECTRICAL** 

CONFERENCE 08 SUPPORT 20 CORRIDOR CONFERENCE 07 0 [ 0 ] [ 0 ] [ 0 ] 0 [0] [ 0 ] 

**DEMOLITION 12TH FLOOR PLAN - ELECTRICAL** 

DocuSign Envelope ID: A5895716-0C1C-47BD-850F-CE8938C999C1

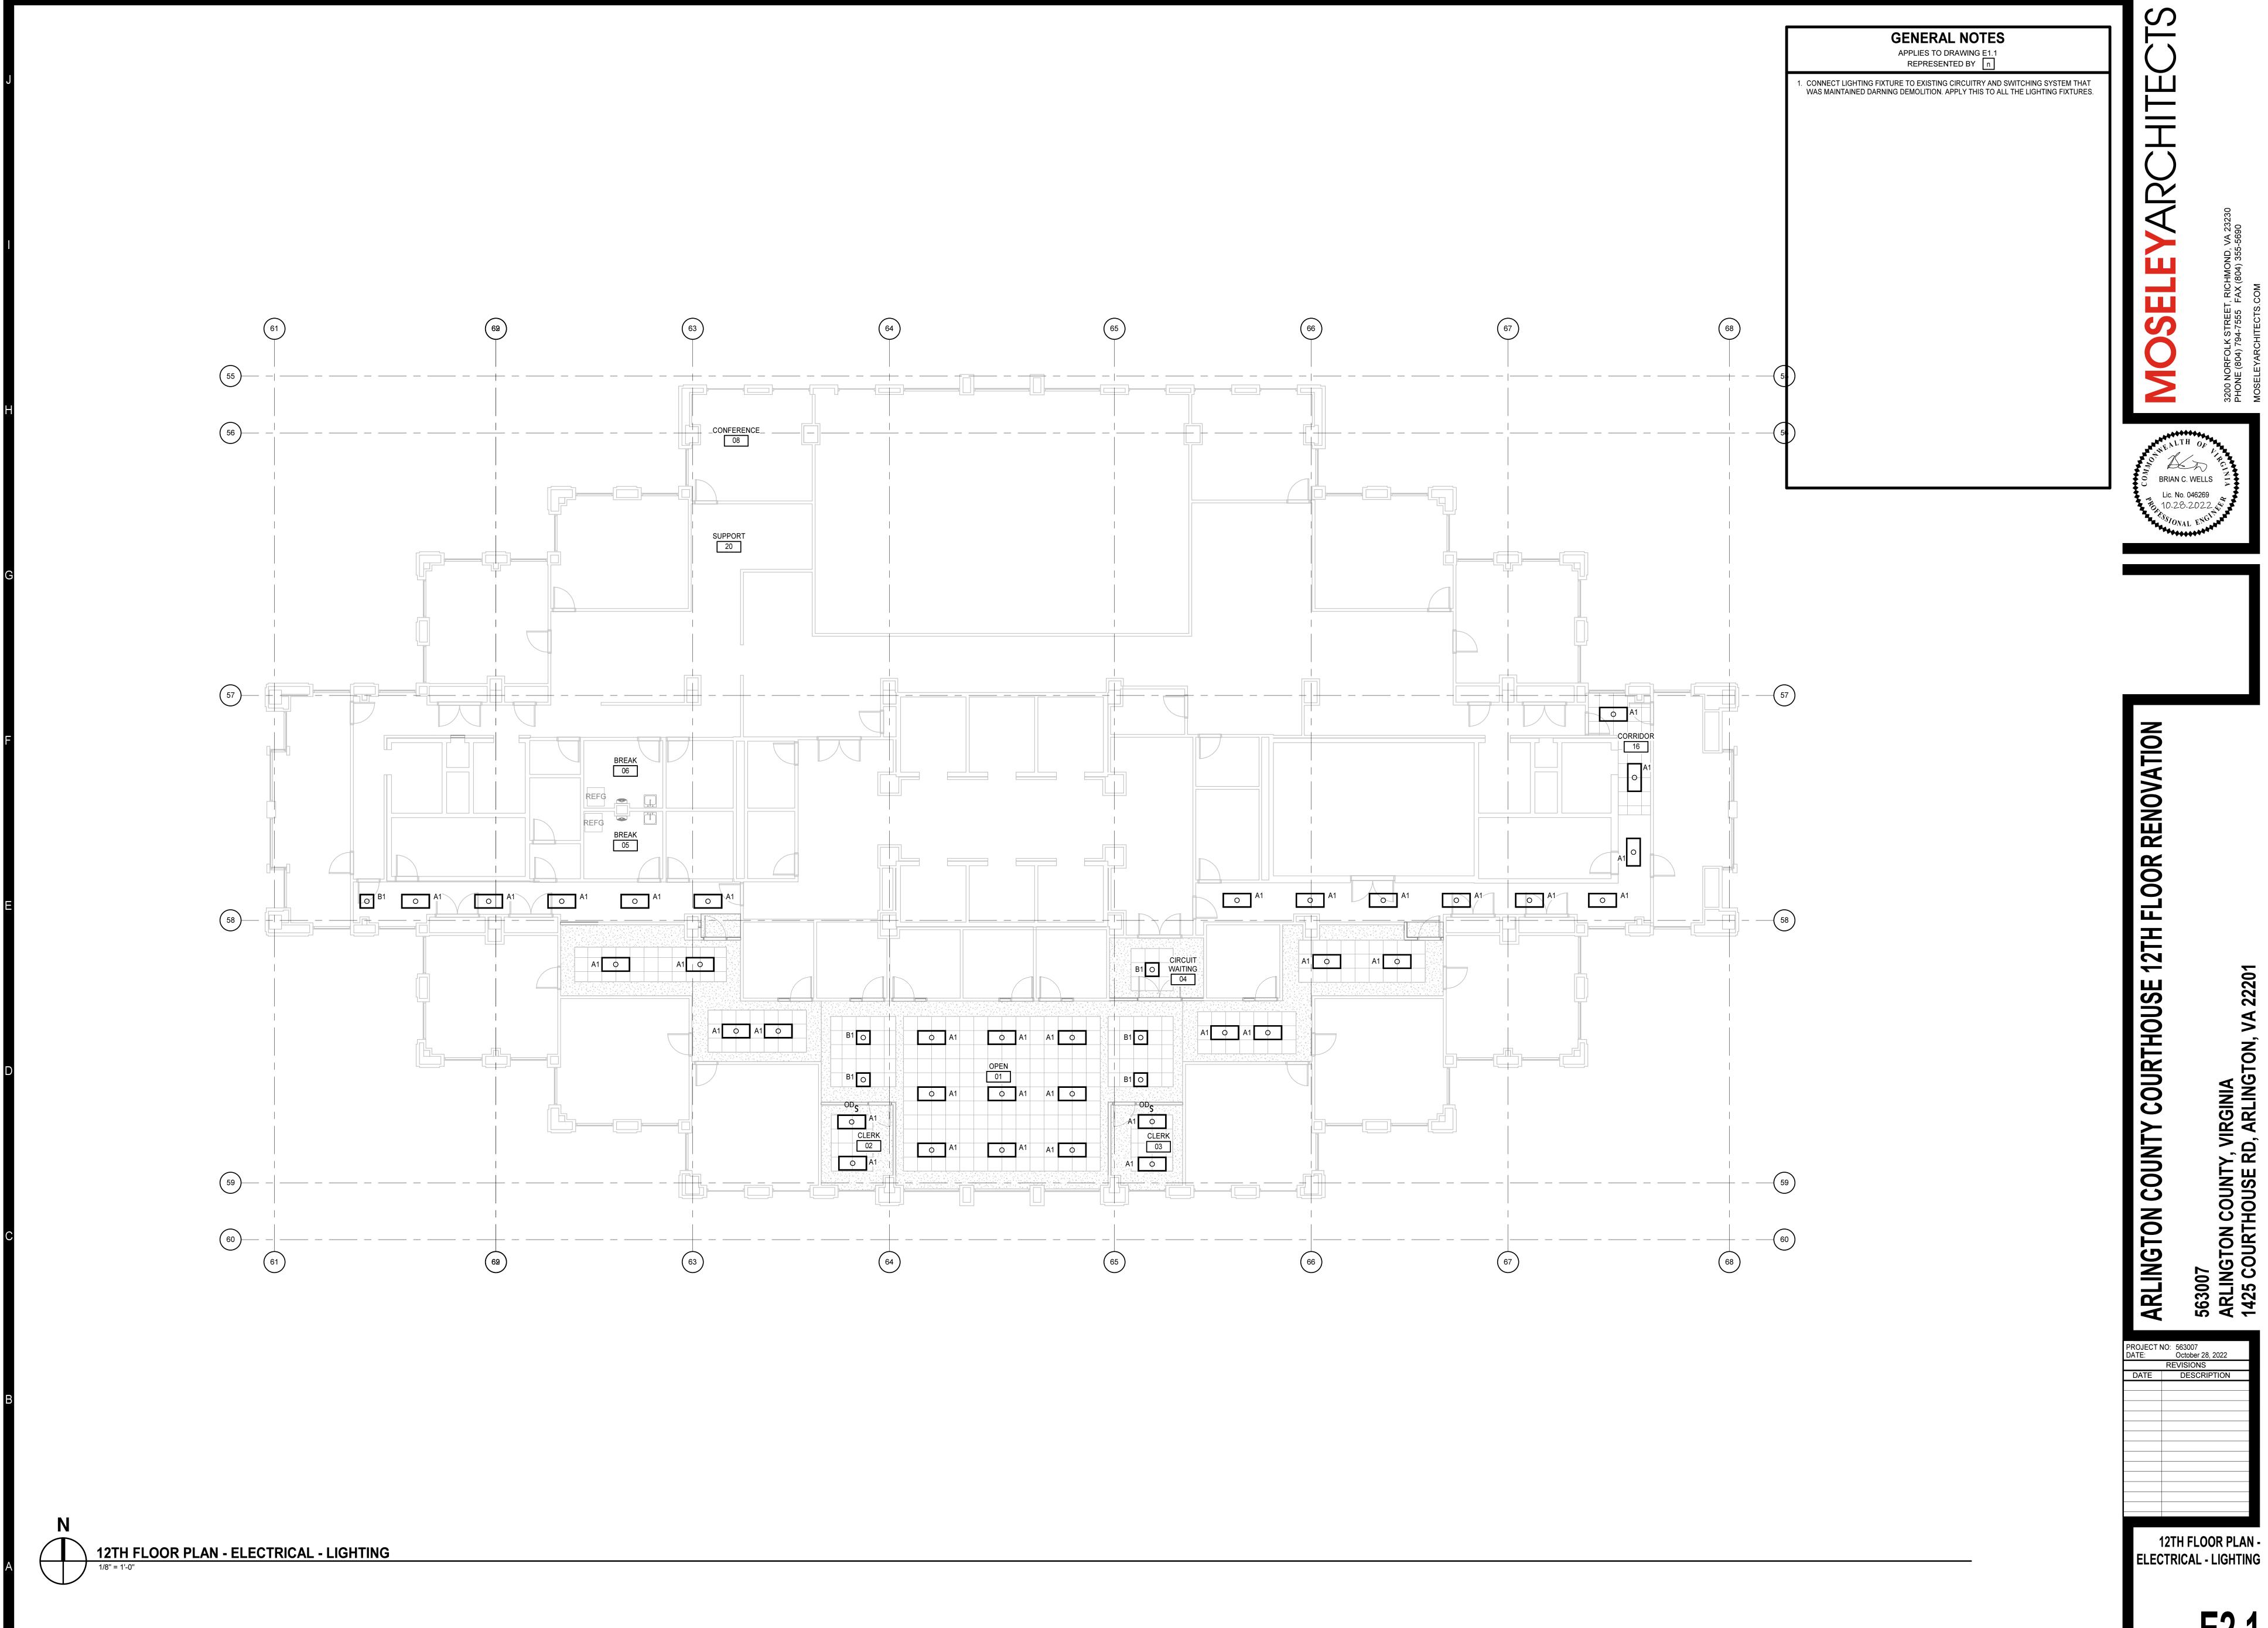

DocuSign Envelope ID: A5895716-0C1C-47BD-850F-CE8938C999C1

DocuSign Envelope ID: A5895716-0C1C-47BD-850F-CE8938C999C1

10SELEYARCHITEC

BRIAN C. WELLS 1 Lic. No. 046269 10.28.2022

ARLINGTON COUNTY COURTHOUSE 12TH FLOOR RENOVATION

563007 VIDGINI CO INCTONI O VIDGINI A

PROJECT NO: 563007
DATE: October 28, 2022

REVISIONS
DATE DESCRIPTION

12TH FLOOR PLAN -ELECTRICAL - POWER AND COMMUNICATIONS

DEMOLITION PLAN KEYNOTES

REPRESENTED BY 

APPLIES TO DRAWING A1.2.1

2 REMOVE DUMBWAITER ACCESS PANEL AND HARDWARE

7 REMOVE CHAIR RAIL AND WALL COVERING BELOW CHAIR RAIL

DEMOLITION PLAN LEGEND
APPLIES TO DRAWINGS A1.2.1 - A1.2.n

REMOVE EXISTING PARTITION/WALL/ITEM

INFORMATION.

BASE IN AREA

EXISTING PARTITION/ WALL/ ITEM TO REMAIN

REMOVE EXISTING DOOR AND FRAME ASSEMBLY INCLUDING DOOR HARDWARE, ANCHORS, AND THRESHOLD (WHERE OCCURS).

REMOVE EXISTING PLUMBING FIXTURE. REFER TO PLUMBING DEMOLITION PLAN FOR ADDITIONAL

REMOVE ALL EXISTING FINISH FLOORING AND

REMOVE ALL EXISTING FINISH FLOORING, BASE, AND SUSPENDED CEILINGS IN AREA

4 SALVAGE BOOKCASE, RETURN TO COUNTY

6 SALVAGE CASEWORK, RETURN TO COUNTY


1 REMOVE WALLCOVERING

3 REMOVE CASEWORK

8 REMOVE PICTURE RAIL

DEMOLITION 12TH FLOOR PLAN

A1.2.1

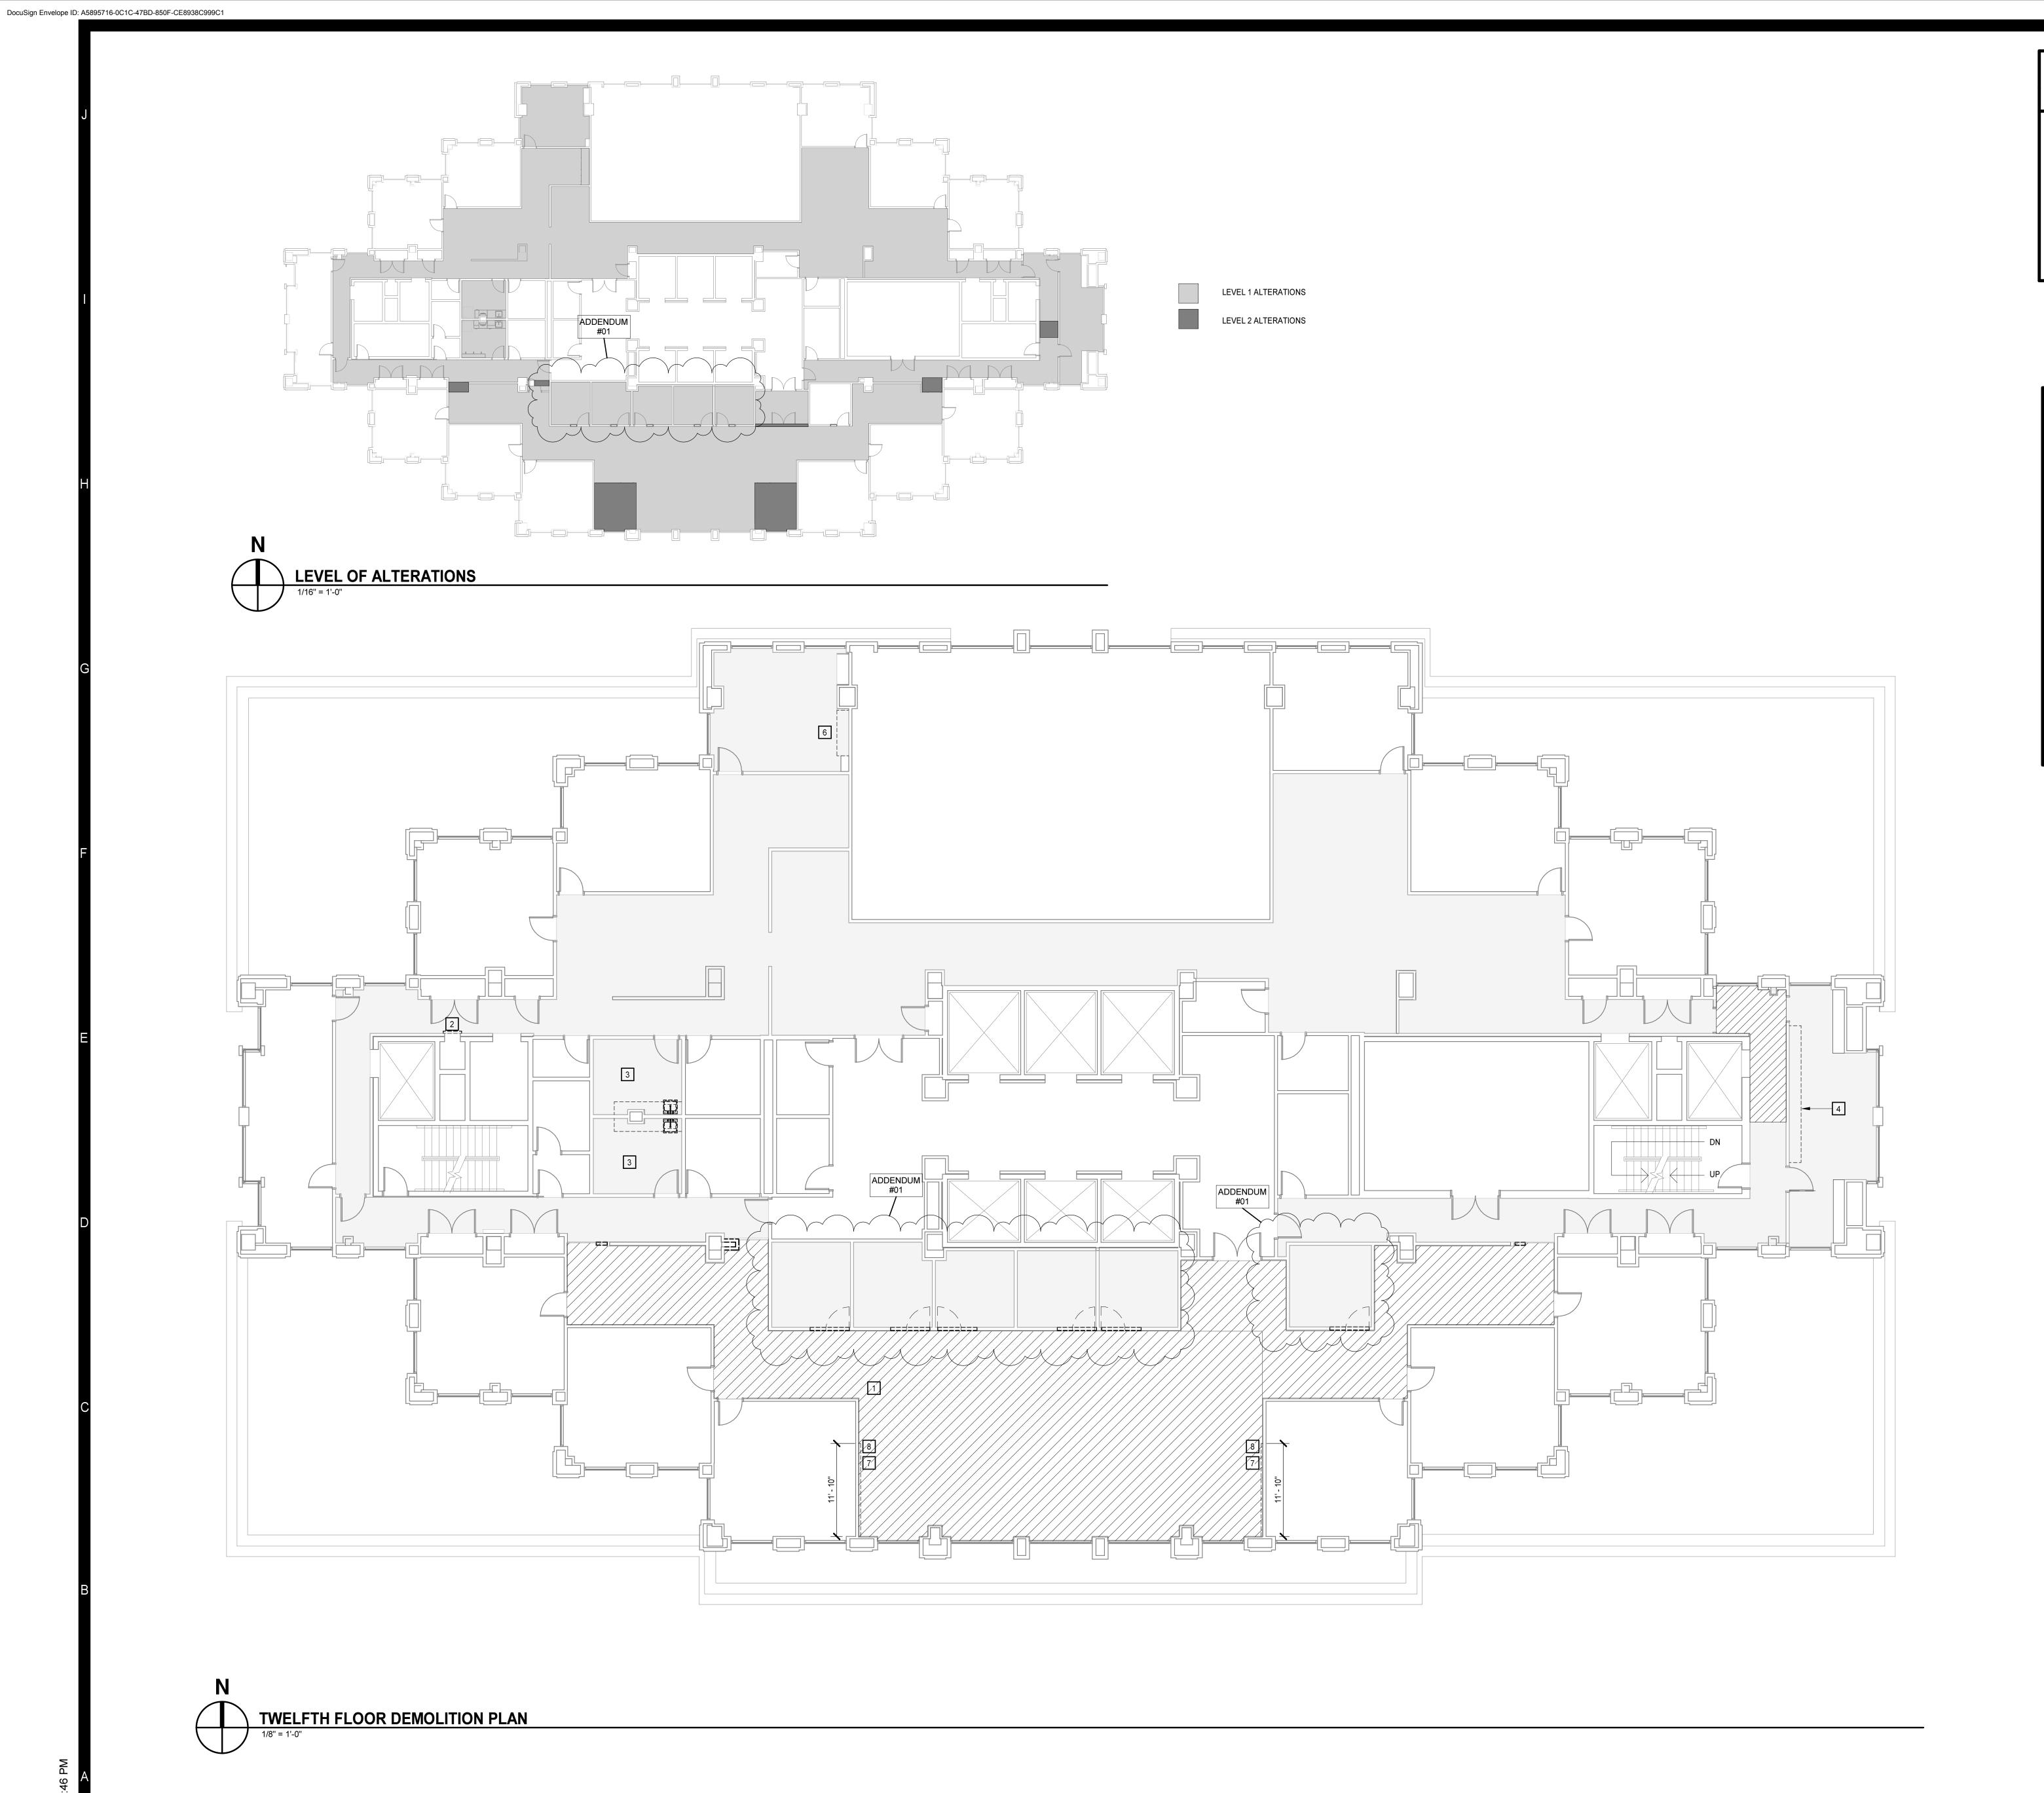

GENERAL NOTES


APPLIES TO DRAWING E1.1

REPRESENTED BY n

1. CONNECT LIGHTING FIXTURE TO EXISTING CIRCUITRY AND SWITCHING SYSTEM THAT WAS MAINTAINED DARNING DEMOLITION. APPLY THIS TO ALL THE LIGHTING FIXTURES.

12TH FLOOR PLAN -ELECTRICAL - LIGHTING

E2.1

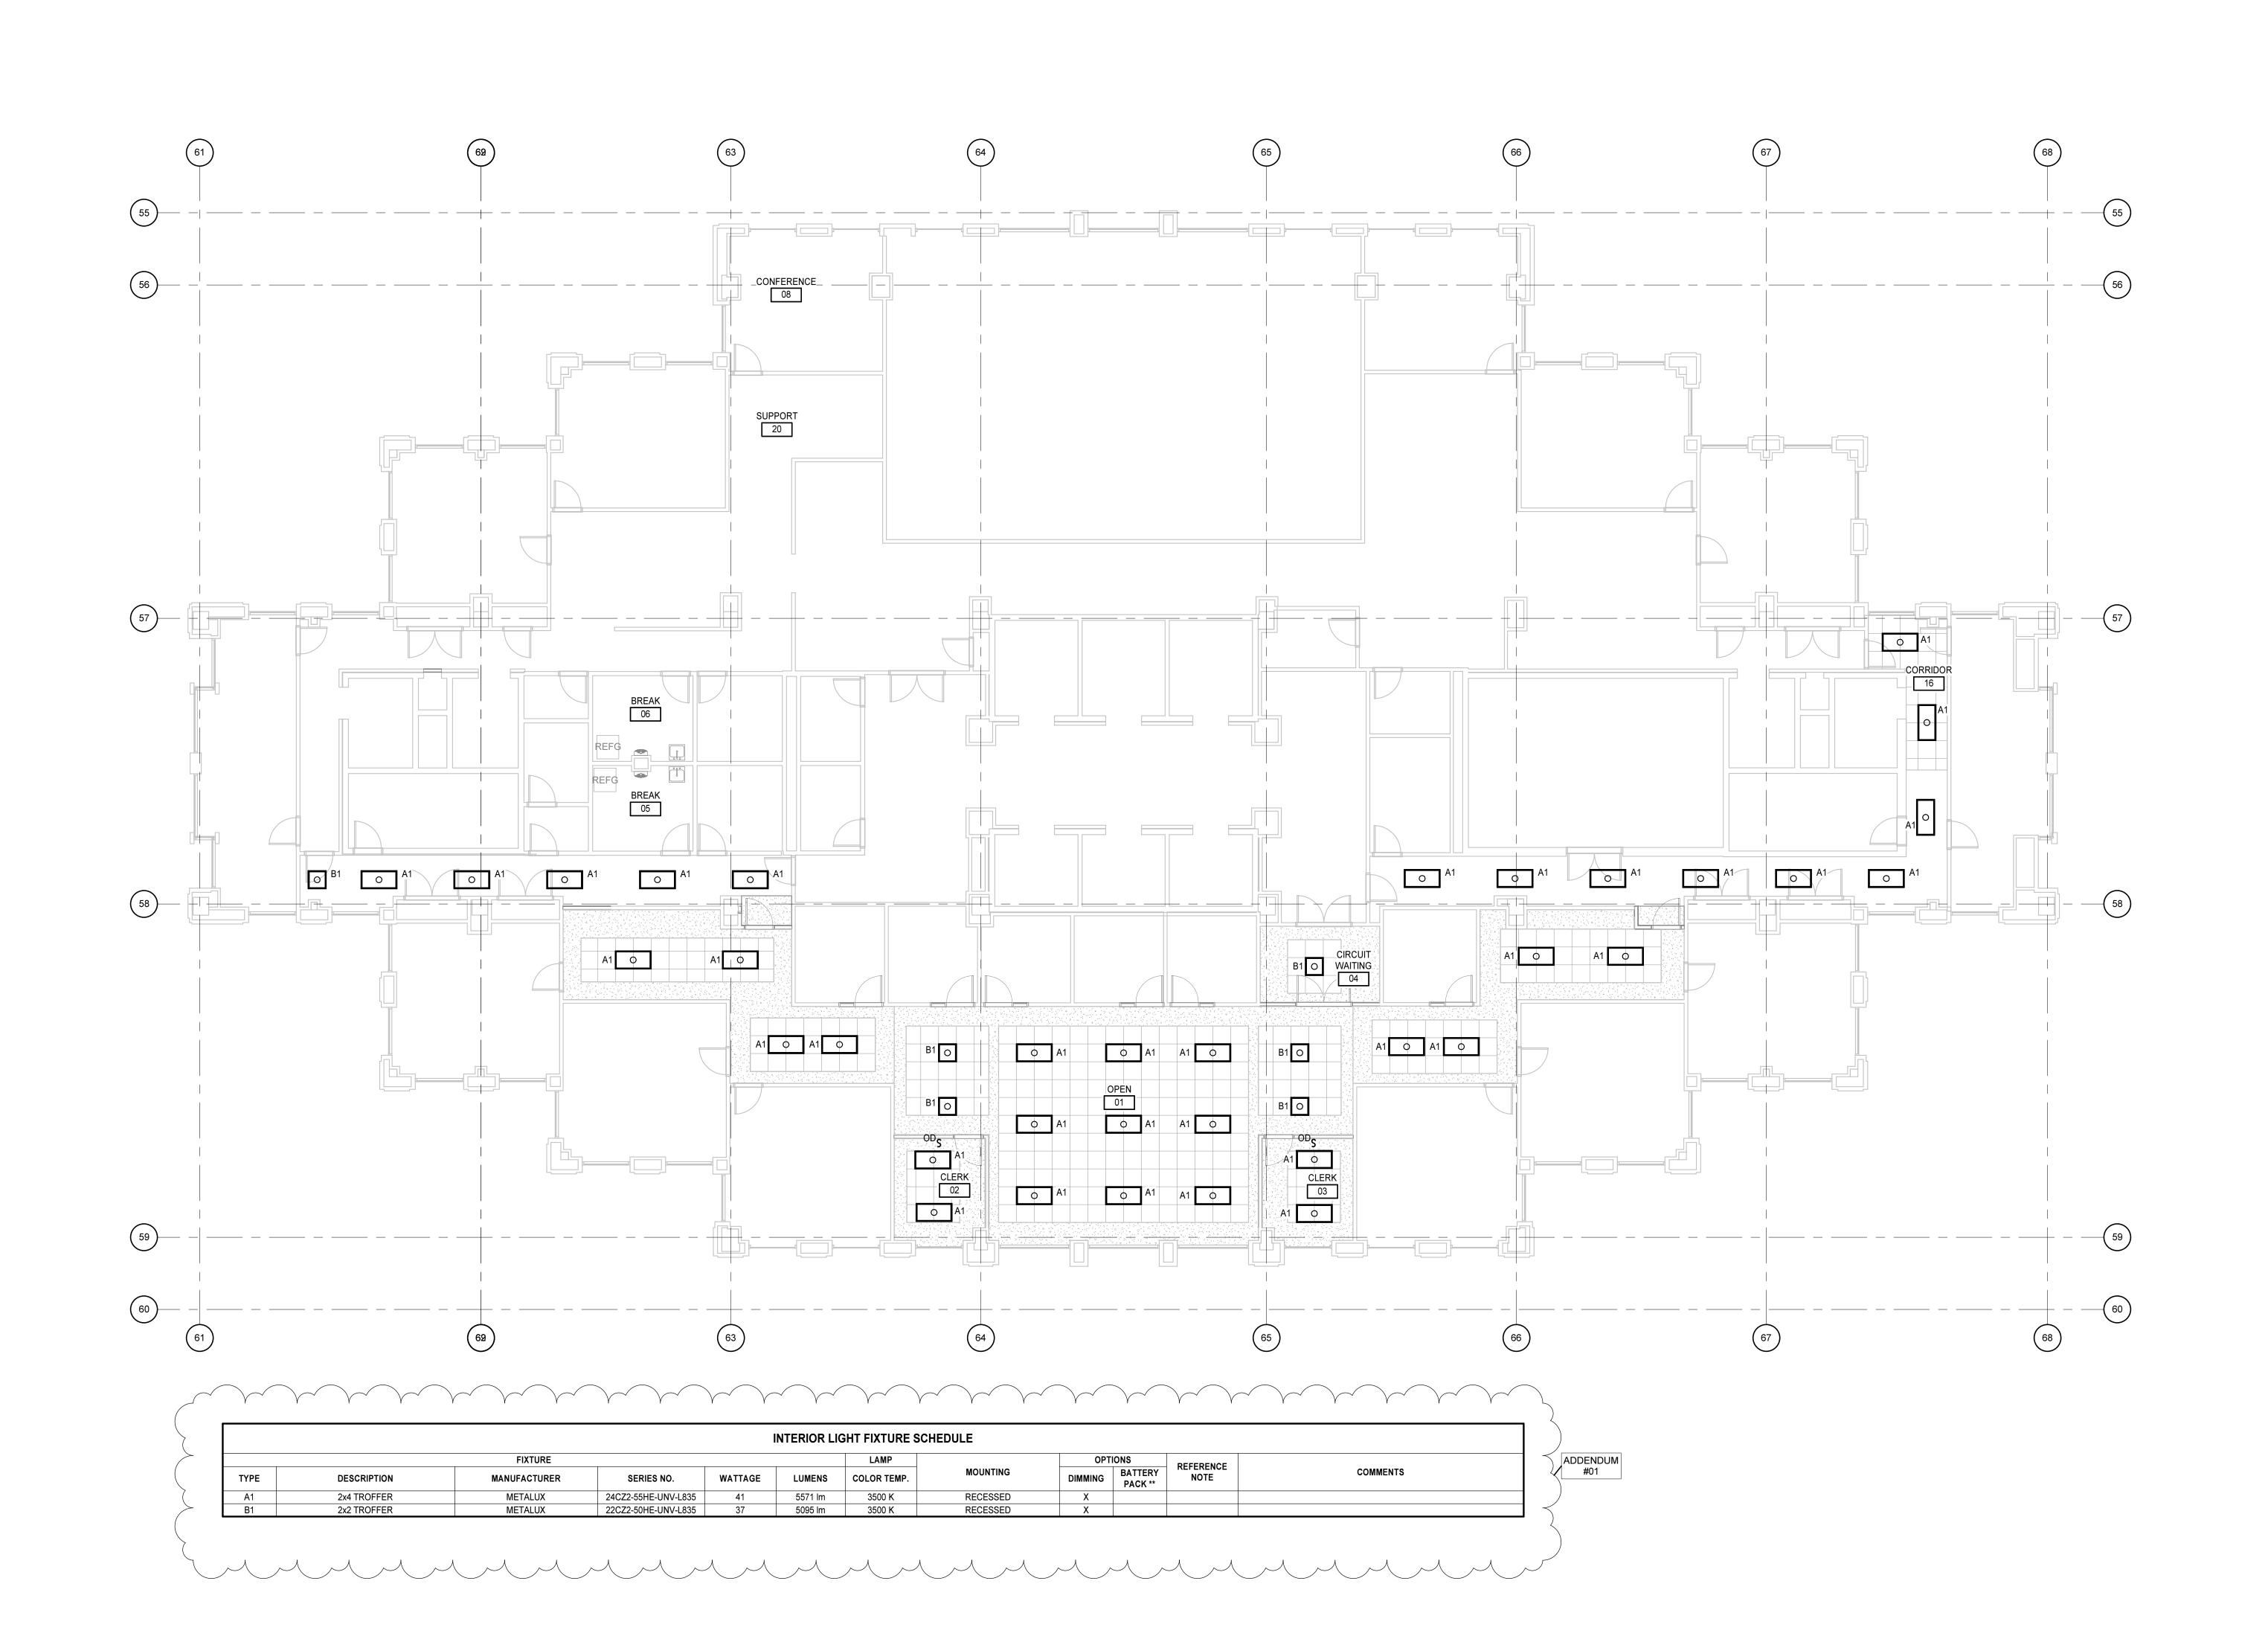

5/2023 10:33:47 AM

12TH FLOOR PLAN - ELECTRICAL - LIGHTING

DocuSign Envelope ID: A5895716-0C1C-47BD-850F-CE8938C999C1


#### **ABBREVIATIONS** ABOVE ABOVE FINISHED FLOOR ABOVE FINISHED GRADE AFG AIR HANDLING UNIT BLDG BUILDING CENTERLINE CLG CEILING COL COLUMN CONC CONCRETE CONT CONTINUATION CORR CORRIDOR CR CLASSROOM CUBIC CUBIC FEET CU FT DCW DOMESTIC COLD WATER DEG DEGREE(S) DEMO DEMOLISH OR DEMOLITION DIAMETER DUCTILE IRON PIPE DOWN DRY PIPE DOWNSPOUT DETAIL DWG DRAWING EAST **ECGH** ELECTRIC CEILING HEATER EXHAUST FAN EXTRA HAZARD GROUP 1 EH-2 EXTRA HAZARD GROUP 2 ELEC ELECTRICAL EQUAL **EQUIP EQUIPMENT EXPANSION TANK** ETR EXISTING TO REMAIN EWH ELECTRIC WATER HEATER EXISTING EXP **EXPANSION FARENHEIT** FIRE DAMPER FDC FIRE DEPARTMENT CONNECTION FG FINISHED GRADE FIRE HYDRANT FHC FIRE HOSE CABINET FIRE HOSE STATION FHVC FIRE HOSE VALVE CABINET FLR FLOOR FIRE PROTECTION FOOT OR FEET FVC FIRE VALVE CABINET GALLON(S) GALLONS PER MINUTE GUH GAS-FIRED UNIT HEATER HOSE BIB HEAD HORIZ HORIZONTAL HORSEPOWER HOT WATER INSIDE DIAMETER INCH INSUL INSULATE OR INSULATION JAN JANITOR KITCHEN KW KILOWATT(S) LABORATORY LAVATORY POUNDS LINEAR FOOT (FEET) LIGHT HAZARD MATL MATERIAL MAXIMUM MECH MECHANICAL MFR MANUFACTURER MANHOLE MINIMUM MISCELLANEOUS MOUNTED NORTH NOT APPLICABLE/AVAILABLE NORMALLY CLOSED NIC NOT IN CONTRACT NORMALLY OPEN NO. OR# NUMBER ON CENTER OUTSIDE DIAMETER OFCI OWNER FURNISHED CONTRACTOR INSTALLED OFF OFFICE OH-1 ORDINARY HAZARD GROUP 1 OH-2 ORDINARY HAZARD GROUP 2 PRECAST POST INDICATOR VALVE POLY POLYETHYLENE PREFAB PREFABRICATE(D) PROJ PROJECT POUNDS PER SQUARE FOOT POUNDS PER SQUARE INCH POUNDS PER SQUARE INCH GAUGE PVC POLYVINYL CHLORIDE REF REFERENCE REQ REQUIRED ROOM RPM REVOLUTIONS PER MINUTE RTU ROOF TOP UNIT SOUTH SANITARY SCH SCHEDULE SMOKE DAMPER SHEET SIMILAR STATIC PRESSURE SPEC SPECIFICATION SPR SPRINKLER SQUARE STANDARD STD STL STEEL STOR STORAGE SW SWITCH TEMPERATURE THK THICK(NESS) TOILET TOSL TOP OF SLAB TYPICAL UNDERGROUND UNIT HEATER UNLESS UNDICATED UNLESS NOTED (INDICATED) OTHERWISE VERT VERTICAL

WEST

WITHOUT

WATER HEATER

W/O

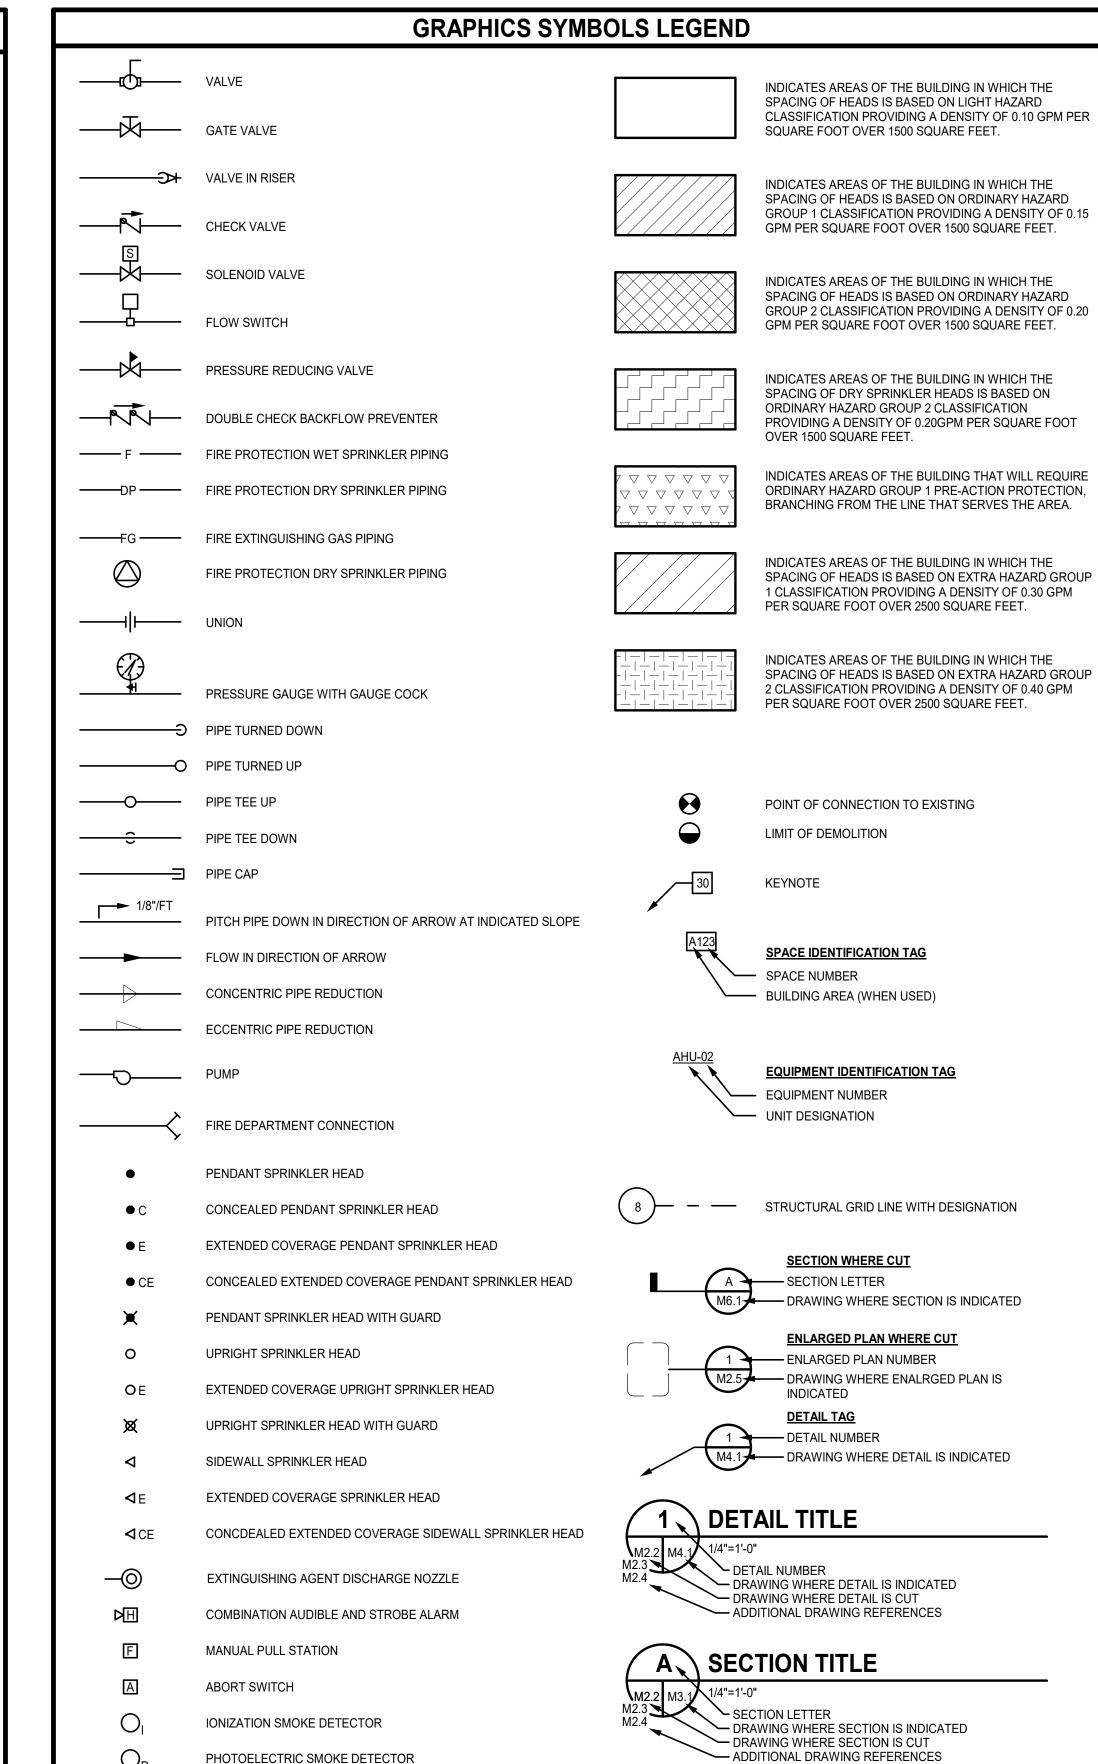

## **GENERAL NOTES**

THE CONTRACT DOCUMENTS ARE COMPLEMENTARY AND WHAT IS REQUIRED BY ONE SHALL BE AS BINDING AS IF REQUIRED BY ALL. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE THE BETTER QUALITY. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE THE GREATER QUANTITY

COORDINATE THE LOCATION OF ALL SPRINKLER PIPING WITH THE WORK OF OTHER TRADES. SPRINKLER PIPING SHALL NOT BE INSTALLED WHERE ITS LOCATION INHIBITS ACCESS TO EQUIPMENT ABOVE THE CEILING, FILTER ACCESS OR INFRINGES UPON CLEARANCES DICTATED BY THE NATIONAL ELECTRIC CODE.

VERIFY DIMENSIONS AND ROUTING IN FIELD BEFORE FABRICATION OF PIPING AND FIXTURES.

PHOTOELECTRIC SMOKE DETECTOR

REFER TO THE LIFE SAFETY PLAN FOR LOCATIONS OF FIRE AND SMOKE SEPARATION ASSEMBLIES. REFER TO STRUCTURAL DRAWINGS FOR DETAILS AND MAXIMUM SPACING REQUIREMENTS REGARDING HANGER ATTACHMENTS TO STEEL BAR JOISTS.

## SPRINKLER HEADS

IN SUSPENDED ACOUSTICAL OR GYPSUM CEILINGS: PROVIDE CONCEALED, QUICK RESPONSE TYPE SPRINKLERS WITH MATCHING TO EXISTING COVER PLATE.

REVISIONS DATE DESCRIPTION

PROJECT NO: 563007

DAVID T. WHATELY

**RENOVATIO** 

00R

군

**2TH** 

SE

COURTHOU

OUNTY

S

ARLINGTON

, VIRGINIA RD, ARLINGTON,

TON COUNTY, COURTHOUSE

LEGENDS, **ABBREVIATIONS AND GENERAL NOTES** 

FIRE PROTECTION KEYNOTES

APPLIES TO DRAWINGS FP2.1

REPRESENTED BY n

 ADD/ RELOCATE NEW FIRE SPRINKLERS PER NFPA 13 AND LOCAL AUTHORITY HAVING JURISDICTION STANDARDS TO ACCOMMODATE THE RENOVATION OF THIS SPACE.

2. PROVIDE NEW FIRE SPRINKLERS IN SAME LOCATION TO ACCOMMODATE REMOVAL AND REPLACEMENT OF CEILINGS WITHIN THIS SPACE.

3. OUTLINED AREA OF RENOVATION.

NEW 12TH FLOOR PLAN
- FIRE PROTECTION

FP2.

**NEW 12TH FLOOR PLAN - FIRE PROTECTION** 

DocuSign Envelope ID: A5895716-0C1C-47BD-850F-CE8938C999C1

## PROJECT SPECIFICATIONS

# ARLINGTON COUNTY COURTHOUSE TWELFTH FLOOR RENOVATION

### **ARLINGTON, VIRGINIA**



ARCHITECT/ENGINEER RICHMOND, VIRGINIA

**BID/PRICING SET** 

October 28, 2022

Architect's Project No: 563007

#### **TABLE OF CONTENTS**

#### <u>DIVISION 0 – BIDDING AND CONTRACTUAL REQUIREMENTS</u>

Refer to Arlington County Procurement Requirements under separate cover.

Prebid Question Form: (Use on-line form. To access form go to <a href="www.moseleyarchitects.com">www.moseleyarchitects.com</a>, "Bidding", find applicable project and click the link "Submit a Question").

#### **SPECIFICATIONS**

#### DIVISION 1 – GENERAL REQUIREMENTS

011000	Summary
012000	Price and Payment Procedures
012500	Substitution Procedures
	Substitution Request Form (After Receipt of Bids)
013000	Administrative Requirements
013216	Construction Progress Schedule
014000	Quality Requirements
014200	Definitions and Reference Standards
014520	Testing, Adjusting, and Balancing for HVAC
015000	Temporary Facilities and Controls
016000	Product Requirements
017000	Execution and Closeout Requirements
017800	Closeout Submittals
017900	Demonstration and Training
018119	Indoor Air Quality Requirements

#### **DIVISION 2 – EXISTING CONDITIONS**

024100 Demolition

<u>DIVISION 3 – CONCRETE</u> (not used)

<u>DIVISION 4 – MASONRY</u> (not used)

**DIVISION 5 - METALS** 

055000 Metal Fabrications

#### <u>DIVISION 6 – WOOD PLASTICS AND COMPOSITES</u>

061000 Rough Carpentry 062000 Finish Carpentry

064100 Architectural Woodwork and Casework

#### <u>DIVISION 7 – THERMAL AND MOISTURE PROTECTION</u>

079200 Joint Sealants

TABLE OF CONTENTS 001100 - 1

233113

233300 233600

233713

Metal Ducts

Air Duct Accessories

Diffusers, Registers, and Grilles

Air Terminal Units

#### ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION

Arlington, Virginia Architect's Project No: 563007

	Architect's Project No: 563007					
DIVISION 8 – OPENINGS						
081113 Steel Doors and Frames						
081433 Stile and Rail Wood Doors						
083113	Access Doors and Panels					
087100	Door Hardware					
DIVISION 9 – FINISHES						
092216	Cold Formed Steel Framing - Non-Structural (CFSF-NS)					
092900	Gypsum Board					
095100	Acoustical Ceilings					
096500	Resilient Flooring					
096513	Resilient Base and Accessories					
096813	Tile Carpeting					
099100	Painting					
DIVISION 10 - SPE	CIALTIES (not used)					
DIVISION 11 - EQU	JIPMENT (not used)					
DIVISION 12 - FUR	RNISHINGS (not used)					
DIVISION 13 – SPE	CIAL CONSTRUCTION (not used)					
DIVISION 14 - CON	NVEYING SYSTEMS (not used)					
DIVISION 21 – FIRE	<u>E SUPPRESSION</u> (not used)					
DIVISION 22 – PLU	MBING					
220500	Common Work Results for Plumbing Piping					
220517	Sleeves and Sleeve Seals for Plumbing Piping					
220523	General Duty Valves for Plumbing Piping					
220529	Hangers and Supports for Plumbing Piping					
220553	Identification for Plumbing Piping and Equipment					
220700	Plumbing Insulation					
221116	Domestic Water Piping					
221316	Sanitary Waste and Vent Piping					
224000	Plumbing Fixtures					
DIVISION 23 – MECHANICAL						
230500	Common Work Results for HVAC					
230513	Motors for HVAC Equipment					
230529	Hangers and Supports for HVAC Piping and Equipment					
230548	Vibration Control for HVAC Seismic Category A-B					
230553	Identification for HVAC Piping and Equipment					
230700	HVAC Insulation					
232113	Hydronic Piping					
000440	MALIB					

TABLE OF CONTENTS 001100 - 2

#### ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION

Arlington, Virginia Architect's Project No: 563007

#### <u>DIVISION 25 – INTEGRATED AUTOMATION</u> (not used)

#### **DIVISION 26 – ELECTRICAL**

260519	Low-Voltage Electrical Power Conductors
260526	Grounding and Bonding for Electrical Systems
260529	Hangers and Supports for Electrical Systems
260533	Raceway and Boxes for Electrical Systems
260544	Sleeves and sleeve Seals for Electrical Raceways and Cabling
260553	Identification for Electrical Systems
260923	Lighting Control Devices
262726	Wiring Devices
262816	Enclosed Switches and Circuit Brakers
265119	LED Interior Lighting

<u>DIVISION 27 – COMMUNICATIONS</u> (not used)

<u>DIVISION 28 – ELECTRONIC SAFETY AND SECURITY</u> (not used)

<u>DIVISIONS 31 – 34 SITEWORK</u> (not used)

**END OF TABLE OF CONTENTS** 

TABLE OF CONTENTS 001100 - 3

Architect's Project No.: 563007

#### **SECTION 011000 SUMMARY**

#### **PART 1 GENERAL**

#### 1.01 PROJECT

- A. Project Name: Arlington County Courthouse; Twelfth Floor Renovation.
- B. Owner's Name: Arlington County, Virginia.
- C. Architect's Name: Moseley Architects of Richmond, VA.

#### 1.02 CONTRACT DESCRIPTION

A. Contract Type: A single prime contract based on a Stipulated Price as described in the standard form of agreement.

#### 1.03 PROFESSIONAL SEALS

- A. Use of Professional Seals on Bidding, Procurement, and Contract Documents: For the purposes of this paragraph, the term "Regulant" refers to the individual who signs and seals parts of the Contract Documents (e.g. the Drawings and Specifications). Certain information has been excerpted verbatim from a source or sources (e.g., UL Assemblies, SMACNA details, IBC code text) which was considered or used by Regulant in preparing parts of the Contract Documents, as follows:
  - The excerpted information was neither prepared under the direct control nor personal supervision nor created by the Regulant, as it was prepared by the source and owner of the excerpted information.
  - For purposes of bidding, procuring, and performance of the Work, and in any event of conflicts or ambiguities between the excerpted information in the Contract Documents and the requirements of applicable codes and standards, provide the better quality or greater quantity of Work which, at a minimum, complies with the requirements of the applicable codes and standards.
  - Advise Architect immediately upon becoming aware of requirements of the Work which are not consistent with the requirements of the excerpted information.
  - Attribution is acknowledged for information obtained and included herein verbatim from other source or sources.
  - Regulant has taken into consideration and used certain excerpted information from other sources which are applicable to the Contract Documents, and the Regulant indicates by its seal that it is assuming responsibility for its services in use and application of the excerpted information to the requirements of Work, but not for the excerpted information itself which was prepared by others. Regulant does not indicate by its seal that it is responsible for use or application of other information in such source or sources which was not included herein.

#### 1.04 OWNER OCCUPANCY

- A. Owner intends to continue to occupy adjacent portions of the existing building during the entire construction period.
- B. Owner intends to occupy the Project upon Substantial Completion.
- C. Cooperate with Owner to minimize conflict and to facilitate Owner's operations.
- D. Schedule the Work to accommodate Owner occupancy.
  - Maintain routes of egress and life safety systems for Owner and occupants at all times.

011000 - 1 Summary

#### ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

#### 1.05 CONTRACTOR USE OF SITE AND PREMISES

- A. Construction Operations: Limited to areas noted on Drawings.
  - Locate and conduct construction activities in ways that will limit disturbance to site.
- B. Provide access to and from site as required by law and by Owner:
  - Emergency Building Exits During Construction: Keep all exits required by code open during construction period; provide temporary exit signs if exit routes are temporarily altered.
  - Do not obstruct roadways, sidewalks, or other public ways without permit.
- C. Time Restrictions:
  - Comply with local regulations for hours of work, noise ordinances, and similar requirements.
  - 2. All work shall be done during normal business hours, between 8 AM and 5 PM.
- D. Utility Outages and Shutdown:
  - Limit disruption of utility services to hours the building is unoccupied.
  - 2. Do not disrupt or shut down life safety systems, including but not limited to fire sprinklers and fire alarm system, without 7 days notice to Owner and authorities having jurisdiction.
  - Prevent accidental disruption of utility services to other facilities.
- Controlled Substances: The use of alcohol and drugs is not permitted on the Project site. Provide a designated outdoor smoking area for construction personnel that is at least 25 feet away from the building.

#### 1.06 SPECIFICATION SECTIONS APPLICABLE TO ALL WORK

The provisions of the Owner/Contractor agreement, General Conditions of the Contract, Supplementary Conditions (if any), and all Division 01 sections shall apply to all sections of the Project Manual.

#### 1.07 SECURITY PROVISIONS

- Background Check: The Owner requires that a background check be performed on all personnel working on the site. Comply with Owner's requirements for screening service to be used. Maintain a list of all accredited persons, submit a copy to Owner on request.
- Identification Badges: Provide identification badges to each person authorized to enter premises. Badge shall include personal photograph, name, employer, expiration date, and an assigned number. Have personnel return badges to Contractor after completion of their portion of the Work.

**PART 2 PRODUCTS - NOT USED** 

**PART 3 EXECUTION - NOT USED** 

**END OF SECTION** 

Summary 011000 - 2

#### ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

#### **SECTION 012000** PRICE AND PAYMENT PROCEDURES

#### **PART 1 GENERAL**

#### 1.01 SECTION INCLUDES

A. Procedures for preparation and submittal of applications for progress payments.

#### 1.02 SCHEDULE OF VALUES

- A. Use Schedule of Values Form: AIA G703, unless otherwise agreed to by Owner in writing.
- B. Forms filled out by hand will not be accepted.
- C. Format: Utilize the Table of Contents of this Project Manual. Identify each line item with number and title of the specification section. Identify site mobilization.
- D. Include in each line item, the amount of Allowances specified in this section. For unit cost Allowances, identify quantities taken from Contract Documents multiplied by the unit cost to achieve the total for the item.
- E. Include separately from each line item, a direct proportional amount of Contractor's overhead and profit.
- F. Revise schedule to list approved Change Orders, with each Application For Payment.
  - When a Change Order includes multiple PCOs, break down the total Change Order to include each PCO as an individual line item.

#### 1.03 APPLICATIONS FOR PROGRESS PAYMENTS

- A. Payment Period: Submit at intervals stipulated in the Agreement.
- B. Use Form AIA G702 and Form AIA G703.
- C. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit sample to Architect for approval.
- D. Forms filled out by hand will not be accepted.
- E. For each item, provide a column for listing each of the following:
  - Item Number.
  - 2. Description of work.
  - 3. Scheduled Values.
  - 4. Previous Applications.
  - 5. Work in Place and Stored Materials under this Application.
  - Authorized Change Orders.
  - 7. Total Completed and Stored to Date of Application.
  - 8. Balance to Finish.
  - Retainage.
- F. Execute certification by signature of authorized officer.
- G. Use data from approved Schedule of Values. Provide dollar value in each column for each line item for portion of work performed and for stored products.
- List each authorized Change Order as a separate line item, listing Change Order number and dollar amount as for an original item of work.
  - When a Change Order includes multiple PCOs, break down the total Change Order to include each PCO as an individual line item.

Architect's Project No.: 563007

- I. Submit one electronic and three hard-copies of each Application for Payment.
- J. Include the following with the application:
  - Transmittal letter as specified for submittals in Section 013000.
  - 2. Construction progress schedule, revised and current as specified in Section 013000.
  - 3. Partial release of liens from major subcontractors and vendors.
  - 4. Affidavits attesting to off-site stored products.

#### 1.04 MODIFICATION PROCEDURES

- A. For minor changes not involving an adjustment to the Contract Sum or Contract Time, Architect will issue instructions directly to Contractor on AIA Document G710 "Architect's Supplemental Instructions."
- B. For changes for which advance pricing is desired, Architect will issue a document that includes a detailed description of a proposed change with supplementary or revised drawings and specifications, a change in Contract Time for executing the change with a stipulation of any overtime work required and the period of time during which the requested price will be considered valid. Contractor shall prepare and submit a fixed price quotation within 14 days, unless otherwise indicated in Proposal Request.
- C. Contractor may propose a change by submitting a request for change to Architect, describing the proposed change and its full effect on the work, with a statement describing the reason for the change, and the effect on the Contract Sum and Contract Time with full documentation.
- D. For other required changes, Architect will issue a Construction Change Directive, on AIA Document G714, signed by Owner instructing Contractor to proceed with the change, for subsequent inclusion in a Change Order.
  - 1. The document will describe the required changes and will designate method of determining any change in Contract Sum or Contract Time.
  - 2. Promptly execute the change.
- E. Computation of Change in Contract Amount: As specified in the Agreement and Conditions of the Contract.
  - 1. For change requested by Architect for work falling under a fixed price contract, the amount will be based on Contractor's price quotation.
  - 2. For change requested by Contractor, the amount will be based on the Contractor's request for a Change Order as approved by Architect.
  - 3. For pre-determined unit prices and quantities, the amount will based on the fixed unit prices.
- F. Substantiation of Costs: Provide full information required for evaluation.
  - 1. Provide the following data:
    - a. Quantities of products, labor, and equipment.
    - b. Taxes, insurance, and bonds.
    - c. Overhead and profit.
    - d. Justification for any change in Contract Time.
    - e. Credit for deletions from Contract, similarly documented.
  - 2. Support each claim for additional costs with additional information:
    - a. Origin and date of claim.
    - b. Dates and times work was performed, and by whom.
    - c. Time records and wage rates paid.
    - Invoices and receipts for products, equipment, and subcontracts, similarly documented.

Architect's Project No.: 563007

- G. Execution of Change Orders: Architect will issue Change Orders on AIA Document G701 for signatures of parties as provided in the Conditions of the Contract.
- H. After execution of Change Order, promptly revise Schedule of Values and Application for Payment forms to record each authorized Change Order as a separate line item and adjust the Contract Sum.
- Promptly revise progress schedules to reflect any change in Contract Time, revise subschedules to adjust times for other items of work affected by the change, and resubmit.

#### 1.05 APPLICATION FOR FINAL PAYMENT

- A. Prepare Application for Final Payment as specified for progress payments, identifying total adjusted Contract Sum, previous payments, and sum remaining due.
- B. Application for Final Payment will not be considered until the following have been accomplished:
  - All closeout procedures specified in Section 017000.
- C. Provide evidence and supporting data for the following, as attachments to the Application for Final Payment:
  - 1. AIA G706, "Contractor's Affidavit of Payment of Debts and Claims."
  - 2. AIA G707, "Consent of Surety to Final Payment."
  - Settlement of all debts and claims, including liquidated damages, taxes, and fees. 3.
  - Utility meter readings, fuel levels, and similar measurements, as of the date of turn over to 4. the Owner.
  - 5. Certificates for insured products.

**PART 2 PRODUCTS - NOT USED** 

**PART 3 EXECUTION - NOT USED** 

**END OF SECTION** 

Architect's Project No.: 563007

#### **SECTION 012500** SUBSTITUTION PROCEDURES

#### **PART 1 GENERAL**

#### 1.01 DEFINITIONS

- Substitutions: Changes from Contract Documents requirements proposed by Contractor to materials, products, assemblies, and equipment.
  - Substitutions for Cause: Proposed due to changed Project circumstances beyond Contractor's control, such as unavailability, regulatory changes, or unobtainable warranty terms.
  - Substitutions for Convenience: Proposed due to possibility of offering substantial 2. advantage to the Project.

#### PART 2 PRODUCTS - NOT USED

#### PART 3 EXECUTION

#### 3.01 GENERAL REQUIREMENTS

- A Substitution Request for products, assemblies, materials, and equipment constitutes a representation that the submitter:
  - 1 Has investigated proposed product and determined that it meets or exceeds the quality level of the specified product, equipment, assembly, or system.
  - 2. Agrees to provide the same warranty for the substitution as for the specified product.
  - Agrees to provide same or equivalent maintenance service and source of replacement parts, as applicable.
  - Agrees to coordinate installation and make changes to other work that may be required for 4. the work to be complete, with no additional cost to Owner.
  - Waives claims for additional costs or time extension that may subsequently become apparent.
  - 6. Agrees to reimburse Owner and Architect for review or redesign services associated with re-approval by authorities.
- Document each request with complete data substantiating compliance of proposed substitution with Contract Documents. Burden of proof is on proposer.
  - Note explicitly any non-compliant characteristics.
- Content: Include information necessary for tracking the status of each Substitution Request, and information necessary to provide an actionable response.
  - A copy of the Substitution Request Form that shall be used is included at the end of this Section for informational purposes. Request a Word or editable PDF version of the form from the Architect and complete the form digitally; do not complete the form by hand.
  - 2. Contractor's Substitution Request documentation must include the following:
    - Substitution Request Information:
      - Indication of whether the substitution is for cause or convenience.
      - 2) Issue date.
      - 3) Reference to particular Contract Document(s) specification section number, title, and article/paragraph(s).
      - Description of Substitution. 4)
      - Reason why the specified item cannot be provided. 5)

Substitution Procedures 012500 - 1

Architect's Project No.: 563007

- Description of how proposed substitution affects other parts of work.
- b. Attached Comparative Data: Provide point-by-point, side-by-side comparison addressing essential attributes specified, as appropriate and relevant for the item:
  - Physical characteristics. 1)
  - 2) In-service performance.
  - 3) Expected durability.
  - Visual effect.
  - Sustainable design features. 5)
  - 6) Warranties.
  - Other salient features and requirements. 7)
  - Include, as appropriate or requested, the following types of documentation:
    - (a) Product Data:
    - (b) Samples.
    - (c) Certificates, test, reports or similar qualification data.
    - (d) Drawings, when required to show impact on adjacent construction elements.
- Impact of Substitution: Provide data indicating cost savings to Owner and change in Contract Time due to accepting substitution.
- D. Limit each request to a single proposed substitution item.
  - Submit an electronic document, combining the request form with supporting data into single document.

#### 3.02 SUBSTITUTION PROCEDURES DURING CONSTRUCTION

- A. Architect will consider requests for substitutions for convenience only within 30 days after date of Agreement.
  - Substitutions for convenience submitted after this time period may or may not be considered, at the Architect's discretion.
- Submit request for Substitution for Cause immediately upon discovery of need for substitution. but not later than 14 days prior to time required for review and approval by Architect, in order to stay on approved project schedule.
- Submit request for Substitution for Convenience immediately upon discovery of its potential advantage to the project, but not later than 14 days prior to time required for review and approval by Architect, in order to stay on approved project schedule.
  - In addition to meeting general documentation requirements, document how the requested substitution benefits the Owner through cost savings, time savings, greater energy conservation, or in other specific ways.
  - 2. Document means of coordinating of substitution item with other portions of the work, including work by affected subcontractors.
  - 3. Bear the costs engendered by proposed substitution of:
    - Owner's compensation to the Architect for any required redesign, time spent processing and evaluating the request.
    - b. Other unanticipated project considerations.
- Substitutions will not be considered under one or more of the following circumstances:
  - When they are indicated or implied on shop drawing or product data submittals, without having received prior approval.
  - 2. Without a separate written request.

Substitution Procedures 012500 - 2

Architect's Project No.: 563007

#### 3.03 RESOLUTION

- A. Architect may request additional information and documentation prior to rendering a decision. Provide this data in an expeditious manner.
- Architect will notify Contractor in writing of decision to accept or reject request.

#### 3.04 ACCEPTANCE

A. Accepted substitutions change the work of the Project. They will be documented and incorporated into work of the project by Change Order, Construction Change Directive, Architectural Supplementary Instructions, or similar instruments provided for in the Conditions of the Contract.

#### 3.05 CLOSEOUT ACTIVITIES

A. See Section 017800 - Closeout Submittals, for closeout submittals.

#### **END OF SECTION**

Substitution Procedures 012500 - 3

## **Substitution Request Form – After Receipt of Bids**

All Substitution Requests shall be submitted by the Contractor only. Substitution Requests received from subcontractors, sub-subcontractors, manufacturers, vendors, etc., will be "rejected" without review.

review.				
General Information				
Project Name	Arlington County Courthouse; Twe	Ifth Floor Renovation	l	
A/E Project Number	563007			
Specific	ed Product/Item Information			
Specification Title				
Section				
Page				
Article / Paragraph				
Description				
Propos	ed Substitution Information			
Proposed Substitution				
Reason for not providing specified product/item				
Comparative Data	Attach a point-by-point comparative between the proposed substitution a not provided, this Request will be re-	nd the specified produ		
Manufacturer				
Manufacturer Address				
Manufacturer Phone				
Manufacturer Representative Email address				
Trade / Model Name				
Model Number				
Installer				
Installer Address				
Installer Phone				
History	New product 2-5 years	5-10 yrs 10	yrs or longer	
Proposed substitution affects other parts of the Work	☐ Yes	□ No		
If yes, explain				
Savings to Owner for accepting proposed substitution	\$			
Proposed substitution affects Contract Time	☐ Yes	□ No		

If yes			Add			☐ Deduct
If yes, number of calendar days						
Proposed Substitution Similar Installation						
Have you (this Contractor) used this product/item on any other projects			Yes			□ No
Project						
Project Address						
Architect/Engineer						
A/E Phone						
Owner						
Owner Phone						
Date installed						
Attached Supporting Data						
☐ Drawings	☐ Product Data/Specs		Samples	☐ Tests	☐ Report	s 🔲

#### Contractor certifies all of the following:

- Contractor shall provide specified product/item in the event this Substitution request is rejected.
- Proposed substitution has been fully investigated and determined to be equal or superior in all respects to the specified product, except as may otherwise be specifically and clearly indicated herein.
- If applicable, proposed substitution shall not adversely affect LEED requirements nor shall it prevent achieving the relative number of applicable LEED point[s] the specified product would have received.
- Proposed substitution's function, appearance, and quality are equal or superior in all respects to the specified product, except as may otherwise be specifically and clearly indicated herein.
- Same or superior warranty and/or guarantees shall be furnished for proposed substitution as is required for the specified product/item.
- Same maintenance service and source replacement parts, as applicable, are available; including local availability.
- Proposed substitution shall have no adverse effect on other trades.
- Cost data as stated herein is complete. Claims for additional costs related to the accepted proposed substitution which may subsequently become apparent shall be waived; including licenses, fees, and/or royalties.
- Proposed substitution shall not affect dimensions and functional clearances. If the proposed substitution does affect dimensions and/or functional clearances, Contractor shall adjust the Work as required and necessary to accommodate the proposed substitution at no additional cost to the Contract.
- Payment shall be made by the Contractor, via a deduct/credit Change Order, for changes to the building design, including A/E fees for the design and detailing, caused by the proposed substitution.
- Coordination, installation, and changes to the Work as necessary for the accepted proposed substitution shall be complete in all respects.

Contractor Information		
Submitted by		
Signed By		
Date		
Email address of Signee above		
Company Name		
Address		
Phone		

Architect / Engineer Review and Action				
Acceptance of this substitution request is an acceptance of only the manufacturer and product/item for general conformance with the design concept reflected in the Contract Documents. The A/E has made no attempt to verify specific performance data, or to check the details of the proposed substitution as to special features, capacities, physical dimensions, or code and/or regulatory compliance, all of which remain the responsibility of the Contractor.				
Proposed Substitution is found to be Provide submittals in accordance with	acceptable for inclusion in Change Order, if approved by Owner – th Contract Document requirements.			
<u> </u>	acceptable as noted for inclusion in Change Order, if approved by dance with Contract Document requirements.			
Proposed Substitution is rejected – P	Proposed Substitution is rejected – Provide specified product/item.			
Proposed Substitution submittal/form	Proposed Substitution submittal/form not in accordance with Contract Documents (not timely, incomplete)			
Comments / Remarks				
Reviewed by				
Signed By				
Date				

END OF SUBSTITUTION REQUEST FORM

Architect's Project No.: 563007

#### **SECTION 013000** ADMINISTRATIVE REQUIREMENTS

#### **PART 1 GENERAL**

#### 1.01 RELATED REQUIREMENTS

A. Section 016000 - Product Requirements: General product requirements.

#### 1.02 GENERAL ADMINISTRATIVE REQUIREMENTS

- A. Comply with requirements of Section 017000 Execution and Closeout Requirements for coordination of execution of administrative tasks with timing of construction activities.
- Electronic File Distribution: Upon request, Contractor may be provided electronic files for use in coordination of the Work and preparation of submittals. Contractor shall submit a signed Request Form for Electronic Files, provided by the Architect.
  - Electronic files do not contain all of the information of the Bid Documents or Contract Documents for construction of the Project, and the Architect shall not be responsible for differences between electronic files, Bid Documents, and Contract Documents.

#### 1.03 SUBMITTALS

- A. General Contractor Personnel: As soon as practical after award of Contract, provide a summary of General Contractor's on site personnel. Identify each individual, beginning with project superintendent. List project responsibilities, cell phone number, and email address.
- B. Subcontractors: As soon as practical after award of Contract, provide a summary of all companies and individuals engaged as subcontractors for any part of the Project. Include a contact name, company address, phone number, and email address, and identify what part of the Work shall be completed by each subcontractor.
- C. Coordination Drawings: Submit completed Coordination Drawings for Architect's information.

#### PART 2 PRODUCTS - NOT USED

#### PART 3 EXECUTION

#### 3.01 ELECTRONIC DOCUMENT SUBMITTAL SERVICE

- All documents transmitted for purposes of administration of the contract are to be in electronic (PDF, MS Word, or MS Excel) format, as appropriate to the document, and transmitted via an Internet-based submittal service that receives, logs and stores documents, provides electronic stamping and signatures, and notifies addressees via email.
  - Besides submittals for review, information, and closeout, this procedure applies to Requests for Interpretation (RFIs), progress documentation, contract modification documents (e.g. supplementary instructions, change proposals, change orders), applications for payment, field reports and meeting minutes, Contractor's correction punchlist, and any other document any participant wishes to make part of the project
  - It is Contractor's responsibility to submit documents in allowable format. 2.
  - Subcontractors, suppliers, and Architect's consultants will be permitted to use the service 3. at no extra charge.
  - Paper document transmittals will not be reviewed unless previously approved; emailed 4. electronic documents will not be reviewed.

Architect's Project No.: 563007

- All other specified submittal and document transmission procedures apply, except that electronic document requirements do not apply to samples or color selection charts.
- Submittal Service: Coordinate method for exchanging files no later than the Preconstruction Meeting. The Architect's "Newforma InfoExchange" website and procedures can be used at no charge. If the Contractor chooses to use a different platform and methodology:
  - The Architect may reject the methodology or platform proposed and:
    - use the Architect's Newforma InfoExchange website, or
    - the project team will revert to traditional hard-copy exchange;
  - 2. or the Contractor shall bear the cost of software, licensing, training, etc, for the project team to participate.
- C. Project Closeout: Architect will determine when to terminate the service for the project and is responsible for obtaining archive/record copies of files for Owner. If the Project Team uses an alternate platform preferred by the Contractor, the Contractor shall be responsible for distributing archive/record copies of files to Owner and Architect.

#### 3.02 PRECONSTRUCTION MEETING

- A. Architect will schedule a meeting after Notice of Award.
- B. Attendance Required:
  - 1. Owner.
  - 2. Architect.
  - 3. Contractor.
  - 4. Major subcontractors, consultants, Owner's Commissioning Agent, and others as necessary and appropriate.
- C. Agenda:
  - 1. **Execution of Owner-Contractor Agreement.**
  - 2. Submission of executed bonds and insurance certificates.
  - 3. Distribution of Contract Documents.
  - 4. Submission of list of subcontractors, list of products, schedule of values, and progress schedule.
  - 5. Designation of personnel representing the parties to Contract and Architect.
  - Procedures and processing of field decisions, submittals, substitutions, applications for payments, proposal request, Change Orders, and Contract closeout procedures.
  - 7. Scheduling.
  - 8. Site mobilization and utilization.
  - 9. Other project-specific items on pre-distributed agenda.
- D. Architect shall record minutes and distribute digital copies to Owner, Contractor, and other attendees. Contractor shall be responsible for distribution to subcontractors and other personnel affected by decisions made.

#### 3.03 INDOOR AIR QUALITY (IAQ) MANAGEMENT PLAN DEVELOPMENT SESSION

- A. Architect will schedule a meeting after Notice of Award.
- B. Attendance Required:
  - 1. Owner.
  - Owner's Commissioning Agent. 2.
  - 3. Architect.
  - 4. Mechanical engineer.

Architect's Project No.: 563007

- 5. Contractor.
- 6. HVAC subcontractor.
- 7. Other major subcontractors, consultants, and others as necessary and appropriate.

#### C. Agenda:

- 1. Protection of Materials: Discussion of how and where materials that could impact IAQ will be stored, including but not limited to, the following:
  - a. Insulation.
  - b. Gypsum board.
  - c. Flooring materials.
  - d. Ceiling panels.
  - e. Furnishings.
  - f. Odorous chemicals.
- 2. Protection of HVAC: Discussion of how HVAC equipment will be stored installed, and operated during construction.
- 3. Pathway Interruption: Discussion of how airflow between construction zones will be limited to prevent the spreading of pollutants from one part of the building to another.
- 4. Housekeeping: Discussion of how the building will be kept clean and dry.
- 5. Materials Installation Scheduling: Discussion of what wet (odor emitting) materials will be used on the project, in order to schedule their installation before fuzzy (odor absorbing) materials.

#### 3.04 PREINSTALLATION MEETINGS

- A. When required in individual specification sections, convene a preinstallation meeting at the site prior to commencing work of the section. Do not allow installation of affected work to proceed until preinstallation meeting can be held.
- B. Require attendance of parties directly affecting, or affected by, work of the specific section.
- C. Notify Architect and Owner in advance of meeting date.
- D. Prepare agenda and preside at meeting:
  - 1. Review conditions of examination, preparation and installation procedures.
  - 2. Review coordination with related work.
- E. Record minutes and distribute copies within two days after meeting to participants, with copies to Architect, Owner, participants, and those affected by decisions made.

#### 3.05 PROGRESS MEETINGS

- A. Architect will make arrangements for meetings, prepare agenda with copies for participants, preside at meetings.
- B. Attendance Required:
  - 1. Owner.
  - 2. Architect.
  - 3. Contractor's superintendent.
  - Other subcontractors or consultants as required for the specific parts of the Work to be discussed.

#### C. Agenda:

- 1. Review minutes of previous meetings.
- 2. Review of work progress.
- 3. Field observations, problems, and decisions.

Architect's Project No.: 563007

- 4. Identification of problems that impede, or will impede, planned progress.
- 5. Review of submittals schedule and status of submittals.
- 6. Review of RFIs log and status of responses.
- 7. Maintenance of progress schedule.
- 8. Corrective measures to regain projected schedules.
- 9. Planned progress during succeeding work period.
- 10. Maintenance of quality and work standards.
- 11. Effect of proposed changes on progress schedule and coordination.
- 12. Other business relating to the work.
- D. Architect shall record minutes and distribute copies to the Owner, Contractor, and other consultants, Owner's representatives, or other third party attendees. The Contractor shall be responsible for distributing to any affected subcontractors and other personnel.

#### 3.06 CLOSEOUT MEETING

- A. Schedule and administer closeout meeting no later than 30 days before the scheduled Date of Substantial Completion.
- B. Make arrangements for the meeting, prepare agenda with copies for participants, and preside at the meeting.
- C. Attendance Required:
  - 1. Owner.
  - 2. Architect.
  - 3. Contractor's superintendent.
  - 4. Major subcontractors.
  - 5. Other subcontractors or consultants as required.

#### D. Agenda:

- Review closeout requirements and procedures in Division 1 Section "Execution and Closeout Requirements."
- 2. Review startup, testing, and adjusting of all systems, including testing/adjusting/balancing and Commissioning,
- 3. Coordination of inspections by local authorities having jurisdiction and third party Special Inspectors as required to obtain Certificate of Occupancy.
- 4. Coordination of Owner's occupancy and changeover of utilities, insurance, and building keying/lock system.
- 5. Procedures for Contractor's Correction Punch List, Architect's Substantial Completion inspection, and Final Correction Punch List.
- 6. Delivery, turnover, and storage of maintenance materials, attic stock, special tools, and other non-installed materials.
- 7. Coordination of closeout documentation, including demonstration and training materials and videos, as built/record documents, operation and maintenance binders, and warranty binders.
- 8. Removal of temporary facilities, construction equipment, and tools.
- 9. Final cleaning, touchup, restoration, and preventive maintenance.
- 10. Coordination of final Applications for Payment.
- E. Record minutes and distribute copies within two days after meeting to participants, with copies to Architect, Owner, participants, and those affected by decisions made.

## ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

#### 3.07 DAILY CONSTRUCTION REPORTS

- A. Include only factual information. Do not include personal remarks or opinions regarding operations and/or personnel.
- B. Prepare a daily construction report recording the following information concerning events at Project site and project progress:
  - 1. Date.
  - 2. High and low temperatures, and general weather conditions.
  - 3. List of subcontractors at Project site.
  - 4. Approximate count of personnel at Project site.
  - 5. Major equipment at Project site.
  - 6. Material deliveries.
  - 7. Safety, environmental, or industrial relations incidents.
  - 8. Meetings and significant decisions.
  - 9. Unusual events (submit a separate special report).
  - 10. Stoppages, delays, shortages, and losses. Include comparison between scheduled work activities (in Contractor's most recently updated and published schedule) and actual activities. Explain differences, if any. Note days or periods when no work was in progress and explain the reasons why.
  - 11. Directives and requests of Authority(s) Having Jurisdiction (AHJ).
  - 12. Testing and/or inspections performed.
  - 13. Signature of Contractor's authorized representative.

#### 3.08 COORDINATION DRAWINGS AND COORDINATION CONFERENCE

- A. Coordination Drawings: The Contractor shall prepare coordination drawings of all spaces where utilities, systems, and other components converge or intersect and efficient installation is required to accommodate all components.
  - 1. Prepare coordination drawings of the following spaces, at minimum. Supplement with additional spaces as required by project-specific conditions.
    - a. Above ceilings.
    - b. Vertical chases, shafts, and wall cavities.
    - c. Mechanical and electrical rooms, fire pump room, and other major utility spaces.
  - Provide accurate overall dimensions of components (for example, outside diameters of pipe and conduit, or overall ductwork dimensions including insulation and enclosure thickness).
  - 3. Include accessory components of systems that could cause potential conflicts, such as bracing, slotted channel framing, hangers, and other supports, valve handles, flanges, fittings, cable/wire management trays, and other similar components.
  - 4. Include sequence of installation of all components, materials, and systems.
  - 5. Include means of access to each component, material, or system, for maintenance and repairs.
  - 6. Provide additional coordination drawings as required by individual specification sections.
  - 7. Prepare Coordination Drawings using project-specific information. Do not use photocopies or reproductions of Contract Documents, and do not use standard details or data from manufacturers, suppliers, or other outside parties.
  - 8. Drawing Files: The Contractor may develop coordination drawings using 2D CAD software or with 3D BIM software with clash-detection functionality.

Architect's Project No.: 563007

- The Architect will furnish original 3D BIM model or 2D DWG files for Contractor's use upon receipt of Architect's "Request Form for Electronic Files". A copy of this form shall be provided to the Contractor upon request.
  - The Architect makes no guarantee to the accuracy of components in electronic files. The Contractor shall coordinate electronic data with the Contract Documents in order to provide final Coordination Drawings.
  - If using 2D files, the Contractor shall prepare drawings in multiple views (for example, RCP and section) to fully represent 3D space, for example plenum heights, wall assembly thicknesses, etc.
- Submittal: Submit Coordination Drawings as a "Submittal for Information." Architect will not approve Coordination Drawings, but will keep on file for use in subsequent coordination and conflict resolution.
- Coordination Conference: Schedule and conduct a Coordination Conference prior to beginning construction or rough-in of affected work. Require attendance by all affected trades and installers.
  - Identify the Coordination Conference as a "milestone" date on the Construction Progress Schedule.
  - Advise the Architect of all potential conflicts identified in the Coordination Drawings and at 2. the Coordination Conference.
  - Do not proceed with construction or installation of components, materials, or systems until 3. potential conflicts have been resolved and affected parties have agreed to a remedy.
  - Remedies to address conflicts not identified in the Coordination Drawings, at the Coordination Conference, or otherwise addressed prior to construction or installation of affected components, materials, and systems, or discovery of a non-workable situation not identified or addressed, will not be considered as a basis for delay, time extension, or additional cost to the Contract.

#### 3.09 REQUESTS FOR INFORMATION (RFI)

- A. Definition: A request seeking one of the following:
  - An interpretation, amplification, or clarification of some requirement of Contract Documents arising from inability to determine from them the exact material, process, or system to be installed; or when the elements of construction are required to occupy the same space (interference); or when an item of work is described differently at more than one place in Contract Documents.
  - A resolution to an issue which has arisen due to field conditions and affects design intent.
- Preparation: Prepare an RFI immediately upon discovery of a need for interpretation of Contract Documents. Failure to submit a RFI in a timely manner is not a legitimate cause for claiming additional costs or delays in execution of the work.
  - Prepare a separate RFI for each specific item. 1.
    - Review, coordinate, and comment on requests originating with subcontractors and/or materials suppliers.
    - Do not forward requests which solely require internal coordination between subcontractors.
  - 2. Prepare in a format and with content acceptable to Owner.
  - 3. Prepare using software provided by the Electronic Document Submittal Service.
  - Combine RFI and its attachments into a single electronic file. PDF format is preferred.
- C. Reason for the RFI: Prior to initiation of an RFI, carefully study all Contract Documents to confirm that information sufficient for their interpretation is not included.

Architect's Project No.: 563007

- 1. Include in each request Contractor's signature attesting to good faith effort to determine from Contract Documents information requiring interpretation.
- 2. Unacceptable Uses for RFIs: Do not use RFIs to request the following:
  - Approval of submittals (use procedures specified elsewhere in this section).
  - Approval of substitutions (see Section 016000 Product Requirements) b.
  - Changes that entail change in Contract Time and Contract Sum (comply with provisions of the Conditions of the Contract).
  - Different methods of performing work than those indicated in the Contract Drawings and Specifications (comply with provisions of the Conditions of the Contract).
- Improper RFIs: Requests not prepared in compliance with requirements of this section, 3. and/or missing key information required to render an actionable response. They will be returned without a response.
- Frivolous RFIs: Requests regarding information that is clearly indicated on, or reasonably inferable from, Contract Documents, with no additional input required to clarify the question. They will be returned without a response.
  - The Owner reserves the right to assess the Contractor for the costs (on time-andmaterials basis) incurred by the Architect, and any of its consultants, due to processing of such RFIs.
- D. Content: Include identifiers necessary for tracking the status of each RFI, and information necessary to provide an actionable response.
  - Official Project name and number, and any additional required identifiers established in Contract Documents.
  - 2. Owner's, Architect's, and Contractor's names.
  - 3. Discrete and consecutive RFI number, and descriptive subject/title.
  - Issue date and requested reply date. 4.
  - Reference to particular Contract Document(s) requiring additional information/interpretation. Identify pertinent drawing and detail number and/or specification section number, title, and paragraph(s).
  - 6. Annotations: Field dimensions and/or description of conditions which have engendered the request.
  - Contractor's suggested resolution: A written and/or a graphic solution, to scale, is 7. required in cases where clarification of coordination issues is involved, for example: routing, clearances, and/or specific locations of work shown diagrammatically in Contract Documents. If applicable, state the likely impact of the suggested resolution on Contract Time or the Contract Sum.
- E. Attachments: Include sketches, coordination drawings, descriptions, photos, submittals, and other information necessary to substantiate the reason for the request.
- F. RFI Log: Prepare and maintain a tabular log of RFIs for the duration of the project.
  - 1. Indicate current status of every RFI. Update log promptly and on a regular basis.
  - Note dates of when each request is made, and when a response is received.
- G. Review Time: Architect will respond and return RFIs to Contractor within seven calendar days of receipt. For the purpose of establishing the start of the mandated response period. RFIs received after 12:00 noon will be considered as having been received on the following regular working day.
  - Response period may be shortened or lengthened for specific items, subject to mutual agreement.
- H. Responses: Content of answered RFIs will not constitute in any manner a directive or authorization to perform extra work or delay the project. If in Contractor's belief it is likely to

Architect's Project No.: 563007

lead to a change to Contract Sum or Contract Time, promptly issue a notice to this effect, and follow up with an appropriate Change Order request to Owner.

- Response may include a request for additional information, in which case the original RFI will be deemed as having been answered, and an amended one is to be issued forthwith. Identify the amended RFI with an R suffix to the original number.
- Do not extend applicability of a response to specific item to encompass other similar 2. conditions, unless specifically so noted in the response.
- 3. Upon receipt of a response, promptly review and distribute it to all affected parties, and update the RFI Log.
- Notify Architect within seven calendar days if an additional or corrected response is 4. required by submitting an amended version of the original RFI, identified as specified above.

#### 3.10 SUBMITTAL SCHEDULE

- Submit to Architect for review a schedule for submittals in tabular format.
  - Coordinate with Contractor's construction schedule and schedule of values.
  - 2. Format schedule to allow tracking of status of submittals throughout duration of construction.
  - Arrange information to include scheduled date for initial submittal, specification number and title, submittal category (for review or for information), description of item of work covered, and role and name of subcontractor.
  - Account for time required for preparation, review, manufacturing, fabrication and delivery when establishing submittal delivery and review deadline dates.
    - For assemblies, equipment, systems comprised of multiple components and/or requiring detailed coordination with other work, allow for additional time to make corrections or revisions to initial submittals, and time for their review.
    - Account for a reasonable duration of time to allow for final color selections, approvals, and preparation of final finish schedule. This period shall begin upon receipt of all submittals requiring color selection.

#### 3.11 SUBMITTALS FOR REVIEW

- When the following are specified in individual sections, submit them for review:
  - 1. Product data.
  - 2. Design data.
  - 3. Shop drawings.
  - Samples for selection. 4.
  - 5. Samples for verification.
- Submit to Architect for review for the limited purpose of checking for compliance with information given and the design concept expressed in Contract Documents.
- Samples will be reviewed for aesthetic, color, or finish selection.
- D. Color Selection: In individual specification sections, specific items are identified which require color/finish selections to be made by the Architect from color chart or sample submittals. The Submittal Schedule, prepared according to "Submittal Schedule" paragraph above, shall identify these required color/finish submittals.
  - Submittals requiring color selection must be submitted by Contractor and approved by Architect for conformance with Contract Documents prior to the start of the color selection process. When the submittals have been approved for conformance with Contract Documents, the process for color selection, presentation of color concepts, Owner approval, and Color Schedule preparation will begin.

#### ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

- 2. Interior Color Selections: The Architect will make coordinated selections of colors/finishes for the building interior, present the resulting color concepts to the Owner for approval, and prepare the actual Interior Color Schedule for the Work.
- E. After review, provide copies and distribute in accordance with SUBMITTAL PROCEDURES article below.

#### 3.12 SUBMITTALS FOR INFORMATION

- A. When the following are specified in individual sections, submit them for information:
  - Certificates.
  - 2. Test reports.
  - 3. Inspection reports.
  - 4. Manufacturer's instructions.
  - 5. Manufacturer's field reports.
  - 6. Other types indicated.
- Submit for Architect's knowledge as contract administrator or for Owner.

#### 3.13 SUBMITTALS FOR PROJECT CLOSEOUT

- A. Submit Correction Punch List for Substantial Completion.
- Submit Final Correction Punch List for Substantial Completion. B.
- When the following are specified in individual sections, submit them at project closeout in compliance with requirements of Section 017800 - Closeout Submittals:
  - 1. Project record documents.
  - 2. Operation and maintenance data.
  - 3. Warranties.
  - 4. Bonds.
  - 5. Other types as indicated.

#### 3.14 NUMBER OF COPIES OF SUBMITTALS

- A. Electronic Documents: Submit one electronic copy in PDF format; an electronically-marked up file will be returned. Create PDFs at native size and right-side up; illegible files will be rejected.
- Selection Samples: Submit one set of manufacturer's charts indicating full range of available colors, textures, patterns, and other aesthetic qualities.
- Verification Samples: Submit three sets of physical samples. Two sets will be retained by Architect, the third will be returned to the Contractor. Maintain approved sample at the Project site for use in comparing to installed Work.
  - Where a full-size assembly of multiple components is required as a sample (for example, railing section or full-size cabinet), only one sample is required for those items.

#### 3.15 SUBMITTAL PROCEDURES

- A. General Requirements:
  - Use a single transmittal for all submittals required by each individual specification section, 1. unless otherwise indicated.
    - Verification samples and large shop drawing submittals may be submitted under separate cover when approved by Architect.
  - 2. Transmit using AIA G810 or other approved form.
  - Sequentially identify each item. For revised submittals use original number and a sequential numerical suffix.

## ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architectic Project No.: 563007

Architect's Project No.: 563007

- 4. Identify: Project; Contractor; subcontractor or supplier; pertinent drawing and detail number; and specification section number and article/paragraph, as appropriate on each copy.
- 5. Apply Contractor's stamp, signed or initialed certifying that review, approval, verification of products required, field dimensions, adjacent construction work, and coordination of information is in accordance with the requirements of the work and Contract Documents.
  - a. Submittals from sources other than the Contractor, or without Contractor's stamp will not be acknowledged, reviewed, or returned.
- 6. Deliver each submittal on date noted in submittal schedule, unless an earlier date has been agreed to by all affected parties, and is of the benefit to the project.
  - Upload submittals in electronic form to Electronic Document Submittal Service website.
- 7. Schedule submittals to expedite the Project, and coordinate submission of related items.
  - a. Allow sufficient time for administrative processing, Architect's initial review, and potential resubmittals.
    - 1) Large submittals may require longer review durations. Large or multi-part submittals (such as structural steel or aluminum storefront and curtainwall) may be submitted by building area, building level, or otherwise subdivided "packages" with the approval of the Architect. Subdivided "packages" will be reviewed one at a time in the order received. If large submittals are submitted in their entirety as a single package, the Architect may elect to review and return portions of the submittal individually, and will coordinate the schedule for return of these partial reviews with the Contractor for sequencing in the Work.
  - b. Allow additional time for submittals requiring sequential reviews involving Architect's consultants, Owner, or another affected party.
  - c. Allow additional time for submittals requiring sequential reviews involving approval from authorities having jurisdiction (AHJ), in addition to Architect's approval.
  - d. No extensions to the project schedule shall be granted due to delays that can be attributed to submittal processing or failure to allow for sequential reviews or resubmittals.
- 8. Identify variations from Contract Documents and product or system limitations that may be detrimental to successful performance of the completed work.
- 9. When revised for resubmission, identify all changes made since previous submission.
- 10. Distribute reviewed submittals. Instruct parties to promptly report inability to comply with requirements.
- 11. Incomplete submittals may not be reviewed, unless they are partial submittals for distinct portion(s) of the work, and have received prior approval for their use.
- 12. Submittals not requested will be recognized, and will be returned "Not Reviewed".

#### B. Product Data Procedures:

- 1. Submit only information required by individual specification sections.
- 2. Collect required information into a single submittal.
- 3. Submit concurrently with related shop drawing submittal.
- 4. Do not submit (Material) Safety Data Sheets for materials or products.

#### C. Shop Drawing Procedures:

- Prepare accurate, drawn-to-scale, original shop drawing documentation by interpreting Contract Documents and coordinating related work.
- 2. Do not reproduce Contract Documents to create shop drawings.
- 3. Generic, non-project-specific information submitted as shop drawings do not meet the requirements for shop drawings.

Architect's Project No.: 563007

#### D. Samples Procedures:

- 1. Transmit related items together as single package.
- 2. Identify each item to allow review for applicability in relation to shop drawings showing installation locations.
- 3. Selection Samples: Provide color charts that accurately relay color, pattern, and texture information. Photographs or photocopies of color charts are unacceptable and subject to rejection.
- 4. Verification Samples: Provide physical samples of each color selected by Architect from Selection Samples. Verification samples shall be manufactured and prepared identically to the material that shall be used in the installed Work. Label each sample clearly with manufacturer, product name, and color, texture, and/or pattern name as applicable. Photographs of physical samples are unacceptable and subject to rejection.

#### 3.16 SUBMITTAL REVIEW

- A. Submittals for Review: Architect will review each submittal, and approve, or take other appropriate action.
- B. Submittals for Information: Architect will acknowledge receipt, but will take no other action.
- C. Architect's actions will be reflected by marking each returned submittal using virtual stamp on electronic submittals.
  - Notations may be made directly on submitted items and/or listed on appended Submittal Review cover sheet.
- D. Architect's actions on items submitted for review:
  - 1. Authorizing purchasing, fabrication, delivery, and installation:
    - a. "Approved as Noted":
      - Where review notations indicate revisions are necessary, submit corrected item, with review notations acknowledged and incorporated.
  - 2. Not Authorizing fabrication, delivery, and installation:
    - a. "Revise and Resubmit":
      - 1) Resubmit revised item, with review notations acknowledged and incorporated.
    - b. "Rejected/Resubmit":
      - New submittal required, with item complying with requirements of Contract Documents.
    - c. "Color Selection Required":
      - 1) Color selections for the entire project, or portion thereof, will be provided after receipt of all color charts and samples required for the Project.
    - d. "Not Submitted":
      - Additional submittal items are required that were not provided in the original submittal.
- E. Architect's actions on items submitted for information:
  - 1. Items for which no action was taken:
    - a. "Not Reviewed": To notify the Contractor that the submittal has been received for record only.

#### **END OF SECTION**

## ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

Architect's Project No.: 563007

## SECTION 013216 CONSTRUCTION PROGRESS SCHEDULE

#### **PART 1 GENERAL**

#### 1.01 SUBMITTALS

- A. Within 10 days after date of Agreement, submit preliminary schedule defining planned operations for the first 60 days of Work, with a general outline for remainder of Work.
- B. If preliminary schedule requires revision after review, submit revised schedule within 10 days.
- C. Within 20 days after review of preliminary schedule, submit draft of proposed complete schedule for review.
  - Include written certification that major contractors have reviewed and accepted proposed schedule.
- D. Within 10 days after joint review, submit complete schedule.
- E. Submit updated schedule with each Application for Payment.
- F. Submit in PDF format.

#### 1.02 QUALITY ASSURANCE

A. Scheduler: Contractor's personnel or specialist Consultant specializing in CPM scheduling with experience in scheduling construction work of a complexity comparable to this Project, and having use of computer facilities capable of delivering a detailed graphic printout within 48 hours of request.

#### 1.03 SCHEDULE FORMAT

A. Listings: In chronological order according to the start date for each activity. Identify each activity with the applicable specification section number.

#### **PART 2 PRODUCTS - NOT USED**

#### PART 3 EXECUTION

#### 3.01 PRELIMINARY SCHEDULE

A. Prepare preliminary schedule in the form of a horizontal bar chart.

#### 3.02 CONTENT

- A. Show complete sequence of construction by activity, with dates for beginning and completion of each element of construction.
- B. Identify work of separate phases and other logically grouped activities.
- C. Identify all major milestone dates, including, but not limited to, Notice to Proceed and Substantial and Final Completion dates.
- D. Identify duration of each activity, in maximum 15 day intervals.
- E. Incorporate work restrictions indicated in Division 1 Section "Summary," if any.
- F. Show accumulated percentage of completion of each item, and total percentage of Work completed, as of the first day of each month.
- G. Provide separate schedule of submittal dates for shop drawings, product data, and samples, owner-furnished products, products identified under Allowances, and dates reviewed submittals will be required from Architect. Indicate decision dates for selection of finishes.

Architect's Project No.: 563007

- H. Indicate procurement duration and delivery dates for long-lead time items.
- Coordinate submittal approval process with procurement and delivery requirements. Submittals requiring resubmission or revision for approval will not be allowed as a basis for schedule impacts.
- Indicate delivery dates for owner-furnished products.
- Indicate the time period for color selection activity and approval by Owner and Architect, as required per Division 1 Section "Administrative Requirements."
- Indicate date of changeover from temporary to permanent utilities.
- M. Indicate time periods for Commissioning activities, equipment startup, and testing and balancing.
- Provide a reasonable time period prior to the date of Substantial Completion for administrative activities and procedures.
- O. Provide legend for symbols and abbreviations used.

#### 3.03 BAR CHARTS

- A. Include a separate bar for each major portion of Work or operation.
- Identify critical path activities.
- C. Identify the first work day of each week.

#### 3.04 REVIEW AND EVALUATION OF SCHEDULE

- A. Participate in joint review and evaluation of schedule with Architect at each submittal.
- B. Evaluate project status to determine work behind schedule and work ahead of schedule.
- C. After review, revise as necessary as result of review, and resubmit within 10 days.

#### 3.05 UPDATING SCHEDULE

- A. Maintain schedules to record actual start and finish dates of completed activities.
- B. Indicate progress of each activity to date of revision, with projected completion date of each activity.
- C. Annotate diagrams to graphically depict current status of Work.
- Identify activities modified since previous submittal, major changes in Work, and other identifiable changes.
- Indicate changes required to maintain Date of Substantial Completion.
- Schedule revisions shall not modify any Contract Dates or the Contract Sum, unless specifically approved and documented via Change Order.
- G. Submit reports required to support recommended changes.
- H. Provide narrative report to define problem areas, anticipated delays, and impact on the schedule. Report corrective action taken or proposed and its effect.
- Recovery Schedule: If the Contractor is 14 or more days behind schedule, in the opinion of the Owner, the Contractor shall prepare a Recovery Schedule, incorporating a reasonable. mutually agreed upon length of time to return the Work to the approved Schedule. The Recovery Schedule shall be prepared to the same level of detail as the original construction progress schedule. Submit the recovery schedule for Owner review; do not proceed until the Owner has approved.
  - At the end of the recovery period, Owner shall reevaluate construction progress and determine if the Recovery Schedule has been successfully completed. If completed,

Architect's Project No.: 563007

Owner shall direct the Contractor to proceed with the latest approved Construction Schedule.

- If the Contractor is still behind schedule at the end of the recovery period, the Owner shall direct the Contractor to provide additional schedule revisions to complete the recovery, or may at its option pursue other means of resolution as provided for by the Contract Documents.
- Need for and preparation of a Recovery Plan shall not be the basis of additional cost to 2. the Owner or extension of Project Schedule, unless the Contractor can demonstrate that the reason for being behind schedule is no fault of their own.

#### 3.06 DISTRIBUTION OF SCHEDULE

- Distribute copies of updated schedules to Contractor's project site file, to subcontractors, suppliers, Architect, Owner, and other concerned parties.
- Instruct recipients to promptly report, in writing, problems anticipated by projections indicated in schedules.

#### **END OF SECTION**

Architect's Project No.: 563007

## SECTION 014000 QUALITY REQUIREMENTS

#### **PART 1 GENERAL**

#### 1.01 RELATED REQUIREMENTS

A. Section 014200 - Definitions and Reference Standards.

#### 1.02 DEFINITIONS

- A. Contractor's Quality Control Plan: Contractor's management plan for executing the Contract for Construction.
- B. Contractor's Professional Design Services/Delegated Design: Design of some aspect or portion of the project by party other than the design professional of record. Provide these services as part of the Contract for Construction.
  - 1. Design Services Types Required:
    - a. Construction-Related: Services Contractor needs to provide in order to carry out the Contractor's sole responsibilities for construction means, methods, techniques, sequences, and procedures.
    - b. Design-Related: Design services explicitly required to be performed by another design professional due to highly-technical and/or specialized nature of a portion of the project. Services primarily involve engineering analysis, calculations, and design, and are not intended to alter the aesthetic aspects of the design.
- C. Design Data: Design-related, signed and sealed drawings, calculations, specifications, certifications, shop drawings and other submittals provided by Contractor, and prepared directly by, or under direct supervision of, appropriately licensed design professional.

#### 1.03 CONTRACTOR'S CONSTRUCTION-RELATED PROFESSIONAL DESIGN SERVICES

- A. Coordination: Contractor's professional design services are subject to requirements of project's Conditions for Construction Contract.
- B. Provide such engineering design services as may be necessary to plan and safely conduct certain construction operations, pertaining to, but not limited to the following:
  - 1. Temporary sheeting, shoring, or supports.
  - 2. Temporary scaffolding.
  - 3. Temporary bracing.
  - 4. Temporary falsework for support of spanning or arched structures.
  - Temporary foundation underpinning.
  - 6. Temporary stairs or steps required for construction access only.
  - 7. Temporary hoist(s) and rigging.
  - 8. Investigation of soil conditions and design of temporary foundations to support construction equipment.
  - 9. Additional temporary controls as required.

#### 1.04 CONTRACTOR'S DESIGN-RELATED PROFESSIONAL DESIGN SERVICES

- A. Coordination: Contractor's professional design services are subject to requirements of project's Conditions for Construction Contract.
- B. Base design on performance and/or design criteria indicated in individual specification sections.
  - 1. Submit a Request for Information to Architect if the criteria indicated are not sufficient to perform required design services.

Quality Requirements 014000 - 1

Architect's Project No.: 563007

C. Scope of Design Services/Delegated Design: As required by individual specification sections.

#### 1.05 SUBMITTALS

- A. See Section 013000 Administrative Requirements, for submittal procedures.
- B. Designer's Qualification Statement: Submit for Architect's knowledge as contract administrator, or for Owner's information.
  - 1. Include information for each individual professional responsible for producing, or supervising production of, design-related professional services provided by Contractor.
    - a. Full name.
    - b. Professional licensure information.
    - c. Statement addressing extent and depth of experience specifically relevant to design of items assigned to Contractor.
- C. Design Data: Submit for Architect's knowledge as contract administrator for the limited purpose of assessing compliance with information given and the design concept expressed in the Contract Documents, or for Owner's information.
  - 1. Include calculations that have been used to demonstrate compliance to performance and regulatory criteria provided, and to determine design solutions.
  - 2. Include required product data and shop drawings.
  - 3. Include a statement or certification attesting that design data complies with criteria indicated, such as building codes, loads, functional, and similar engineering requirements.
  - 4. Include signature and seal of design professional responsible for allocated design services on calculations and drawings.
- D. Test Reports: After each test/inspection, require testing agency to promptly distribute digital copy of report to Architect, Owner, Contractor, and others as required.
  - 1. Include:
    - a. Date issued.
    - b. Project title and number.
    - c. Name of inspector.
    - d. Date and time of sampling or inspection.
    - e. Identification of product and specifications section.
    - f. Location in the Project.
    - g. Type of test/inspection.
    - h. Date of test/inspection.
    - i. Results of test/inspection.
    - j. Compliance with Contract Documents.
    - k. When requested by Architect, provide interpretation of results.
- E. Certificates: When specified in individual specification sections, submit certification by the manufacturer and Contractor to Architect, in quantities specified for Product Data.
  - 1. Indicate material or product complies with or exceeds specified requirements. Submit supporting reference data, affidavits, and certifications as appropriate.
  - 2. Certificates may be recent or previous test results on material or product, but must be acceptable to Architect.
- F. Manufacturer's Instructions: When specified in individual specification sections, submit printed instructions for delivery, storage, assembly, installation, start-up, adjusting, and finishing, for the Owner's information. Indicate special procedures, perimeter conditions requiring special attention, and special environmental criteria required for application or installation.

Quality Requirements 014000 - 2

## ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architectic Project No.: 563007

Architect's Project No.: 563007

- G. Manufacturer's Field Reports:
  - 1. Submit report promptly to Architect for information.
  - 2. Submit for information for the limited purpose of assessing compliance with information given and the design concept expressed in the Contract Documents.

#### 1.06 QUALITY ASSURANCE

- A. Testing Agency Qualifications:
  - Submit copy of report of laboratory facilities inspection made by NIST Construction Materials Reference Laboratory during most recent inspection, with memorandum of remedies of any deficiencies reported by the inspection.
  - 2. Qualification Statement: Provide documentation showing testing laboratory is accredited under OSHA's Nationally Recognized Testing Laboratory (NRTL) program or through the National Institute of Standards and Technology's (NIST's) National Voluntary Laboratory Accreditation Program (NVLAP).
- B. Designer Qualifications: Where professional engineering design services and design data submittals are specifically required of Contractor by Contract Documents, provide services of a Professional Engineer experienced in design of this type of work and licensed in the State in which the Project is located.
- C. Contractor's Quality Control (CQC) Plan:
  - Prior to start of work, submit a comprehensive plan describing how contract deliverables will be produced. Tailor CQC plan to specific requirements of the project. Include the following information:
    - a. Management Structure: Identify personnel responsible for quality. Include a chart showing lines of authority.
      - Include qualifications (in resume form), duties, responsibilities of each person assigned to CQC function.
    - Management Approach: Define, describe, and include in the plan specific methodologies used in executing the work.
      - 1) Management and control of documents and records relating to quality.
      - 2) Communications.
      - 3) Coordination procedures.
      - 4) Resource management.
      - Process control.
      - 6) Inspection and testing procedures and scheduling, including inspections by authorities having jurisdiction and special inspections.
      - 7) Control of noncomplying work.
      - Tracking deficiencies from identification, through acceptable corrective action, and verification.
      - Control of testing and measuring equipment.
      - 10) Project materials certification.
      - 11) Managerial continuity and flexibility.
    - c. Acceptance of the plan is required prior to start of construction activities not including mobilization work. Owner's acceptance of the plan will be conditional and predicated on continuing satisfactory adherence to the plan. Owner reserves the right to require Contractor to make changes to the plan and operations, including removal of personnel, as necessary, to obtain specified quality of work results.

Quality Requirements 014000 - 3

Architect's Project No.: 563007

#### 1.07 REFERENCES AND STANDARDS

- A. For products and workmanship specified by reference to a document or documents not included in the Project Manual, also referred to as reference standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.
- B. Comply with reference standard of date of issue current on date of Contract Documents, except where a specific date is established by applicable code.
- C. Obtain copies of standards where required by product specification sections.
- D. Maintain copy at project site during submittals, planning, and progress of the specific work, until Substantial Completion.
- Should specified reference standards conflict with Contract Documents, comply with the higher quality or quantity, and provide documentation of the conflict to the Architect.
- Neither the contractual relationships, duties, or responsibilities of the parties in Contract nor those of Architect shall be altered from Contract Documents by mention or inference otherwise in any reference document.

#### 1.08 TESTING AND INSPECTION AGENCIES AND SERVICES

- A. Owner will employ and pay for services of an independent testing agency to perform Special Inspections and other specified testing indicated in individual specification sections.
- Where indicated in individual specification sections, Contractor shall employ and pay for services of an independent testing agency to perform other specified testing.
- C. Employment of agency in no way relieves Contractor of obligation to perform Work in accordance with requirements of Contract Documents.
- D. Contractor Employed Agency: Testing agency shall comply with requirements of ASTM E 329, and shall be certified through OSHA's Nationally Recognized Testing Laboratory (NRTL) program or through the National Institute of Standards and Technology's (NIST's) National Voluntary Laboratory Accreditation Program (NVLAP).
  - Testing Equipment: Calibrated at reasonable intervals either by NIST or using an NIST established Measurement Assurance Program, under a laboratory measurement quality assurance program.

#### PART 2 PRODUCTS - NOT USED

#### PART 3 EXECUTION

#### 3.01 CONTROL OF INSTALLATION

- A. Monitor quality control over suppliers, manufacturers, products, services, site conditions, and workmanship, to produce work of specified quality.
- Comply with manufacturers' instructions, including each step in sequence.
- C. Should manufacturers' instructions conflict with Contract Documents, request clarification from Architect before proceeding.
- D. Comply with specified standards as minimum quality for the work except where more stringent tolerances, codes, or specified requirements indicate higher standards or more precise workmanship.
- E. Have work performed by persons qualified to produce required and specified quality.

014000 - 4 **Quality Requirements** 

# ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

Architect's Project No.: 563007

- F. Verify that field measurements are as indicated on shop drawings or as instructed by the manufacturer.
- G. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, and disfigurement.

# 3.02 MOCK-UPS

- A. Before installing portions of the Work where mock-ups are required, construct mock-ups in location and size indicated for each form of construction and finish required to comply with the following requirements, using materials indicated for the completed Work. The purpose of mock-up is to demonstrate the proposed range of aesthetic effects and workmanship.
- B. Accepted mock-ups establish the standard of quality the Architect will use to judge the Work.
- C. Tests shall be performed under provisions identified in this section and identified in the respective product specification sections.
- D. Assemble and erect specified items with specified attachment and anchorage devices, flashings, seals, and finishes.
- E. Obtain Architect's approval of mock-ups before starting work, fabrication, or construction.
  - 1. Architect will issue written comments within seven (7) working days of initial review and each subsequent follow up review of each mock-up.
  - 2. Make corrections as necessary until Architect's approval is issued.
- F. Architect will use accepted mock-ups as a comparison standard for the remaining Work.
- G. Where mock-up has been accepted by Architect and is specified in product specification sections to be removed, protect mock-up throughout construction, remove mock-up and clear area when directed to do so by Architect.

#### 3.03 TOLERANCES

- Monitor fabrication and installation tolerance control of products to produce acceptable Work.
   Do not permit tolerances to accumulate.
- B. Comply with manufacturers' tolerances. Should manufacturers' tolerances conflict with Contract Documents, request clarification from Architect before proceeding.
- C. Adjust products to appropriate dimensions; position before securing products in place.

# 3.04 TESTING AND INSPECTION

- A. See individual specification sections for testing and inspection required.
- B. Testing Agency Duties for Contractor-employed Testing and Inspection Agencies:
  - Test samples of mixes submitted by Contractor.
  - 2. Provide qualified personnel at site. Cooperate with Architect and Contractor in performance of services.
  - Perform specified sampling and testing of products in accordance with specified standards.
  - 4. Ascertain compliance of materials and mixes with requirements of Contract Documents.
  - 5. Promptly notify Architect and Contractor of observed irregularities or non-compliance of Work or products.
  - 6. Perform additional tests and inspections required by Architect.
  - 7. Attend preconstruction meetings and progress meetings.
  - 8. Submit reports of all tests/inspections specified.
- C. Limits on Testing/Inspection Agency Authority:

Quality Requirements 014000 - 5

# ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

,

- Agency may not release, revoke, alter, or enlarge on requirements of Contract Documents.
- 2. Agency may not approve or accept any portion of the Work.
- 3. Agency may not assume any duties of Contractor.
- 4. Agency has no authority to stop the Work.

# D. Contractor Responsibilities:

- 1. Deliver to agency at designated location, adequate samples of materials proposed to be used that require testing, along with proposed mix designs.
- 2. Cooperate with laboratory personnel, and provide access to the Work and to manufacturers' facilities.
- 3. Provide incidental labor and facilities:
  - a. To provide access to Work to be tested/inspected.
  - To obtain and handle samples at the site or at source of Products to be tested/inspected.
  - c. To facilitate tests/inspections.
  - d. To provide storage and curing of test samples.
- 4. Notify Architect and laboratory 24 hours prior to expected time for operations requiring testing/inspection services.
- 5. Employ services of an independent qualified testing laboratory and pay for additional samples, tests, and inspections required by Contractor beyond specified requirements.
- 6. Arrange with Owner's agency and pay for additional samples, tests, and inspections required by Contractor beyond specified requirements.
- 7. Coordinate repairs where testing and inspection has damaged the Work.
- E. Re-testing and/or re-inspections required because of non-compliance with specified requirements shall be performed by the same agency. Do not proceed with construction activities that would conceal or cover work needing re-testing or re-inspection.
- F. Re-testing and/or re-inspections required because of non-compliance with specified requirements shall be paid for by Contractor.

#### 3.05 MANUFACTURERS' FIELD SERVICES

- A. When specified in individual specification sections, require material or product suppliers or manufacturers to provide qualified staff personnel to observe site conditions, conditions of surfaces and installation, quality of workmanship, and field quality control requirements as applicable, and to initiate instructions when necessary.
- B. Provide a written report of observations and site decisions or instructions given to applicators or installers that are supplemental or contrary to manufacturers' written instructions or Contract Documents. Obtain Owner's approval prior to proceeding with any modifications.

# 3.06 DEFECT ASSESSMENT

- A. Replace Work or portions of the Work not complying with specified requirements.
- B. Contractor may request to restore defective Work or portions of the Work to comply with specified requirements in lieu of replacement. Obtain Owner's approval prior to proceeding with restoration.
- C. If, in the opinion of Owner, it is not practical to restore or remove and replace the work, Owner will direct an appropriate remedy or adjust payment.

# **END OF SECTION**

Quality Requirements 014000 - 6

Architect's Project No.: 563007

# **SECTION 014200 DEFINITIONS AND REFERENCE STANDARDS**

#### **PART 1 GENERAL**

#### 1.01 SUMMARY

- A. The definitions include in this section supplement, but do not replace, the definitions contained in the General Conditions. In the event of duplication, the General Conditions shall govern.
- Other definitions are included in individual specification sections.

#### 1.02 DEFINITIONS

- A. Furnish: To supply, deliver, unload, and inspect for damage.
- B. Install: To unpack, assemble, erect, apply, place, finish, cure, protect, clean, start up, and make ready for use.
- C. Product: Material, machinery, components, equipment, fixtures, and systems forming the work result. Not materials or equipment used for preparation, fabrication, conveying, or erection and not incorporated into the work result. Products may be new, never before used, or re-used materials or equipment.
- D. Provide: To furnish and install.
- E. Supply: Same as Furnish.
- F. Installer: A Contractor or other entity engaged by Contractor, as an employee, subcontractor, or contractor of lower tier, to perform a particular construction operation, including installation, erection, application, and similar operations.
  - Using a term such as "carpentry" does not imply that certain construction activities must be performed by accredited or unionized individuals of a corresponding generic name, such as "carpenter." It also does not imply that specified requirements apply exclusively to tradespeople of the corresponding generic name.
- G. Experienced: When used with the term "Installer," this term means having successfully completed previous work similar in size and scope to this Project; being familiar with the special requirements indicated; and having complied with the requirements of local authorities having jurisdiction.
- H. Replace: Provide an acceptable like product or material in place of a missing or unacceptable (rejected) product or material. To "replace" an unacceptable product or material includes its removal and disposal.
- Punch List: A written list of unfinished Work and defective Work resulting from inspection and testing to determine whether Substantial Completion has been accomplished. The unfinished Work and defective Work must be finished and corrected to obtain Substantial or Final Completion, in accordance with the General Conditions.
- Written or Printed: When used in conjunction with manufacturer's product data or installation requirements, either of these terms may be used to require compliance with manufacturer's current printed and published information.

#### 1.03 REFERENCE STANDARDS

A. For products or workmanship specified by reference to a document or documents not included in the Project Manual, also referred to as reference standards, comply with requirements of the standard, except when more rigid requirements are specified, or are required by applicable codes or local authorities having jurisdiction.

Architect's Project No.: 563007

- B. Should specified reference standards conflict with Contract Documents, request clarification from the Architect before proceeding.
- C. Neither the contractural relationships, duties, or responsibilities of the parties in Contract nor those of the Architect shall be altered by Contract Documents by mention or inference otherwise in any reference document.

PART 2 PRODUCTS - NOT USED

**PART 3 EXECUTION - NOT USED** 

**END OF SECTION** 

Arlington County, Virginia Architect's Project No: 563007

# SECTION 014520 - TESTING, ADJUSTING, AND BALANCING

#### PART 1 - GENERAL

# 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

# 1.2 SUMMARY

- A. Section Includes:
  - 1. Balancing Air Systems:
    - a. Constant-volume air systems.
    - b. Variable-air-volume systems.
  - 2. Testing, Adjusting, and Balancing Equipment:
    - a. Motors.
    - b. Condensing units.
    - c. Heat-transfer coils.

# 1.3 DEFINITIONS

- A. AABC: Associated Air Balance Council.
- B. BAS: Building automation system.
- C. NEBB: National Environmental Balancing Bureau.
- D. TAB: Testing, adjusting, and balancing.
- E. TAB Specialist: An independent entity meeting qualifications to perform TAB work.

# 1.4 PREINSTALLATION MEETINGS

- A. TAB Conference: If requested by the Owner or Architect, conduct a TAB conference at Project Site after approval of the TAB strategies and procedures plan to develop a mutual understanding of the details. Provide a minimum of 14 days' notice of scheduled meeting time and location.
  - 1. Minimum Agenda Items:
    - a. The Contract Documents examination report.

Arlington County, Virginia Architect's Project No: 563007

- b. The TAB plan.
- c. Needs for coordination and cooperation of trades and subcontractors.
- d. Proposed procedures for documentation and communication flow.

#### 1.5 ACTION SUBMITTALS

- A. Sustainable Design Submittals:
  - 1. TAB Report: Documentation indicating that Work complies with ASHRAE/IES 90.1, Section 6.7.2.3 "System Balancing."

#### 1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: Within 30 days of Contractor's Notice to Proceed, submit documentation that the TAB agent and this Project's TAB team members meet the qualifications specified in "Quality Assurance" Article.
- B. Contract Documents Examination Report: Within 60 days of Contractor's Notice to Proceed, submit the Contract Documents review report as specified in Part 3.
- C. Strategies and Procedures Plan: Within 90 days of Contractor's Notice to Proceed, submit TAB strategies and step-by-step procedures as specified in "Preparation" Article.
- D. System Readiness Checklists: Within 90 days of Contractor's Notice to Proceed, submit system readiness checklists as specified in "Preparation" Article.
- E. Examination Report: Submit a summary report of the examination review required in "Examination" Article. Provide deficiency report before and during performance of TAB procedures to CM, Owner, CX and Architect. Deficiencies in Final TAB Report as cause for poor TAB will be cause for TAB Report rejection.
- F. Certified TAB reports: Within 14 days of completion of balancing work, submit testing and balancing report.
- G. Sample report forms. Forms should be specific to project and include actual information and measurements to be taken by TAB.

# 1.7 QUALITY ASSURANCE

- A. TAB Specialists Qualifications: Certified by AABC or NEBB. TAB provider shall be an independent company from the contractors performing the work.
  - 1. TAB Field Supervisor: Employee of the TAB specialist and certified by AABC or NEBB.
  - 2. TAB Technician: Employee of the TAB specialist and certified by AABC or NEBB as a TAB technician.

Arlington County, Virginia Architect's Project No: 563007

- B. Instrumentation Type, Quantity, Accuracy, and Calibration: Comply with requirements in ASHRAE 111, Section 4, "Instrumentation."
- C. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6.7.2.3 "System Balancing."
- D. The following information shall be submitted as part of the Quality Assurance Submittal:
  - 1. Provide evidence of satisfactory completion of at least two projects of similar size and scope. Submit the following for each project:
    - a. Completed testing and balancing reports for each project.
    - b. If not included in the testing and balancing report, provide equipment startup checklists for each project.
    - c. Owner contact for each project.
    - d. Design engineer contact for each project.
    - e. Architect contact for each project.
  - 2. The Architect shall determine whether the agent is qualified and the decision shall be final. Re-submittals on behalf of the same company shall not be considered.
- E. TAB Conference: After approval of the TAB submittals, the TAB specialist shall arrange a meeting with the Owner's and the Architect's representatives to develop a mutual understanding of the details and review the TAB strategies and procedures plan. Ensure the participation of TAB team members, equipment manufacturers' authorized service representatives, HVAC controls installer, and other support personnel. Provide 14 days' notice of scheduled meeting time and location.
  - 1. Minimum Agenda:
    - a. Submittal distribution requirements.
    - b. Contract documents examination report.
    - c. TAB strategies and procedures plan.
    - d. Work schedule and project site access requirements.
    - e. Coordination and cooperation of trades and subcontractors.
    - f. Coordination of documentation and communication flow.
    - g. Systems readiness checklists.
- F. TAB Reports: Use standard forms from AABC's "National Standards for TAB" or NEBB's "Procedural Standards for TAB of Environmental Systems."
- G. Instrumentation Type, Quantity, and Accuracy: As described in the "AABC National Standards for Total System Balance" or NEBB's "Procedural Standards for TAB of Environmental Systems," Section II, "Required Instrumentation for NEBB Certification."
- H. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6.7.2.3 "System Balancing."

Arlington County, Virginia Architect's Project No: 563007

# 1.8 COORDINATION

- A. Coordinate the efforts of work performed under other sections for operation of systems and equipment to support and assist TAB activities.
- B. Notice: Provide 7 days' notice to the Contractor and Architect for each test. Include scheduled test dates and times.
- C. Perform TAB after any required leakage and pressure tests on air and water distribution systems have been satisfactorily completed.

# 1.9 WARRANTY

- A. General Warranty: The national project performance guarantee indicated in this Article shall not deprive the Owner of other rights the Owner may have under other provisions of the Contract Documents and shall be in addition to, and run concurrent with, other warranties made by the Contractor under requirements of the Contract Documents.
- B. Special Guarantee: Provide a guarantee on NEBB or AABC forms stating that NEBB or AABC will assist in completing the requirements of the Contract Documents if the TAB Agent fails to comply with the Contract Documents. Guarantee includes the following provisions:
  - 1. The certified Agent has tested and balanced systems according to the Contract Documents.
  - 2. Systems are balanced to optimum performance capabilities within design and installation limits.

# PART 2 - PRODUCTS (Not Applicable)

# **PART 3 - EXECUTION**

# 3.1 EXAMINATION

- A. Examine the Contract Documents to become familiar with Project requirements and to discover conditions in systems designs that may preclude proper TAB of systems and equipment.
- B. Examine installed systems for balancing devices, such as test ports, gage cocks, thermometer wells, flow-control devices, balancing valves and fittings, and manual volume dampers. Verify that locations of these balancing devices are applicable for intended purpose and are accessible.
- C. Examine the approved submittals for HVAC and Plumbing systems and equipment.

Arlington County, Virginia Architect's Project No: 563007

- D. Examine design data including HVAC system descriptions, statements of design assumptions for environmental conditions and systems output, and statements of philosophies and assumptions about HVAC system and equipment controls.
- E. Examine ceiling plenums and underfloor air plenums used for supply, return, or relief air to verify that they are properly separated from adjacent areas. Verify that penetrations in plenum walls are sealed and fire-stopped if required.
- F. Examine equipment performance data including fan and pump curves.
  - 1. Relate performance data to Project conditions and requirements, including system effects that can create undesired or unpredicted conditions that cause reduced capacities in all or part of a system.
  - 2. Calculate system-effect factors to reduce performance ratings of HVAC equipment when installed under conditions different from the conditions used to rate equipment performance. To calculate system effects for air systems, use tables and charts found in AMCA 201, "Fans and Systems," or in SMACNA's "HVAC Systems Duct Design." Compare results with the design data and installed conditions.
- G. Examine system and equipment installations and verify that field quality-control testing, cleaning, and adjusting specified in individual Sections have been performed.
- H. Examine test reports specified in individual system and equipment Sections.
- I. Examine HVAC equipment and verify that bearings are greased, belts are aligned and tight, filters are clean, and equipment with functioning controls is ready for operation.
- J. Examine terminal units, such as variable-air-volume boxes, and verify that they are accessible and their controls are connected and functioning.
- K. Examine strainers. Verify that startup screens have been replaced by permanent screens with indicated perforations.
- L. Examine control valves for proper installation for their intended function of throttling, diverting, or mixing fluid flows.
- M. Examine heat-transfer coils for correct piping connections and for clean and straight fins.
- N. Examine system pumps to ensure absence of entrained air in the suction piping.
- O. Examine operating safety interlocks and controls on HVAC equipment.
- P. Provide deficiency report before and during performance of TAB procedures to CM, Owner, CX and Architect. Observe and record system reactions to changes in conditions. Record default set points if different from indicated values.

Arlington County, Virginia Architect's Project No: 563007

# 3.2 PREPARATION

- A. Prepare a TAB plan that includes the following:
  - 1. Equipment and systems to be tested.
  - 2. Custom strategies and step-by-step procedures for balancing the systems.
  - 3. Instrumentation to be used.
  - 4. Sample forms with specific identification for all equipment.
  - 5. Include TAB schedule, start dates, durations, and end dates for each equipment/system test
- B. Perform system-readiness checks of HVAC systems and equipment to verify system readiness for TAB work. Include, at a minimum, the following:
  - 1. Airside:
    - a. Verify that leakage and pressure tests on air distribution systems have been satisfactorily completed.
    - b. Duct systems are complete with terminals installed.
    - c. Volume, smoke, and fire dampers are open and functional.
    - d. Clean filters are installed.
    - e. Fans are operating, free of vibration, and rotating in correct direction.
    - f. Variable-frequency controllers' startup is complete and safeties are verified.
    - g. Automatic temperature-control systems are operational.
    - h. Ceilings are installed.
    - i. Windows and doors are installed.
    - j. Suitable access to balancing devices and equipment is provided.

# 3.3 GENERAL PROCEDURES FOR TESTING AND BALANCING

- A. Perform testing and balancing procedures on each system according to the procedures contained in AABC's "National Standards for Total System Balance," ASHRAE 111, or NEBB's "Procedural Standards for Testing, Adjusting, and Balancing of Environmental Systems" and in this Section.
- B. Cut insulation, ducts, pipes, and equipment cabinets for installation of test probes to the minimum extent necessary for TAB procedures.
  - 1. After testing and balancing, patch probe holes in ducts with same material and thickness as used to construct ducts.
  - 2. Install and join new insulation that matches removed materials. Restore insulation, coverings, vapor barrier, and finish according to Section 230700 HVAC Insulation.
- C. Mark equipment and balancing devices, including damper-control positions, valve position indicators, fan-speed-control levers, and similar controls and devices, with paint or other

Arlington County, Virginia Architect's Project No: 563007

suitable, permanent identification material to show final settings. Fasten/lock balancing devices in place.

D. Take and report testing and balancing measurements in inch-pound (IP) units.

# 3.4 GENERAL PROCEDURES FOR BALANCING AIR SYSTEMS

- A. Prepare test reports for both fans and outlets. Obtain manufacturer's outlet factors and recommended testing procedures. Cross-check the summation of required outlet volumes with required fan volumes.
- B. Prepare schematic diagrams of systems' "as-built" duct layouts.
- C. For variable-air-volume systems, develop a plan to simulate diversity.
- D. Determine the best locations in main and branch ducts for accurate duct-airflow measurements.
- E. Check airflow patterns from the outdoor-air louvers and dampers and the return- and exhaust-air dampers through the supply-fan discharge and mixing dampers.
- F. Locate start-stop and disconnect switches, electrical interlocks, and motor starters.
- G. Verify that motor starters are equipped with properly sized thermal protection.
- H. Check dampers for proper position to achieve desired airflow path.
- I. Check for airflow blockages.
- J. Check condensate drains for proper connections and functioning.
- K. Check for proper sealing of air-handling-unit components.
- L. Verify that air duct system is sealed as specified in Section 233113 "Metal Ducts."
- 3.5 PROCEDURES FOR CONSTANT-VOLUME AIR SYSTEMS (Split System Air Conditioners, Energy Recovery Ventilator, Fans)
  - A. Adjust fans to deliver total indicated airflows within the maximum allowable fan speed listed by fan manufacturer.
    - 1. Measure total airflow.
      - a. Set outside-air, return-air, and relief-air dampers for proper position that simulates minimum outdoor-air conditions.
      - b. Where duct conditions allow, measure airflow by Pitot-tube traverse. If necessary, perform multiple Pitot-tube traverses to obtain total airflow.

Arlington County, Virginia Architect's Project No: 563007

- c. Where duct conditions are not suitable for Pitot-tube traverse measurements, a coil traverse may be acceptable.
- d. If a reliable Pitot-tube traverse or coil traverse is not possible, measure airflow at terminals and calculate the total airflow.
- 2. Measure fan static pressures as follows:
  - a. Measure static pressure directly at the fan outlet or through the flexible connection.
  - b. Measure static pressure directly at the fan inlet or through the flexible connection.
  - c. Measure static pressure across each component that makes up the air-handling system.
  - d. Report artificial loading of filters at the time static pressures are measured.
- 3. Review Record Documents to determine variations in design static pressures versus actual static pressures. Calculate actual system-effect factors. Recommend adjustments to accommodate actual conditions.
- 4. Obtain approval from Architect for adjustment of fan speed higher or lower than indicated speed. Comply with requirements in HVAC sections for air-handling units for adjustment of fans, belts, and pulley sizes to achieve indicated air-handling-unit performance.
- 5. Do not make fan-speed adjustments that result in motor overload. Consult equipment manufacturers about fan-speed safety factors. Modulate dampers and measure fan-motor amperage to ensure that no overload occurs. Measure amperage in full-cooling, full-heating, economizer, and any other operating mode to determine the maximum required brake horsepower.
- B. Adjust volume dampers for main duct, submain ducts, and major branch ducts to indicated airflows.
  - 1. Measure airflow of submain and branch ducts.
  - 2. Adjust submain and branch duct volume dampers for specified airflow.
  - 3. Re-measure each submain and branch duct after all have been adjusted.
- C. Adjust air inlets and outlets for each space to indicated airflows.
  - 1. Set airflow patterns of adjustable outlets for proper distribution without drafts.
  - 2. Measure inlets and outlets airflow.
  - 3. Adjust each inlet and outlet for specified airflow.
  - 4. Re-measure each inlet and outlet after they have been adjusted.
- D. Verify final system conditions.
  - 1. Re-measure and confirm that minimum outdoor, return, and relief airflows are within design. Readjust to design if necessary.
  - 2. Re-measure and confirm that total airflow is within design.
  - 3. Re-measure all final fan operating data, rpms, volts, amps, and static profile.
  - 4. Mark all final settings.
  - 5. Test system in economizer mode. Verify proper operation and adjust if necessary.
  - 6. Measure and record all operating data.

Arlington County, Virginia Architect's Project No: 563007

7. Record final fan-performance data.

# 3.6 PROCEDURES FOR MOTORS

- A. Motors 1/2 HP and Larger: Test at final balanced conditions and record the following data:
  - 1. Manufacturer's name, model number, and serial number.
  - 2. Motor horsepower rating.
  - 3. Motor nameplate and measured rpm.
  - 4. Phase and hertz.
  - 5. Nameplate and measured voltage, each phase.
  - 6. Nameplate and measured amperage, each phase.
  - 7. Starter size and thermal-protection-element rating.
  - 8. Service factor and frame size.
- B. Motors Driven by Variable-Frequency Controllers: Test manual bypass of controller to prove proper operation.

# 3.7 PROCEDURES FOR CONDENSING UNITS

- A. Verify proper rotation of fans.
- B. Measure dry bulb and wet bulb entering- and leaving-air temperatures.
- C. Record fan and motor operating data.

# 3.8 PROCEDURES FOR HEAT-TRANSFER COILS

- A. Measure, adjust, and record the following nameplate and measured data for each electric heating coil:
  - 1. Nameplate data.
  - 2. Airflow.
  - 3. Dry bulb and wet bulb entering- and leaving-air temperature at full load.
  - 4. Voltage and amperage input of each phase at full load.
  - 5. Calculated kilowatt at full load.
  - 6. Fuse or circuit-breaker rating for overload protection.
- B. Measure, adjust, and record the following nameplate and measured data for each refrigerant coil:
  - 1. Dry-bulb temperature of entering and leaving air.
  - 2. Wet-bulb temperature of entering and leaving air.
  - 3. Airflow.
  - 4. Capacity (Btu/hr) at full load.

Arlington County, Virginia Architect's Project No: 563007

# 3.9 TOLERANCES

- A. Set HVAC system's airflow rates and water flow rates within the following tolerances:
  - 1. Supply, Return, and Exhaust Fans and Equipment with Fans: 0 to plus 10 percent.
  - 2. Outside Air: 0 to plus 10 percent.
  - 3. Air Outlets: Plus or minus 10 percent.
  - 4. Return Inlets: Plus or minus 10 percent.
  - 5. Exhaust Inlets: 0 to plus 10 percent.
  - 6. Unless indicated otherwise: Plus or minus 10 percent.
- B. Maintaining pressure relationships as designed shall have priority over the tolerances specified above.

# 3.10 PROGRESS REPORTING

- A. Initial Construction-Phase Report: Based on examination of the Contract Documents as specified in "Examination" Article, prepare a report on the adequacy of design for systems balancing devices. Recommend changes and additions to systems balancing devices to facilitate proper performance measuring and balancing. Recommend changes and additions to HVAC systems and general construction to allow access for performance measuring and balancing devices.
- B. Status Reports: Prepare weekly progress reports to describe completed procedures, procedures in progress, and scheduled procedures. Include a list of deficiencies and problems found in systems being tested and balanced. Prepare a separate report for each system and each building floor for systems serving multiple floors.

# 3.11 FINAL REPORT

- A. General: Prepare a certified written report; tabulate and divide the report into separate sections for tested systems and balanced systems.
  - 1. Include a certification sheet at the front of the report's binder, signed and sealed by the certified testing and balancing engineer.
  - 2. Include a list of instruments used for procedures, along with proof of calibration.
  - 3. Certify validity and accuracy of field data.
- B. Final Report Contents: In addition to certified field-report data, include the following:
  - 1. Fan curves.
  - 2. Manufacturers' test data.
  - 3. Field test reports prepared by system and equipment installers.
  - 4. Other information relative to equipment performance; do not include Shop Drawings and Product Data.

# Arlington County, Virginia Architect's Project No: 563007

- C. General Report Data: In addition to form titles and entries, include the following data:
  - 1. Title page.
  - 2. Name and address of the TAB specialist.
  - 3. Project name.
  - 4. Project location.
  - 5. Architect's name and address.
  - 6. Engineer's name and address.
  - 7. Contractor's name and address.
  - 8. Report date.
  - 9. Signature of TAB supervisor who certifies the report.
  - 10. Table of Contents with the total number of pages defined for each section of the report.

    Number each page in the report.
  - 11. Summary of contents including the following:
    - a. Indicated versus final performance.
    - b. Notable characteristics of systems.
    - c. Description of system operation sequence if it varies from the Contract Documents.
  - 12. Nomenclature sheets for each item of equipment.
  - 13. Data for terminal units, including manufacturer's name, type, size, and fittings.
  - 14. Notes to explain why certain final data in the body of reports vary from indicated values.
  - 15. Test conditions for fans and pump performance forms including the following:
    - a. Settings for outdoor-, return-, and exhaust-air dampers.
    - b. Conditions of filters.
    - c. Cooling coil, wet- and dry-bulb conditions.
    - d. Fan drive settings including settings and percentage of maximum pitch diameter.
    - e. Settings for supply-air, static-pressure controller.
    - f. Other system operating conditions that affect performance.
- D. System Diagrams: Include schematic layouts of air distribution systems. Present each system with single-line diagram and include the following:
  - 1. Quantities of outdoor, supply, return, and exhaust airflows.
  - 2. Duct, outlet, and inlet sizes.
  - 3. Position of balancing devices.
- E. Air-Handling-Unit Test Reports: For air-handling units with coils, include the following:
  - 1. Unit Data:
    - Unit identification.
    - b. Location.
    - c. Make and type.
    - d. Model number and unit size.
    - e. Manufacturer's serial number.

# Arlington County, Virginia Architect's Project No: 563007

- f. Unit arrangement and class.
- g. Discharge arrangement.
- h. Sheave make, size in inches, and bore.
- i. Center-to-center dimensions of sheave and amount of adjustments in inches.
- j. Number, make, and size of belts.
- k. Number, type, and size of filters.

# 2. Motor Data:

- a. Motor make, and frame type and size.
- b. Horsepower and rpm.
- c. Volts, phase, and hertz.
- d. Full-load amperage and service factor.
- e. Sheave make, size in inches, and bore.
- f. Center-to-center dimensions of sheave and amount of adjustments in inches.

# 3. Test Data (Nameplate and Measured Values):

- a. Total airflow rate in cfm.
- b. Total system static pressure in inches wg.
- c. Fan rpm.
- d. Discharge static pressure in inches wg.
- e. Filter static-pressure differential in inches wg. Simulate dirty filters and define alarm set point.
- f. Cooling-coil static-pressure differential in inches wg.
- g. Heating-coil static-pressure differential in inches wg.
- h. Outdoor airflow in cfm.
- i. Return airflow in cfm.
- j. Outdoor-air damper position.
- k. Return-air damper position.
- 1. Supply diffuser and return grille airflow rates in cfm.

# F. Apparatus-Coil Test Reports:

# 1. Coil Data:

- a. System identification.
- b. Location.
- c. Coil type.
- d. Number of rows.
- e. Fin spacing in fins per inch.
- f. Make and model number.
- g. Face area in square feet.
- h. Tube size in NPS.
- i. Tube and fin materials.
- j. Circuiting arrangement.

# 2. Test Data (Nameplate and Measured Values):

Arlington County, Virginia Architect's Project No: 563007

- a. Airflow rate in cfm.
- b. Average face velocity in fpm.
- c. Air pressure drop in inches wg.
- d. Outdoor-air, wet- and dry-bulb temperatures in deg F.
- e. Return-air, wet- and dry-bulb temperatures in deg F.
- f. Entering-air, wet- and dry-bulb temperatures in deg F.
- g. Leaving-air, wet- and dry-bulb temperatures in deg F.
- h. Refrigerant expansion valve and refrigerant types.
- i. Refrigerant suction pressure in psig.
- j. Refrigerant suction temperature in deg F.
- k. Inlet steam pressure in psig.
- 1. Total capacity in Btu/hr.
- G. Electric-Coil Test Reports: For electric furnaces, duct coils, and electric coils installed in central-station air-handling units, include the following:
  - 1. Unit Data:
    - a. System identification.
    - b. Location.
    - c. Coil identification.
    - d. Capacity in Btu/h.
    - e. Number of stages.
    - f. Connected volts, phase, and hertz.
    - g. Rated amperage.
    - h. Airflow rate in cfm.
    - i. Face area in square feet.
    - j. Minimum face velocity in fpm.
  - 2. Test Data (Nameplate and Measured Values):
    - a. Heat output in Btu/h.
    - b. Airflow rate in cfm.
    - c. Air velocity in fpm.
    - d. Entering-air temperature in deg F.
    - e. Leaving-air temperature in deg F.
    - f. Voltage at each connection.
    - g. Amperage for each phase.
- H. Fan Test Reports: For supply, return, and exhaust fans, include the following:
  - 1. Fan Data:
    - a. System identification.
    - b. Location.
    - c. Make and type.
    - d. Model number and size.
    - e. Manufacturer's serial number.

# Arlington County, Virginia Architect's Project No: 563007

- f. Arrangement and class.
- g. Sheave make, size in inches, and bore.
- h. Center-to-center dimensions of sheave and amount of adjustments in inches.

# 2. Motor Data:

- a. Motor make, and frame type and size.
- b. Horsepower and rpm.
- c. Volts, phase, and hertz.
- d. Full-load amperage and service factor.
- e. Sheave make, size in inches, and bore.
- f. Center-to-center dimensions of sheave, and amount of adjustments in inches.
- g. Number, make, and size of belts.
- 3. Test Data (Nameplate and Measured Values):
  - a. Total airflow rate in cfm.
  - b. Total system static pressure in inches wg.
  - c. Fan rpm.
  - d. Volts, phase, and hertz.
  - e. Full-load amperage and service factor.
  - f. Discharge static pressure in inches wg.
  - g. Suction static pressure in inches wg.
- I. Round, Flat-Oval, and Rectangular Duct Traverse Reports: Include a diagram with a grid representing the duct cross-section and record the following:
  - 1. Report Data:
    - a. System and air-handling-unit number.
    - b. Location and zone.
    - c. Traverse air temperature in deg F.
    - d. Duct static pressure in inches wg.
    - e. Duct size in inches.
    - f. Duct area in square feet.
    - g. Indicated airflow rate in cfm.
    - h. Indicated velocity in fpm.
    - i. Actual airflow rate in cfm.
    - j. Actual average velocity in fpm.
    - k. Barometric pressure in psig.
- J. Air-Terminal-Device Reports (Unit heaters, Ductless split systems):
  - 1. Unit Data:
    - a. System and air-handling unit identification.
    - b. Location and zone.
    - c. Apparatus used for test.
    - d. Area served.

Arlington County, Virginia Architect's Project No: 563007

- e. Make.
- f. Number from system diagram.
- g. Type and model number.
- h. Size
- i. Effective area in square feet.
- 2. Test Data (Nameplate and Measured Values):
  - a. Airflow rate in cfm.
  - b. Air velocity in fpm.
  - c. Preliminary airflow rate as needed in cfm.
  - d. Preliminary velocity as needed in fpm.
  - e. Final airflow rate in cfm.
  - f. Final velocity in fpm.
  - g. Space temperature in deg F.
- K. Instrument Calibration Reports:
  - 1. Report Data:
    - a. Instrument type and make.
    - b. Serial number.
    - c. Application.
    - d. Dates of use.
    - e. Dates of calibration.

# 3.12 VERIFICATION OF TAB REPORT

- A. The TAB specialist's test and balance engineer shall conduct the inspection in the presence of Commissioning Authority.
- B. Commissioning Authority shall randomly select measurements, documented in the final report, to be rechecked. Rechecking shall be limited to either 10 percent of the total measurements recorded.
- C. If rechecks yield measurements that differ from the measurements documented in the final report by more than the tolerances allowed, the measurements shall be noted as "FAILED."
- D. If the number of "FAILED" measurements is greater than 10 percent of the total measurements checked during the final inspection, the testing and balancing shall be considered incomplete and shall be rejected.
- E. If TAB work fails, proceed as follows:
  - 1. TAB specialists shall recheck all measurements and make adjustments. Revise the final report and balancing device settings to include all changes; resubmit the final report and request a second final inspection.

Arlington County, Virginia Architect's Project No: 563007

- 2. If the second final inspection also fails, Owner may contract the services of another TAB specialist to complete TAB work according to the Contract Documents and deduct the cost of the services from the original TAB specialist's final payment.
- 3. If the second verification also fails, Architect may contact AABC Headquarters regarding the AABC National Performance Guaranty.
- F. Prepare test and inspection reports.

# 3.13 ADDITIONAL TESTS

- A. Within 90 days of completing TAB, perform additional TAB to verify that balanced conditions are being maintained throughout and to correct unusual conditions.
- B. Seasonal Periods: If initial TAB procedures were not performed during near-peak summer and winter conditions, perform additional TAB during near-peak summer and winter conditions.
- C. Technician that provided services under this Section shall provide support to commissioning agent. Refer to Commissioning Specification Sections for details.

END OF SECTION 014520

Architect's Project No.: 563007

# **SECTION 015000** TEMPORARY FACILITIES AND CONTROLS

#### **PART 1 GENERAL**

#### 1.01 REFERENCE STANDARDS

A. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials 2022.

#### 1.02 TEMPORARY UTILITIES

- A. Owner will provide the following:
  - Electrical power, consisting of connection to existing facilities.
  - 2. Water supply, consisting of connection to existing facilities.
- B. Existing facilities may be used.
- C. Temporary Lighting: Provide supplemental temporary lighting as required to produce lighting levels necessary for proper installation of the Work.
- D. Temporary Heating, Cooling, and Ventilation: Supplement building HVAC systems with temporary measures and equipment as required for curing, drying, and humidity control. Comply with manufacturer's installation instructions for specific product requirements.
  - Provide measures and equipment to meet warranty requirements of interior woodwork specified in Division 6 and/or Division 12 sections.

#### 1.03 TELECOMMUNICATIONS SERVICES

- Provide, maintain, and pay for telecommunications services to field office at time of project mobilization.
- B. Telecommunications services shall include:
  - Telephone Service: Contractor shall ensure that all of its forces, including on-site managers/supervisors of each Subcontractor, have mobile devices and adequate voice and data coverage for on-site operations
  - Internet Connections: Minimum of one; DSL modem or faster. 2.
  - Video Conferencing and Video Site Visit/Walkthrough Infrastructure: Maintain personal computer/laptop with large format display screen and video conferencing software in the common-use field office.
    - Maintain equipment in common-use field office for site visits and walkthroughs, including a portable, high quality digital video camera, audio headset with microphone for walkthrough commentary/narration, and accessories including connection cables and battery packs.

#### 1.04 TEMPORARY SANITARY FACILITIES

- Use of existing facilities is permitted.
- B. Maintain daily in clean and sanitary condition.
- C. At end of construction, return facilities to same or better condition as originally found.

# 1.05 BARRIERS

A. Provide barriers to prevent unauthorized entry to construction areas, to prevent access to areas that could be hazardous to workers or the public, to allow for owner's use of site and to protect existing facilities and adjacent properties from damage from construction operations and demolition.

Architect's Project No.: 563007

B. Protect vehicular traffic, stored materials, site, and structures from damage.

#### 1.06 FENCING

- A. Construction: Commercial grade chain link fence.
  - Contractor may provide either fixed or portable fencing to suit conditions. For portable fencing, provide concrete or galvanized steel bases for supporting posts. Bases for portable fencing shall not obstruct sidewalks or other pathways used by pedestrians.
- B. Unless otherwise indicated, provide chain link fencing to enclose Contractor's laydown/storage areas.

# 1.07 EXTERIOR ENCLOSURES

A. Provide temporary weather tight closure of exterior openings to accommodate acceptable working conditions and protection for Products, to allow for temporary heating and maintenance of required ambient temperatures identified in individual specification sections, and to prevent entry of unauthorized persons. Provide access doors with self-closing hardware and locks.

# 1.08 INTERIOR ENCLOSURES

- A. Provide temporary partitions to separate work areas from completed areas, to prevent penetration of dust and moisture, and to prevent damage to installed materials and equipment.
- Construction: Framing and gypsum board sheet materials with closed joints and sealed edges at intersections with existing surfaces.
  - Maximum flame spread rating of 75 in accordance with ASTM E84.

#### 1.09 SECURITY

- A. Provide security and facilities to protect Work, and Owner's operations from unauthorized entry, vandalism, or theft.
- B. Coordinate with Owner's security program.
- C. Environmental Protection: Comply with EPA, OSHA and other regulatory requirements to prevent contamination of site, air, and public sewer/runoff.
  - Provide additional work restrictions and protective measures as indicated on Civil/Site Drawings and as specified in Division 01 Section "Summary."

# 1.10 VEHICULAR ACCESS AND PARKING

- Comply with regulations relating to use of streets and sidewalks, access to emergency facilities, and access for emergency vehicles.
- B. Coordinate access and haul routes with governing authorities and Owner.
- C. Provide and maintain access to fire hydrants, free of obstructions.
- D. Provide means of removing mud from vehicle wheels before entering streets.
- Designated existing on-site roads may be used for construction traffic.
- Existing parking areas may be used for construction parking. Coordinate with Owner to determine acceptable locations and number of parking spaces available.

# 1.11 WASTE REMOVAL

- A. Provide waste removal facilities and services as required to maintain the site in clean and orderly condition.
- B. Provide containers with lids. Remove trash from site periodically.

Architect's Project No.: 563007

- C. If materials to be recycled or re-used on the project must be stored on-site, provide suitable non-combustible containers; locate containers holding flammable material outside the structure unless otherwise approved by the authorities having jurisdiction.
- D. Open free-fall chutes are not permitted. Terminate closed chutes into appropriate containers with lids.

# 1.12 PROJECT IDENTIFICATION

- A. Provide project identification sign of design and construction indicated on drawings.
  - Obtain and pay for any permits required for temporary signage by local authority having iurisdiction.
- B. Erect on site at location(s) established by Architect.
- C. Provide temporary directional signage as directed to facilitate site access for visitors and other construction personnel.
- D. No other signs are allowed without Owner permission except those required by law.

# 1.13 REMOVAL OF UTILITIES, FACILITIES, AND CONTROLS

- A. Remove temporary utilities, equipment, facilities, materials, prior to Date of Substantial Completion inspection.
- B. Remove temporary underground installations.
- C. Clean and repair damage caused by installation or use of temporary work.
- D. Restore new permanent facilities used during construction to specified condition.

# **PART 2 PRODUCTS**

# 2.01 MATERIALS

- A. Rough Carpentry: 2x lumber, in length and depth required for floor to ceiling partitions. Partitions shall not be fastened to installed ceiling or flooring finishes. Provide additional bracing and concealed attachments to building structure.
- B. Gypsum Board: 1/2-inch gypsum wallboard; ASTM C 1396.
- C. Insulation: Mineral-wool fiber blankets; with maximum flame-spread and smoke-developed ratings of 25 and 50 when tested per ASTM E 84.
- D. Polyethylene Sheet: Minimum 10 mil reinforced sheeting; achieving a passing rating when tested per NFPA 701, and a maximum flame-spread rating of 15 when tested per ASTM E 84.
- E. Walk-Off Mats: Dust-, dirt- and silica-control walk-off mats at each entrance into the enclosed construction area and each entrance through temporary partitions.
- Hardware: Provide temporary hinges, latch, and lock at doors in temporary partitions. Where doors in temporary partitions are also indicated to serve as egress, provide ADA-compliant exit device and closer.

# 2.02 EQUIPMENT

A. Fire Extinguishers: Provide portable UL rated extinguishers. Provide extinguisher types rated for potential classes of fire expected for construction work indicated.

Architect's Project No.: 563007

# **PART 3 EXECUTION**

#### 3.01 ELEVATOR AND STAIR USAGE

- A. Use of existing elevator is permitted, with the following conditions:
  - Owner shall designate one elevator for construction use. Refer to the Drawings for approved elevator, and confirm with Owner prior to start of the Work.
  - Contractor shall comply with all regulations of local authority having jurisdiction and obtain 2. written approval from building official.
  - 3. Contractor shall provide for personnel to operate elevator during construction hours. Operation by non-authorized staff is prohibited.
  - 4. Do not overload elevators.
  - Provide protective coverings over all exposed surfaces. Contractor shall be responsible for 5. restoration of all damaged surfaces.
  - 6. Elevators shall be cleaned and maintained in condition acceptable to Owner. Contractor shall provide maintenance service and inspection at Substantial Completion and shall be responsible for replacement of operating parts or finishes that are worn beyond service
  - 7. Owner reserves the right to revoke permission for elevator use if the conditions are not met.
- Use of existing stairs is permitted. If used, cover existing finishes and maintain stairs without damage. Clean and restore stairs to Owner's approval at Substantial Completion.

# 3.02 PEST CONTROL

- A. Provide pest-control services at regular intervals, performed in compliance with regulations of state regulations, and by a pest-control firm licensed in the state where the project is located. Any chemicals and pesticides used shall be approved by EPA and local authority having jurisdiction. Contractor's pest control plan shall ensure the facility is free of termites, roaches, rodents, and other pests at time of Substantial Completion.
  - Coordinate with Owner's Integrated Pest Management (IPM) plan where applicable. 1.
  - 2. Provide Ownerwith a minimum 72 hours pre-notification for pest-control treatments.

# 3.03 TEMPORARY FIRE PROTECTION

- A. Comply with International Fire Code, Chapter 33 "Fire Safety During Construction and Demolition" for preventing damage to structures under construction.
  - Comply with NFPA 241 "Standard for Safeguarding Construction, Alteration, and Demolition Operations" for additional provisions and conditions that are not covered by Chapter 33 of the International Fire Code.
- Provide a fire-prevention program, review with all personnel on site, and post fire-prevention information in clearly visible area. Coordinate fire-prevention program with local fire department.
- C. Provide clearly labeled portable fire extinguishers.
- D. Provide fire watch in compliance with OSHA requirements during and after use of all potential ignition sources, including but not limited to, welders, grinders, cutting torches, heating and electrical equipment, and lighting.
- E. Do not allow smoking in areas under construction.

# 3.04 MOISTURE CONTROL

A. Prevent the absorption of moisture and humidity by:

Architect's Project No.: 563007

- 1. Delivery and storage of such materials in fully sealed moisture-impermeable packaging.
- Provide sufficient ventilation for drying within reasonable time frame.
- Provide temporary mechanical ventilation for humidity and moisture control. Do not store or install material in the building unless ambient temperature and humidity is within manufacturer's acceptable range. Do not install wet materials, and ensure that substrates are fully dry prior to installing other materials over them.
- Provide continuous monitoring of installed materials. Remove gypsum board, wood products, and other mold-supporting products, if they become and remain wet for 48 hours. Remove and replace any materials showing visible signs of mold or mildew.

# 3.05 TEMPORARY FACILITY USAGE AND REMOVAL

- Maintenance and Usage: Keep temporary facilities clean and in well-maintained condition for the duration of the Project. Prevent misuse of or damage to facilities by construction personnel. Make repairs to temporary facilities or replace facilities as required to keep them in good operating condition and in compliance with applicable OSHA, local permitting, and other applicable regulations.
- Changeover: Coordinate changeover from temporary facilities to permanent facilities at Substantial Completion, unless an alternate arrangement for changeover has been agreed upon in writing by Owner.
  - 1 Contractor shall be responsible for repair, restoration, and cleaning of permanent facilities that are used for construction purposes after changeover.
- C. Removal: Unless otherwise indicated, temporary facilities and controls are the property of the Contractor, and shall be removed upon Architect's approval when Contractor can demonstrate that they are no longer needed.
  - Comply with construction waste management and recycling requirements for temporary facilities and materials that are not able to be reused.
  - 2. After removal of temporary facilities and controls, complete all permanent construction that was not accessible due to the presence of temporary facilities.
  - Remove materials that have become soiled or contaminated due to construction vehicle traffic, parking, temporary field offices, oil or other chemical spillage, and other temporary usage, and replace with clean material. Complete grading, landscaping, paving, and other site improvements, and repair or restore all damage to existing or previously completed site improvements.

# **END OF SECTION**

Architect's Project No.: 563007

# **SECTION 016000** PRODUCT REQUIREMENTS

#### **PART 1 GENERAL**

#### 1.01 RELATED REQUIREMENTS

- A. Section 011000 Summary: Identification of Owner-supplied products.
- Section 012500 Substitution Procedures: Substitutions made during procurement and/or construction phases.
- C. Section 014000 Quality Requirements: Product quality monitoring.

#### 1.02 DEFINITIONS

- A. Comparable Product: An unnamed product that is similar in quality and performance to named product(s).
- Basis-of-Design Product: A specific product selected by the Architect for use in the design process; based on certain performance characteristics, physical qualities or details, a specialized finish type, pattern, or color, or other indicated characteristics.

# 1.03 WARRANTIES

- A. Product warranties shall be provided in addition to and run concurrently to Contractor's general warranty/guarantee.
  - Unless otherwise indicated, all warranty terms shall start on the date of Substantial Completion.
- Manufacturer's Warranty: A standard warranty issued by the product manufacturer, covering production and material defects.
- Special Warranties: Warranties in addition to standard manufacturer's warranty, covering fabrication, installation, or specific performance items such as weathertightness
- D. Warranty Form: Warranty shall be provided on either manufacturer's standard form or on specified form. When a sample warranty form is not included in the Project Manual, the warranty shall be on mutually agreed form.

# **PART 2 PRODUCTS**

# 2.01 EXISTING PRODUCTS

- A. Do not use materials and equipment removed from existing premises unless specifically required or permitted by Contract Documents.
- Unforeseen historic items encountered remain the property of the Owner; notify Owner promptly upon discovery; protect, remove, handle, and store as directed by Owner.
- Existing materials and equipment indicated to be removed, but not to be re-used, relocated, reinstalled, delivered to the Owner, or otherwise indicated as to remain the property of the Owner, become the property of the Contractor; remove from site.

# 2.02 NEW PRODUCTS

- A. Provide new products unless specifically required or permitted by Contract Documents.
- B. See Section 014000 Quality Requirements, for additional source quality control requirements.
- C. Use of products having any of the following characteristics is not permitted:
  - Made using or containing CFC's or HCFC's.

016000 - 1 **Product Requirements** 

# ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

2. Containing lead, cadmium, or asbestos.

#### 2.03 PRODUCT OPTIONS

- A. Products Specified with a Single Named Product: Where required by Owner due to facility standards, provide the named product; no options or substitutions allowed.
- B. Products Specified by Reference Standards or by Description Only: Use any product meeting those standards or description.
- Products Specified by Naming One or More Manufacturers: Use a product of one of the manufacturers named and meeting specifications, no options or substitutions allowed.
- Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named.
- Products Specified by Naming One or More Manufacturers with a Provision for Comparable Products: Unnamed comparable product may be submitted after award of Contract. Comply with requirements in "Comparable Products" article below.

# 2.04 BASIS-OF-DESIGN PRODUCTS

- A. Where a product is specified by naming a Basis-of-Design, comply with the following:
  - Where a list of additional manufacturers is provided, provide the Basis-of-Design product or a comparable product by one of the listed manufacturers, in compliance with "Comparable Products" article below.
  - Where a list of additional manufacturers is not provided, provide the Basis-of-Design product, or submit a substitution request in compliance with Section 012500 - Substitution Procedures.
  - Basis-of-Design characteristics shall include requirements in the Specifications and on the 3. Drawings.
  - Where the Basis-of-Design lists a specific finish, manufacturers wishing to submit as a 4. Comparable Product or as a substitution shall certify that they are able to provide an exact match to the specified finish, or that they will provide a custom finish to match.

# 2.05 COMPARABLE PRODUCTS

- A. Where a product is specified with a provision for comparable products, Contractors submitting a Comparable Product shall comply with the following:
  - The submitted product shall not require changes to the Work, unless specifically approved by Architect. If changes are required, the Contractor shall resubmit the product as a substitution request, and the Contractor shall bear the cost of the changes, coordinate with other impacted contractors, and provide appropriate notations on record documents.
  - Contractor shall provide, with the submittal, a detailed breakdown comparing the submitted product to at least one of the other listed products: list specified performance qualities, test results, dimensions, finish, and other critical properties.
  - 3. Contractor shall provide warranty data indicating that submitted Comparable Product complies with indicated warranty term(s).
- B. Comparable product submittals are subject to Architect's final approval. If a proposed product is found to be unacceptable. Contractor shall revert to one of the named products.

# 2.06 COLOR/FINISH OPTIONS

A. Preselected Color/Finish: Where a specific manufacturer's premium or custom finish or color is indicated as the basis-of-design, other listed manufacturers shall certify that they can provide an exact match, or that they will provide pricing under the assumption that a custom finish or color will be required.

016000 - 2 **Product Requirements** 

Architect's Project No.: 563007

B. Color/Finish Selection: Unless specifically indicated to either be a custom color or to be selected from manufacturer's standard range, color and finish selections shall be made from manufacturer's full range of options, including premiums, metallics, wood grains, etc.

#### 2.07 MAINTENANCE MATERIALS

- A. Furnish extra materials, spare parts, tools, and software of types and in quantities specified in individual specification sections.
- B. Deliver to location designated by Owner; obtain receipt prior to final payment.

#### PART 3 EXECUTION

#### 3.01 SUBSTITUTION LIMITATIONS

A. See Section 012500 - Substitution Procedures.

#### 3.02 OWNER-SUPPLIED PRODUCTS

- A. See Section 011000 Summary for identification of Owner-supplied products.
- B. Owner's Responsibilities:
  - Arrange for and deliver Owner reviewed shop drawings, product data, and samples, to Contractor.
  - 2. Arrange and pay for product delivery to site.
  - 3. On delivery, inspect products jointly with Contractor.
  - Submit claims for transportation damage and replace damaged, defective, or deficient items.
  - 5. Arrange for manufacturers' warranties, inspections, and service.
- C. Contractor's Responsibilities:
  - 1. Review Owner reviewed shop drawings, product data, and samples.
  - Receive and unload products at site; inspect for completeness or damage jointly with Owner.
  - 3. Handle, store, install and finish products.
  - 4. Repair or replace items damaged after receipt.

# 3.03 TRANSPORTATION AND HANDLING

- A. Package products for shipment in manner to prevent damage; for equipment, package to avoid loss of factory calibration.
- B. If special precautions are required, attach instructions prominently and legibly on outside of packaging.
- C. Coordinate schedule of product delivery to designated prepared areas in order to minimize site storage time and potential damage to stored materials.
- Transport and handle products in accordance with manufacturer's instructions.
- E. Transport materials in covered trucks to prevent contamination of product and littering of surrounding areas.
- F. Promptly inspect shipments to ensure that products comply with requirements, quantities are correct, and products are undamaged.
- G. Provide equipment and personnel to handle products by methods to prevent soiling, disfigurement, or damage, and to minimize handling.
- H. Arrange for the return of packing materials, such as wood pallets, where economically feasible.

Product Requirements 016000 - 3

# ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

# 3.04 STORAGE AND PROTECTION

- A. Provide protection of stored materials and products against theft, casualty, or deterioration.
- Designate receiving/storage areas for incoming products so that they are delivered according to installation schedule and placed convenient to work area in order to minimize waste due to excessive materials handling and misapplication.
  - Structural Loading Limitations: Handle and store products and materials so as not to exceed static and dynamic load-bearing capacities of project floor and roof areas.
- Store and protect products in accordance with manufacturers' instructions.
- Store with seals and labels intact and legible.
- Arrange storage of materials and products to allow for visual inspection for the purpose of determination of quantities, amounts, and unit counts.
- Store sensitive products in weathertight, climate-controlled enclosures in an environment favorable to product.
- G. For exterior storage of fabricated products, place on sloped supports above ground.
- H. Provide off-site storage and protection when site does not permit on-site storage or protection.
- Protect products from damage or deterioration due to construction operations, weather, precipitation, humidity, temperature, sunlight and ultraviolet light, dirt, dust, and other contaminants.
- Comply with manufacturer's warranty conditions, if any.
- K. Do not store products directly on the ground.
- Cover products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of products.
- M. Prevent contact with material that may cause corrosion, discoloration, or staining.
- N. Provide equipment and personnel to store products by methods to prevent soiling, disfigurement, or damage.
- O. Arrange storage of products to permit access for inspection. Periodically inspect to verify products are undamaged and are maintained in acceptable condition.

# **END OF SECTION**

**Product Requirements** 016000 - 4

Architect's Project No.: 563007

# **SECTION 017000 EXECUTION AND CLOSEOUT REQUIREMENTS**

#### **PART 1 GENERAL**

#### 1.01 SUBMITTALS

- A. See Section 013000 Administrative Requirements, for submittal procedures.
- B. Project Record Documents: Accurately record actual locations of capped and active utilities.

#### 1.02 PROJECT CONDITIONS

- A. Ventilate enclosed areas to assist cure of materials, to dissipate humidity, and to prevent accumulation of dust, fumes, vapors, or gases.
- Dust and Silica Control: Execute work by methods to minimize raising dust and silica from construction operations. Provide positive means to prevent air-borne dust and silica from dispersing into atmosphere and over adjacent property.
  - Provide dust-proof enclosures to prevent entry of dust and silica that is generated outdoors.
  - 2. Provide dust-proof barriers between construction areas and areas continuing to be occupied by Owner.
- C. Noise Control: Provide methods, means, and facilities to minimize noise produced by construction operations.
  - At All Times: Excessively noisy tools and operations will not be tolerated inside the building at any time of day. If unavoidable, coordinate with Owner for acceptable times.
- D. Pest and Rodent Control: Provide methods, means, and facilities to prevent pests and insects from damaging the work.
- Pollution Control: Provide methods, means, and facilities to prevent contamination of soil. water, and atmosphere from discharge of noxious, toxic substances, and pollutants produced by construction operations. Comply with federal, state, and local regulations.
- Hazardous Materials: Do not use materials or products that contain hazardous substances, for permanently installed products and materials, installation materials, or for cleaning or other construction use.

#### 1.03 COORDINATION

- A. See Section 011000 for occupancy-related requirements.
- Coordinate scheduling, submittals, and work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements. with provisions for accommodating items installed later.
- C. Notify affected utility companies and comply with their requirements.
- D. Verify that utility requirements and characteristics of new operating equipment are compatible with building utilities. Coordinate work of various sections having interdependent responsibilities for installing, connecting to, and placing in service, such equipment.
- Coordinate space requirements, supports, and installation of mechanical and electrical work that are indicated diagrammatically on drawings. Follow routing indicated for pipes, ducts, and conduit, as closely as practicable; place runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
- F. In finished areas except as otherwise indicated, conceal pipes, ducts, and wiring within the construction. Coordinate locations of fixtures and outlets with finish elements.

Architect's Project No.: 563007

- G. Coordinate completion and clean-up of work of separate sections.
- H. After Owner occupancy of premises, coordinate access to site for correction of defective work and work not in accordance with Contract Documents, to minimize disruption of Owner's activities.
- After Substantial Completion, coordinate access to site for correction of defective work and work not in accordance with Contract Documents, to minimize disruption of Owner's activities.

#### **PART 2 PRODUCTS**

#### 2.01 PATCHING MATERIALS

- A. New Materials: As specified in product sections; match in-place products and work for patching and extending work.
- Type and Quality of Existing Products: Determine by inspecting and testing products where necessary, referring to in-place, approved work as a standard.
- Product Substitution: For any proposed change in materials, submit request for substitution described in Section 016000 - Product Requirements.

#### PART 3 EXECUTION

#### 3.01 EXAMINATION

- A. Verify that existing conditions and substrate surfaces are acceptable for subsequent work. Start of work means acceptance of existing conditions.
- Verify that in-place substrate is capable of structural support or attachment of new work being applied or attached.
- C. Examine and verify specific conditions described in individual specification sections.
- D. Take field measurements before confirming product orders or beginning fabrication, to minimize waste due to over-ordering or misfabrication.
- E. Verify that utility services are available, of the correct characteristics, and in the correct locations.
- Prior to Cutting: Examine existing conditions prior to commencing work, including elements subject to damage or movement during cutting and patching. After uncovering existing work, assess conditions affecting performance of work. Beginning of cutting or patching means acceptance of existing conditions.

# 3.02 PREPARATION

- A. Clean substrate surfaces prior to applying next material or substance.
- Seal cracks or openings of substrate prior to applying next material or substance.
- C. Apply manufacturer required or recommended substrate primer, sealer, or conditioner prior to applying any new material or substance in contact or bond.

# 3.03 GENERAL INSTALLATION REQUIREMENTS

- Fire Safety: Comply with provisions of 2018 International Fire Code, Chapter 33; "Fire Safety During Construction and Demolition" for preventing damage to structures under construction.
  - In addition to compliance with regulatory requirements, conduct construction operations in compliance with NFPA 241, including applicable recommendations in Appendix A.
- Install products as specified in individual sections, in accordance with manufacturer's instructions and recommendations, and so as to avoid waste due to necessity for replacement.

Architect's Project No.: 563007

- Make vertical elements plumb and horizontal elements level, unless otherwise indicated.
- Install equipment and fittings plumb and level, neatly aligned with adjacent vertical and horizontal lines, unless otherwise indicated.
- Make consistent texture on surfaces, with seamless transitions, unless otherwise indicated.
- Make neat transitions between different surfaces, maintaining texture and appearance.

# 3.04 ALTERATIONS

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
  - Verify that construction and utility arrangements are as indicated.
  - 2. Report discrepancies to Architect before disturbing existing installation.
  - Beginning of alterations work constitutes acceptance of existing conditions.
- Keep areas in which alterations are being conducted separated from other areas that are still occupied.
  - Provide, erect, and maintain temporary dustproof partitions of construction specified in Section 015000.
- Remove existing work as indicated and as required to accomplish new work.
  - Remove items indicated on drawings. 1.
  - 2. Relocate items indicated on drawings.
  - Where new surface finishes are to be applied to existing work, perform removals, patch, and prepare existing surfaces as required to receive new finish; prepare substrate per manufacturer's requirements for successful application of new finish.
  - 4. Where new surface finishes are not specified or indicated, patch holes and damaged surfaces to match adjacent finished surfaces.
- Services (Including but not limited to HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications): Remove, relocate, and extend existing systems to accommodate new construction.
  - 1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components; if necessary, modify installation to allow access or provide access panel.
  - Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
    - Disable existing systems only to make switchovers and connections; minimize duration of outages.
    - b. See Section 011000 for other limitations on outages and required notifications.
    - Provide temporary connections as required to maintain existing systems in service.
  - 3. Remove abandoned pipe, ducts, conduits, and equipment, including those above accessible ceilings; remove back to source of supply where possible, otherwise cap stub and tag with identification; patch holes left by removal using materials specified for new construction.
- Protect existing work to remain.
  - 1. Prevent movement of structure; provide shoring and bracing if necessary.
  - 2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
  - Repair adjacent construction and finishes damaged during removal work.
- F. Adapt existing work to fit new work: Make as neat and smooth transition as possible.

# ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

Architect's Project No.: 563007

- When existing finished surfaces are cut so that a smooth transition with new work is not possible, terminate existing surface along a straight line at a natural line of division and make recommendation to Architect.
- 2. Where removal of partitions or walls results in adjacent spaces becoming one, rework floors, walls, and ceilings to a smooth plane without breaks, steps, or bulkheads.
- G. Patching: Where the existing surface is not indicated to be refinished, patch to match the surface finish that existed prior to cutting. Where the surface is indicated to be refinished, patch so that the substrate is ready for the new finish.
- H. Refinish existing surfaces as indicated:
  - Where rooms or spaces are indicated to be refinished, refinish all visible existing surfaces to remain to the specified condition for each material, with a neat transition to adjacent finishes
- I. Clean existing systems and equipment in all spaces impacted by alteration work.
- J. Remove demolition debris and abandoned items from alterations areas and dispose of off-site; do not burn or bury.
- K. Do not begin new construction in alterations areas before demolition is complete.

#### 3.05 CUTTING AND PATCHING

- A. Perform cutting and patching to:
  - 1. Complete the work.
  - 2. Fit products together to integrate with other work.
  - 3. Provide openings for penetration of mechanical, electrical, and other services.
  - 4. Match work that has been cut to adjacent work.
  - 5. Repair areas adjacent to cuts to required condition.
  - 6. Repair new work damaged by subsequent work.
  - 7. Remove samples of installed work for testing when requested.
  - 8. Remove and replace defective and non-complying work.
- B. Execute work by methods that avoid damage to other work and that will provide appropriate surfaces to receive patching and finishing. In existing work, minimize damage and restore to specified condition.
- C. Employ skilled and experienced installer to perform cutting and patching.
- D. Restore work with new products in accordance with requirements of Contract Documents.
- E. Fit work to pipes, sleeves, ducts, conduit, and other penetrations through surfaces.
- F. At penetrations of fire rated walls, partitions, ceiling, or floor construction, completely seal voids with fire rated material to maintain existing fire ratings, to full thickness of the penetrated element.
- G. Patching:
  - Finish patched surfaces to match finish that existed prior to patching. On continuous surfaces, refinish to nearest intersection or natural break. For an assembly, refinish entire unit.
  - 2. Match color, texture, and appearance.
  - Repair patched surfaces that are damaged, lifted, discolored, or showing other imperfections due to patching work. If defects are due to condition of substrate, repair substrate prior to repairing finish.

Architect's Project No.: 563007

# 3.06 PROGRESS CLEANING

- A. Maintain areas free of waste materials, debris, and rubbish. Maintain site in a clean and orderly condition.
- Remove debris and rubbish from pipe chases, plenums, attics, crawl spaces, and other closed B. or remote spaces, prior to enclosing the space.
- C. Broom and vacuum clean interior areas prior to start of surface finishing, and continue cleaning to eliminate dust and silica.
- D. Collect and remove waste materials, debris, and trash/rubbish from site periodically and dispose off-site; do not burn or bury.

# 3.07 PROTECTION OF INSTALLED WORK

- A. Protect installed work from damage by construction operations.
- B. Provide special protection where specified in individual specification sections.
- C. Provide temporary and removable protection for installed products. Control activity in immediate work area to prevent damage.
- D. Provide protective coverings at walls, projections, jambs, sills, and soffits of openings.
- Protect finished floors, stairs, and other surfaces from traffic, dirt, wear, damage, or movement of heavy objects, by protecting with durable sheet materials.
- Protect work from spilled liquids. If work is exposed to spilled liquids, immediately remove protective coverings, dry out work, and replace protective coverings.
- Prohibit traffic or storage upon waterproofed or roofed surfaces. If traffic or activity is necessary, obtain recommendations for protection from waterproofing or roofing material manufacturer.
- H. Prohibit traffic from landscaped areas.
- Remove protective coverings when no longer needed; reuse or recycle coverings if possible. I.

# 3.08 DEMONSTRATION AND INSTRUCTION

A. See Section 017900 - Demonstration and Training.

# 3.09 FINAL CLEANING

- A. Execute final cleaning prior to Substantial Completion.
  - Clean areas to be occupied by Owner prior to final completion before Owner occupancy.
- B. Use cleaning materials that are nonhazardous.
- Clean glass, surfaces exposed to view; remove temporary labels, stains and foreign substances, polish transparent and glossy surfaces, vacuum carpeted and soft surfaces.
- D. Remove all labels that are not permanent. Do not paint or otherwise cover fire test labels or nameplates on mechanical and electrical equipment.
- Clean equipment and fixtures to a sanitary condition with cleaning materials appropriate to the surface and material being cleaned.
- F. Replace filters of operating equipment.
- G. Clean site; sweep paved areas, rake clean landscaped surfaces.
- H. Remove waste, surplus materials, trash/rubbish, and construction facilities from the site; dispose of in legal manner; do not burn or bury.

Architect's Project No.: 563007

# 3.10 CLOSEOUT PROCEDURES

- A. Prior to Substantial Completion, complete the following:
  - Provide all inspections required by local authorities having jurisdiction to obtain Certificate of Occupancy, and provide written certification of completion of Special Inspections.
  - Provide preventive maintenance services for all equipment used prior to Substantial 2. Completion, and provide initial maintenance servicing for all products and equipment that will be subject to ongoing maintenance/service contracts.
  - Provide final cleaning of all products, materials, and equipment, and provide touch up and restoration of exposed materials and finishes.
  - 4. Provide fresh batteries in all battery-powered products and equipment.
  - Provide demonstration and training for Owner's personnel on all required systems and 5. equipment.
  - 6. Coordinate a walkthrough with the Owner and the local fire department and other emergency services.
  - To the maximum extent possible, remove temporary facilities and controls, construction 7. equipment and tools, and similar items that are not part of the finished Work.
  - Coordinate changeover with the Owner of permanent utilities, insurance requirements, 8. and building's permanent keying and lock system.
- Notify Architect when work is considered ready for Architect's Substantial Completion inspection.
- Submit written certification containing Contractor's Correction Punch List, that Contract Documents have been reviewed, work has been inspected, and that work is complete in accordance with Contract Documents and ready for Architect's Substantial Completion inspection.
- D. Owner will occupy the building after Substantial Completion as specified in Section 011000.
- E. Conduct Substantial Completion inspection and create Final Correction Punch List containing Architect's and Contractor's comprehensive list of items identified to be completed or corrected and submit to Architect.
- F. Correct items of work listed in Final Correction Punch List and comply with requirements for access to Owner-occupied areas.
- G. Notify Architect when work is considered finally complete and ready for Architect's Substantial Completion final inspection.
- Prior to final completion, complete the following:
  - Complete items of work determined by Architect listed in executed Certificate of Substantial Completion.
  - 2. Provide final pest and rodent control treatments and inspections.
  - Remove any remaining construction equipment, tools, and materials; perform additional cleaning required due to construction activities following Substantial Completion, and leave the site prepared for Owner occupancy.
  - Submit final demonstration and training materials and videos, as built/record documents, 4. operation and maintenance binders, and warranty binders.
  - Submit final application for payment. 5.

# 3.11 MAINTENANCE

- A. Provide service and maintenance of components indicated in specification sections.
  - Contractor's maintenance responsibility shall be through Substantial Completion, unless a longer term is required by individual specification section.

Architect's Project No.: 563007

B. Maintenance service shall not be assigned or transferred to any agent or third party without prior written consent of the Owner.

**END OF SECTION** 

Architect's Project No.: 563007

#### **SECTION 017800 CLOSEOUT SUBMITTALS**

#### **PART 1 GENERAL**

#### 1.01 SECTION INCLUDES

- Project record documents.
- Operation and maintenance data.
- C. Warranties and bonds.

#### 1.02 RELATED REQUIREMENTS

- A. Section 013000 Administrative Requirements: Submittal procedures, shop drawings, product data, and samples.
- B. Individual Product Sections: Specific requirements for operation and maintenance data.
- C. Individual Product Sections: Warranties required for specific products or Work.

#### 1.03 SUBMITTALS

- A. Project Record Documents: Submit documents to Architect within 15 days after the date of Substantial Completion.
- B. Operation and Maintenance Data:
  - For equipment, or component parts of equipment put into service during construction and operated by Owner, submit completed documents within 15 days after acceptance.
  - Submit one PDF draft copy of completed documents within 15 days after the Closeout Conference. This copy will be reviewed and returned, with Architect comments. Revise content of all document sets as required prior to final submission.
  - After revisions are complete, submit one bound hard copy and PDF electronic file of revised final documents in final form within 15 days after Substantial Completion.

#### Warranties and Bonds:

- For equipment or component parts of equipment put into service during construction with Owner's permission, submit documents within 15 days after acceptance.
- Make other submittals within 15 days after Date of Substantial Completion, prior to final 2. Application for Payment.
- 3. For items of Work for which acceptance is delayed beyond Date of Substantial Completion, submit within 15 days after acceptance, listing the date of acceptance as the beginning of the warranty period.

#### PART 2 PRODUCTS - NOT USED

#### PART 3 EXECUTION

#### 3.01 PROJECT RECORD DOCUMENTS

- A. Maintain on site one set of the following record documents; record actual revisions to the Work:
  - 1. Drawings.
  - 2. Addenda.
  - Change Orders and other modifications to the Contract.
  - Miscellaneous record submittals.
- Ensure entries are complete and accurate, enabling future reference by Owner.

Architect's Project No.: 563007

- Include revised Drawings reissued during Bidding and Construction.
- Store record documents separate from documents used for construction.
  - Keep record documents in a location accessible to Architect for periodic review and reference.
  - 2. Maintain in legible condition. If record document set becomes damaged or excessively dirty, transfer comments to clean set prior to submittal to Architect.
- Record information concurrent with construction progress.
- Record Drawings: Legibly mark each item to record actual construction including:
  - Measured depths of foundations in relation to finish first floor datum.
  - Measured horizontal and vertical locations of underground utilities and appurtenances, referenced to permanent surface improvements.
  - Measured locations of internal utilities and appurtenances concealed in construction, 3. referenced to visible and accessible features of the Work.
  - 4. Field changes of dimension and detail.
  - Details not on original Contract drawings. 5.
- Miscellaneous Record Submittals: Where other specification sections require completion certifications, or closeout or record submittals, submit in a single binder organized by specification section.

#### 3.02 ASSEMBLY OF RECORD DOCUMENTS

- Submittal for Architect's Review:
  - Submit PDF scanned copy of marked up prints.
  - Architect shall review and provide comment on completeness
- Submittal for Distribution to Owner:
  - After Architect has approved for content and completeness, submit PDF scanned copy of final marked up prints, and submit hard copy originals.
  - Submit full set of Drawings, regardless of whether any modification or markings are on 2. each sheet.

#### 3.03 OPERATION AND MAINTENANCE DATA

- A. Product Data: Mark each sheet to clearly identify specific products and component parts, and data applicable to installation. Delete inapplicable information.
- Drawings: Supplement product data to illustrate relations of component parts of equipment and systems, to show control and flow diagrams. Do not use Project Record Documents as maintenance drawings.
- Typed Text: As required to supplement product data. Provide logical sequence of instructions for each procedure, incorporating manufacturer's instructions.

#### 3.04 OPERATION AND MAINTENANCE DATA FOR MATERIALS AND FINISHES

- A. For Each Product, Applied Material, and Finish:
  - 1. Product data, with catalog number, size, composition, and color and texture designations.
  - Information for re-ordering custom manufactured products.
- B. Instructions for Care and Maintenance: Manufacturer's recommendations for cleaning agents and methods, precautions against detrimental cleaning agents and methods, and recommended schedule for cleaning and maintenance.
- Moisture protection and weather-exposed products: Include product data listing applicable reference standards, chemical composition, and details of installation. Provide

Architect's Project No.: 563007

recommendations for inspections, maintenance, and repair.

- D. Additional information as specified in individual product specification sections.
- E. Where additional instructions are required, beyond the manufacturer's standard printed instructions, have instructions prepared by personnel experienced in the operation and maintenance of the specific products.

#### 3.05 OPERATION AND MAINTENANCE DATA FOR EQUIPMENT AND SYSTEMS

- For Each Item of Equipment and Each System:
  - Description of unit or system, and component parts.
  - 2. Identify function, normal operating characteristics, and limiting conditions.
  - 3. Include performance curves, with engineering data and tests.
  - Complete nomenclature and model number of replaceable parts.
- Where additional instructions are required, beyond the manufacturer's standard printed instructions, have instructions prepared by personnel experienced in the operation and maintenance of the specific products.
- C. Panelboard Circuit Directories: Provide electrical service characteristics, controls, and communications; typed.
- D. Include color coded wiring diagrams as installed.
- E. Operating Procedures: Include start-up, break-in, and routine normal operating instructions and sequences. Include regulation, control, stopping, shut-down, and emergency instructions. Include summer, winter, and any special operating instructions.
- Maintenance Requirements: Include routine procedures and guide for preventative maintenance and troubleshooting; disassembly, repair, and reassembly instructions; and alignment, adjusting, balancing, and checking instructions.
- G. Provide servicing and lubrication schedule, and list of lubricants required.
- Include manufacturer's printed operation and maintenance instructions.
- Include sequence of operation by controls manufacturer.
- Provide original manufacturer's parts list, illustrations, assembly drawings, and diagrams required for maintenance.
- K. Provide control diagrams by controls manufacturer as installed.
- Provide Contractor's coordination drawings, with color coded piping diagrams as installed.
- M. Provide charts of valve tag numbers, with location and function of each valve, keyed to flow and control diagrams.
- N. Provide list of original manufacturer's spare parts, current prices, and recommended quantities to be maintained in storage.
- Include test and balancing reports.
- P. Additional Requirements: As specified in individual product specification sections.

#### 3.06 ASSEMBLY OF OPERATION AND MAINTENANCE MANUALS

- A. Assemble operation and maintenance data into durable manuals for Owner's personnel use, with data arranged in the same sequence as, and identified by, the specification sections.
- Where systems involve more than one specification section, provide separate tabbed divider for each system.
- C. Binders: Commercial quality, 8-1/2 by 11 inch three D side ring binders with durable plastic covers; 2 inch maximum ring size. When multiple binders are used, correlate data into related

Architect's Project No.: 563007

- consistent groupings.
- D. Cover: Identify each binder on front and spine with typed or printed title OPERATION AND MAINTENANCE INSTRUCTIONS; identify title of Project; identify subject matter of contents.
- E. Project Directory: Title and address of Project; names, addresses, and telephone numbers of Architect, Consultants, Contractor and subcontractors, with names of responsible parties.
- Tables of Contents: List every item separated by a divider, using the same identification as on the divider tab; where multiple volumes are required, include all volumes Tables of Contents in each volume, with the current volume clearly identified.
- G. Dividers: Provide tabbed dividers for each separate product and system; identify the contents on the divider tab; immediately following the divider tab include a description of product and major component parts of equipment.
- H. Text: Manufacturer's printed data, or typewritten data on 20 pound paper.
- Drawings: Provide with reinforced punched binder tab. Bind in with text; fold larger drawings to size of text pages.
- Arrangement of Contents: Organize each volume in parts as follows:
  - Project Directory.
  - 2. Table of Contents, of all volumes, and of this volume.
  - Operation and Maintenance Data: Arranged by system, then by product category.
    - Source data.
    - b. Product data.
    - Operation and maintenance data. C.
    - Field quality control data.
    - Photocopies of warranties and bonds.

#### 3.07 WARRANTIES AND BONDS

- A. Obtain warranties and bonds, executed in duplicate by responsible Subcontractors, suppliers, and manufacturers, within 15 days after completion of the applicable item of work. Except for items put into use with Owner's permission, leave date of beginning of time of warranty until Date of Substantial completion is determined.
- B. Verify that documents are in proper form, contain full information, and are notarized.
- C. Retain warranties and bonds until time specified for submittal.
- D. Manual: Bind in commercial quality 8-1/2 by 11 inch three D side ring binders with durable plastic covers.
- Cover: Identify each binder on front and spine with typed or printed title WARRANTIES AND BONDS, with title of Project; name, address and telephone number of Contractor and equipment supplier; and name of responsible company principal.
- Table of Contents: Neatly typed, in the sequence of the Table of Contents of the Project Manual, with each item identified with the number and title of the specification section in which specified, and the name of product or work item.
- G. Separate each warranty or bond with index tab sheets keyed to the Table of Contents listing. Provide full information, using separate typed sheets as necessary. List Subcontractor, supplier, and manufacturer, with name, address, and telephone number of responsible principal.

H. Provide photocopy of each warranty in operation and maintenance manuals; locate each warranty with applicable O&M data for product or equipment.

**END OF SECTION** 

Architect's Project No.: 563007

#### **SECTION 017900 DEMONSTRATION AND TRAINING**

#### **PART 1 GENERAL**

#### 1.01 SUMMARY

- Demonstration of products, systems, equipment, and other items where indicated in specific specification sections.
- Training of Owner personnel in operation and maintenance of products, systems, equipment, and as otherwise indicated in specific specification sections.

#### 1.02 SUBMITTALS

- See Section 013000 Administrative Requirements, for submittal procedures.
- Draft Training Plans: Owner will designate personnel to be trained; tailor training to needs and skill-level of attendees.
  - 1. Submit not less than four weeks prior to start of training.
  - 2. Revise and resubmit until acceptable.
  - 3. Provide an overall schedule showing all training sessions.
  - Include at least the following for each training session:
    - Identification, date, time, and duration.
    - b. Description of products and/or systems to be covered.
    - Name of firm and person conducting training; include qualifications. C.
    - d. Intended audience, such as job description.
    - e. Objectives of training and suggested methods of ensuring adequate training.
    - Methods to be used, such as classroom lecture, live demonstrations, hands-on, etc. f.
    - g. Media to be used, such as slides, hand-outs, etc.
    - Training equipment required, such as projector, projection screen, etc., to be provided by Contractor.
- C. Training Manuals: Provide training manual for each attendee.
  - Include applicable portion of O&M manuals.
  - 2. Include copies of all hand-outs, slides, overheads, video presentations, etc., that are not included in O&M manuals.
  - Provide one extra copy of each training manual to be included with operation and maintenance data.

#### Training Reports:

- Identification of each training session, date, time, and duration. 1.
- Sign-in sheet showing names and job titles of attendees. 2.
- 3. List of attendee questions and written answers given, including copies of and references to supporting documentation required for clarification; include answers to questions that could not be answered in original training session.
- E. Video Recordings: Submit digital video recording of each demonstration and training session for Owner's subsequent use.
  - 1. Format: DVD Disc.
  - 2. Label each disc and container with session identification and date.
  - Where available, provide manufacturer's pre-produced training videos in conjunction with live demonstration and training video.

Architect's Project No.: 563007

#### 1.03 QUALITY ASSURANCE

- A. Instructor Qualifications: Familiar with design, operation, maintenance and troubleshooting of the relevant products and systems.
  - 1. Instructor shall be certified by the manufacturer or fabricator of system.
  - Where a single person is not familiar with all aspects, provide specialists with necessary qualifications.

#### PART 2 PRODUCTS - NOT USED

#### **PART 3 EXECUTION**

#### 3.01 DEMONSTRATION - GENERAL

- A. Demonstrations conducted during system start-up do not qualify as demonstrations for the purposes of this section, unless approved in advance by Owner.
- Demonstrations conducted during Functional Testing need not be repeated unless Owner personnel training is specified.
- Demonstration may be combined with Owner personnel training if applicable, and if acceptable to Owner.
- D. Operating Equipment and Systems: Demonstrate operation in all modes, including start-up, shut-down, seasonal changeover, emergency conditions, and troubleshooting, and maintenance procedures, including scheduled and preventive maintenance.
  - Complete demonstrations within two weeks after the date of Substantial Completion.
  - For equipment or systems requiring seasonal operation, perform demonstration for other 2. season within six months.
- E. Non-Operating Products: Demonstrate cleaning, scheduled and preventive maintenance, and repair procedures.
  - 1. Complete demonstrations within two weeks after the date of Substantial Completion.

#### 3.02 TRAINING - GENERAL

- A. Conduct training on-site, utilizing installed products and equipment, unless otherwise indicated.
- B. Provide training in minimum two hour segments.
- C. Training schedule will be subject to availability of Owner's personnel to be trained; re-schedule training sessions as required by Owner; once schedule has been approved by Owner failure to conduct sessions according to schedule will be cause for Owner to charge Contractor for personnel "show-up" time.
- D. Review of Facility Policy on Operation and Maintenance Data: During training discuss:
  - Typical contents and organization of all manuals, including explanatory information, system narratives, and product specific information.
  - Typical uses of the O&M manuals. 2.
- E. Product- and System-Specific Training:
  - Review the applicable O&M manuals.
  - For systems, provide an overview of system operation, design parameters and 2. constraints, and operational strategies.
  - Review instructions for proper operation in all modes, including start-up, shut-down, seasonal changeover and emergency procedures, and for maintenance, including preventative maintenance.

Architect's Project No.: 563007

- 4. Discuss cleaning products and procedures, including recommended cleaning products and products that are detrimental to equipment operation or finishes.
- 5. Provide hands-on training on all operational modes possible and preventive maintenance.
- 6. Emphasize safe and proper operating requirements; discuss relevant health and safety issues, warning or error indications, and emergency procedures and shutdown.
- 7. Discuss common troubleshooting problems and solutions. Include minor adjustments for resolving noise, vibration, and improving system efficiency.
- 8. Discuss any peculiarities of equipment installation or operation.
- 9. Discuss warranties and guarantees, including procedures necessary to avoid voiding coverage. Include discussion of continuing maintenance agreements and procedures.
- 10. Review recommended tools and spare parts inventory suggestions of manufacturers.
- 11. Review spare parts and tools required to be furnished by Contractor.
- 12. Review spare parts suppliers and sources and procurement procedures.
- F. Be prepared to answer questions raised by training attendees; if unable to answer during training session, provide written response within three days.

#### **END OF SECTION**

Architect's Project No.: 563007

#### **SECTION 018119** INDOOR AIR QUALITY REQUIREMENTS

#### **PART 1 GENERAL**

#### 1.01 SUMMARY

- A. Provide Indoor Air Quality (IAQ) Management Plan to remain in force during the construction period.
- Chapter 3 of the Sheet Metal and Air Conditioning National Contractors' Association (SMACNA) IAQ Guideline for Occupied Buildings Under Construction, 2nd Edition 2007, available from SMACNA (703-803-2980 or www.smacna.org).

#### 1.02 SUBMITTAL

A. Construction Indoor Air Quality Management Plan (CIAQM Plan).

#### PART 2 OBJECTIVES DURING CONSTRUCTION

#### 2.01 PROTECTION

- Store all materials and equipment in a protected area (inside warehouse or storage trailer). Protect materials and equipment that are too large or heavy to store in a trailer from water and dirt/dust/debris.
  - OPTION: When stored outside, provide two layers of minimum 8-mil poly on the ground and elevate equipment or material a minimum of 4 inches to allow water to run off. Secure top and sides with two layers of 8-mil poly to prevent water penetration and dust/dirt accumulation.
- Protect HVAC equipment from dust and odors. Do not store equipment in areas near painting, pressure washing, or excavation. Do not operate equipment during cutting or grinding of masonry or concrete.
  - Replace all existing filtration media immediately prior to Substantial Completion.
    - Filtration media installed in air-handling units shall have a Minimum Efficiency Reporting Value (MERV) of 8.

#### 2.02 SOURCE CONTROL

- A. Minimize IAQ contaminants introduced by construction materials.
- B. Store waste construction materials a minimum of 30 feet away from the building.
- C. Do not smoke within 30 feet of the exterior building perimeter.

#### 2.03 PATHWAY INTERRUPTION

- A. Provide barriers to contain construction areas to allow a portion of the building to be cleaned and then operate the HVAC system in that cleaned area. Acceptable barriers include dust curtains and temporary walls.
  - Protect areas of the building in which HVAC is operational by physical barriers from areas of the building not acceptable for operation of the HVAC system.
- Maintain areas within 30 feet of outdoor air intakes free of dust, dirt, debris, and volatile materials while the HVAC system is in operation.

#### 2.04 HOUSEKEEPING

A. As dust accumulates at the Site, it can become airborne when disturbed by nearby activity. Similarly, spills or excess applications of products containing solvents will increase odors at the

Architect's Project No.: 563007

Site. Leaving the Site wet or damp for more than a day could result in the growth of mold and bacteria. Therefore, Site cleanup and maintenance is important to maintaining good IAQ during construction.

- B. Perform the following to control contaminants at the Site:
  - Suppress dust with wetting agents or sweeping compounds
  - Provide an efficient dust collection method (e.g. a damp rag, wet mop, or vacuum 2. equipped with a high efficiency particulate arrester (HEPA) filter or wet scrubber).
  - Remove spills or excess applications of solvent-containing products immediately. Provide 3. low-VOC emitting spot removers and cleaning agents near occupied areas.
  - Remove accumulated water and keep work areas as dry as possible, including the use of 4. dehumidification, if necessary.
  - Vacuum with HEPA filtered vacuum cleaners to prevent settled dust from becoming 5. airborne again.
  - 6. Protect porous materials from exposure to moisture. Replace items that remain damp for more than four hours.

#### **END OF SECTION**

Architect's Project No.: 563007

#### **SECTION 024100 DEMOLITION**

#### **PART 1 GENERAL**

#### 1.01 SUBMITTALS

- A. See Section 013000 Administrative Requirements, for submittal procedures.
- Site Plan: Showing:
  - Areas for temporary construction and field offices.
- Project Record Documents: Accurately record actual locations of capped and active utilities and subsurface construction.

#### PART 2 PRODUCTS -- NOT USED

#### PART 3 EXECUTION

#### 3.01 GENERAL PROCEDURES AND PROJECT CONDITIONS

- A. All demolition work shall be considered unclassified. Barring discovery of hazardous materials or undocumented structural components, where elements are indicated to be demolished, the bid price shall be for complete demolition of the element, regardless of the individual component makeup of that element.
- Comply with applicable codes and regulations for demolition operations and safety of adjacent structures and the public.
  - 1. Obtain required permits.
  - Fire Safety: Comply with applicable requirements of the International Fire Code: Chapter 2. 33. and with NFPA 241.
    - Use of explosives is not permitted. a.
    - Hot Work: Remove all combustibles from areas where hot work is required, including use of cutting torches, welding, or heating equipment. Maintain fire watch for entire duration of hot work and for a minimum 30 minutes after completion of hot work.
      - Keep portable fire extinguishers within 30 feet of locations where hot work is being performed for entire duration.
    - Maintain egress routes and emergency access routes at all times; do not allow C. demolished materials to accumulate and block routes.
    - Remove combustible demolished materials from the building by the end of each work day. Temporarily store combustible materials in noncombustible containers with selfclosing lids until they can be removed from the building.
    - Do not burn demolished material on site.
  - Take precautions to prevent catastrophic or uncontrolled collapse of structures to be 3. removed; do not allow worker or public access within range of potential collapse of unstable structures.
  - 4. Provide, erect, and maintain temporary barriers and security devices.
  - Conduct operations to minimize effects on and interference with adjacent structures and 5. occupants.
  - Do not close or obstruct roadways or sidewalks without permit. 6.
  - Conduct operations to minimize obstruction of public and private entrances and exits; do 7. not obstruct required exits at any time; protect persons using entrances and exits from removal operations.

Demolition 024100 - 1

Architect's Project No.: 563007

- 8. Obtain written permission from owners of adjacent properties when demolition equipment will traverse, infringe upon or limit access to their property.
- C. Do not begin removal until receipt of notification to proceed from Owner.
- Do not begin removal until built elements to be salvaged or relocated have been removed.
- E. Protect existing structures and other elements that are not to be removed.
  - Provide bracing and shoring.
  - 2. Prevent movement or settlement of adjacent structures.
  - 3. Stop work immediately if adjacent structures appear to be in danger.

#### 3.02 EXISTING UTILITIES

- A. Coordinate work with utility companies; notify before starting work and comply with their requirements; obtain required permits.
- B. Protect existing utilities to remain from damage.
- C. Do not disrupt public utilities without permit from authority having jurisdiction.
- D. Do not close, shut off, or disrupt existing life safety systems that are in use without at least 7 days prior written notification to Owner.
- E. Do not close, shut off, or disrupt existing utility branches or take-offs that are in use without at least 3 days prior written notification to Owner.
- F. Locate and mark utilities to remain; mark using highly visible tags or flags, with identification of utility type; protect from damage due to subsequent construction, using substantial barricades if necessary.
- G. Remove exposed piping, valves, meters, equipment, supports, and foundations of disconnected and abandoned utilities.

#### 3.03 SELECTIVE DEMOLITION FOR ALTERATIONS

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
  - 1. Verify that construction and utility arrangements are as indicated.
  - 2. Report discrepancies to Architect before disturbing existing installation.
  - 3. Beginning of demolition work constitutes acceptance of existing conditions that would be apparent upon examination prior to starting demolition.
- B. Separate areas in which demolition is being conducted from other areas that are still occupied.
  - 1. Provide, erect, and maintain temporary dustproof partitions of construction specified in Section 015000 in locations indicated on drawings.
- C. Maintain weatherproof exterior building enclosure except for interruptions required for replacement or modifications; take care to prevent water and humidity damage.
- D. Remove existing work as indicated and as required to accomplish new work.
  - 1. Remove items indicated on drawings.
- E. Services (Including but not limited to HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications): Remove existing systems and equipment as indicated.
  - 1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components.
  - 2. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
  - 3. Verify that abandoned services serve only abandoned facilities before removal.

Demolition 024100 - 2

- 4. Remove abandoned pipe, ducts, conduits, and equipment, including those above accessible ceilings; remove back to source of supply where possible, otherwise cap stub and tag with identification.
- F. Floor Finishes: After removal of existing floor finishes including backings, underlayments, and thick set mortar beds, remove all residual adhesives and glue. Provide grinding, sanding, or shot-blasting of existing concrete floor slab to achieve the proper surface to receive new indicated floor finish. Coordinate slab surface preparations required for each new indicated floor finish with appropriate subcontractor.
- G. Existing Surfaces to Receive Finishes: Remove miscellaneous hangers, exposed nails not serving as fasteners, and similar protrusions; remove adhesive residue and tape; fill anchorage holes; and otherwise patch and restore surface to be a uniform substrate suitable for applied finishes.
- H. Protect existing work to remain.
  - 1. Prevent movement of structure; provide shoring and bracing if necessary.
  - 2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
  - 3. Repair adjacent construction and finishes damaged during removal work.
  - 4. Patch as specified for patching new work.

#### 3.04 DEBRIS AND WASTE REMOVAL

- A. Remove debris, junk, and trash from site.
- B. Leave site in clean condition, ready for subsequent work.
- C. Clean up spillage and wind-blown debris from public and private lands.

#### **END OF SECTION**

Demolition 024100 - 3

Architect's Project No.: 563007

#### SECTION 055000 METAL FABRICATIONS

#### **PART 1 GENERAL**

#### 1.01 SUBMITTALS

- A. See Section 013000 Administrative Requirements, for submittal procedures.
- B. Product Data: Provide product data for factory fabricated products and accessory materials, including the following:
- C. Shop Drawings: Indicate profiles, sizes, connection attachments, reinforcing, anchorage, size and type of fasteners, and accessories. Include erection drawings, elevations, and details where applicable.
- D. Welders' Qualification Statement: Welders' certificates in accordance with AWS B2.1/B2.1M and dated no more than 12 months before start of scheduled welding work.

#### 1.02 QUALITY ASSURANCE

A. Welder Qualifications: Welding processes and welding operators qualified in accordance with AWS D1.1/D1.1M and AWS D1.2/D1.2M and dated no more than 12 months before start of scheduled welding work.

#### **PART 2 PRODUCTS**

#### 2.01 MATERIALS - STEEL

- A. Steel Sections: ASTM A36/A36M.
- B. Steel Tubing: ASTM A501/A501M hot-formed structural tubing.
- C. Plates: ASTM A283/A283M.
- D. Pipe: ASTM A53/A53M, Grade B Schedule 40, black finish.
- E. Mechanical Fasteners: Same material as or compatible with materials being fastened; type consistent with design and specified quality level.
  - Provide stainless steel fasteners for all exterior construction and for fastening aluminum and stainless steel fabrications.
  - 2. Provide stainless steel fasteners at areas subject to moisture or steam, including mechanical rooms, janitor/custodial rooms with floor sinks, and similar spaces.
  - Provide zinc-plated fasteners for interior construction except where stainless steel is indicated.
- F. Bolts, Nuts, and Washers: ASTM A307, Grade A, plain.
- G. Shop and Touch-Up Primer: MPI # 79/SSPC-Paint 15, universal shop primer; complying with VOC limitations of authorities having jurisdiction.
- H. Grout: ASTM C1107, non-shrink construction type grout.

#### 2.02 FABRICATION

- A. Fit and shop assemble items in largest practical sections, for delivery to site.
- Fabricate items with joints tightly fitted and secured.
- C. Grind exposed joints flush and smooth with adjacent finish surface. Make exposed joints butt tight, flush, and hairline. Ease exposed edges to small uniform radius.

Metal Fabrications 055000 - 1

Architect's Project No.: 563007

D. Supply components required for anchorage of fabrications. Fabricate anchors and related components of same material and finish as fabrication, except where specifically noted otherwise.

#### 2.03 FABRICATED ITEMS

A. Plates and Tubes and Other Miscellaneous Steel Shapes Not Attached to Structural Framing: As indicated on Drawings.

#### 2.04 FINISHES - STEEL

- A. Prime paint steel items.
- B. Prepare interior items to be primed in accordance with SSPC-SP3 Power Tool Cleaning.
- C. Clean surfaces of rust, scale, grease, and foreign matter prior to finishing.
- D. Prime Painting: One coat.

#### 2.05 FABRICATION TOLERANCES

- A. Squareness: 1/8 inch maximum difference in diagonal measurements.
- B. Maximum Offset Between Faces: 1/16 inch.
- C. Maximum Misalignment of Adjacent Members: 1/16 inch.
- D. Maximum Bow: 1/8 inch in 48 inches.
- E. Maximum Deviation From Plane: 1/16 inch in 48 inches.

#### **PART 3 EXECUTION**

#### 3.01 EXAMINATION

A. Verify that field conditions are acceptable and are ready to receive work.

#### 3.02 PREPARATION

- A. Clean and strip primed steel items to bare metal where site welding is required.
- B. Supply setting templates to the appropriate entities for steel items required to be cast into concrete or embedded in masonry.

#### 3.03 INSTALLATION

- A. Install items plumb and level, accurately fitted, free from distortion or defects.
- B. Provide for erection loads, and for sufficient temporary bracing to maintain true alignment until completion of erection and installation of permanent attachments.
- C. Perform field welding in accordance with AWS D1.1/D1.1M.
- D. Obtain approval prior to site cutting or making adjustments not scheduled.
- E. After erection, prime welds, abrasions, and surfaces not shop primed, except surfaces to be in contact with concrete.

#### 3.04 TOLERANCES

- A. Maximum Variation From Plumb: 1/4 inch per story, non-cumulative.
- B. Maximum Offset From True Alignment: 1/4 inch.

Metal Fabrications 055000 - 2

Architect's Project No.: 563007

C. Maximum Out-of-Position: 1/4 inch.

**END OF SECTION** 

Metal Fabrications 055000 - 3

Architect's Project No.: 563007

#### **SECTION 061000** ROUGH CARPENTRY

#### **PART 1 GENERAL**

#### 1.01 REFERENCE STANDARDS

- A. ASTM C557 Standard Specification for Adhesives for Fastening Gypsum Wallboard to Wood Framing 2003 (Reapproved 2017).
- B. ASTM D3498 Standard Specification for Adhesives for Field-Gluing Wood Structural Panels (Plywood or Oriented Strand Board) to Wood Based Floor System Framing 2019a.
- C. ASTM E84 Standard Test Method for Surface Burning Characteristics of Building Materials 2022.
- D. AWC (WFCM) Wood Frame Construction Manual for One- and Two-Family Dwellings 2018.
- E. AWPA U1 Use Category System: User Specification for Treated Wood 2022.
- F. PS 2 Performance Standard for Wood Structural Panels 2018.
- G. PS 20 American Softwood Lumber Standard 2021.
- H. SPIB (GR) Grading Rules 2014.

#### 1.02 SUBMITTALS

- A. See Section 013000 Administrative Requirements for submittal procedures.
- B. Product Data: Provide technical data on fire-retardant materials, wood preservative materials and application instructions.

#### 1.03 DELIVERY, STORAGE, AND HANDLING

- General: Cover wood products to protect against moisture. Support stacked products to prevent deformation and to allow air circulation.
- B. Fire Retardant Treated Wood: Prevent exposure to precipitation during shipping, storage, and installation.

#### **PART 2 PRODUCTS**

#### 2.01 GENERAL REQUIREMENTS

- A. Dimension Lumber: Comply with PS 20 and requirements of specified grading agencies.
  - If no species is specified, provide species graded by the agency specified; if no grading agency is specified, provide lumber graded by grading agency meeting the specified requirements.
  - Grading Agency: Grading agency whose rules are approved by the Board of Review, American Lumber Standard Committee at www.alsc.org and who provides grading service for the species and grade specified; provide lumber stamped with grade mark unless otherwise indicated.

#### 2.02 DIMENSION LUMBER FOR CONCEALED APPLICATIONS

- A. Grading Agency: Southern Pine Inspection Bureau, Inc; SPIB (GR).
- B. Sizes: Nominal sizes as indicated on drawings, S4S.
- C. Moisture Content: Kiln-dry or MC15.
- D. Stud Framing (2 by 2 through 2 by 6):

Architect's Project No.: 563007

- Species: Southern Pine.
- 2. Grade: No. 2.
- E. Miscellaneous Framing, Blocking, Nailers, Grounds, and Furring:
  - 1. Lumber: S4S, No. 2 or Standard Grade.
  - 2. Boards: Standard or No. 3.
- F. Provide fire-retardant-treated (FRT) lumber at all framing, blocking and other miscellaneous lumber for raised platform construction (judge/clerk/witness bench).

#### 2.03 CONSTRUCTION PANELS

- Subflooring: PS 2 type, rated Sheathing.
  - Bond Classification: Exposure 1.
  - 2. Performance Category: 3/4 PERF CAT.
  - 3. Provide fire-retardant-treated (FRT) at subflooring of all raised platform (judge/clerk/witness bench) applications.

#### 2.04 ACOUSTIC SUBFLOORING ASSEMBLY

- A. Cellulose Based Fiber Board Subflooring: ASTM C 209 sound-deadening board composed of recycled paper and wood fibers in a binding medium. Provide 5/8-inch thick units unless indicated otherwise.
  - 1. Density: Not less than 26 pcf per ASTM C 209.
  - 2. Tensile Strength: Not less than 450 psi per ASTM C 209.
  - 3. Hardness: 230 lbs when tested in accordance with ASTM D1037.
  - 4. Water Absorption by Volume: 5% maximum in a 2-hour immersion.
  - 5. Expansion Due to Humidity: 0.25% at 50 to 90% relative humidity per ASTM C 209
  - 6. NRC: 0.20.
  - 7. Flame Spread and Smoke Developed: 200 and 400 (Class C) per ASTM E 84.
- Acoustic Underlayment: Acoustic underlayment material designed to acoustically decouple flooring from subflooring.
  - 1. Products:
    - a. Acoustical Surfaces, Inc.; Acoustik.
    - b. All Noise Control; Footfall.
    - c. KN Rubber; QuietDown.
    - d. Sound Seal; Sound Shark.
  - 2. Material: Acoustic recycled rubber sheet.
  - 3. Thickness: 1/4 inch.
  - 4. Flame Spread and Smoke Developed: Maximum 84 and 400, per ASTM E 84.
  - 5. Method of Installation: Adhesive; as recommended by manufacturer.

#### 2.05 ACCESSORIES

- A. Fasteners and Anchors:
  - 1. Metal and Finish: Provide hot-dipped galvanized steel complying with ASTM A 153 or stainless steel at exterior, high humidity, and preservative-treated wood locations.
    - Fasteners at interior FRT shall be per FRT treatment manfuacturer's recommendations.
  - 2. Drywall Screws: Bugle head, hardened steel, power driven type, length three times thickness of sheathing.

Architect's Project No.: 563007

- B. Sill Gasket: 1/4 inch thick, plate width, glass fiber strip or closed cell plastic foam from continuous rolls.
- Subfloor Adhesives: Waterproof, air cure type, cartridge dispensed; adhesives designed for subfloor applications and complying with either ASTM C557 or ASTM D3498.

#### 2.06 FACTORY WOOD TREATMENT

- A. Treated Lumber and Plywood: Comply with requirements of AWPA U1 Use Category System for wood treatments determined by use categories, expected service conditions, and specific applications.
  - 1. Fire-Retardant Treated Wood: Provide FRT lumber and plywood stamped with name and mark of qualified testing agency, fire-retardant treatment product and manufacturer, wood species and drying method, testing standards, and flame spread and smoke development indices.
    - a. For exterior FRT and FRT that will be exposed to moisture, include accelerated weathering test language, with the words "No increase in the listed classification when subjected to Standard Rain Test ASTM D 2898".
  - Preservative-Treated Wood: Provide lumber and plywood marked or stamped by an 2. ALSC-accredited testing agency, certifying level and type of treatment in accordance with AWPA standards.

#### Fire Retardant Treatment:

- Interior Type A: AWPA U1, Use Category UCFA, Commodity Specification H, low temperature (low hygroscopic) type, chemically treated and pressure impregnated; capable of providing a maximum flame spread index of 25 and maximum smoke developed index of 450, when tested in accordance with ASTM E84, with no evidence of significant combustion when test is extended for an additional 20 minutes.
  - Kiln dry wood after treatment to a maximum moisture content of 19 percent for lumber and 15 percent for plywood.
  - Treat interior concealed blocking, plywood backing panels, and other rough carpentry items as indicated.
  - Do not use treated wood in applications exposed to weather or where the wood may C. become wet.
- Strength Adjustments (Structural Panels/Plywood): Test FRT structural panels/plywood per ASTM D 5516 and develop strength adjustment factors per ASTM D 6305.
- Strength Adjustments (Lumber): Test FRT lumber per ASTM D 5664 and develop strength adjustment factors per ASTM D 6841.

#### C. Preservative Treatment:

- Restrictions: Do not use lumber or plywood treated with chromated copper arsenate (CCA). Do not use lumber or plywood treated with inorganic boron (SBX) for applications exposed to water, ground/soil contact, or interior floor slabs/concrete. Comply with additional treatment restrictions as required by local authorities having jurisdiction.
- 2. Preservative Pressure Treatment of Lumber & Plywood Above Grade: AWPA U1, Use Category UC3B, Commodity Specification A using waterborne preservative.
  - Use Category UC2 is acceptable for interior lumber and plywood above grade (not in contact with floor slab).
  - Kiln dry lumber after treatment to maximum moisture content of 19 percent. b.
  - Treat lumber in contact with concrete. C.
  - Treat lumber in other locations as indicated. d.

Architect's Project No.: 563007

#### **PART 3 EXECUTION**

#### 3.01 PREPARATION

- A. Install sill gasket under sill plate of framed walls bearing directly on concrete; puncture gasket cleanly to fit tightly around protruding anchor bolts.
- Coordinate installation of rough carpentry members specified in other sections.

#### 3.02 INSTALLATION - GENERAL

- Select material sizes to minimize waste.
- B. Reuse scrap to the greatest extent possible; clearly separate scrap for use on site as accessory components, including: shims, bracing, and blocking.
- Where treated wood is used on interior, provide temporary ventilation during and immediately after installation sufficient to remove indoor air contaminants.

#### 3.03 FRAMING INSTALLATION

- Set framing members level, plumb, and true to line. Discard pieces with defects that would lower required strength.
- Make provisions for temporary construction loads, and provide temporary bracing sufficient to maintain structure in true alignment and safe condition until completion of erection and installation of permanent bracing.
- C. Install framing members full length without splices.
- D. Comply with member sizes, spacing, and configurations indicated, and fastener size and spacing indicated, but not less than required by applicable codes and AWC (WFCM) Wood Frame Construction Manual.
- E. Frame wall openings with two or more studs at each jamb; support headers on cripple studs.

#### 3.04 BLOCKING, NAILERS, AND SUPPORTS

- A. Provide framing and blocking members as indicated or as required to support finishes, fixtures, specialty items, and trim.
- B. In metal-framed walls, provide continuous FRT blocking around door and window openings for anchorage of frames, securely attached to stud framing.
- In metal-framed walls, provide FRT blocking attached to stude as backing and support for wallmounted items, unless item can be securely fastened to two or more studs or other method of support is explicitly indicated.

#### 3.05 INSTALLATION OF CONSTRUCTION PANELS

- A. Subflooring: Glue and nail to framing; staples are not permitted.
- B. Acoustic Underlayment: Secure to subflooring per manufacturer's instructions.

#### 3.06 TOLERANCES

- A. Framing Members: 1/4 inch from true position, maximum.
- Variation from Plane, Other than Floors: 1/4 inch in 10 feet maximum, and 1/4 inch in 30 feet maximum.

#### 3.07 CLEANING

A. Waste Disposal:

Architect's Project No.: 563007

- Comply with applicable regulations. 1.
- 2. Do not burn scrap on project site.
- 3. Do not burn scraps that have been pressure treated.
- 4. Do not send materials treated with pentachlorophenol, CCA, or ACA to co-generation facilities or "waste-to-energy" facilities.
- B. Do not leave wood, shavings, sawdust, etc. on the ground or buried in fill.
- C. Prevent sawdust and wood shavings from entering the storm drainage system.

#### **END OF SECTION**

#### SECTION 062000 FINISH CARPENTRY

#### **PART 1 GENERAL**

#### 1.01 REFERENCE STANDARDS

- A. AWI (QCP) Quality Certification Program Current Edition.
- B. AWI/AWMAC/WI (AWS) Architectural Woodwork Standards, 2nd Edition 2014, with Errata (2016).
- C. AWMAC/WI (NAAWS) North American Architectural Woodwork Standards 2021, with Errata.

#### 1.02 SUBMITTALS

- A. See Section 013000 Administrative Requirements for submittal procedures.
- B. Product Data:
  - Provide manufacturer's product data, storage and handling instructions for factoryfabricated units.
- C. Shop Drawings: Indicate materials, component profiles, fastening methods, jointing details, and accessories.
  - 1. Provide the information required by AWI/AWMAC/WI (AWS) or AWMAC/WI (NAAWS).
  - 2. Include certification program label.

#### 1.03 QUALITY ASSURANCE

- A. Fabricator Qualifications: Company specializing in fabricating the products specified in this section with minimum five years of documented experience.
  - 1. Accredited participant in the specified certification program prior to the commencement of fabrication and throughout the duration of the project.
  - 2. Single Source Responsibility: Provide and install this work from single fabricator.

#### B. Quality Certification:

- 1. Comply with AWI (QCP) woodwork association quality certification service/program in accordance with requirements for work specified in this section: www.awiqcp.org/#sle.
- 2. Provide labels or certificates indicating that the work complies with AWI/AWMAC/WI (AWS) requirements for grade or grades specified.
- 3. Provide designated labels on shop drawings as required by certification program.
- 4. Provide designated labels on installed products as required by certification program.
- 5. Submit certifications upon completion of installation that verifies this work is in compliance with specified requirements.

#### 1.04 DELIVERY, STORAGE, AND HANDLING

- A. Store finish carpentry items under cover, elevated above grade, and in a dry, well-ventilated area not exposed to heat or sunlight.
- B. Protect from moisture damage.
- C. Handle materials and products to prevent damage to edges, ends, or surfaces.

Finish Carpentry 062000 - 1

Architect's Project No.: 563007

#### **PART 2 PRODUCTS**

#### 2.01 FINISH CARPENTRY ITEMS

- A. Quality Standard: Custom Grade, in accordance with AWI/AWMAC/WI (AWS), unless noted otherwise.
- Surface Burning Characteristics: Provide materials having fire and smoke properties as required by applicable code.

#### 2.02 LUMBER MATERIALS

- A. Hardwood Lumber (for Transparent Finish): Red oak, plain sawn, maximum moisture content of 6 percent, of quality suitable for transparent finish.
- Hardwood Lumber (for Opaque Finish): Closed-grain species, plain sawn, maximum moisture content of 6 percent, paint grade.

#### 2.03 FASTENINGS

- A. Adhesive for Purposes Other Than Laminate Installation: Suitable for the purpose; not containing formaldehyde or other volatile organic compounds.
- B. Fasteners: Of size and type to suit application; zinc-coated steel finish.

#### 2.04 ACCESSORIES

- A. Adhesive: Type recommended by fabricator to suit application.
- B. Wood Filler: Solvent base, tinted to match surface finish color.

#### 2.05 SITE FINISHING MATERIALS

- A. Stain, Shellac, Varnish, and Finishing Materials: In compliance with AWI/AWMAC/WI (AWS), unless noted otherwise.
- B. Finishing: Field painted opaque finish, as specified in Section 099100 "Painting".

#### 2.06 FABRICATION

- A. Shop assemble work for delivery to site, permitting passage through building openings.
- B. Shop prepare and identify components for book match grain matching during site erection.
- When necessary to cut and fit on site, provide materials with ample allowance for cutting. Provide trim for scribing and site cutting.

#### 2.07 SHOP FINISHING

- A. Sand work smooth and set exposed nails and screws.
- B. Apply wood filler in exposed nail and screw indentations.
- C. On items to receive transparent finishes, use wood filler that matches surrounding surfaces and is of type recommended for the applicable finish.
- Finish work in accordance with AWI/AWMAC/WI (AWS), Section 5 Finishing for grade specified and as follows:
  - 1. Transparent:
    - System 3, Lacquer, Postcatalyzed; or System 5, Conversion Varnish.
    - Stain: As selected by Architect.
    - Sheen: Satin. C.

062000 - 2 Finish Carpentry

Architect's Project No.: 563007

2. Opaque: Refer to Division 9 "Painting".

#### **PART 3 EXECUTION**

#### 3.01 EXAMINATION

A. Verify adequacy of backing and support framing.

#### 3.02 INSTALLATION

- A. Install custom fabrications in accordance with AWI/AWMAC/WI (AWS) requirements for grade indicated.
- Install factory-fabricated units in accordance with manufacturer's printed installation B. instructions.
- Set and secure materials and components in place, plumb and level.
- D. Carefully scribe work abutting other components, with maximum gaps of 1/32 inch. Do not use additional overlay trim to conceal larger gaps.

#### **END OF SECTION**

Finish Carpentry 062000 - 3

Architect's Project No.: 563007

#### **SECTION 064100** ARCHITECTURAL WOODWORK AND CASEWORK

#### **PART 1 GENERAL**

#### 1.01 DEFINITIONS

- A. Exposed: Portions of casework visible when drawers and cabinet doors are closed, including end panels, bottoms of cases more than 42 inches above finished floor, tops of cases less than 72 inches above finished floor and all members visible in open cases or behind glass doors.
- Semi-Exposed: Portions of casework and surfaces behind solid doors, tops of cases more than 72 inches above finished floor and bottoms of cabinets more than 30 inches but less than 42 inches above finished floor.
- C. Concealed: Sleepers, web frames, dust panels and other surfaces not generally visible after installation and cabinets less than 30 inches above finished floor.

#### 1.02 REFERENCE STANDARDS

- A. ASTM E84 Standard Test Method for Surface Burning Characteristics of Building Materials 2022.
- B. AWI (QCP) Quality Certification Program Current Edition.
- C. AWMAC/WI (NAAWS) North American Architectural Woodwork Standards 2021, with Errata.
- D. BHMA A156.9 Cabinet Hardware 2020.
- E. ISFA 2-01 Classification and Standards for Solid Surfacing Material 2013.
- F. NEMA LD 3 High-Pressure Decorative Laminates 2005.

#### 1.03 ADMINISTRATIVE REQUIREMENTS

A. Preinstallation Meeting: Convene a preinstallation meeting not less than one week before starting work of this section; require attendance by all affected installers.

#### 1.04 SUBMITTALS

- A. See Section 013000 Administrative Requirements for submittal procedures.
- B. Shop Drawings: Indicate materials, component profiles, fastening methods, jointing details, and accessories.
  - 1. Include field measurements, and indicate where field measurements differ from documents.
- C. Product Data: Provide data for hardware accessories.
- D. Selection Samples: Submit manufacturer's color charts indicating full range of available colors, for each product requiring color selection.
- Verification Samples: Submit actual samples, manufacturer's standard size, for each specified finish and color of the following materials:
  - 1. Plastic laminate.
  - 2. Solid surface.
  - PVC edge banding.
- F. Fabricator Qualifications: Include evidence of accreditation with quality control program.
- G. Certificate: Submit labels and certificates required by quality assurance and quality control programs.

Architect's Project No.: 563007

#### 1.05 QUALITY ASSURANCE

- A. Fabricator Qualifications: Company specializing in fabricating the products specified in this section with experience on Projects of similar size and scope.
  - Accredited participant in the specified certification program prior to the commencement of fabrication and throughout the duration of the project.
  - 2. Single Source Responsibility: Provide and install this work from single fabricator.
    - It is acceptable to subcontract portions of the work to a separate specialty subcontractor (for example, pre-fabricated plastic-laminate-faced casework); however, each fabricator shall be independently accredited; submit accreditation for each fabricator. The primary woodwork contractor shall be responsible for ensuring the work of all Division 06 sections is well coordinated and properly fabricated and installed.

#### B. Quality Certification:

- Comply with AWI (QCP) woodwork association quality certification service/program in accordance with requirements for work specified in this section: www.awiqcp.org/#sle.
  - This AWI (QCP) project is registered as project number [
- Provide for third-party AWI final inspection of fabricated architectural casework (prior to delivery). AWI program of self-certification in lieu of third-party inspection is not acceptable.
- Provide for third-party AWI final inspection of field-installed woodwork (after installation). 3. AWI program of self-certification in lieu of third-party inspection is not acceptable.
- Provide labels or certificates indicating that the installed work complies with 4. AWI/AWMAC/WI (AWS) requirements for grade or grades specified.
- 5. Provide designated labels on shop drawings as required by certification program.
- Provide designated labels on installed products as required by certification program. 6.
- 7. Submit certifications upon completion of installation that verifies this work is in compliance with specified requirements.
- Replace, repair, or rework all work for which certification is refused.

#### 1.06 DELIVERY, STORAGE, AND HANDLING

- A. Comply with Section 2 of the Architectural Woodwork Standards: "Care & Storage."
- B. Deliver woodwork after finishes are complete, including painting, and HVAC is operating at occupancy conditions in all spaces where woodwork will be installed.
- C. Store in an environmentally controlled location. Protect units from moisture damage.

#### 1.07 FIELD CONDITIONS

During and after installation of woodwork, maintain temperature and humidity conditions in building spaces at same levels planned for occupancy.

#### **PART 2 PRODUCTS**

#### 2.01 PERFORMANCE REQUIREMENTS

- A. Quality Standard: Custom Grade, in accordance with AWI/AWMAC/WI (AWS), unless noted otherwise.
- B. Surface Burning Characteristics: Flame spread index of 25, maximum; smoke developed index of 450, maximum; when tested in accordance with ASTM E84.
- C. All countertop surfaces shall be NSF approved for food contact.

Architect's Project No.: 563007

D. Accessibility Requirements: Fabricate and install woodwork and casework in compliance with ICC/ANSI A117.1 and with ADA Standards for Accessible Design.

#### 2.02 CABINETS

- A. Quality Standard: Custom Grade, in accordance with AWI/AWMAC/WI (AWS), unless noted otherwise.
- B. Plastic-Laminate-Clad Cabinets: Custom grade, except as modified below. Solid wood and wood panel construction; each unit self-contained and not dependent on adjacent units or building structure for rigidity; in sizes necessary to avoid field cutting except for scribes and filler panels. Include adjustable levelers for base cabinets.
  - 1. Style: Flush overlay. Ease doors and drawer fronts slightly at edges.
  - 2. Cabinet Nominal Dimensions: Unless otherwise indicated, provide cabinets of widths and heights indicated on drawings, and with following front-to-back dimensions:
    - a. Base Cabinets: 24 inches.
    - b. Tall Cabinets: 22 inches.
    - c. Wall Cabinets: 13 inches.
  - 3. Drawer Construction: Provide <u>premium</u> grade for drawer box construction.
  - 4. Plastic Laminate: Apply plastic laminate finish in full uninterrupted sheets consistent with manufactured sizes. Fit corners and joints hairline.
    - a. Finish: Matte or suede, gloss rating of 5 to 20.
    - b. Surface Color and Pattern: As selected by Architect from manufacturer's full line.
    - c. Exposed Interior Surfaces: Thermally fused laminate (melamine) is acceptable only at drawer boxes. Provide HPDL, type VGS or CLS, at semi-exposed interiors of cabinets (cabinets with doors). Provide type VGS for exposed interior horizontal shelving surfaces.
    - d. Apply undecorated laminate backing sheet to concealed reverse side of plastic laminate finished surfaces.
- C. ADA Sink Cabinets: Fabricate a panel of 3/4-inch moisture resistant core material and veneer/cladding material to match adjacent cabinets. Panel shall be removable for service access to undercounter plumbing. Provide with Z-clip attachment system for concealed fastening and with a steel cable retainer, minimum 4 feet long, so that panel can be set aside for service access. Fasten Z-clips and steel cable retainer to panel and to substrate with tamper-resistant fasteners.
  - 1. Provide an undercounter vertical "apron" piece at front of ADA sink locations as indicated, flush to fronts of adjacent cabinets and finished to match.

#### 2.03 WOOD-BASED COMPONENTS

- A. Wood fabricated from old growth timber is not permitted.
- B. Core Material for Cabinets: ANSI A208.1, Grade M-2 particleboard.
  - At Contractor's option, cabinet backs may be fabricated of ANSI A208.2, Grade MD medium-density fiberboard.
- C. Core Material for Countertops: Manufacturer's standard ANSI A208.1, Grade M-2 particleboard, ANSI A208.2, Grade MD fiberboard, or exterior grade plywood.
  - At countertops containing sinks, provide core material meeting ANSI MR10 for moisture resistance. Available Products:
    - a. Arauco North America: Duraflake VESTA Moisture Resistant ULEF.
    - b. Collins Pine; FreeForm.
    - c. Georgia-Pacific; Ultrastock MR MDF.

Architect's Project No.: 563007

Roseburg Forest Products; SkyBlend MR-10.

#### 2.04 LAMINATE MATERIALS

- Manufacturers:
  - Formica Corporation. 1.
  - 2. Panolam Industries International, Inc; Nevamar Standard HPL.
  - 3. Panolam Industries International, Inc; Pionite Standard HPL.
  - 4. Wilsonart LLC; Pressed Linen 4991-39 (Basis-of-Design).
- Thermally Fused Laminate (TFL): Melamine resin, NEMA LD 3, Type VGL laminate panels.
- C. High Pressure Decorative Laminate (HPDL): NEMA LD 3, types as recommended for specific applications.
- D. Provide specific types as follows:
  - Horizontal Countertop Surfaces: HGS, 0.048 inch (1.2 mm) nominal thickness.
  - Vertical Surfaces and Non-Countertop Horizontal Surfaces: VGS, 0.028 inch (0.7 mm) 2. nominal thickness.
  - 3. Cabinet Liner: CLS, 0.020 inch (0.5 mm) nominal thickness.
  - Laminate Backer: BKL, 0.020 inch nominal thickness, undecorated; for application to 4. concealed backside of panels faced with high pressure decorative laminate.

#### 2.05 SOLID SURFACING MATERIAL

- A. Solid Surfacing Material: ISFA 2-01.
  - 1. Products:
    - E. I. du Pont de Nemours and Company; Corian (Basis-of-Design).
    - Formica Group: Solid Surfacing.
    - LG Hausys America; HI-MACS.
  - 2. Thickness: 1/2-inch.
  - 3. Type: Standard Type.
  - Color and Pattern: Rain Cloud. 4.

#### 2.06 COUNTERTOPS

- A. Fabricate in accordance with AWI/AWMAC/WI (AWS), Section 11 Countertops, Custom Grade and with manufacturer's requirements.
- Plastic Laminate Countertops: High-pressure decorative laminate (HPDL) sheet bonded to B. substrate.
  - 1. Laminate Sheet: NEMA LD 3, Grade HGS, 0.048 inch nominal thickness.
  - Core: Particleboard or fiberboard as specified, except provide moisture resistant type at sink locations.
  - Exposed Edge Treatment: Square, substrate built up to 1-1/2 inch thick unless otherwise 3. indicated; covered with 3 mm edge banding with eased ends.
  - Back and End Splashes: 3/4-inch thick core material with Grade HGS face and 0.5 mm edge banding/tape at edges.
- C. Solid Surfacing Countertops and Window Stools: Solid surfacing sheet or plastic resin casting over structural "ladder" type substrate/core.
  - Solid Surfacing Sheet and Plastic Resin Castings: Complying with ISFA 2-01 and NEMA 1. LD 3; acrylic or polyester resin, mineral filler, and pigments; homogenous, non-porous and capable of being worked and repaired using standard woodworking tools; no surface coating; color and pattern consistent throughout thickness.

Architect's Project No.: 563007

- 2. Core: Fabricate solid surface countertop core of manufacturer's recommended moistureresistant sheet strip/ladder fabrication. Build up core material for total countertop thickness indicated.
- Fabricate in accordance with manufacturer's standard requirements, and in one piece to 3. the greatest extent possible.
  - Shop-fabricate cutouts and holes in solid surface for plumbing fixtures, deck-mounted soap dispensers, and other items indicated on Drawings.
- Provide manufacturer's standard configuration for exposed edges, back and end 4. splashes, and per the requirements below:
  - Edge and Corner Profiles: Eased.
  - Provide built up edges to standard thickness indicated (1-1/2 inches unless otherwise indicated).
  - Provide 4 inch high back and end splashes, unless otherwise indicated.
- Window Stools: Scribe window stools to fit jamb conditions as indicated. 5.

#### 2.07 ACCESSORIES

- A. Adhesive: Type recommended by fabricator to suit application.
- B. Plastic Edge Banding: Extruded PVC, flat shaped; smooth finish; of width to match component thickness.
  - Provide 3 mm edge banding at all door and drawer front edges and laminate countertop 1. edges.
  - 2. Provide 0.5 mm edge banding (tape) at cabinet body edges, shelf edges, and other semiexposed/exposed interior edges.
  - Color: As selected by Architect from manufacturer's full range.
- Grommets: Standard plastic grommets for cut-outs, in black color unless otherwise indicated.
  - Grommet Size: To fit 2-1/2 inch diameter cut-out, nominal, unless otherwise indicated.
  - Grommets shall have removable caps and slot for wire passage.
- Ballistic-Resistant Fiberglass Armor Panels: Lightweight ballistic armor fabricated of fiberglassreinforced composite structural flat sheet material, 1/2-inch thick nominal, tested to and passing UL 752 for Level 3 protection (National Institute of Justice NIJ 0108.01 Level IIIA).
  - 1. Products:
    - North American Bullet Proof; ShotGard BB-3. a.
    - Point Blank Body Armor, Inc.; Life-Gard Ballistic Armor Type LG-4. b.
    - Safeguard Security Systems, Inc.; Armortex OF 300.
    - Substitutions: See Section 016000 Product Requirements.

#### 2.08 HARDWARE

- A. Hardware: BHMA A156.9, types as recommended by fabricator for quality grade specified.
- Adjustable Shelf Supports: Standard side-mounted system using recessed metal shelf standards or multiple holes for pin supports and coordinated shelf rests, polished chrome finish, for nominal 1 inch spacing adjustments.
- C. Workstation Brackets: Fixed, L-shaped, corner reinforced, face-of-stud mounting, Provide at all countertop/worksurface that is unsupported by cabinetry at 16 inches o.c., unless otherwise indicated.
  - 1. Materials: Formed steel shapes.
    - Finish: Manufacturer's standard, factory-applied, textured powder coat.
    - Color: Selected by Architect from manufacturer's standard range.

Architect's Project No.: 563007

- 2. Load Capacity: 1000 lbs minimum per pair of brackets, tested at 16 inches o.c. spacing.
- 3. Size: Provide nominal sizes below. Provide additional sizes as required for other countertop/workstation applications indicated on Drawings.
  - a. Provide 21 inches high by 28 inches deep for standard 30 inch deep countertops.
  - b. Provide 21 inches high by 21 inches deep for standard 25 inch deep countertops.
- 4. Products:
  - a. A&M Hardware, Inc; Standard Brackets.
  - b. Best Brackets; ADA Workstation Support Standard Steel Bracket.
  - c. FastCap; SpeedBrace.
  - d. Lyman Associates; Counter Top Supports.
  - e. Substitutions: See Section 016000 Product Requirements.
- D. Drawer and Door Pulls: BHMA A156.9, B02011, back-mounted "U" shaped wire pull, steel with chrome finish, 4 inch centers.
- E. Cabinet Locks: Keyed cylinder, two keys per lock, master keyed, steel with chrome finish.
- F. Drawer Slides:
  - 1. Type: Full extension.
  - 2. Static Load Capacity: Heavy Duty grade.
    - For standard box drawers under 30 inches wide, provide BHMA Grade 1HD-100 with minimum load capacity of 100 lbf.
    - b. For file drawers and drawers 30 inches wide or larger, provide BHMA Grade 2HD-200 with minimum load capacity of 200 lbf.
    - c. For pencil drawer slides, provide 3/4 extension with minimum load capacity of 45 lbf.
  - 3. Mounting: Side mounted.
  - Stops: Integral type.
  - 5. Features: Provide soft close type.
  - 6. Manufacturers:
    - a. Accuride International, Inc.
    - b. Fulterer USA.
    - c. Grass America Inc.
    - d. Knape & Vogt Manufacturing Company.
- G. Hinges: Butt type, BHMA A156.9, Grade 1, 2-3/4 inch, 5-knuckle steel with nickel-plated finish. Provide with antifriction bearings and rounded hospital tips.
  - 1. Provide two hinges for doors less than 48 inches high, and three hinges for doors more than 48 inches high.
- H. Hinges: European style concealed type, BHMA A156.9, B01602, steel with nickel-plated finish.
  - 1. Provide minimum 110 degree opening standard, and 160 degree opening at ADA sink base cabinets.
- I. Undercounter Wire Management: Provide the following, as indicated:
  - 1. Vinyl J-shaped channel wire manager for undercounter mounting, continuous for full length of countertop.

#### 2.09 FABRICATION

A. Assembly: Shop assemble casework items for delivery to site in units easily handled and to permit passage through building openings.

Architect's Project No.: 563007

- B. Edging: Fit shelves, doors, and exposed edges with specified edging. Do not use more than one piece for any single length.
- C. Fitting: When necessary to cut and fit on site, provide materials with ample allowance for cutting. Provide matching trim for scribing and site cutting.
  - Fittings and Fixture Locations: Cut and drill components for fittings and fixtures.
  - 2. Scribes and Fillers: Panels of matching construction and finish, for locations where cabinets do not fit tight to adjacent construction.
  - 3. Seal or prime paint concealed cut edges of wood and laminate casework.
- D. Hardware Application: Factory-machine casework members for hardware that is not surface applied.
- E. Apron Frames: Construction similar to other cabinets, with modifications.
  - 1. Frames fabricated from panels standard with the manufacturer. Include front and back panels, with drawer suspension framing mechanically fastened to support channels spanning between them.
- F. Plastic Laminate: Apply plastic laminate finish in full uninterrupted sheets consistent with manufactured sizes. Fit corners and joints hairline; secure with concealed fasteners. Slightly bevel exposed edges. Locate counter butt joints minimum 2 feet from sink cut-outs.
- G. Solid Surfacing: Fabric in one piece to greatest extent possible; join pieces with adhesive sealant and finish joints smooth in accordance with manufacturer's recommendations and instructions.
- H. Countertop Fabrication: Fabricate tops and splashes in the largest sections practicable, with top surface of joints flush.
  - Fabricate to overhang fronts and ends of cabinets 1 inch except where top butts against cabinet or wall.
  - 2. Prepare all cutouts accurately to size; replace tops having improperly dimensioned or unnecessary cutouts or fixture holes.
- Provide back/end splash wherever counter edge abuts vertical surface unless otherwise indicated.
  - 1. Height: 4 inches, unless otherwise indicated.
  - Mechanically fasten back and end splashes to countertops with steel brackets at 16 inches on center.
- J. Wall-Mounted Counters (not mounted over cabinets): Provide ADA compliant knee space with brackets, skirts, or aprons, as indicated on Drawings.

#### 2.10 SHOP FINISHING

- A. Sand work smooth and set exposed nails and screws.
- B. On items to receive transparent finishes, use wood filler matching or blending with surrounding surfaces and of types recommended for applied finishes.
- C. Finish work in accordance with AWI/AWMAC/WI (AWS), Section 5 Finishing for grade specified and as follows:
  - 1. Transparent:
    - a. System 3, Lacquer, Postcatalyzed OR System 5, Varnish, Conversion.
    - b. Stain: As selected by Architect.
    - c. Sheen: Satin.

Architect's Project No.: 563007

#### **PART 3 EXECUTION**

#### 3.01 EXAMINATION

- Verify adequacy of backing and support framing.
- B. Verify location and sizes of utility rough-in associated with work of this section.

#### 3.02 INSTALLATION

- A. Install work in accordance with AWI/AWMAC/WI (AWS) requirements for grade indicated.
- Set and secure custom cabinets in place, assuring that they are rigid, plumb, and level.
- C. Use fixture attachments in concealed locations for wall mounted components.
- D. Use concealed joint fasteners to align and secure adjoining cabinet units.
- Carefully scribe casework abutting other components, with maximum gaps of 1/32 inch. Do not use additional overlay trim for this purpose.
- Secure cabinets to floor using appropriate angles and anchorages.
- Secure wall cabinets at top and bottom, at each end and no more than 16 inches on center. Secure directly into metal wall framing, or into FRT wood or metal channel blocking with No. 10 wafer head screws. Wall mounted hanger strips are not acceptable.
- H. Countersink anchorage devices at exposed locations. Conceal with solid wood plugs of species to match surrounding wood; finish flush with surrounding surfaces.

#### 3.03 ADJUSTING

- Test installed work for rigidity and ability to support loads.
- Adjust moving or operating parts to function smoothly and correctly.

#### 3.04 CLEANING

A. Clean casework, counters, shelves, hardware, fittings, and fixtures.

#### **END OF SECTION**

Architect's Project No.: 563007

#### **SECTION 079200** JOINT SEALANTS

#### **PART 1 GENERAL**

#### 1.01 SUBMITTALS

- A. See Section 013000 Administrative Requirements, for submittal procedures.
- Product Data for Sealants: Submit manufacturer's technical data sheets for each product to be used, that includes the following.
  - Physical characteristics, including movement capability, VOC content, hardness, cure time, and color availability.
  - 2. List of backing materials approved for use with the specific product.
  - Substrates that product is known to satisfactorily adhere to and with which it is compatible.
  - 4. Substrates the product should not be used on.
- Product Data for Accessory Products: Submit manufacturer's technical data sheet for each product to be used, including physical characteristics, installation instructions, and recommended tools.
- D. Color Cards for Selection: Where sealant color is not specified, submit manufacturer's color cards showing standard colors available for selection.
- Preconstruction Laboratory Test Reports: Submit at least four weeks prior to start of installation.
- Preinstallation Field Adhesion Test Plan: Submit at least two weeks prior to start of installation.
- G. Preinstallation Field Adhesion Test Reports: Submit filled out Preinstallation Field Adhesion Test Reports log within 10 days after completion of tests; include bagged test samples and photographic records.

#### 1.02 QUALITY ASSURANCE

- A. Installer Qualifications: Company specializing in performing the work of this section, and is approved and/or certified by manufacturer.
- Preconstruction Laboratory Testing: Arrange for sealant manufacturer(s) to test each combination of sealant, substrate, backing, and accessories.
  - Adhesion Testing: In accordance with ASTM C794. 1.
  - 2. Compatibility Testing: In accordance with ASTM C1087.
  - 3. Allow sufficient time for testing to avoid delaying the work.
  - 4. Deliver to manufacturer sufficient samples for testing.
  - Report manufacturer's recommended corrective measures, if any, including primers or techniques not indicated in product data submittals.
  - Testing is not required if sealant manufacturer provides data showing previous testing, not 6. older than 24 months, that shows satisfactory adhesion, lack of staining, and compatibility.
- C. Preinstallation Field Adhesion Test Plan: Include destructive field adhesion testing of one sample of each combination of sealant type and substrate, except interior acrylic latex sealants, and include the following for each tested sample.
  - Identification of testing agency. 1.
  - Preinstallation Field Adhesion Test Log Form: Include the following data fields, with 2. known information filled out.
    - a. Test date.
    - Copy of test method documents.

Joint Sealants 079200 - 1

Architect's Project No.: 563007

- Age of sealant upon date of testing.
- d. Test results, modeled after the sample form in the test method document.
- e. Indicate use of photographic record of test.

#### D. Field Adhesion Test Procedures:

- 1. Allow sealants to fully cure as recommended by manufacturer before testing.
- 2. Have a copy of the test method document available during tests.
- 3. Record the type of failure that occurred, other information required by test method, and the information required on the Field Quality Control Log.
- 4. When performing destructive tests, also inspect the opened joint for proper installation characteristics recommended by manufacturer, and report any deficiencies.
- 5. Deliver the samples removed during destructive tests in separate sealed plastic bags, identified with project, location, test date, and test results, to Owner.
- 6. If any combination of sealant type and substrate does not show evidence of minimum adhesion or shows cohesion failure before minimum adhesion, report results to Architect.
- E. Destructive Field Adhesion Test: Test for adhesion in accordance with ASTM C1521, using Destructive Tail Procedure.
  - 1. Sample: At least 18 inches long.
  - 2. Minimum Elongation Without Adhesive Failure: Consider the tail at rest, not under any elongation stress; multiply the stated movement capability of the sealant in percent by two; then multiply 1 inch by that percentage; if adhesion failure occurs before the "1 inch mark" is that distance from the substrate, the test has failed.
  - If either adhesive or cohesive failure occurs prior to minimum elongation, take necessary
    measures to correct conditions and re-test; record each modification to products or
    installation procedures.

#### 1.03 WARRANTY

- A. See Section 017800 Closeout Submittals, for additional warranty requirements.
- B. Correct defective work within a five year period after Date of Substantial Completion.
- C. Warranty: Include coverage for installed sealants and accessories that fail to achieve watertight seal, exhibit loss of adhesion or cohesion, or do not cure.

#### **PART 2 PRODUCTS**

#### 2.01 JOINT SEALANT APPLICATIONS

#### A. Scope:

- 1. Interior Joints: Do not seal interior joints unless specifically indicated to be sealed. Interior joints to be sealed include, but are not limited to, the following items.
  - a. Joints between door and other frames and adjacent construction.
  - b. Wall and ceiling joints.
  - Other joints indicated below.
- 2. Do not seal the following types of joints.
  - a. Joints indicated to be treated with manufactured expansion joint cover or some other type of sealing device.
  - b. Joints where sealant is specified to be provided by manufacturer of product to be sealed.
  - c. Joints where installation of sealant is specified in another section.
- B. Interior Joints: Use non-sag polyurethane sealant (ES-1), unless otherwise indicated.

Joint Sealants 079200 - 2

Architect's Project No.: 563007

- 1. Type AS-1 Joints at sound-rated or acoustic assemblies, and at full-height panel wall and partition assemblies indicated to have sound attenuation batts.
- 2. Type LS-1 Joints around perimeters of interior doors, and similar framed openings.
- C. Interior Wet Areas: Bathrooms, restrooms, and kitchens; fixtures in wet areas include plumbing fixtures, countertops, cabinets, and other similar items.
- D. Sound-Rated Assemblies: Walls and ceilings identified as "STC-rated", "sound-rated", or "acoustical".

#### 2.02 NONSAG JOINT SEALANTS

- A. Type ES-1 Polyurethane Sealant: ASTM C920, Grade NS, Uses M and A; multi-component; not expected to withstand continuous water immersion or traffic.
  - 1. Movement Capability: Plus and minus 25 percent, minimum.
  - 2. Color: To be selected by Architect from manufacturer's standard range.
  - Manufacturers:
    - a. ITW Polymers Sealants; Permathane SM 7200.
    - b. Master Builders Solutions by BASF; MasterSeal NP2.
    - c. Pecora Corporation; DynaTrol II:e.
    - d. Sika Corporation; Sikaflex-2c NS.
    - e. Tremco Commercial Sealants & Waterproofing; Dymeric 240 FC or Vulkem 227.
    - f. Substitutions: See Section 016000 Product Requirements.
- B. Type LS-1 Acrylic Emulsion Latex: Water-based; ASTM C834, single component, non-staining, non-bleeding, non-sagging; not intended for exterior use.
  - 1. Color: To be selected by Architect from manufacturer's standard range.
  - 2. Grade: ASTM C834; Grade NF.
  - Manufacturers:
    - a. Bostik, Inc; Chem-Calk 600.
    - b. ITW Polymers Sealants; SM 8200.
    - c. Master Builders Solutions; MasterSeal NP 520.
    - d. Pecora Corporation; AC-20 +Silicone.
    - e. Tremco Commercial Sealants & Waterproofing; Tremflex 834.
    - f. Substitutions: See Section 016000 Product Requirements.
- C. Type AS-1 Acrylic Emulsion Latex: Water-based; ASTM C834, single component, non-staining, non-bleeding, non-sagging acoustical sealant.
  - 1. Color: Standard colors matching finished surfaces, Type OP (opaque).
  - 2. Grade: ASTM C834; Grade NF.
  - Manufacturers:
    - a. Accumetric LLC: BOSS 826 Acoustical Sound Sealant.
    - Franklin International, Inc; Titebond GREENchoice Acoustical Smoke & Sound Sealant.
    - c. Hilti, Inc; CP 506 Smoke and Acoustical Sealant.
    - d. Master Builders Solutions; MasterSeal NP 520.
    - e. Momentive Performance Materials. Inc/GE Silicones: RCS20 Acoustical.
    - f. Pecora Corporation; AC-20 FTR or AIS-919.
    - g. Specified Technologies Inc; Smoke N' Sound Acoustical Sealant.
    - h. Tremco Commercial Sealants & Waterproofing; Tremstop Smoke and Sound.

Joint Sealants 079200 - 3

Architect's Project No.: 563007

i. Substitutions: See Section 016000 - Product Requirements.

#### 2.03 ACCESSORIES

- A. Backer Rod: Cylindrical cellular foam rod with surface that sealant will not adhere to, compatible with specific sealant used, and recommended by backing and sealant manufacturers for specific application.
- Backing Tape: Self-adhesive polyethylene tape with surface that sealant will not adhere to and recommended by tape and sealant manufacturers for specific application.
- Masking Tape: Self-adhesive, nonabsorbent, non-staining, removable without adhesive residue, and compatible with surfaces adjacent to joints and sealants.
- Joint Cleaner: Non-corrosive and non-staining type, type recommended by sealant manufacturer; compatible with joint forming materials.
- Primers: Type recommended by sealant manufacturer to suit application; non-staining.

#### **PART 3 EXECUTION**

#### 3.01 EXAMINATION

- Verify that joints are ready to receive work.
- B. Verify that backing materials are compatible with sealants.
- C. Verify that backer rods are of the correct size.
- D. Preinstallation Adhesion Testing: Install a sample for each test location indicated in the test plan.
  - Test each sample as specified in PART 1 under QUALITY ASSURANCE article. 1.
  - 2. Notify Architect of date and time that tests will be performed, at least seven days in advance.
  - Record each test on Preinstallation Adhesion Test Log as indicated. 3.
  - If any sample fails, review products and installation procedures, consult manufacturer, or take whatever other measures are necessary to ensure adhesion; re-test in a different location; if unable to obtain satisfactory adhesion, report to Architect.
  - After completion of tests, remove remaining sample material and prepare joint for new sealant installation.

#### 3.02 PREPARATION

- A. Remove loose materials and foreign matter that could impair adhesion of sealant.
- B. Clean joints, and prime as necessary, in accordance with manufacturer's instructions.
- C. Perform preparation in accordance with manufacturer's instructions and ASTM C1193.
- D. Mask elements and surfaces adjacent to joints from damage and disfigurement due to sealant work; be aware that sealant drips and smears may not be completely removable.
- Concrete Floor Joints That Will Be Exposed in Completed Work: Test joint filler in inconspicuous area to verify that it does not stain or discolor slab.

#### 3.03 INSTALLATION

- A. Perform work in accordance with sealant manufacturer's requirements for preparation of surfaces and material installation instructions.
- B. Perform installation in accordance with ASTM C1193.
- Perform acoustical sealant application work in accordance with ASTM C919.

Joint Sealants 079200 - 4

Architect's Project No.: 563007

- D. Measure joint dimensions and size joint backers to achieve width-to-depth ratio, neck dimension, and surface bond area as recommended by manufacturer, except where specific dimensions are indicated.
- E. Install bond breaker backing tape where backer rod cannot be used.
- F. Install sealant free of air pockets, foreign embedded matter, ridges, and sags, and without getting sealant on adjacent surfaces.
- G. Do not install sealant when ambient temperature is outside manufacturer's recommended temperature range, or will be outside that range during the entire curing period, unless manufacturer's approval is obtained and instructions are followed.
- H. Nonsag Sealants: Tool surface concave, unless otherwise indicated; remove masking tape immediately after tooling sealant surface.
- I. Concrete Floor Joint Filler: After full cure, shave joint filler flush with top of concrete slab.

#### 3.04 FIELD QUALITY CONTROL

- Perform field quality control inspection/testing as specified in PART 1 under QUALITY ASSURANCE article.
- B. Destructive Adhesion Testing: If there are any failures in first 1000 linear feet, notify Architect immediately.
- C. Remove and replace failed portions of sealants using same materials and procedures as indicated for original installation.
- D. Repair destructive test location damage immediately after evaluation and recording of results.

#### **END OF SECTION**

Joint Sealants 079200 - 5

Architect's Project No.: 563007

#### **SECTION 081113** STEEL DOORS AND FRAMES

#### **PART 1 GENERAL**

#### 1.01 REFERENCE STANDARDS

- A. ADA Standards 2010 ADA Standards for Accessible Design 2010.
- B. ANSI/SDI A250.4 Test Procedure and Acceptance Criteria for Physical Endurance for Steel Doors, Frames and Frame Anchors 2018.
- C. ANSI/SDI A250.8 Specifications for Standard Steel Doors and Frames (SDI-100) 2017.
- D. ANSI/SDI A250.10 Test Procedure and Acceptance Criteria for Prime Painted Steel Surfaces for Steel Doors and Frames 2020.
- E. ASTM A1011/A1011M Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon. Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength 2018a.
- BHMA A156.115 Hardware Preparation in Steel Doors and Steel Frames 2016.
- G. ICC A117.1 Accessible and Usable Buildings and Facilities 2017.
- H. NAAMM HMMA 830 Hardware Selection for Hollow Metal Doors and Frames 2002.
- NAAMM HMMA 831 Hardware Locations for Hollow Metal Doors and Frames 2011.
- NAAMM HMMA 840 Guide Specifications For Receipt, Storage and Installation of Hollow Metal Doors and Frames 2017.
- K. NAAMM HMMA 861 Guide Specifications for Commercial Hollow Metal Doors and Frames
- SDI 117 Manufacturing Tolerances for Standard Steel Doors and Frames 2019.

#### 1.02 SUBMITTALS

- A. See Section 013000 Administrative Requirements for submittal procedures.
- Product Data: Materials and details of design and construction, hardware locations, reinforcement type and locations, anchorage and fastening methods, and finishes.
- Shop Drawings: Details of each opening, showing elevations, frame profiles, and any indicated finish requirements.
- D. Manufacturer's Certificate: Certification that products meet or exceed specified requirements.

#### 1.03 QUALITY ASSURANCE

Maintain at project site copies of reference standards relating to installation of products specified.

#### 1.04 DELIVERY, STORAGE, AND HANDLING

- A. Comply with NAAMM HMMA 840 or ANSI/SDI A250.8 (SDI-100) in accordance with specified requirements.
- Protect with resilient packaging; avoid humidity build-up under coverings; prevent corrosion and adverse effects on factory applied painted finish.

Steel Doors and Frames 081113 - 1

#### **PART 2 PRODUCTS**

#### 2.01 MANUFACTURERS

- A. Hollow Metal Doors and Frames:
  - 1. Ceco Door, an Assa Abloy Group company.
  - 2. Curries, an Assa Abloy Group company.
  - 3. Fleming Door Products, an Assa Abloy Group company.
  - 4. Krieger Specialty Products.
  - 5. Mesker, dormakaba Group.
  - 6. Pioneer Industries, Inc.; an Assa Abloy Group company.
  - 7. Republic Doors, an Allegion brand.
  - 8. Steelcraft, an Allegion brand.
  - 9. Technical Glass Products.

#### 2.02 PERFORMANCE REQUIREMENTS

- A. Requirements for Hollow Metal Doors and Frames:
  - Steel Sheet: Comply with one or more of the following requirements; galvannealed steel complying with ASTM A653/A653M, cold-rolled steel complying with ASTM A1008/A1008M, or hot-rolled pickled and oiled (HRPO) steel complying with ASTM A1011/A1011M, commercial steel (CS) Type B, for each.
  - 2. Accessibility: Comply with ICC A117.1 and ADA Standards.
  - 3. Door Top and Bottom Closures: Flush end closure channel, with top and door faces aligned.
    - a. Inverted channel closure is acceptable for bottom edges and top edges of interior doors that are not exposed to view from above.
  - 4. Door Edge Profile: Hinged edge square, and lock edge beveled Beveled edge.
  - 5. Typical Door Face Sheets: Flush.
  - 6. Glazed Lights: Non-removable stops on non-secure side; sizes and configurations as indicated on drawings. Style: Manufacturers standard.
  - 7. Hardware Preparations, Selections and Locations: Comply with NAAMM HMMA 830 and NAAMM HMMA 831 or BHMA A156.115 and ANSI/SDI A250.8 (SDI-100) in accordance with specified requirements.
  - 8. Zinc Coating for Typical Interior and/or Exterior Locations: Provide metal components zinc-coated (galvanized) and/or zinc-iron alloy-coated (galvannealed) by the hot-dip process in accordance with ASTM A653/A653M, with manufacturer's standard coating thickness, unless noted otherwise for specific hollow metal doors and frames.
    - a. Based on SDI Standards: Provide at least A40/ZF120 (galvannealed) when necessary, coating not required for typical interior door applications, and at least A60/ZF180 (galvannealed) for corrosive locations.
- B. Combined Requirements: If a particular door and frame unit is indicated to comply with more than one type of requirement, comply with the specified requirements for each type; for instance, an exterior door that is also indicated as being sound-rated must comply with the requirements specified for exterior doors and for sound-rated doors; where two requirements conflict, comply with the most stringent.

#### 2.03 HOLLOW METAL DOORS

A. Door Finish: Factory primed and field finished.

Steel Doors and Frames 081113 - 2

Architect's Project No.: 563007

- B. Interior Doors, Non-Fire-Rated: Fabricate from either cold-rolled steel sheet or metallic-coated steel sheet.
  - 1. Based on SDI Standards: ANSI/SDI A250.8 (SDI-100).
    - a. Level 3 Extra Heavy-duty.
    - Physical Performance Level A, 1,000,000 cycles; in accordance with ANSI/SDI A250.4.
    - c. Model 1 Full Flush.
    - d. Door Face Metal Thickness: 16 gauge, 0.053 inch, minimum.
  - 2. Door Core Material: Manufacturers standard core material/construction and in compliance with requirements, except kraft paper honeycomb core is not acceptable.
  - 3. Door Thickness: 1-3/4 inches, nominal.

#### 2.04 HOLLOW METAL FRAMES

- A. Comply with standards and/or custom guidelines as indicated for corresponding door in accordance with applicable door frame requirements.
- B. Frame Finish: Factory primed and field finished.
- C. Interior Door Frames, Non-Fire Rated: Face welded type.
  - 1. Frame Metal Thickness: 16 gauge, 0.053 inch, minimum.
- D. Frames for Wood Doors: Comply with frame requirements in accordance with corresponding door.
- E. Provide mortar guard boxes for hardware cut-outs in frames to be installed in masonry or to be grouted.

#### 2.05 FINISHES

A. Primer: Rust-inhibiting, complying with ANSI/SDI A250.10, door manufacturer's standard.

#### 2.06 ACCESSORIES

- A. Mechanical Fasteners for Concealed Metal-to-Metal Connections: Self-drilling, self-tapping, steel with electroplated zinc finish.
- B. Grout for Frames: Mortar grout complying with ASTM C476 with maximum slump of 4 inches as measured in accordance with ASTM C143/C143M for hand troweling in place; plaster grout and thinner pumpable grout are prohibited.
- C. Silencers: Resilient rubber, fitted into drilled hole; provide three on strike side of single door, three on center mullion of pairs, and two on head of pairs without center mullions.
- D. Temporary Frame Spreaders: Provide for factory- or shop-assembled frames.

#### **PART 3 EXECUTION**

#### 3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that opening sizes and tolerances are acceptable.
- C. Verify that finished walls are in plane to ensure proper door alignment.

#### 3.02 INSTALLATION

A. Install doors and frames in accordance with manufacturer's instructions and related requirements of specified door and frame standards or custom guidelines indicated.

Steel Doors and Frames 081113 - 3

Architect's Project No.: 563007

- 1. Install in accordance with ANSI/SDI A250.11.
- Do not remove temporary frame spreaders until after frames have been properly set and secured.
- Coordinate frame anchor placement with wall construction.
- Grout frames in masonry construction, using hand trowel methods; brace frames so that pressure of grout before setting will not deform frames.
- Install door hardware as specified in Section 087100.
- Coordinate installation of electrical connections to electrical hardware items.
- F. Touch up damaged factory finishes.

#### 3.03 TOLERANCES

- Clearances Between Door and Frame: Comply with related requirements of specified frame standards or custom guidelines indicated in accordance with SDI 117 or NAAMM HMMA 861.
- Maximum Diagonal Distortion: 1/16 inch measured with straight edge, corner to corner.

#### 3.04 ADJUSTING

A. Adjust for smooth and balanced door movement.

#### **END OF SECTION**

Steel Doors and Frames 081113 - 4

Architect's Project No.: 563007

#### **SECTION 081433** STILE AND RAIL WOOD DOORS

#### **PART 1 GENERAL**

#### 1.01 REFERENCE STANDARDS

- A. ASTM C1048 Standard Specification for Heat-Strengthened and Fully Tempered Flat Glass 2018.
- B. AWI/AWMAC/WI (AWS) Architectural Woodwork Standards, 2nd Edition 2014, with Errata (2016).

#### 1.02 SUBMITTALS

- A. Product Data: Indicate stile and rail core materials and construction; veneer species, type and characteristics.
- Shop Drawings: Illustrate door opening criteria, elevations, sizes, types, swings, undercuts required, special beveling, special blocking for hardware, factory machining criteria, factory finishing criteria, and cutouts for glazing.
- C. Selection Samples: Manufacturer's color charts and swatches for hardwood species and stain finishes, indicating full range of materials and colors.
- D. Verification Samples: Corner section of door, minimum 8- by 8-inch, indicating stile and rail construction, face and edge veneer, wood species and stain finish, to match that selected.
- E. Manufacturer's qualification statement.
- F. Warranty, executed in Owner's name.

#### 1.03 QUALITY ASSURANCE

A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section, FSC-accredited chain-of-custody manufacturer.

#### 1.04 DELIVERY, STORAGE, AND HANDLING

- Package, deliver, and store doors in accordance with quality standard specified.
- B. Accept doors on site in manufacturer's packaging, and inspect for damage.
- C. Protect doors with resilient packaging sealed with heat shrunk plastic; do not store in damp or wet areas or areas where sunlight might bleach veneer; seal top and bottom edges with tinted sealer if stored more than one week, and break seal on site to permit ventilation.

### 1.05 WARRANTY

- A. See Section 017800 Closeout Submittals for additional warranty requirements.
- B. Interior Doors: Provide manufacturer's warranty for the life of the installation.
  - Provide warranty on glass vision panels for minimum 5 years.
- Include coverage for delamination of veneer, warping beyond specified installation tolerances, defective materials, and telegraphing core construction.

#### PART 2 PRODUCTS

### 2.01 MANUFACTURERS

- A. Stile and Rail Wood Doors:
  - 1. Artistic Doors and Windows, Inc.

Stile and Rail Wood Doors 081433 - 1

Architect's Project No.: 563007

- 2. Dimension Millworks.
- 3. Masonite Architectural; Aspiro Authentic Stile & Rail Doors.
- 4. VT Industries, Inc; Eggers Stile and Rail Doors.
- 5. Substitutions: See Section 016000 Product Requirements.

#### **2.02 DOORS**

- A. Quality Standard: Custom Grade, Heavy Duty performance, in accordance with AWI/AWMAC/WI (AWS), unless otherwise indicated.
- B. Interior Doors: 1-3/4 inches thick unless otherwise indicated; solid lumber construction; mortise and tenon joints. Transparent finish.

#### 2.03 DOOR AND PANEL FACINGS

- A. Veneer Facing for Transparent Finish: American Cherry, veneer grade in accordance with quality standard indicated, plain sliced (flat cut), with book match between leaves of veneer, running match of spliced veneer leaves assembled on door or panel face.
- B. Adhesive: Type II Water Resistant.

#### 2.04 DOOR CONSTRUCTION

- A. Stiles and Rails: Veneered, structural composite lumber (SCL); with veneers well-matched for all pieces on each door.
- B. Vertical Exposed Edge of Stiles: Of same species as veneer facing.
- C. Fit door edge trim to edge of stiles after applying veneer facing.
- D. Bond edge banding to cores.
- E. Panels: Raised, veneered-wood panel or glass panel, as indicated; manufacturer's standard 8-panel construction to match existing.
  - Panel Trim/Sticking: Manufacturer's standard quarter round (ovolo) or ogee profile to match. Verify match to existing doors in field.
  - 2. Veneered Wood Raised Panel Thickness: Not less than 1-1/8 inches.
  - 3. Glass Panels: Provide 6 mm (1/4 inch nominal), fully tempered clear float glass.
- F. Factory machine doors for finish hardware in accordance with hardware requirements and dimensions. Do not machine for surface hardware.
- G. Factory fit doors for frame opening dimensions identified on shop drawings, with edge clearances in accordance with specified quality standard.
- H. Glazed Openings: Non-removable stops on non-secure side; sizes and configurations as indicated on drawings.
- I. Factory install glazing in doors in compliance with quality standards specified, using manufacturer's standard elastomeric glazing sealant.

#### 2.05 FINISHES

- A. Finish work in accordance with AWI/AWMAC/WI (AWS), Section 5 Finishing for grade specified and as follows:
  - Transparent:
    - a. System 5, Varnish, Conversion or System 11, Polyurethane, Catalyzed.
    - b. Stain: As selected by Architect to match existing facility.
    - c. Sheen: Satin.

Stile and Rail Wood Doors 081433 - 2

Architect's Project No.: 563007

#### 2.06 ACCESSORIES

- A. Glazed Openings:
  - Heat-Strengthened and Fully Tempered Glass: ASTM C1048.
  - Tint: Clear.
- B. Panel or Glass Retention Molding: Wood of same species as door facing, flat bead stop, with butted corners; prepared for countersink style tamper proof screws.
- Door Hardware: Refer to Section 087100.

#### **PART 3 EXECUTION**

### 3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that opening sizes and tolerances are acceptable.
- Do not install doors in frame openings that are not plumb or are out of tolerance for size or alignment.

#### 3.02 INSTALLATION

- A. Install doors in accordance with manufacturer's instructions and specified quality standards.
- B. Factory-Finished Doors: Do not field cut or trim; if fit or clearance is not correct, replace door.
- C. Machine cut for hardware.
- D. Coordinate installation of doors with installation of frames and hardware.
- E. Coordinate installation of glazing.

#### 3.03 TOLERANCES

A. Comply with specified quality standard for fit, clearance, and joinery tolerances.

#### 3.04 ADJUSTING

A. Adjust doors for smooth and balanced door movement.

### **END OF SECTION**

Stile and Rail Wood Doors 081433 - 3

Architect's Project No.: 563007

#### SECTION 083100 ACCESS DOORS AND PANELS

#### **PART 1 GENERAL**

#### 1.01 SUBMITTALS

- A. See Section 013000 Administrative Requirements, for submittal procedures.
- Product Data: Provide sizes, types, finishes, hardware, scheduled locations, and details of adjoining work.

#### 1.02 COORDINATION

- A. Verification: Determine specific locations and sizes for access doors needed to gain access to concealed plumbing, mechanical, or other concealed work, and indicate in the schedule specified in "Submittals" Article.
  - This (083100) material specification includes access doors required for Divisions 21 (Fire Suppression), Division 22, (Plumbing), 23 (HVAC) and Division 26 (Electrical) work and any other access doors indicated on Drawings.

#### **PART 2 PRODUCTS**

#### 2.01 WALL AND CEILING MOUNTED ACCESS UNITS

- A. Manufacturers:
  - 1. Activar Construction Products Group, Inc. JL Industries.
  - 2. ACUDOR Products Inc.
  - 3. Babcock-Davis.
  - Bauco Access Panel Solutions Inc.
  - Best Access Doors.
  - 6. Cendrex. Inc.
  - 7. Karp Associates, Inc.
  - 8. Larsen's Manufacturing Company.
  - 9. Milcor, Inc.
  - 10. Nystrom, Inc.
  - 11. Williams Brothers Corporation of America.
  - 12. Substitutions: See Section 016000 Product Requirements.
- B. Wall and Ceiling Mounted Units: Factory fabricated door and frame, fully assembled units with corner joints welded, filled and ground flush; square and without rack or warp; coordinate requirements with type of installation assembly being used for each unit.
  - 1. Material: Steel.
  - 2. Style (Gypsum Board locations): Recessed door panel for infill with wall/ceiling finish.
    - Gypsum Board Mounting Criteria: Use drywall bead type frame.
  - Style (Masonry locations): Exposed frame, with door surface flush with frame surface.
  - 4. Door Style: Double-skinned hollow panel.
  - 5. Frames: 16 gauge, 0.0598 inch, minimum thickness.
  - 6. Double-Skinned Hollow Steel Sheet Door Panels: 16 gauge, 0.059 inch, minimum thickness, on both sides and along each edge.
  - 7. Units in Fire-Rated Assemblies: Fire rating as required by applicable code for fire-rated assembly that access doors are being installed.

Access Doors and Panels 083100 - 1

Architect's Project No.: 563007

- a. Provide products listed by ITS (DIR) or UL (FRD) as suitable for purpose indicated.
- b. Provide certificate of compliance from authorities having jurisdiction indicating approval of fire rated doors.
- c. Fire-rated door assemblies shall conform with and be installed in accordance with (1) NFPA 80, (2) door and frame manufacturer's installation instructions, and (3) listing requirements of qualified testing agency.
- 8. Steel Finish: Primed.
- Hardware:
  - a. Hardware for Fire-Rated Units: As required for listing.
  - b. Hinges for Non-Fire-Rated Units: Concealed, constant force closure spring type.
  - c. Latch/Lock: Cylinder lock-operated cam latch, two keys for each unit.
    - 1) Detention/I-3 Areas: Provide security type key cylinder by same manufacturer as approved security door hardware (Division 11). Key all secure access doors alike, coordinate with Security Hardware masterkeying.

#### **PART 3 EXECUTION**

#### 3.01 EXAMINATION

- A. Verify that rough openings are correctly sized and located.
- B. Begin installation only after substrates have been properly prepared, and if the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

#### 3.02 PREPARATION

- A. Clean surfaces thoroughly prior to proceeding with this work.
- B. Prepare surfaces using methods recommended by manufacturer for applicable substrates in accordance with project conditions.

#### 3.03 INSTALLATION

- A. Install units in accordance with manufacturer's instructions.
- B. Install frames plumb and level in openings, and secure units rigidly in place.
- C. Position units to provide convenient access to concealed equipment when necessary.

#### **END OF SECTION**

Access Doors and Panels 083100 - 2

#### SECTION 087100 - DOOR HARDWARE

#### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

#### 1.2 SUMMARY

- A. This Section includes the following:
  - 1. Commercial door hardware for the following:
    - 1. Swinging doors.
    - 2. Other doors to the extent indicated.
  - 2. Electrified door hardware.
- B. Related Sections include the following:
  - 1. Division 8 Section "Steel Doors and Frames" for astragals provided as part of a fire-rated labeled assembly and for door silencers provided as part of the frame.
  - 2. Division 8 Sections "Flush Wood Doors" and "Stile and Rail Wood Doors" for wood doors, including integral intumescent seals provided as part of fire-rated assemblies.
  - 3. Division 16 Sections for connections to electrical power system and for low-voltage wiring work.
- C. Products furnished, but not installed, under this Section include the following. Coordinating, purchasing, delivering, and scheduling remain requirements of this Section.
  - 1. Final replacement cores and keys to be furnished and installed by Owner.

#### 1.3 SUBMITTALS

- A. Product Data: Include installation details, material descriptions, dimensions of individual components and profiles, and finishes.
- B. Shop Drawings: Details of electrified door hardware, indicating the following:
  - 1. Operation Narrative: Describe the operation of doors controlled by electrified door hardware.
- C. Door Hardware Schedule: Prepared by or under the supervision of supplier, detailing fabrication and assembly of door hardware, as well as procedures and diagrams. Coordinate the final Door Hardware Schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of door hardware.
  - 1. Format: Comply with scheduling sequence and vertical format in DHI's "Sequence and Format for the Hardware Schedule."
  - 2. Organization: Organize the Door Hardware Schedule into door hardware sets indicating complete designations of every item required for each door or opening.
    - 1. Organize door hardware sets in same order as in the Door Hardware Schedule at the end of Part 3.
  - 3. Content: Include the following information:
    - 1. Type, style, function, size, label, hand, and finish of each door hardware item.

Architect's Project No.: 563007

- 2. Manufacturer of each item.
- Fastenings and other pertinent information. 3.
- Location of each door hardware set, cross-referenced to Drawings, both on floor 4. plans and in door and frame schedule.
- 5. Explanation of abbreviations, symbols, and codes contained in schedule.
- 6. Mounting locations for door hardware.
- Door and frame sizes and materials. 7.
- 4. Submittal Sequence: Submit the final Door Hardware Schedule at earliest possible date, particularly where approval of the Door Hardware Schedule must precede fabrication of other work that is critical in the Project construction schedule. Include Product Data, Samples, Shop Drawings of other work affected by door hardware, and other information essential to the coordinated review of the Door Hardware Schedule.
- D. Product Certificates: For electrified door hardware, signed by product manufacturer.
  - Certify that door hardware approved for use on types and sizes of labeled fire doors 1. complies with listed fire door assemblies.
- E. Keying Schedule: Provide a keying schedule based on the owner's keying directions.
- F. Product Test Reports: Based on evaluation of comprehensive tests performed by manufacturer and witnessed by a qualified testing agency, indicating current products meet requirements.
- Maintenance Data: For each type of door hardware to include in maintenance manuals G. specified in Division 1.
- H. Warranties: Special warranties specified in this Section.

#### 1.4 **OUALITY ASSURANCE**

- Installer Qualifications: An experienced installer who has completed door hardware similar A. in material, design, and extent to that indicated for this Project and whose work has resulted in construction with a record of successful in-service performance.
  - Engineering Responsibility: Preparation of data for electrified door hardware, including 1. Shop Drawings, based on testing and engineering analysis of manufacturer's standard units in assemblies similar to those indicated for this Project.
- B. Supplier Qualifications: Door hardware supplier with local warehousing facilities and who is or employs a qualified Architectural Hardware Consultant, available during course of the Work to consult with Contractor, Architect, and Owner about door hardware and keying.
  - 1. Scheduling Responsibility: Preparation of door hardware and keying schedules.
- C. Architectural Hardware Consultant Qualifications: A person who is currently certified by the Door and Hardware Institute as an Architectural Hardware Consultant and who is experienced in providing consulting services for door hardware installations that are comparable in material, design, and extent to that indicated for this Project.
  - Electrified Door Hardware Consultant Qualifications: 1. A qualified Architectural Hardware Consultant who is experienced in providing consulting services for electrified door hardware installations.
- D. Source Limitations: Obtain each type and variety of door hardware from a single manufacturer, unless otherwise indicated.

1. Provide electrified door hardware from same manufacturer as mechanical door hardware, unless otherwise indicated. Manufacturers that perform electrical modifications and that are listed by a testing and inspecting agency acceptable to authorities having jurisdiction are acceptable.

- E. Regulatory Requirements: Comply with provisions of the following:
  - 1. Where indicated to comply with accessibility requirements, comply with Americans with Disabilities Act (ADA), ANSI A117.1, as follows:
    - 1. Handles, Pulls, Latches, Locks, and other Operating Devices: Shape easy to grasp with one hand and not requiring tight grasping, tight pinching, or twisting of wrist.
    - 2. Door Closers: Comply with the following opening-force requirements:
      - 1) Interior Hinged Doors: Maximum 5 lbf applied perpendicular to door.
      - 2) Fire Doors: Minimum opening force per authorities having jurisdiction.
    - 3. Thresholds: Not more than 1/2 inch high, beveled with maximum slope of 1:2.
  - 2. NFPA 101: Comply with the following for means of egress doors:
    - 1. Latches, Locks, and Exit Devices: Not more than 15 lbf to release the latch. Locks shall not require the use of a key, tool, or special knowledge for operation.
    - 2. Door Closers: Not more than 30 lbf to set door in motion and not more than 15 lbf to open door to minimum required width.
    - 3. Thresholds: Not more than 1/2 inch high.
- F. Fire-Rated Door Assemblies: Provide door hardware for assemblies complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire ratings indicated, based on testing according to NFPA 252.
  - 1. Test Pressure: After 5 minutes into the test, neutral pressure level in furnace shall be established at 40 inches or less above the sill. (Positive pressure testing per IBC 2006).
- G. Electrified Door Hardware: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- H. Keying Conference: Meet with the owner, if necessary, to acquire lock keying instructions.

#### 1.5 DELIVERY, STORAGE, AND HANDLING

- A. Inventory door hardware on receipt and provide secure lock-up for door hardware delivered to Project site. Aluminum door hardware should be delivered to jobsite and inventoried by general contractor prior to being turned over to the aluminum door supplier when templates are no adequate to manufacture aluminum doors and frames.
- B. Tag each item or package separately with identification related to the final Door Hardware Schedule and include basic installation instructions with each item or package.
- C. Deliver keys to Construction Manager at the Project site.

#### 1.6 COORDINATION

A. Templates: Obtain and distribute to the parties involved templates for doors, frames, and other work specified to be factory prepared for installing door hardware. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.

Architect's Project No.: 563007

B. Electrical System Roughing-in: Coordinate layout and installation of electrified door hardware with connections to power supplies.

#### 1.7 WARRANTY

- A. General Warranty: Special warranties specified in this Article shall not deprive Owner of other rights Owner may have under other provisions of the Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of the Contract Documents.
- B. Warranty Period: One year from date of Substantial Completion, unless otherwise indicated.
  - 1. Exit Devices: Five years from date of sale.
  - 2. Manual Closers: Thirty years from date of sale.
  - 3. Mortise Locks: Ten years from date of sale.

#### 1.8 MAINTENANCE SERVICE

- A. Maintenance Tools and Instructions: Furnish a complete set of specialized tools and maintenance instructions as needed for Owner's continued adjustment, maintenance, and removal and replacement of door hardware.
- B. Maintenance Service: Beginning at Substantial Completion, provide six months' full maintenance by skilled employees of door hardware Installer. Include quarterly preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper door hardware operation. Provide parts and supplies as used in the manufacture and installation of original products.

#### PART 2 - PRODUCTS

#### 2.1 SCHEDULED DOOR HARDWARE

- A. General: Provide door hardware for each door to comply with requirements in this Section, door hardware sets indicated in door and frame schedule, and the Door Hardware Schedule at the end of Part 3.
  - 1. Door Hardware Sets: Provide quantity, item, size, finish or color indicated, and products equivalent in function and comparable in quality to named products.
- B. Designations: Requirements for design, grade, function, finish, size, and other distinctive qualities of each type of door hardware are indicated in the Door Hardware Schedule at the end of Part 3. Products are identified by using door hardware designations, as follows:
  - 1. Named Manufacturer's Products: Product designation and manufacturer are listed for each door hardware type required for the purpose of establishing minimum requirements. Manufacturers' names are abbreviated in the Door Hardware Schedule.

### 2.2 HINGES AND PIVOTS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
  - 1. Hinges:
    - 1. Hager Companies
    - 2. Ives
    - 3. \*McKinney Products
    - 4. Best

Architect's Project No.: 563007

- 2. Continuous Geared Hinges: Provide serviceable panels at electric hinges that enable access to wiring without removal of hinge.
  - 1. Hager Companies
  - 2. Markar Products, Inc.
  - 3. \*Pemko
  - 4. Select Products
- B. Quantity: As scheduled.
- C. Size: Provide sizes scheduled.
- D. Hinge Base Metal: Unless otherwise indicated, provide the following:
  - 1. Exterior Hinges: Brass, with stainless-steel pin body and brass protruding heads.
  - 2. Interior Hinges: Steel, with steel pin.
  - 3. Hinges for Fire-Rated Assemblies: Steel, with steel pin.
- E. Hinge Options: Comply with the following where indicated in the Door Hardware Schedule or on Drawings:
  - 1. Non-removable Pins: Provide set screw in hinge barrel that, when tightened into a groove in hinge pin, prevents removal of pin while door is closed; for the following applications:
    - 1. Out-swinging exterior doors.
  - 2. Corners: Square.
- F. Continuous-Geared Hinges: Overall width of 4 inches; fabricated to full height of door and frame. Fabricate hinges to template screw locations.
- G. Electrified Functions for Hinges: Comply with the following:
  - 1. Power Transfer: Concealed PTFE-jacketed wires, secured at each leaf and continuous through hinge knuckle. Servable panels at continuous hinges.
- H. Fasteners: Comply with the following:
  - 1. Machine Screws: For metal doors and frames. Install into drilled and tapped holes.
  - 2. Wood Screws: For wood doors and frames.
  - 3. Threaded-to-the-Head Wood Screws: For fire-rated wood doors.
  - 4. Screws: Phillips flat-head screws; Finish screw heads to match surface of hinges.

#### 2.3 LOCKS AND LATCHES

- A. Acceptable Manufacturers:
  - 1. Corbin Russwin ML2000 LSA 606
  - 2. Sargent 8200 LNJ US4
  - 3. Schlage L9000 03A 606
- B. Mortise Locks: Stamped steel case with steel or brass parts; BHMA Grade 1, Series 1000.
- C. Auxiliary Locks: BHMA Grade 1.
- D. Certified Products: Provide door hardware listed in the following BHMA directories:
  - 1. Mechanical Locks and Latches: BHMA's "Directory of Certified Locks & Latches."
- E. Lock Trim: Comply with the following:
  - 1. Lever: Cast
  - 2. Escutcheon (Rose): Cast

Architect's Project No.: 563007

- 3. Lockset Designs: Provide the lockset design designated in schedule or, if sets are provided by another manufacturer, provide designs that match those designated.
- F. Lock Functions: Function numbers and descriptions indicated in the Door Hardware Schedule comply with the following:
  - Mortise Locks: BHMA A156.13. 1.
- G. Lock Throw: Comply with testing requirements for length of bolts to comply with labeled fire door requirements, and as follows:
  - Mortise Locks: Minimum 3/4-inch latchbolt throw. 1.
- H. Backset: 2-3/4 inches, unless otherwise indicated.

#### 2.4 **EXIT DEVICES**

- Acceptable Manufacturers: A.
  - Von Duprin 99 Series-No Substitutes 1.
- Certified Products: Exit devices listed in BHMA's "Directory of Certified Exit Devices." В.
- Panic Exit Devices: Listed and labeled by a testing and inspecting agency acceptable to C. authorities having jurisdiction, for panic protection, based on testing according to UL 305.
- Fire Exit Devices: Complying with NFPA 80 that are listed and labeled by a testing and D. inspecting agency acceptable to authorities having jurisdiction, for fire and panic protection, based on testing according to UL 305 and NFPA 252.
- E. Outside Trim: Lever with cylinder material and finish to match locksets.
  - 1. Match design for locksets and latchsets, unless otherwise indicated.

#### 2.5 **KEYING SYSTEM**

All cylinders must be keyed into the existing Corbin Russwin system. Use standard fixed core A. cylinders. Key locks as directed by the owner during the keying meeting.

#### 2.6 **KEY REQUIREMENTS**

A. Provide temporary construction keying as required.

#### 2.7 **CLOSERS**

- Manufacturers: Subject to compliance with requirements, provide products by one of the A. following:
  - 1. Surface-Mounted Closers:
    - LCN Closers 4040XP No Substitutes
- Surface Closers: BHMA Grade 1 B.
- Certified Products: Provide door closers listed in BHMA's "Directory of Certified Door C. Closers."
- Size of Units: Comply with manufacturer's written recommendations for size of door closers D. depending on size of door, exposure to weather, and anticipated frequency of use. Provide factory-sized closers, adjustable to meet field conditions and requirements for opening force.

### ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION

Arlington, Virginia
Architect's Project No.: 563007

#### 2.8 PROTECTIVE TRIM UNITS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
  - 1. Metal Protective Trim Units:
    - 1. Hager Companies
    - 2. Ives: H. B. Ives
    - 3. \*Rockwood Manufacturing Company
- B. Fasteners: Provide manufacturer's standard exposed fasteners for door trim units consisting of either machine or self-tapping screws.
- C. Furnish protection plates sized 2 inches less than door width on push side and 1 inch less than door width on pull side, by height specified in Door Hardware Schedule.

#### 2.9 DOOR STOPS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
  - 1. Door Controls International
  - 2. Glynn-Johnson
  - 3. Hager Companies
  - 4. Ives: H. B. Ives
  - 5. \*Rockwood Manufacturing Company
- B. Stops and Bumpers: BHMA Grade 1.
- C. Combination Overhead Stops and Holders: BHMA Grade 1.
- D. Floor Stops: For doors, unless wall or other type stops are scheduled or indicated. Do not mount floor stops where they will impede traffic.
  - 1. Where floor or wall stops are not appropriate, provide overhead stops.

#### 2.10 DOOR GASKETING

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
  - 1. Door Gasketing:
    - 1. \*National Guard Products, Inc.
    - 2. Pemko Manufacturing Co., Inc.
    - 3. Reese Enterprises, Inc.
    - 4. Zero International, Inc.
  - 2. Door Bottoms:
    - 1. \*National Guard Products, Inc.
    - 2. Pemko Manufacturing Co., Inc.
    - 3. Reese Enterprises, Inc.
    - 4. Zero International, Inc.
- B. General: Provide continuous weather-strip gasketing on exterior doors where indicated or scheduled. Provide noncorrosive fasteners for exterior applications and elsewhere as indicated.
  - 1. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.
  - 2. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.
  - 3. Door Bottoms: Apply to door bottom, forming seal with threshold when door is closed.

#### 2.11 THRESHOLDS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
  - 1. \*National Guard Products, Inc.
  - 2. Pemko Manufacturing Co., Inc.
  - 3. Reese Enterprises, Inc.
  - 4. Zero International, Inc.

#### 2.12 MISCELLANEOUS DOOR HARDWARE

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
  - 1. Hager Companies
  - 2. Ives: H. B. Ives
  - 3. \*Rockwood Manufacturing Company
- B. Auxiliary Hardware: BHMA Grade 1, unless otherwise indicated.

#### 2.13 FABRICATION

- A. Manufacturer's Nameplate: Do not provide manufacturers' products that have manufacturer's name or trade name displayed in a visible location (omit removable nameplates) except in conjunction with required fire-rated labels and as otherwise approved by Architect.
  - 1. Manufacturer's identification will be permitted on rim of lock cylinders only.
- B. Base Metals: Produce door hardware units of base metal, fabricated by forming method indicated, using manufacturer's standard metal alloy, composition, temper, and hardness. Furnish metals of a quality equal to or greater than that of specified door hardware units and BHMA A156.18 for finishes. Do not furnish manufacturer's standard materials or forming methods if different from specified standard.
- C. Fasteners: Provide door hardware manufactured to comply with published templates generally prepared for machine, wood, and sheet metal screws. Provide screws according to commercially recognized industry standards for application intended. Provide Phillips flathead screws with finished heads to match surface of door hardware, unless otherwise indicated.
  - Concealed Fasteners: For door hardware units that are exposed when door is closed, except for units already specified with concealed fasteners. Do not use through bolts for installation where bolt head or nut on opposite face is exposed unless it is the only means of securely attaching the door hardware. Where through bolts are used on hollow door and frame construction, provide sleeves for each through bolt.
  - 2. Steel Machine or Wood Screws: For the following fire-rated applications:
    - Mortise hinges to doors.
    - 2. Strike plates to frames.
    - 3. Closers to doors and frames.
  - 3. Fasteners for Wood Doors: Comply with requirements of DHI WDHS.2, "Recommended Fasteners for Wood Doors." Thru bolts are not acceptable. Use wood screws for attachment to wood doors.

Architect's Project No.: 563007

#### 2.14 **FINISHES**

- Standard: Comply with BHMA A156.18. A.
- В. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece are not acceptable. Variations in appearance of other components are acceptable if within the range of approved Samples and assembled or installed to minimize contrast.
- D. BHMA Designations: Comply with base material and finish requirements indicated by the following:
  - 1. BHMA 606, US4: Satin brass.

#### **PART 3 - EXECUTION**

#### 3.1 **EXAMINATION**

- A. Examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire door assembly construction, wall and floor construction, and other conditions affecting performance.
- Examine roughing-in for electrical power systems to verify actual locations of wiring В. connections before electrified door hardware installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

#### 3.2 **PREPARATION**

- Steel Doors and Frames: Comply with DHI A115 series. A.
  - Surface-Applied Door Hardware: Drill and tap doors and frames according to SDI 107.
- B. Wood Doors: Comply with DHI A115-W series. Use wood screws on wood doors.

#### 3.3 **INSTALLATION**

- Mounting Heights: Mount door hardware units at heights indicated in following applicable A. publications, unless specifically indicated or required to comply with governing regulations:
  - Standard Steel Door Frames: DHI's "Recommended Locations for Architectural 1. Hardware for Standard Steel Doors and Frames."
  - 2. DHI WDHS.3. Locations for Wood Doors."
- Install each door hardware item to comply with manufacturer's written instructions. Where B. cutting and fitting are required to install door hardware onto or into surfaces that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing work specified in Division 9 Sections. Do not install surface-mounted items until finishes have been completed on substrates involved.
  - 1. Set units level, plumb, and true to line and location. Adjust and reinforce attachment substrates as necessary for proper installation and operation.
  - 2. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.

Architect's Project No.: 563007

C. Thresholds: Set thresholds for exterior doors in full bed of sealant complying with requirements specified in Division 7 Section "Joint Sealants."

#### **ADJUSTING** 3.4

- Initial Adjustment: Adjust and check each operating item of door hardware and each door to A. ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.
  - Door Closers: Adjust sweep period so that, from an open position of 70 degrees, the door will take at least 3 seconds to move to a point 3 inches from the latch, measured to the leading edge of the door.
- B. Six-Month Adjustment: Approximately six months after date of Substantial Completion, Installer shall perform the following:
  - Examine and readjust each item of door hardware as necessary to ensure function of 1. doors and door hardware.
  - 2. Consult with and instruct Owner's personnel on recommended maintenance procedures.
  - Replace door hardware items that have deteriorated or failed due to faulty design, 3. materials, or installation of door hardware units.

#### 3.5 **CLEANING AND PROTECTION**

- Clean adjacent surfaces soiled by door hardware installation. A.
- В. Clean operating items as necessary to restore proper function and finish.
- Provide final protection and maintain conditions that ensure door hardware is without damage C. or deterioration at time of Substantial Completion.

#### 3.6 HARDWARE SETS

#### **HW-1** 01, 05

2 EACH HINGE TA2714 4 1/2 X 4 1/2 US4 NRP 1 EACH HINGE TA2714-QC12 4 ½ X 4 ½ US4

ML20906 LSA 606 M92 24V (FAIL SECURE) 1 EACH LOCKSET

1 EACH WIRE HARNESS QC-C300P 1 EACH WIRE HARNESS OC-C1500P

1 EACH CLOSER 4040XP Rw/PA 696 (PUSH OR PULL SIDE MOUNTED AS REQUIRED)

K1050 8" X 2" LDW CSK US4 1 EACH KICK PLATE 1 EACH WALL STOP 403 US4 (AS REQUIRED)

3 EACH SILENCERS 608

CARD READER, POWER SUPPLY, AND DOOR POSITION SWITCH SUPPLIED BY ACCESS CONTROL PROVIDER. PRESENTATION OF PROPER CREDENTIAL AT THE READER WILL UNLOCK THE LOCK LEVER ON THE CORRIDOR 17 AND 18 SIDES OF THE DOORS FOR AUTHORIZED ENTRY. REX IN LOCK CAN BE USED TO BYPASS THE DOOR POSITION SWITCH SIGNAL FOR AUTHORIZED EGRESS. LOCK TRIM REMAINS LOCKED IN THE EVENT OF A POWER OUTAGE.

Architect's Project No.: 563007

### **HW-2** 02, 03, 09, 10, 11, 14

3 EACH HINGE TA2714 4 ½ X 4 ½ US4 1 EACH LOCKSET ML2051 LSA US4

1 EACH WALL STOP 403 US4 3 EACH SILENCERS 608

#### **HW-3** 08

6 EACH HINGE TA2714 4 ½ X 4 ½ US4
2 SETS PUSH/PULL RM3301 24" US4 BTB5HD
2 EACH CLOSER 4040XP-SCUSH 696

2 EACH KICK PLATE K1050 8" X 1" LDW CSK US4

2 EACH SILENCERS 608

#### **HW-4** 07

3 EACH HINGE TA2714 4 ½ X 4 ½ US4 NRP 1 EACH LOCKSET ML2057 LSA 606 M92 1 EACH ELECTRIC STRIKE 1500C 606 (FAIL SECURE)

1 EACH WIRE HARNESS QC-C300P 2 EACH WIRE HARNESS QC-C1500P

1 EACH AUTO. DOOR OPERATOR BESAM SW200 696

1 EACH RELAY MODULE BEA 10BR3

1 EACH ACTUATOR
BEA 10PBO241 (OUTSIDE ONLY)
1 EACH KICK PLATE
K1050 8" X 2" LDW CSK US4
1 EACH WALL STOP
403 US4 (AS REQUIRED)

3 EACH SILENCERS 608

CARD READER, POWER SUPPLY, AND DOOR POSITION SWITCH SUPPLIED BY ACCESS CONTROL PROVIDER. PRESENTATION OF PROPER CREDENTIAL AT THE READER WILL RELEASE THE ELECTRIC STRIKE AND ACTIVATE THE WALL ACTUATOR FOR AUTHORIZED ENTRY MANUALLY OR BY WAY OF DOOR OPERATOR. REX IN LOCK CAN BE USED TO BYPASS THE DOOR POSITION SWITCH SIGNAL FOR AUTHORIZED EGRESS. ELECTRIC STRIKE REMAINS LOCKED IN THE EVENT OF A POWER OUTAGE.

Architect's Project No.: 563007

#### **HW-5** 04

5 EACH HINGE TA2714 4 ½ X 4 ½ US4 NRP 1 EACH HINGE TA2714-QC-12 4 ½ X 4 ½ US4

2 EACH FLUSH BOLT 555 12" US4 1 EACH DUST PROOF STRIKE 570 US4

1 EACH LOCKSET ML20906 LSA 606 M92 24V (FAIL SECURE)

1 EACH WIRE HARNESS QC-C300P 1 EACH WIRE HARNESS QC-C1500P

1 EACH CLOSER 4040XP SCUSH 696 @ ACTIVE LEAF

1 EACH O H STOP 590S US4 @ INACTIVE LEAF 2 EACH KICK PLATE K1050 8" X 1" LDW CSK US4

2 EACH SILENCERS 608

CARD READER, POWER SUPPLY, AND DOOR POSITION SWITCH SUPPLIED BY ACCESS CONTROL PROVIDER. PRESENTATION OF PROPER CREDENTIAL AT THE READER WILL UNLOCK THE LOCK LEVER ON THE CIRCUIT COURT WAITING SIDE OF THE DOOR FOR AUTHORIZED ENTRY. REX IN LOCK CAN BE USED TO BYPASS THE DOOR POSITION SWITCH SIGNAL FOR AUTHORIZED EGRESS. LOCK TRIM REMAINS LOCKED IN THE EVENT OF A POWER OUTAGE.

END OF SECTION 087100

Architect's Project No.: 563007

### **SECTION 092216 COLD FORMED STEEL FRAMING - NON-STRUCTURAL (CFSF-NS)**

#### **PART 1 GENERAL**

#### 1.01 RELATED REQUIREMENTS

A. Refer to Section 054000 - Cold-Formed Steel Framing - Structural (CFSF-S): Requirements for structural, load-bearing, metal stud framing, exterior wall stud framing, and overhead/suspended/bulkhead framing.

#### 1.02 REFERENCE STANDARDS

- A. ASTM A36/A36M Standard Specification for Carbon Structural Steel 2019.
- B. ASTM A653/A653M Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process 2020.
- C. ASTM A1003/A1003M Standard Specification for Steel Sheet, Carbon, Metallic- and Nonmetallic-Coated for Cold-Formed Framing Members 2015.
- D. ASTM C645 Standard Specification for Nonstructural Steel Framing Members 2018.
- E. ASTM C665 Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing 2017.
- F. ASTM C754 Standard Specification for Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products 2020.
- G. ASTM E90 Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements 2009 (Reapproved 2016).
- H. ASTM E413 Classification for Rating Sound Insulation 2022.

#### 1.03 SUBMITTALS

- A. See Section 013000 Administrative Requirements for submittal procedures.
- B. Product Data: Provide data describing framing member materials and finish, product criteria, load charts, and limitations.

#### **PART 2 PRODUCTS**

### 2.01 FRAMING MATERIALS

- A. Non-Loadbearing Framing System Components: ASTM C645; galvanized sheet steel.
  - Steel Thickness (Studs and Runners): Minimum 0.0179-inch (18 mil / 25 gauge) unless otherwise required to comply with ASTM C754 for the spacing indicated, with maximum deflection of wall framing of L/240 at 5 psf, and as indicated below:
    - Provide minimum 0.0329-inch thickness (33 mil / 20 gauge structural) for all partitions using 3-5/8-inch-deep studs where stud partition height is greater than 12 feet above floor level.
    - Provide minimum 0.0329-inch (33 mil / 20 gauge Structural) for high-density board applications, such as ASTM C 1178 tile backing panels and ASTM C 1629 abuse- or impact-resistant gypsum board, and at door frames.
    - Provide minimum 0.0329-inch (33 mil / 20 gauge Structural) for walls receiving heavy wall-hung items or loads, including but not limited to wall cabinets, wall-hung countertops, TV brackets, liquid tanks, folding and fixed seats, grab bars, handrails, exercise equipment, and shelving greater than 9 inches deep and over 3 feet in length.

Architect's Project No.: 563007

- Studs: C shaped with knurled or embossed faces.
- 3. Runners: U shaped, sized to match studs.
- 4. Furring: Hat-shaped sections, minimum depth of 7/8 inch.
- 5. Resilient Furring Channels: Single or double leg configuration; 1/2 inch channel depth.
- B. Deflection and Firestop Track: Intumescent strip factory-applied to track flanges expands when exposed to heat or flames to provide a perimeter joint seal.
- C. Non-Loadbearing Framing Accessories:
  - Partial Height Wall Framing Support: Provides stud reinforcement and anchored connection to floor.
    - a. Materials: ASTM A36/A36M formed sheet steel support member with factory-welded ASTM A1003/A1003M steel plate base.
  - 2. Framing Connectors: ASTM A653/A653M G90 galvanized steel clips; secures cold rolled channel to wall study for lateral bracing.
  - 3. Sheet Metal Backing: 0.036 inch thick, galvanized.
  - 4. Fasteners: Self-tapping screws designed for attachment of metal framing and recommended by manufacturer.
  - 5. Anchorage Devices: Powder actuated or screw anchors with sleeves, recommended by manufacturer for anchorage to indicated substrates.
  - 6. Acoustic Insulation: ASTM C665; preformed glass fiber, friction fit type, unfaced. Thickness as indicated, or sized to fit stud depth indicated.
  - 7. Acoustic Sealant: Refer to Division 07 Section "Joint Sealants."

#### 2.02 FABRICATION

- A. Fabricate assemblies of framed sections to sizes and profiles required.
- B. Fit, reinforce, and brace framing members to suit design requirements.

#### **PART 3 EXECUTION**

#### 3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that rough-in utilities are in proper location.

#### 3.02 INSTALLATION OF STUD FRAMING

- A. Comply with requirements of ASTM C754.
- B. Extend partition framing to structure where indicated and to ceiling in other locations.
- C. Partitions Terminating at Ceiling: Attach ceiling runner securely to ceiling track in accordance with manufacturer's instructions.
- D. Align and secure top and bottom runners at 24 inches on center.
- E. At partitions indicated with an acoustic rating:
  - Provide components and install as required to produce STC ratings as indicated, based on published tests by manufacturer conducted in accordance with ASTM E90 with STC rating calculated in accordance with ASTM E413.
- F. Fit runners under and above openings; secure intermediate studs to same spacing as wall studs.
- G. Install studs vertically at 16 inches on center, unless otherwise indicated.
- H. Align stud web openings horizontally.

Architect's Project No.: 563007

- I. Secure studs to tracks using crimping method. Do not weld.
- J. Fabricate corners using a minimum of three studs.
- K. Install double studs at wall openings, door and window jambs, not more than 2 inches from each side of openings.
- Coordinate erection of studs with requirements of door frames; install supports and attachments.
- M. Coordinate installation of bucks, anchors, and blocking with electrical, mechanical, and other work to be placed within or behind stud framing.
- N. Blocking: Use FRT wood blocking or metal channel stud blocking, secured to studs. Provide blocking for support of plumbing fixtures, toilet partitions, wall cabinets, toilet accessories, hardware, opening frames, and other built-in-place wall mounted items and equipment.
- O. Furring: Install at spacing and locations shown on drawings. Lap splices a minimum of 6 inches.

#### 3.03 TOLERANCES

- A. Maximum Variation From True Position: 1/8 inch in 10 feet.
- B. Maximum Variation From Plumb: 1/8 inch in 10 feet.

#### **END OF SECTION**

Architect's Project No.: 563007

### SECTION 092900 GYPSUM BOARD

#### **PART 1 GENERAL**

#### 1.01 SUBMITTALS

- A. See Section 013000 Administrative Requirements for submittal procedures.
- B. Product Data: Provide data on gypsum board, glass mat faced gypsum board, accessories, and joint finishing system.
- C. Test Reports: Bullet resistant sheathing and wallboard.

#### **PART 2 PRODUCTS**

#### 2.01 BOARD MATERIALS

- A. Gypsum Wallboard: Paper-faced gypsum panels as defined in ASTM C1396/C1396M; sizes to minimize joints in place; with tapered edges.
  - 1. Application: Use for vertical surfaces and ceilings, unless otherwise indicated.
  - 2. Mold Resistance: Score of 10, when tested in accordance with ASTM D3273.
    - Mold-resistant board is required whenever gypsum board is indicated in rooms subject to steam or water, including mechanical rooms, toilet rooms, custodial rooms, and kitchens.
  - 3. At Assemblies Indicated with Fire-Resistance Rating: Use type required by indicated tested assembly; if no tested assembly is indicated, use Type X board, UL or WH listed.
  - 4. Thickness:
    - a. Vertical Surfaces: 5/8 inch.
    - b. Ceilings: 5/8 inch.
    - c. Curved Surfaces: Provide flexible 1/4 inch thickness gypsum board.
- B. Tile Backing Board:
  - Application: Surfaces behind tile in wet areas including tub and shower surrounds.
  - 2. Mold Resistance: Score of 10, when tested in accordance with ASTM D3273.
  - ANSI Cement-Based Board: Non-gypsum-based; cementitious panels with glass fiber mesh embedded in front and back surfaces complying with ANSI A118.9 and ASTM C 1288 or ASTM C1325.
    - a. Thickness: 5/8 inch.
    - b. Available Products:
      - 1) FinPan, Inc.; Util-A-Crete Backer Board.
      - 2) National Gypsum Company; PermaBase Cement Board.
      - USG Corporation; Durock Cement Board.
      - 4) Substitutions: See Section 016000 Product Requirements.
- C. Bullet Resistant Sheathing and Wallboard: Woven roving, multi-ply, ballistic grade fiberglass cloth with thermoset polyester resin; comply with UL 752 Level 3. Size boards to minimize joints.
  - 1. Thickness: Nominal 7/16 inch or 1/2 inch as standard with manufacturer.
  - 2. Available Products:
    - a. ArmorCore by Waco Composites; Bullet Resistant Fiberglass Panels.
    - b. Armortex, Div. of Safeguard Security System, Inc.; OF 300.

Gypsum Board 092900 - 1

Architect's Project No.: 563007

- c. Chicago Bullet Proof Systems; Fibre-Tex.
- d. C.R. Laurence of North America; BRF300.
- e. Insulgard Corporation; FG-300.
- f. Substitutions: See Section 016000 Product Requirements.
- D. Exterior Sheathing Board for Ceilings and Soffits: Sizes to minimize joints in place; ends square cut.
  - 1. Mold Resistance: Score of 10, when tested in accordance with ASTM D3273.
  - 2. Fungal Resistance: No fungal growth when tested in accordance with ASTM G21.
  - Glass Mat Faced Sheathing: Glass mat faced gypsum substrate as defined in ASTM C1177/C1177M.
  - 4. Edges: Square.
  - Available Glass Mat Faced Products:
    - a. American Gypsum Company; M-Glass Exterior Sheathing.
    - b. CertainTeed Corporation; GlasRoc Exterior Sheathing.
    - c. Continental Building Products; Weather Defense Platinum Exterior Sheathing.
    - d. Georgia-Pacific Gypsum; DensGlass Sheathing.
    - e. National Gypsum Company; Gold Bond eXP Sheathing.
    - f. USG Corporation; USG Securock Brand Ultralight Glass-Mat Sheathing.

#### 2.02 GYPSUM WALLBOARD ACCESSORIES

- A. Acoustic Insulation: ASTM C665; preformed glass fiber, friction fit type, unfaced. Thickness sized to fit metal stud cavity.
- B. Acoustic Sealant: Acrylic emulsion latex or water-based elastomeric sealant; do not use solvent-based non-curing butyl sealant. Refer to sealant AS-1 in Division 7 Section "Joint Sealants."
- C. Putty Pads: Non-hardening endothermic material, in pad form, faced on both sides with poly liner, designed to seal around penetrations and wiring devices, enhancing acoustic performance.
  - 1. Nominal Size: 7-1/4 x 7-1/4 x 3/16 inches.
  - 2. Available Products:
    - a. 3M; Fire Barrier Moldable Putty Pads MPP+.
    - b. Hilti; Firestop Putty Pad, CFS-P PA.
    - Specified Technologies, Inc.; SpecSeal Putty Pad.
- D. Beads, Joint Accessories, and Other Trim: ASTM C1047, rigid plastic, galvanized steel, or rolled zinc, unless noted otherwise.
  - 1. Corner Beads: Low profile, for 90 degree outside corners.
  - 2. L-Trim with Tear-Away Strip: Sized to fit gypsum wallboard size(s) indicated.
- E. Moisture Guard Trim: ASTM C1047, rigid plastic, 48 inch length, applied to bottom edge of gypsum board.
  - 1. Height: 1-3/4 inch.
  - 2. Depth: Match gypsum board thickness.
  - In lieu of moisture guard trim; Contractor may at its option install gypsum board with a 1/2to 5/8-inch gap at base of wall.
- F. Joint Materials: ASTM C475/C475M and as recommended by gypsum board manufacturer for project conditions.

Gypsum Board 092900 - 2

Architect's Project No.: 563007

- 1. Fiberglass Tape (Exterior Soffit/Sheathing Board): 2 inch wide, 10x10 coated glass fiber mesh for joints and corners.
- 2. Paper Tape (Interior Gypsum Board): 2 inch wide, creased paper tape for joints and corners.
- 3. Joint Compound: Setting type, field-mixed.
- G. Exterior Soffit Vents: One piece, perforated, ASTM B221 6063 T5 alloy aluminum, with edge suitable for direct application to gypsum board and manufactured especially for soffit application. Provide continuous vent.
  - 1. Available Manufacturers:
    - a. Fry Reglet.
    - b. Gordon, Inc.
    - c. Pittcon Industries.
    - Stockton Products.
  - 2. Flat, horizontal-to-horizontal application: 2-inch wide with three rows of vent slots for a minimum of 3 square inches of opening per linear foot.
  - 3. Finish: High performance organic coating; color selected by Architect from manufacturer's full range.

#### PART 3 EXECUTION

#### 3.01 EXAMINATION

A. Verify that project conditions are appropriate for work of this section to commence.

#### 3.02 ACOUSTIC ACCESSORIES INSTALLATION

- A. Acoustic Insulation: Place tightly within spaces, around cut openings, behind and around electrical and mechanical items within partitions, and tight to items passing through partitions.
- B. Acoustic Sealant: Install in accordance with manufacturer's instructions.

### 3.03 BOARD INSTALLATION

- A. Comply with ASTM C840, GA-216, and manufacturer's instructions. Install to minimize butt end joints, especially in highly visible locations.
- B. Single-Layer Nonrated: Install gypsum board in most economical direction, with ends and edges occurring over firm bearing.
- C. Double-Layer, Nonrated: Use gypsum board for first layer, placed parallel to framing or furring members, with ends and edges occurring over firm bearing. Place second layer perpendicular to framing or furring members. Offset joints of second layer from joints of first layer.
- D. Fire-Resistance-Rated Construction: Install gypsum board in strict compliance with requirements of assembly listing.
- E. Exterior Sheathing: Comply with ASTM C1280. Install sheathing vertically, with edges butted tight and ends occurring over firm bearing.
- F. Cementitious Backing Board: Install over steel framing members where indicated, in accordance with ANSI A108.11 and manufacturer's instructions.
- G. Bullet Resistant Sheathing and Wallboard:
  - 1. Install bullet-resistant sheathing according to manufacturer's written recommendations and with manufacturer-approved fasteners.
  - 2. Cover all joints between boards with a 4 inch strip of the same thickness material as the boards, centered on the joint.

Gypsum Board 092900 - 3

Architect's Project No.: 563007

#### 3.04 INSTALLATION OF TRIM AND ACCESSORIES

- Control Joints: Place control joints in compliance with ASTM C 840, consistent with lines of building spaces, and as indicated.
  - 1. Not more than 30 feet apart on walls and ceilings over 50 feet long.
  - At exterior soffits, not more than 30 feet apart in both directions. 2.
- Corner Beads: Install at external corners, using longest practical lengths.
- C. Edge Trim: Install at locations where gypsum board abuts dissimilar materials.
- D. Moisture Guard Trim: Install on bottom edge of gypsum board according to manufacturer's instructions and in locations indicated on drawings. In lieu of moisture guard trim; Contractor may at its option install gypsum board with a 1/2- to 5/8-inch gap at base of wall.
- Exterior Soffit Vents: Install according to manufacturer's written instructions and in locations indicated on drawings. Provide vent area specified.
- Putty Pads: Install putty pads on the backside of items penetrating gypsum board on all walls/partitions containing acoustic insulation. Items include, but are not limited to, wiring devices, cable, conduit, and pipe. Completely cover and seal around each penetration.

#### 3.05 JOINT TREATMENT

- A. Glass Mat Faced Gypsum Board and Exterior Glass Mat Faced Sheathing: Use fiberglass joint tape, embed and finish with setting type joint compound.
- B. Paper Faced Gypsum Board: Use paper joint tape, embed with drying type joint compound and finish with drying type joint compound.
- C. Finish gypsum board in accordance with levels defined in ASTM C840, as follows:
  - Level 5: Walls and ceilings to receive semi-gloss or gloss paint finish, indicated to receive special applied finishes, and other areas specifically indicated.
  - 2. Level 4: Walls and ceilings to receive paint finish or wall coverings, unless otherwise indicated.
  - 3. Level 2: In utility areas, behind cabinetry, and on backing board to receive tile finish.
  - Level 1: Fire-resistance-rated wall areas above finished ceilings, whether or not accessible in the completed construction.
- D. Tape, fill, and sand exposed joints, edges, and corners to produce smooth surface ready to receive finishes.
  - Feather coats of joint compound so that camber is maximum 1/32 inch.
- Where Level 5 finish is indicated, spray apply high build drywall surfacer over entire surface after joints have been properly treated; achieve a flat and tool mark-free finish.
- Fill and finish joints and corners of cementitious backing board as recommended by manufacturer.

#### 3.06 TOLERANCES

Maximum Variation of Finished Gypsum Board Surface from True Flatness: 1/8 inch in 10 feet in any direction.

#### **END OF SECTION**

092900 - 4 Gypsum Board

Architect's Project No.: 563007

#### **SECTION 095100 ACOUSTICAL CEILINGS**

#### **PART 1 GENERAL**

#### 1.01 REFERENCE STANDARDS

- A. ASTM A653/A653M Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process 2020.
- ASTM C635/C635M Standard Specification for Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings 2022.
- C. ASTM C636/C636M Standard Practice for Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-In Panels 2019.
- D. ASTM E84 Standard Test Method for Surface Burning Characteristics of Building Materials 2022.
- E. ASTM E580/E580M Standard Practice for Installation of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Subject to Earthquake Ground Motions 2022.
- F. ASTM E1264 Standard Classification for Acoustical Ceiling Products 2022.

#### 1.02 SUBMITTALS

- A. See Section 013000 Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Indicate grid layout and related dimensioning.
- C. Product Data: Provide data on suspension system components, acoustical units, and specialty ceiling products as indicated.
- D. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
  - See Section 016000 Product Requirements, for additional provisions.
  - 2. Extra Acoustical Panels: Quantity equal to 2 percent of total installed, of each type.

#### 1.03 QUALITY ASSURANCE

A. Source Limitations: Provide each acoustical ceiling assembly (ceiling panel and suspension system) from a single manufacturer to obtain manufacturer's system warranty.

### 1.04 DELIVERY, STORAGE, AND HANDLING

- A. Do not deliver until building is weather-tight and conditioned.
- Store materials in dry and clean location until needed for installation. During installation, handle in a manner that will prevent damage and to prevent marring and soiling of finished surfaces.

#### 1.05 FIELD CONDITIONS

Maintain uniform temperature and humidity at occupancy conditions during and after acoustical unit installation. Allow products to acclimatize prior to installation.

#### 1.06 WARRANTY

- A. System Warranty: Provide a single source system warranty covering both acoustical ceiling panels and suspension system.
  - Warranty shall cover material failures including sag, warping, shrinkage, or delamination, biologic growth including mold or mildew, and rusting of suspension system.
  - Warranty Period: Minimum 15 years, from date of Substantial Completion. 2.

**Acoustical Ceilings** 095100 - 1

Architect's Project No.: 563007

#### **PART 2 PRODUCTS**

#### 2.01 PERFORMANCE REQUIREMENTS

A. Surface Burning Characteristics: Each acoustical ceiling shall be Class A rated, with flame spread index of 25 or less, smoke developed index of 450 or less, when tested in accordance with ASTM E84.

#### 2.02 ACOUSTICAL PANELS

- A. Acoustical Panels General: ASTM E1264, Class A.
  - Antibacterial/Antimicrobial Treatment: Provide acoustical panels that have been factorytreated by manufacturer for resistance to bacteria, mold, mildew, and fungus.
  - 2. Humidity/Sag Treatment: Provide acoustical panels that have been factory-treated by manufacturer for humidity and sag-resistance.
- B. Acoustical Panels: Mineral fiber with membrane-faced overlay, with the following characteristics:
  - 1. Classification: ASTM E1264 Type IV.
    - a. Form: 2, water felted.
    - b. Pattern: "E" lightly textured.
  - 2. Size: 24 by 24 inches.
  - 3. Thickness: 3/4 inch.
  - 4. Light Reflectance: Not less than 0.88, determined in accordance with ASTM E1264.
  - 5. NRC Range: Not less than 0.75, determined in accordance with ASTM E1264.
  - Ceiling Attenuation Class (CAC): Not less than 35, determined in accordance with ASTM E1264.
  - 7. Panel Edge: Square.
  - 8. Color: White.
  - 9. Suspension System: Exposed grid.
  - 10. Products:
    - a. Armstrong World Industries, Inc; Ultima Item #1911.
    - b. CertainTeed Ceilings, Inc.; Symphony m Item #1222BB-75-1.
    - c. USG Corporation; Mars Acoustical Panels Item #86785.
    - d. Substitutions: See Section 016000 Product Requirements.

#### 2.03 SUSPENSION SYSTEM(S)

- A. Metal Suspension Systems General: Complying with ASTM C635/C635M; die cut and interlocking components, with perimeter moldings, hold down clips, stabilizer bars, clips, and splices as required.
  - 1. Materials:
    - a. Steel Grid: ASTM A653/A653M, G30 coating, unless otherwise indicated.
  - Cross Tee/Main Runner Connection: Override (stepped).
  - 3. Main Runner End Coupling: Bayonet ("stab") type; knuckle type is not acceptable.
- B. Exposed Suspension System: Hot-dipped galvanized steel grid and cap.
  - Structural Classification: Intermediate-duty, when tested in accordance with ASTM C635/C635M.
  - 2. Profile: Tee; 15/16 inch face width.
  - 3. Finish: Baked enamel.

Acoustical Ceilings 095100 - 2

Architect's Project No.: 563007

#### 4. Products:

- a. Armstrong World Industries, Inc; Prelude XL 15/16".
- b. CertainTeed Ceilings, Inc; 15/16" EZ Stab Classic System.
- c. USG Corporation; Donn Brand DX/DXL 15/16 inch Acoustical Suspension System.
- d. Substitutions: See Section 016000 Product Requirements.

#### 2.04 ACCESSORIES

- A. Support Channels and Hangers: Galvanized steel; size and type to suit application, seismic requirements, and ceiling system flatness requirement specified.
- B. Hanger Wire: 12 gauge, 0.08 inch galvanized steel wire.
- C. Perimeter Moldings: Same metal and finish as grid.

#### **PART 3 EXECUTION**

#### 3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that layout of hangers will not interfere with other work.

#### 3.02 PREPARATION

- A. Install after major above-ceiling work is complete.
- B. Coordinate the location of hangers with other work.

#### 3.03 INSTALLATION - SUSPENSION SYSTEM

- A. Install suspension system in accordance with ASTM C636/C636M, ASTM E580/E580M, and manufacturer's instructions and as supplemented in this section.
- Rigidly secure system, including integral mechanical and electrical components, for maximum deflection of 1:360.
- C. Lay out system to a balanced grid design with edge units no less than 50 percent of acoustical unit size.
- D. Perimeter Molding: Install at intersection of ceiling and vertical surfaces and at junctions with other interruptions.
  - 1. Use longest practical lengths.
- E. Suspension System, Non-Seismic: Hang suspension system independent of walls, columns, ducts, pipes and conduit. Where carrying members are spliced, avoid visible displacement of face plane of adjacent members.
- F. Where ducts or other equipment prevent the regular spacing of hangers, reinforce the nearest affected hangers and related carrying channels to span the extra distance.
- G. Do not support components on main runners or cross runners if weight causes total dead load to exceed deflection capability.
- H. Support fixture loads using supplementary hangers located within 6 inches of each corner, or support components independently.
- I. Do not eccentrically load system or induce rotation of runners.

#### 3.04 INSTALLATION - ACOUSTICAL UNITS

A. Install acoustical units in accordance with manufacturer's instructions.

Acoustical Ceilings 095100 - 3

Architect's Project No.: 563007

- B. Fit acoustical units in place, free from damaged edges or other defects detrimental to appearance and function.
- C. Fit border trim neatly against abutting surfaces.
- D. Install acoustical units level, in uniform plane, and free from twist, warp, and dents.
- E. Cutting Acoustical Units:
  - Cut to fit irregular grid and perimeter edge trim.
  - Make field cut edges of same profile as factory edges. 2.
- F. Where round obstructions occur, provide preformed closures to match perimeter molding.

#### 3.05 TOLERANCES

- A. Maximum Variation from Flat and Level Surface: 1/8 inch in 10 feet.
- B. Maximum Variation from Plumb of Grid Members Caused by Eccentric Loads: 2 degrees.

#### **END OF SECTION**

095100 - 4 **Acoustical Ceilings** 

#### **SECTION 096500** RESILIENT FLOORING

#### **PART 1 GENERAL**

#### 1.01 REFERENCE STANDARDS

- A. ASTM E492 Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine 2009, with Editorial Revision (2016).
- B. ASTM E648 Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source 2019a, with Editorial Revision (2020).
- C. ASTM F710 Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring 2021.
- D. ASTM F1066 Standard Specification for Vinyl Composition Floor Tile 2004 (Reapproved 2018).
- E. ASTM F1700 Standard Specification for Solid Vinyl Floor Tile 2020.
- F. ASTM F1869 Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride 2022.
- G. ASTM F2170 Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes 2019a.

#### 1.02 SUBMITTALS

- A. See Section 013000 Administrative Requirements for submittal procedures.
- B. Product Data: Provide data on specified products, describing physical and performance characteristics; including sizes, patterns and colors available; and installation instructions.
- Shop Drawings: Indicate seaming plans and floor patterns.
- D. Selection Samples: Submit manufacturer's complete set of color samples for Architect's initial selection.

#### 1.03 DELIVERY, STORAGE, AND HANDLING

- Upon receipt, immediately remove any shrink-wrap and check materials for damage and the correct style, color, quantity and run numbers.
- B. Store all materials off of the floor in an acclimatized, weather-tight space.
- C. Maintain temperature in storage area between 55 degrees F and 90 degrees F.

#### 1.04 FIELD CONDITIONS

Store materials for not less than 48 hours prior to installation in area of installation at a temperature of 70 degrees F to achieve temperature stability. Thereafter, maintain conditions above 55 degrees F.

#### 1.05 WARRANTY

- A. See Section 017800 Closeout Submittals, for additional warranty requirements.
- Manufacturer's Warranty: Provide a ten (10) year manufacturer warranty, covering defective material and installation.
- C. Installer's Warranty: Installer shall warrant that the products have been installed in accordance with manufacturer's instructions.

096500 - 1 Resilient Flooring

Architect's Project No.: 563007

1. The installer shall provide a ten (10) year warranty against product failure due to excessive moisture vapor transmission through the slab.

#### PART 2 PRODUCTS

#### 2.01 TILE FLOORING

- A. Vinyl Tile VT: Printed film type, with transparent or translucent wear layer; acoustic interlayer or backing.
  - 1. Minimum Requirements: Comply with ASTM F1700, Class III.
  - 2. Impact Insulation Class (IIC): 57, minimum, when floor-ceiling assembly tested in accordance with ASTM E492.
  - Critical Radiant Flux (CRF): Minimum 0.45 watt per square centimeter, when tested in accordance with ASTM E648.
  - 4. Plank Tile Size: 6 by 36 inch.
  - 5. Wear Layer Thickness: 0.020 inch.
  - 6. Total Thickness: 0.20 inch.
  - 7. Color: TELLURIDE 02540.

#### 2.02 ACCESSORIES

- A. Subfloor Filler: Type recommended by adhesive material manufacturer.
- B. Primers, Adhesives, and Seam Sealer: Waterproof; types recommended by flooring manufacturer.
- C. Moisture Vapor Treatment: Where resilient flooring and accessories are installed over concrete slabs, and where field testing indicates high moisture vapor testing through concrete slabs, provide alkaline-resistant product designed to control excessive moisture vapor transmission through concrete slab in accordance with Division 01 MVT allowance and unit price, and per the following:
  - 1. Products: Provide product approved by flooring manufacturer and complying with performance requirements below, equivalent to one of the following:
    - a. Duraamen Engineered Products, Inc.; Perdure MVT.
    - b. Maxxon Corporation; Maxxon MVP.
    - Tnemec Company Inc.; Epoxoprime MVT, Series 208.
  - 2. Performance Requirements:
    - a. Verify with flooring manufacturer that submitted product maintains compliance with all provisions of flooring manufacturer's warranty.
    - b. Low-VOC: Provide product with VOC content less than 15 g/L.
    - c. Bond Strength to Concrete: Minimum 400 psi per ASTM D 4541 (100% concrete failure).
    - d. Permeance: Maximum 0.1 perm per ASTM E 96, and 0.10 grains/hr/ft²/in-Hg, per ASTM F3010.
    - Applications: Provide MVT for all concrete slabs on-grade and lightweight concrete elevated slabs.

#### **PART 3 EXECUTION**

#### 3.01 EXAMINATION

A. Verify that surfaces are flat to tolerances acceptable to flooring manufacturer, free of cracks that might telegraph through flooring, clean, dry, and free of curing compounds, surface

Resilient Flooring 096500 - 2

Architect's Project No.: 563007

hardeners, and other chemicals that might interfere with bonding of flooring to substrate.

- Cementitious Subfloor Surfaces: Verify that substrates are ready for resilient flooring installation by testing for moisture and alkalinity (pH).
  - Test as Follows:
    - a. Alkalinity (pH): ASTM F710.
    - Internal Relative Humidity: ASTM F2170.
    - Moisture Vapor Emission: ASTM F1869.

#### 3.02 PREPARATION

- A. Prepare floor substrates as recommended by flooring and adhesive manufacturers.
- Remove subfloor ridges and bumps. Fill minor low spots, cracks, joints, holes, and other defects with subfloor filler to achieve smooth, flat, hard surface.
- C. Prohibit traffic until filler is fully cured.
- D. Clean substrate.

#### 3.03 INSTALLATION - GENERAL

- Starting installation constitutes acceptance of subfloor conditions.
- B. Install in accordance with manufacturer's written instructions.
- C. Adhesive-Applied Installation:
  - Fit joints and butt seams tightly.
  - Set flooring in place, press with heavy roller to attain full adhesion.
- D. Where type of floor finish, pattern, or color are different on opposite sides of door, terminate flooring under centerline of door.
- Install edge strips at unprotected or exposed edges, where flooring terminates, and where indicated.
- Scribe flooring to walls, columns, cabinets, floor outlets, and other appurtenances to produce tight joints.

#### 3.04 INSTALLATION - TILE FLOORING

- Mix tile from container to ensure shade variations are consistent when tile is placed, unless otherwise indicated in manufacturer's installation instructions.
- Lay flooring with joints and seams parallel to building lines to produce symmetrical pattern.

### 3.05 CLEANING

- A. Remove excess adhesive from floor, base, and wall surfaces without damage.
- Clean in accordance with manufacturer's written instructions.
- C. Polish: Apply not less than three coats of floor polish. Provide additional coats as required to comply with manufacturer's recommendations.

#### 3.06 PROTECTION

A. Prohibit traffic on resilient flooring for 48 hours after installation.

#### **END OF SECTION**

Resilient Flooring 096500 - 3

Architect's Project No.: 563007

# **SECTION 096513 RESILIENT BASE AND ACCESSORIES**

#### **PART 1 GENERAL**

#### 1.01 SUBMITTALS

- A. See Section 013000 Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data on specified products, describing physical and performance characteristics; including sizes, patterns and colors available; and installation instructions.
- Selection Samples: Submit manufacturer's complete set of color samples for Architect's initial selection.
- D. Verification Samples: Submit in manufacturer's standard size, illustrating color and pattern for each resilient flooring product specified.

#### 1.02 DELIVERY, STORAGE, AND HANDLING

- Upon receipt, immediately remove any shrink-wrap and check materials for damage and the correct style, color, quantity and run numbers.
- B. Maintain temperature in storage area between 55 degrees F and 90 degrees F.
- C. Protect roll materials from damage by storing on end.

#### 1.03 FIELD CONDITIONS

- Store materials for not less than 48 hours prior to installation in area of installation at a temperature of 70 degrees F to achieve temperature stability. Thereafter, maintain conditions above 55 degrees F.
- B. Maintain conditions at occupancy conditions for installation and until Substantial Completion.

#### **PART 2 PRODUCTS**

#### 2.01 RESILIENT BASE

- A. Resilient Base: ASTM F1861, Type TP, rubber, thermoplastic; Style B, Cove.
  - Products (Type TP):
    - a. Armstrong World Industries, Inc.; Rubber Coved Toe Wall Base.
    - Flexco (USA), Inc.; Flexco Base 2000 Cove.
    - Johnsonite, a Tarkett Company; Rubber Wall Base Cove. C.
    - d. Mannington Commercial; Burkebase Type TP - Coved.
    - Nora Systems, Inc; nora wall base; Article 820.
    - Roppe Corporation; 700 Series TPR Wall Base Style B (Coved).
    - Substitutions: See Section 016000 Product Requirements.
  - Critical Radiant Flux (CRF): Minimum 0.45 watt per square centimeter, when tested in 2. accordance with ASTM E648 or NFPA 253.
  - 3. Height: 4 inch.
  - 4. Thickness: 0.125 inch minimum.
  - Finish: Satin. 5.
  - Length: Roll; manufacturer's standard length. 6.
  - 7. Color: To be selected by Architect from manufacturer's full range.

Architect's Project No.: 563007

#### 2.02 STAIR COVERING

- A. Stair Treads: Rubber; full width and depth of stair tread in one piece; tapered thickness.
  - Manufacturers:
    - a. Flexco, Inc.
    - b. Johnsonite, a Tarkett Company.
    - c. Mannington Commercial.
    - d. Nora Rubber Flooring.
    - e. Roppe Corporation.
    - f. Substitutions: See Section 016000 Product Requirements.
  - Minimum Requirements: Comply with ASTM F2169, Type TS, rubber, vulcanized thermoset.
  - 3. Critical Radiant Flux (CRF): Minimum 0.45 watt per square centimeter, when tested in accordance with ASTM E648 or NFPA 253.
  - 4. Nominal Thickness: 0.250 inch, tapered towards rear.
  - 5. Nosing: Square, adjustable; 1-1/2 inch height.
  - 6. Striping: 2 inch wide contrasting color abrasive strips.
  - 7. Texture: Raised, with pattern selected from manufacturer's full range.
  - 8. Color: To be selected by Architect from manufacturer's full range.
- B. Stair Risers: Full height and width of tread in one piece, matching treads in material and color.
  - 1. Manufacturer: Provide risers by same manufacturer as treads.
  - 2. Thickness: 0.125 inch.
- C. Stair Stringers: Full height in one piece and in maximum available lengths, matching treads in material and color.
  - 1. Manufacturer: Provide stringers by same manufacturer as treads.
  - Nominal Thickness: 0.080 inch.

#### 2.03 MOLDINGS, TRANSITIONS, AND EDGE STRIPS

- A. Moldings, Transition and Edge Strips:
  - 1. Manufacturers:
    - a. Flexco, Inc.
    - b. Johnsonite.
    - c. Mannington Commercial.
    - d. R.C.A. Rubber Company (The).
    - e. Roppe Corporation.
    - f. VPI, LLC; Floor Products Division.
    - g. Substitutions: See Section 016000 Product Requirements.
  - 2. Molding/Transition Strip Profiles: Provide in sizes as required to suit flooring thicknesses and applications.
    - a. Coved edge/cap for carpet.
    - b. Joiner between carpet and resilient flooring or other materials with different heights.
    - c. Transition strip between different types of materials that are the same height or between different styles/patterns of the same material.
    - d. Slim transition strip with approximately 1/4-inch wide visible transition profile.
    - e. Reducer strip at edges of flooring to reduce height to 0".

Architect's Project No.: 563007

- Subfloor leveling accessory to transition between materials with height differences up
- 3. Material: Manufacturer's standard rubber or vinyl.
- 4. Color: To be selected by Architect from manufacturer's full range.

#### 2.04 ACCESSORIES

- A. Leveling Compound: Blended cement mix, latex-modified, for use as trowelable underlayment, approved by resilient accessory manufacturer.
- Primers, Adhesives, and Seam Sealer: Waterproof; types recommended by flooring manufacturer.
- Moisture Vapor Treatment: Where resilient flooring and accessories are installed over concrete slabs, provide alkaline-resistant product designed to control excessive moisture vapor transmission through concrete slab, per the following:
  - Products: Provide product approved by flooring manufacturer and complying with performance requirements below, equivalent to one of the following:
    - a. Duraamen Engineered Products, Inc.; Perdure MVT.
    - Maxxon Corporation; Maxxon MVP. b.
    - Tnemec Company Inc.; Epoxoprime MVT, Series 208.
  - 2. Performance Requirements:
    - Verify with flooring manufacturer that submitted product maintains compliance with all provisions of flooring manufacturer's warranty.
    - Low-VOC: Provide product with VOC content less than 15 g/L. b.
    - Bond Strength to Concrete: Minimum 400 psi per ASTM D 4541 (100% concrete failure).
    - Permeance: Maximum 0.1 perm per ASTM E 96, and 0.10 grains/hr/ft<sup>2</sup>/in-Hg, per ASTM F3010.
    - Applications: Provide MVT for all concrete slabs on-grade and lightweight concrete elevated slabs.
- D. Floor Polish: Fluid-applied polish recommended by resilient flooring manufacturer.

# **PART 3 EXECUTION**

#### 3.01 EXAMINATION

- A. Verify that surfaces are flat to tolerances acceptable to flooring manufacturer, free of cracks that might telegraph through flooring, clean, dry, and free of curing compounds, surface hardeners, and other chemicals that might interfere with bonding of flooring to substrate.
- Verify that wall surfaces are smooth and flat within the tolerances specified for that type of work, are dust-free, and are ready to receive resilient base.
  - Do not apply wall base until other finish items, including casework and painting, are complete.
- C. Cementitious Subfloor Surfaces (Stair Treads/Landings): Verify that substrates are ready for resilient flooring installation by testing for moisture and alkalinity (pH).
  - Test as Follows:
    - Alkalinity (pH): ASTM F710, when required by stair accessory manufacturer.
    - Internal Relative Humidity: ASTM F2170. One test per stair area. b.
    - Moisture Vapor Emission: ASTM F1869. One test per stair area. C.

Architect's Project No.: 563007

- After testing is complete, prepare concrete and install moisture vapor treatment (MVT) in accordance with manufacturer's written instructions. If testing indicates measurements are within acceptable levels for flooring installation with the need for MVT, the MVT may be omitted where approved by the Architect.
- After installation of MVT, perform final moisture tests to verify that moisture-vaporemission-rate is at an acceptable level for stair accessory installation. Proceed with installation only after moisture-vapor-emission-rate and relative humidity do not exceed the following:
  - Moisture-Vapor-Emission Rate: Maximum 3lbs. of water/1,000 sq. ft. in 24 hours, unless indicated otherwise by resilient accessory manufacturer.
  - Relative Humidity: Maximum 75 percent relative humidity, unless indicated otherwise by resilient accessory manufacturer.

# 3.02 PREPARATION

- A. Prepare floor substrates as recommended by flooring and adhesive manufacturers.
- B. Remove subfloor ridges and bumps. Fill minor low spots, cracks, joints, holes, and other defects with leveling compound to achieve smooth, flat, hard surface.
- C. Prohibit traffic until leveling compound is fully cured.
- D. Clean substrate.

#### 3.03 INSTALLATION - GENERAL

- A. Starting installation constitutes acceptance of subfloor conditions.
- B. Install in accordance with manufacturer's written instructions.
- C. Adhesive-Applied Installation:
  - Fit joints and butt seams tightly. 1.
  - Set flooring in place, press with heavy roller to attain full adhesion.
- D. Where type of floor finish, pattern, or color are different on opposite sides of door, install such that molding profiles or transition strips are centered under the door panel.
- Install edge/reducer strips at unprotected or exposed edges, where flooring terminates, and where indicated.
  - Resilient Strips: Attach to substrate using adhesive.

# 3.04 INSTALLATION - RESILIENT BASE

- A. Fit joints tightly and make vertical. Maintain minimum dimension of 18 inches between joints.
- Install base on solid backing. Bond tightly to wall and floor surfaces.
- Job form internal and external corners in accordance with manufacturer's instructions. Form corners by "V" cutting or scribing; do not bend material in a manner that creates stress whitening.
- In addition to walls, install base on other permanent construction with exposed vertical faces at floor level, including, but not limited to, columns, pilasters, and casework/cabinet knee and toe spaces.
- E. Scribe and fit to door frames and other interruptions.
- F. At uneven substrate surfaces (such as masonry mortar joints), provide manufacturer's recommended filler sealant or adhesive to fill voids along top of base.

# ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

Architect's Project No.: 563007

# 3.05 INSTALLATION - STAIR COVERINGS

- A. Install stair coverings in one piece for full width and depth of tread.
- B. Install stringers configured tightly to stair profile.
- C. Adhere over entire surface. Fit accurately and securely.
- D. Clean stair tread and landing accessories and apply floor polish according to manufacturer's written instructions.

#### 3.06 CLEANING

- A. Remove excess adhesive from floor, base, and wall surfaces without damage.
- B. Clean in accordance with manufacturer's written instructions.

# 3.07 PROTECTION

- A. Prohibit traffic on resilient accessories for 48 hours after installation.
- B. Cover resilient accessories and protect from heavy construction traffic and equipment until Substantial Completion.

#### **END OF SECTION**

Architect's Project No.: 563007

# **SECTION 096813 TILE CARPETING**

#### **PART 1 GENERAL**

#### 1.01 REFERENCE STANDARDS

- A. ASTM E648 Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source 2019a, with Editorial Revision (2020).
- B. NFPA 253 Standard Method of Test for Critical Radiant Flux of Floor Covering Systems Using a Radiant Heat Energy Source 2023.

#### 1.02 ADMINISTRATIVE REQUIREMENTS

A. Substitutions/Prequalification: Manufacturers seeking consideration to bid their product as an acceptable alternative shall provide full product data and full range of selection samples during the bid period. Products that do not meet the technical and aesthetic critieria will not be accepted. No substitutions shall be permitted for carpet tile after receipt of bids.

#### 1.03 SUBMITTALS

- A. See Section 013000 Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data on specified products, describing physical and performance characteristics; sizes, patterns, colors available, and method of installation.
- Shop Drawings: Indicate layout of joints, direction of carpet pile, and location of edge moldings and transition strips.
  - Where multiple carpet tile products are specified (including multiple products in a single space, installed in an indicated pattern), indicate on the shop drawings the locations where each product is being installed.
- D. Selection Samples: Submit manufacturer's color charts indicating full range of colors for carpet tiles and for accessories.
- E. Verification Sample: Submit full size sample for each required color, pattern, and texture.
  - Submit samples in manufacturer's standard size for each accessory product.
- Maintenance Data: Include maintenance procedures, recommended maintenance materials, and suggested schedule for cleaning.
  - Include specific procedures and materials that are not recommended, including those that may be harmful to carpet tile or that would void warranty.
- G. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
  - See Section 016000 Product Requirements, for additional provisions.
  - Extra Carpet Tiles: Quantity equal to 5 percent of total installed of each color and pattern installed.

#### 1.04 QUALITY ASSURANCE

Critical Radiant Flux: All carpet tiles shall be Class I rated, with a minimum CRF of 0.45 watts/sq cm, when tested by an independent testing agency in accordance with ASTM E648 or NFPA 253.

# 1.05 FIELD CONDITIONS. STORAGE AND HANDLING

A. Comply with the Carpet and Rug Institute (CRI) Publication "CRI 104 - Standard for Installation of Commercial Carpet." Comply with Section 4.0 for storage and handling. Section 7.0 for ambient temperature and ventilation, and Section 9.0 for Product Acclimation.

096813 - 1 Tile Carpeting

Architect's Project No.: 563007

#### 1.06 WARRANTY

- A. See Section 017800 Closeout Submittals, for additional warranty requirements.
- B. Carpet Tile Warranty: Provide a ten (10) year manufacturer warranty, covering defective material and faulty installation.
  - Warranty shall cover excessive surface wear (defined as more than 10% loss by weight of face fiber), edge raveling, backing separation, shrinking, stretching, cupping, doming, static electricity, or color loss or fading.

#### **PART 2 PRODUCTS**

#### 2.01 MATERIALS

- Tile Carpeting, Type C-TILE-A: Field tile for main courtroom area. Tufted, manufactured in one color dye lot.
  - Product: "Ridge Tile" 5T446; manufactured by Shaw Contract. 1.
    - Basis-of-Design Color is Silt 06518.
  - 2. Tile Size: 9 by 36 inch, nominal.
  - Critical Radiant Flux: Minimum of 0.45 watts/sq cm, when tested in accordance with 3. ASTM E648 or NFPA 253.
  - 4. Primary Backing Material: Manufacturer's standard; recycled vinyl with fiberglass reinforcing.
- Tile Carpeting, Type C-TILE-B: Accent tile for ramp, jury box, and judge/witness/clerk bench locations only. Tufted, manufactured in one color dye lot.
  - Product: "Ridge Tile" 5T446; manufactured by Shaw Contract.
    - Basis-of-Design Color is River Rock 06481.
  - 2. Tile Size: 9 by 36 inch, nominal.
  - Critical Radiant Flux: Minimum of 0.45 watts/sq cm, when tested in accordance with ASTM E648 or NFPA 253.
  - 4. Primary Backing Material: Manufacturer's standard.

#### 2.02 ACCESSORIES

- A. Subfloor Filler: Type recommended by flooring material manufacturer.
- B. Edge Strips: Embossed aluminum, color as selected by Architect.
- C. Nosing: Aluminum type, square nose, ribbed top surface, one piece per stair tread width, color as selected by Architect.
- D. Carpet Tile Adhesive: Recommended by carpet tile manufacturer; releasable type.

# PART 3 EXECUTION

# 3.01 EXAMINATION

- A. Verify that subfloor surfaces are smooth and flat within tolerances specified for that type of work and are ready to receive carpet tile.
- Verify that subfloor surfaces are dust-free and free of substances that could impair bonding of adhesive materials to subfloor surfaces.
- C. Cementitious Subfloor Surfaces: Verify that substrates are ready for flooring installation by testing for moisture and alkalinity (pH).

096813 - 2 Tile Carpeting

# ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

Architect's Project No.: 563007

- D. Wood Subfloor Surfaces: Verify that subflooring and underlayments as specified in Division 6 "Rough Carpentry" are complete, dust-free, and compatible with adhesive materials.
- E. Verify that required floor-mounted utilities are in correct location.

#### 3.02 PREPARATION

- A. Prepare floor substrates as recommended by flooring and adhesive manufacturers.
- B. Remove subfloor ridges and bumps. Fill minor or local low spots, cracks, joints, holes, and other defects with subfloor filler.
- Apply, trowel, and float filler to achieve smooth, flat, hard surface. Prohibit traffic until filler is cured.

#### 3.03 INSTALLATION

- A. Starting installation constitutes acceptance of subfloor conditions.
- B. Install carpet tile in accordance with manufacturer's instructions and CRI 104 (Commercial).
- C. Blend carpet from different cartons to ensure minimal variation in color match.
- D. Cut carpet tile clean. Fit carpet tight to intersection with vertical surfaces without gaps.
- E. Lay carpet tile in square pattern, with pile direction parallel to next unit, set parallel to building lines, unless otherwise indicated.
- F. Locate change of color or pattern between rooms or at transitions to other finish flooring material directly under door leaf centerlines, or at the center of cased openings.
- G. Fully adhere carpet tile to substrate.
- H. Install carpet tile into wall recesses, knee spaces under cabinets or countertops, closets, and other similar spaces.
- I. Trim carpet tile neatly at walls and around interruptions.
- J. Complete installation of edge strips, concealing exposed edges.

#### 3.04 INSTALLATION ON STAIRS

- A. Use one piece of carpet for each tread and the riser below. Apply seam adhesive to all cut edges.
- B. Lay carpet with pile direction in the length of the stair.
- C. Adhere carpet tight to stair treads and risers.

#### 3.05 CLEANING AND PROTECTION

- A. Remove excess adhesive without damage, from floor, base, and wall surfaces.
- B. Clean and vacuum carpet surfaces.
- C. Protect installed carpet in accordance with CRI 104, Section 13.7 "Post Installation."

# **END OF SECTION**

Tile Carpeting 096813 - 3

Architect's Project No.: 563007

# **SECTION 099100 PAINTING**

#### **PART 1 GENERAL**

#### 1.01 REFERENCE STANDARDS

- A. MPI (APSM) Master Painters Institute Architectural Painting Specification Manual Current Edition.
- B. SSPC-SP 1 Solvent Cleaning 2015, with Editorial Revision (2016).
- C. SSPC-SP 6 Commercial Blast Cleaning 2007.

#### 1.02 SUBMITTALS

- A. See Section 013000 Administrative Requirements, for submittal procedures.
- B. Product Data: Provide complete list of products to be used, with the following information for
  - Manufacturer's name, product name and/or catalog number, and general product category (e.g., "alkyd enamel").
  - Cross-reference to specified paint system(s) product is to be used in; include description of each system.

# 1.03 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products to site in sealed and labeled containers; inspect to verify acceptability.
- B. Container Label: Include manufacturer's name, type of paint, brand name, lot number, brand code, coverage, surface preparation, drying time, cleanup requirements, color designation, and instructions for mixing and reducing.
- Paint Materials: Store at minimum ambient temperature of 45 degrees F and a maximum of 90 degrees F, in ventilated area, and as required by manufacturer's instructions.

# 1.04 FIELD CONDITIONS

- A. Do not apply materials when surface and ambient temperatures are outside the temperature ranges required by the paint product manufacturer.
- Follow manufacturer's recommended procedures for producing best results, including testing of substrates, moisture in substrates, and humidity and temperature limitations.
- Do not apply materials when relative humidity exceeds 85 percent, at temperatures less than 5 degrees F above the dew point, or to damp or wet surfaces.
- Minimum Application Temperatures for Paints: 50 degrees F for interiors unless required otherwise by manufacturer's instructions.
- Provide lighting level of 80 ft candles measured mid-height at substrate surface.

#### **PART 2 PRODUCTS**

# 2.01 MANUFACTURERS

- A. Paints:
  - 1. Benjamin Moore.
  - 2. PPG Paints.
  - Sherwin-Williams Company.

**Painting** 099100 - 1

Architect's Project No.: 563007

#### 2.02 PAINTS AND FINISHES - GENERAL

- A. Paints and Finishes: Ready-mixed, unless intended to be a field-catalyzed paint.
  - Provide paints and finishes of a soft paste consistency, capable of being readily and uniformly dispersed to a homogeneous coating, with good flow and brushing properties, and capable of drying or curing free of streaks or sags.
  - Supply each paint material in quantity required to complete entire project's work from a 2. single production run.
  - Do not reduce, thin, or dilute paint or finishes or add materials unless such procedure is specifically described in manufacturer's product instructions.

#### 2.03 ACCESSORY MATERIALS

- A. Accessory Materials: Provide primers, sealers, cleaning agents, cleaning cloths, sanding materials, and clean-up materials as required for final completion of painted surfaces.
- B. Patching Material: Latex filler.
- C. Fastener Head Cover Material: Latex filler.

#### PART 3 EXECUTION

#### 3.01 EXAMINATION

- A. Verify that surfaces are ready to receive work as instructed by the product manufacturer.
- Examine surfaces scheduled to be finished prior to commencement of work. Report any condition that may potentially affect proper application.
- C. Test shop-applied primer for compatibility with subsequent cover materials.
- Measure moisture content of surfaces using an electronic moisture meter. Do not apply finishes unless moisture content of surfaces is below the following maximums:
  - 1. Gypsum Wallboard: 12 percent.

#### 3.02 PREPARATION

- A. Clean surfaces thoroughly and correct defects prior to application.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- Remove or repair existing paints or finishes that exhibit surface defects.
- D. Remove or mask surface appurtenances, including electrical plates, hardware, light fixture trim, escutcheons, and fittings, prior to preparing surfaces or finishing.
- E. Seal surfaces that might cause bleed through or staining of topcoat.
- F. Concrete:
  - Remove release agents, curing compounds, efflorescence, and chalk. Do not coat surfaces if moisture content or alkalinity of surfaces to be coated exceeds that permitted in manufacturer's written instructions.

# G. Masonry:

- Remove efflorescence and chalk. Do not coat surfaces if moisture content, alkalinity of surfaces, or if alkalinity of mortar joints exceed that permitted in manufacturer's written instructions. Allow to dry.
- H. Gypsum Board: Fill minor defects with filler compound. Spot prime defects after repair.
- Galvanized Surfaces:

099100 - 2 **Painting** 

Architect's Project No.: 563007

- 1. Remove surface contamination and oils and wash with solvent according to SSPC-SP 1.
- J. Ferrous Metal:
  - 1. Solvent clean according to SSPC-SP 1.
  - Remove rust, loose mill scale, and other foreign substances using using methods recommended in writing by paint manufacturer and blast cleaning according to SSPC-SP 6 "Commercial Blast Cleaning". Protect from corrosion until coated.

#### 3.03 APPLICATION

- A. Apply products in accordance with manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual".
- B. Where adjacent sealant is to be painted, do not apply finish coats until sealant is applied.
- C. Do not apply finishes to surfaces that are not dry. Allow applied coats to dry before next coat is applied.
- D. Apply each coat to uniform appearance in thicknesses specified by manufacturer.
- E. Sand wood and metal surfaces lightly between coats to achieve required finish.
- F. Vacuum clean surfaces of loose particles. Use tack cloth to remove dust and particles just prior to applying next coat.
- G. Reinstall electrical cover plates, hardware, light fixture trim, escutcheons, and fittings removed prior to finishing.

#### 3.04 CLEANING

A. Collect waste material that could constitute a fire hazard, place in closed metal containers, and remove daily from site.

#### 3.05 PROTECTION

- A. Protect finishes until completion of project.
- B. Touch-up damaged finishes after Substantial Completion.

# 3.06 INTERIOR PAINT SCHEDULE

- A. General: Provide the following paint systems for the various substrates, as indicated. Dry film thickness is noted as "DFT." Provide compatibility test areas on existing painted substrates.
- B. Gypsum Board Systems with Latex Finish: Satin (egg-shell) finish at walls and flat finish on ceilings except as indicated otherwise. Provide best commercial Low-VOC formulation with 0 VOC per EPA test method 24.
  - 1. Filler Coat: 0 VOC (per EPS test method 24) Latex Primer.
    - Moore: N534 Ultra Spec 500 Interior Latex Primer.
    - b. PPG: 6-4900 Speedhide Zero VOC Interior Latex Primer.
    - S-W: B28-2600 ProMar 200 Zero VOC Interior Latex Primer.
  - 2. First & Second Finish Coats: Interior Low-VOC Acrylic Satin Finish. (Low lustre/Satin = 25-45% @60°) Provide for wall finishes unless indicated otherwise.
    - Moore: N538 Ultra Spec 500 Interior Eggshell.
    - b. PPG: 6-4300 Speedhide Zero VOC Interior Eggshell Latex.
    - c. S-W: B20-2600 ProMar 200 Zero VOC Interior Latex Eq-Shell.
    - d. S-W: B24-2600 ProMar 200 Zero VOC Interior Latex Low Sheen.
  - 3. First & Second Finish Coats: Interior Low-VOC Acrylic Flat Finish. Provide for ceiling applications unless indicated otherwise.

Painting 099100 - 3

# ARLINGTON COUNTY COURTHOUSE; TWELFTH FLOOR RENOVATION Arlington, Virginia Architect's Project No.: 563007

- a. Moore: N536 Ultra Spec 500 Interior Flat.
- b. PPG: 6-4100 Speedhide Zero VOC Interior Latex Flat.
- c. S-W: B30-2600 ProMar 200 Zero VOC Interior Latex Flat.
- C. Ferrous Metal: Semi-Gloss Direct to Metal ("DTM") Acrylic Enamel Finish: 2 Coats over primer, with total DFT not less than 2.5 mils.
  - 1. Prime Coat: Lead-free, acrylic Base Primer. Not required on shop primed items.
    - a. Moore: HP29 Ultra Spec HP DTM Acrylic Semi-Gloss.
    - b. PPG: 90-712 Pitt-Tech Int/Ext Primer/Finish Industrial Enamel.
    - c. S-W: B66 W1 DTM Acrylic Primer/Finish (or B66 W200).
  - First and Second Coat: DTM Acrylic Semi-Gloss Enamel. (30-40 units @ 60°)
    - a. Moore: HP29 Ultra Spec HP DTM Acrylic Semi-Gloss.
    - b. PPG: 90-1210 Pitt-Tech Int/Ext Semi-Gloss DTM Industrial Enamel.
    - S-W: B66W1150 Series Pro Industrial DTM Acrylic Semi-Gloss Coating.
- D. Painted Woodwork and Hardboard: Semi-Gloss Acrylic Enamel Finish: Two topcoats over undercoater.
  - 1. First Coat: Interior Oil Undercoat.
    - Moore: 024 Fresh Start Multi-Purpose Interior/Exterior Oil Based Primer.
    - b. PPG: 17-941NF Seal Grip Int/Ext. Alkyd Universal Primer.
    - c. S-W: B49 W8820 Multi-Purpose Oil-Based Primer.
  - First and Second Finish Coats: Premium Acrylic Semi-Gloss Enamel <150 g/L. DFT 3.5 Mils min.
    - a. Moore: 551 Regal Select Semi-Gloss.
    - b. PPG: 87-6 Manor Hall Interior Semi-Gloss Acrylic Latex.
    - c. S-W: B31W20 ProClassic Waterborne.
- E. Stained woodwork with transparent finish is specified in Division 6 Sections by woodworker.

#### **END OF SECTION**

Painting 099100 - 4

Arlington County, Virginia Architect's Project No: 563007

#### SECTION 220500 - COMMON WORK RESULTS FOR PLUMBING

# PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

#### 1.2 DEFINITIONS

- A. Finished Spaces: Spaces other than mechanical and electrical equipment rooms, furred spaces, pipe chases, unheated spaces immediately below roof, spaces above ceilings, unexcavated spaces, crawlspaces, and tunnels.
- B. Exposed, Interior Installations: Exposed to view indoors. Examples include finished occupied spaces and mechanical equipment rooms.
- C. Exposed, Exterior Installations: Exposed to view outdoors or subject to outdoor ambient temperatures and weather conditions. Examples include rooftop locations.
- D. Concealed, Interior Installations: Concealed from view and protected from physical contact by building occupants. Examples include above ceilings and in chases.
- E. Concealed, Exterior Installations: Concealed from view and protected from weather conditions and physical contact by building occupants but subject to outdoor ambient temperatures. Examples include installations within unheated shelters.
- F. The following are industry abbreviations for plastic materials:
  - 1. ABS: Acrylonitrile-butadiene-styrene plastic.
  - 2. CPVC: Chlorinated polyvinyl chloride plastic.
  - 3. PE: Polyethylene plastic.
  - 4. PVC: Polyvinyl chloride plastic.
- G. The following are industry abbreviations for rubber materials:
  - 1. EPDM: Ethylene-propylene-diene terpolymer rubber.
  - 2. NBR: Acrylonitrile-butadiene rubber.

#### 1.3 SUBMITTALS

- A. Product Data: For the following:
  - 1. Transition fittings.
  - 2. Dielectric fittings.

Arlington County, Virginia Architect's Project No: 563007

- 3. Mechanical sleeve seals.
- 4. Escutcheons.

#### 1.4 OUALITY ASSURANCE

- A. Steel Support Welding: Qualify processes and operators according to AWS D1.1, "Structural Welding Code--Steel."
- B. Steel Pipe Welding: Qualify processes and operators according to ASME Boiler and Pressure Vessel Code: Section IX, "Welding and Brazing Qualifications."
  - 1. Comply with provisions in ASME B31 Series, "Code for Pressure Piping."
  - 2. Certify that each welder has passed AWS qualification tests for welding processes involved and that certification is current.
- C. Electrical Characteristics for Plumbing Equipment: Equipment of higher electrical characteristics may be furnished provided such proposed equipment is approved in writing and connecting electrical services, circuit breakers, and conduit sizes are appropriately modified. If minimum energy ratings or efficiencies are specified, equipment shall comply with requirements.

# 1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver pipes and tubes with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe end damage and to prevent entrance of dirt, debris, and moisture.
- B. Store plastic pipes protected from direct sunlight. Support to prevent sagging and bending.

# 1.6 COORDINATION

- A. Arrange for pipe spaces, chases, slots, and openings in building structure during progress of construction, to allow for plumbing installations.
- B. Coordinate installation of required supporting devices and set sleeves in poured-in-place concrete and other structural components as they are constructed.
- C. Coordinate requirements for access panels and doors for plumbing items requiring access that are concealed behind finished surfaces. Access panels and doors are specified in Division 08 Section "Access Doors and Frames."

Arlington County, Virginia Architect's Project No: 563007

#### 1.7 INTENT OF CONTRACT DOCUMENTS

- A. Plumbing drawings are diagrammatic, indicating general locations and arrangements of pipe, and equipment. Not necessarily indicating all offsets, conditions, and appurtenances required to provide clearances for maximum practical accessibility to perform maintenance.
- B. Coordinate work in order to achieve proper operation and to provide a maintainable installed condition
- C. Notify the Architect's representative immediately of conditions which do not comply or will not produce this result.
- D. Indicated configurations were used to size pipes, pumps, expansion tanks and other devices. Install piping and equipment generally as indicated. Minor deviations are permitted in the course of necessary coordination. Major changes shall be submitted for approval by the Architect's representative. Additional fittings and offsets not shown on the drawings are expected, anticipated by the design, and shall be provided. If more than 5% of the indicated number of fittings are required or if one change in direction is within six inches of another change in direction and this "Z" shape is not indicated notify the Architect's representative immediately. Provide necessary additional fittings and offsets. Changes in pipe size shall be made only with written approval from the Architect's representative.

#### PART 2 - PRODUCTS

# 2.1 PIPE, TUBE, AND FITTINGS

- A. Refer to other Division 22 piping sections for pipe, tube, and fitting materials and joining methods.
- B. Pipe Threads: ASME B1.20.1 for factory-threaded pipe and pipe fittings.

# 2.2 JOINING MATERIALS

- A. Refer to individual Division 22 piping sections for joining materials not listed below.
- B. Pipe-Flange Gasket Materials: Suitable for chemical and thermal conditions inside & outside pipe and:
  - 1. ASME B16.21, nonmetallic, flat, asbestos-free, 1/8-inch maximum thickness unless thickness or specific material is otherwise indicated.
    - a. Full-Face Type: For flat-face, Class 125, cast-iron and cast-bronze flanges.
    - b. Narrow-Face Type: For raised-face, Class 250, cast-iron and steel flanges.
  - 2. AWWA C110, rubber, flat face, 1/8-inch-thick, unless otherwise indicated, and full-face or ring type, unless otherwise indicated.

Arlington County, Virginia Architect's Project No: 563007

- C. Solder Filler Metals: ASTM B 32, lead-free (95% Tin, 5% Antimony) alloy. Include water-flushable flux according to ASTM B 813.
- D. Brazing Filler Metals: AWS A5.8, BCuP Series, copper-phosphorus alloys for general-duty brazing, unless otherwise indicated; and AWS A5.8, BAg1, silver alloy for refrigerant piping, unless otherwise indicated.
- E. Welding Filler Metals: Comply with AWS D10.12 for welding materials appropriate for wall thickness and chemical analysis of steel pipe being welded.
- F. Solvent Cements for Joining Plastic Piping:
  - 1. ABS Piping: ASTM D 2235.
  - 2. CPVC Piping: ASTM F 493.
  - 3. PVC Piping: ASTM D 2564. Include primer according to ASTM F 656.
  - 4. PVC to ABS Piping Transition: ASTM D 3138.

# 2.3 MECHANICAL GROOVED JOINT COUPLINGS

- A. Manufacturer: Victaulic
- B. Description: Pipe joint consisting of a grooved pipe, EPDM gasket, steel housing, 2 bolts and 2 nuts.
- C. Gasket Material: Grade "E" EPDM suitable for use up to 250 degrees F.
- D. Housing: Carbon steel

# 2.4 DIELECTRIC FITTINGS

- A. Description: Combination fitting of copper alloy and ferrous materials with threaded, solder-joint, plain, or weld-neck end connections that match piping system materials.
- B. Insulating Material: Suitable for system fluid, pressure, and temperature.
- C. Dielectric Flanges: Factory-fabricated, companion-flange assembly, for 150 or 300 psig working pressure, as required to suit system pressures.
  - 1. Available Manufacturers:
    - a. Capitol Manufacturing Co.
    - b. Central Plastics Company.
    - c. Epco Sales, Inc.
    - d. Watts Industries, Inc.; Water Products Div.

Arlington County, Virginia Architect's Project No: 563007

- D. Dielectric-Flange Kits: Companion-flange assembly for field assembly. Include flanges, full-faceor ring-type neoprene or phenolic gasket, phenolic or polyethylene bolt sleeves, phenolic washers, and steel backing washers.
  - 1. Available Manufacturers:
    - a. Advance Products & Systems, Inc.
    - b. Calpico, Inc.
    - c. Central Plastics Company.
    - d. Pipeline Seal and Insulator, Inc.
  - 2. Separate companion flanges and steel bolts and nuts shall have 150- or 300-psig minimum working pressure where required to suit system pressures.
- E. Dielectric Couplings: Galvanized-steel coupling with inert and noncorrosive, thermoplastic lining; threaded ends; and 300-psig minimum working pressure at 225 deg F.
  - 1. Available Manufacturers:
    - a. Calpico, Inc.
    - **b.** Lochinvar Corp.

#### 2.5 SLEEVES

- A. Galvanized-Steel Sheet: 0.0239-inch minimum thickness; round tube closed with welded longitudinal joint.
- B. Steel Pipe: ASTM A 53, Type E, Grade B, Schedule 40, galvanized, plain ends.
- C. Cast Iron: Cast or fabricated "wall pipe" equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop, unless otherwise indicated.
- D. Stack Sleeve Fittings: Manufactured, cast-iron sleeve with integral clamping flange. Include clamping ring and bolts and nuts for membrane flashing.
  - 1. Underdeck Clamp: Clamping ring with set screws.
- E. Molded PE: Reusable, PE, tapered-cup-shaped, and smooth-outer surface with nailing flange for attaching to wooden forms.

# 2.6 ESCUTCHEONS

A. Description: Manufactured wall and ceiling escutcheons and floor plates, with an ID to closely fit around pipe, tube, and insulation of insulated piping and an OD that completely covers opening.

# Arlington County, Virginia Architect's Project No: 563007

- B. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with polished chrome-plated finish.
- C. One-Piece, Cast-Brass Type: With set screw.
  - 1. Finish: Polished chrome-plated.
- D. Split-Casting, Cast-Brass Type: With concealed hinge and set screw.
  - 1. Finish: Polished chrome-plated.
- E. One-Piece, Floor-Plate Type: Cast-iron floor plate.
- F. Split-Casting, Floor-Plate Type: Cast brass with concealed hinge and set screw.

#### **PART 3 - EXECUTION**

# 3.1 PIPING SYSTEMS - COMMON REQUIREMENTS

- A. Install piping according to the following and Division 22 Sections specifying piping systems.
- B. Install piping in concealed locations, unless otherwise indicated and except in equipment rooms and service areas.
- C. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- D. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- E. Install piping to permit valve servicing.
- F. Install piping at the minimum slopes required by authorities having jurisdiction unless otherwise indicated.
- G. Install piping free of sags and bends.
- H. Install fittings for changes in direction and branch connections.
- I. Install piping to allow application of insulation.
- J. Select system components with pressure rating equal to or greater than system operating pressure.
- K. Install escutcheons for penetrations of walls, ceilings, and floors according to the following:
  - 1. Exposed, Interior Installations/Piping with Fitting or Sleeve Protruding from Wall: One-piece, deep-pattern type.

Arlington County, Virginia Architect's Project No: 563007

- 2. Exposed, Interior Installations/Chrome-Plated Piping: One-piece, cast-brass type with polished chrome-plated finish and set-screw.
- 3. Exposed, Interior Installations/Insulated Piping: One-piece, cast-brass type with polished chrome-plated finish.
- 4. Exposed, Interior Installations/Bare Piping at Wall and Floor Penetrations in Finished Spaces: One-piece, cast-brass type with finish to match surrounding surfaces.
- 5. Exposed, Interior Installations/Bare Piping at Ceiling Penetrations in Finished Spaces: One-piece or split-casting, cast-brass type with finish to match surrounding surfaces.
- 6. Exposed, Interior Installations/Piping in Unfinished Service Spaces: None, provide sealant.
- 7. Exposed, Interior Installations/Piping in Equipment Rooms: None, provide sealant.
- 8. Exposed, Interior Installations/Piping at Floor Penetrations in Equipment Rooms, Fan Rooms, or similar wet spaces: None provide sealant and sleeve extending 2" above floor to prevent liquid leaking to floor below
- L. Sleeves are not required for core-drilled holes.
  - 1. Exception: Exposed, Interior Installations at Floor Penetrations in Equipment Rooms, Fan Rooms, or similar wet spaces.
- M. Permanent sleeves are not required for holes formed by removable PE sleeves.
  - 1. Exception: Exposed, Interior Installations at Floor Penetrations in Equipment Rooms, Fan Rooms, or similar wet spaces.
- N. Install sleeves for pipes passing through walls, floors, or roofs.
  - 1. Cut sleeves to length for mounting flush with both surfaces.
    - a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level. Extend cast-iron sleeve fittings below floor slab as required to secure clamping ring.
  - 2. Install sleeves as walls and slabs are constructed.
    - a. PVC Pipe Sleeves: Permitted for pipes smaller than NPS 6 except aboveground, exterior-walls.
    - b. Steel Sheet Sleeves: Permitted for pipes NPS 6 and larger, penetrating gypsum-board partitions except aboveground, exterior-walls.
    - c. Stack Sleeve Fittings: For pipes penetrating floors. Secure flashing between clamping flanges. Install section of cast-iron soil pipe to extend sleeve to 2 inches above finished floor. Seal space outside sleeve fittings with grout.
  - 3. Except for penetrations where mechanical sleeve seals are used, seal annular space between sleeve and pipe or pipe insulation, using joint sealants appropriate for size, depth, and location of joint. Refer to Division 7 Section "Joint Sealants".
  - 4. Install steel pipe for sleeves smaller than 6 inches in diameter.
  - 5. Install cast-iron "wall pipes" for sleeves 6 inches and larger in diameter.

Arlington County, Virginia Architect's Project No: 563007

- 6. Mechanical Sleeve Seal Installation: Select type and number of sealing elements required for pipe material and size. Position pipe in center of sleeve. Assemble mechanical sleeve seals and install in annular space between pipe and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.
- 7. Sleeves from an approved sleeve seal manufacturer shall be acceptable.
- O. Mechanical Sleeve Seal Installation: Select type and number of sealing elements required for pipe material and size. Position pipe in center of sleeve. Assemble mechanical sleeve seals and install in annular space between pipe and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.
- P. Fire-Barrier Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with firestop materials. Refer to Section "Penetration Firestopping" for materials.
- Q. Verify final equipment locations for roughing-in.
- R. Refer to equipment specifications in other Sections of these Specifications for roughing-in requirements.

#### 3.2 PIPING JOINT CONSTRUCTION

- A. Join pipe and fittings according to the following requirements and Division 22 Sections specifying piping systems.
- B. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
- C. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.
- D. Soldered Joints: Apply ASTM B 813, water-flushable flux, unless otherwise indicated, to tube end. Construct joints according to ASTM B 828 or CDA's "Copper Tube Handbook," using lead-free solder alloy complying with ASTM B 32.
- E. Brazed Joints: Construct joints according to AWS's "Brazing Handbook," "Pipe and Tube" Chapter, using copper-phosphorus brazing filler metal complying with AWS A5.8.
- F. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
  - 1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is specified.
  - 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged. Do not use pipe sections that have cracked or open welds.

Arlington County, Virginia Architect's Project No: 563007

- G. Welded Joints: Construct joints according to AWS D10.12, using qualified processes and welding operators according to Part 1 "Quality Assurance" Article.
- H. Flanged Joints: Select appropriate gasket material, size, type, and thickness for service application. Install gasket concentrically positioned. Use suitable lubricants on bolt threads.
- I. Plastic Piping Solvent-Cement Joints: Clean and dry joining surfaces. Join pipe and fittings according to the following:
  - 1. Comply with ASTM F 402 for safe-handling practice of cleaners, primers, and solvent cements.
  - 2. ABS Piping: Join according to ASTM D 2235 and ASTM D 2661 Appendixes.
  - 3. CPVC Piping: Join according to ASTM D 2846/D 2846M Appendix.
  - 4. PVC Pressure Piping: Join schedule number ASTM D 1785, PVC pipe and PVC socket fittings according to ASTM D 2672. Join other-than-schedule-number PVC pipe and socket fittings according to ASTM D 2855.
  - 5. PVC Non-pressure Piping: Join according to ASTM D 2855.
  - 6. PVC to ABS Non-pressure Transition Fittings: Join according to ASTM D 3138 Appendix.
- J. Plastic Pressure Piping Gasketed Joints: Join according to ASTM D 3139.
- K. Plastic Non-pressure Piping Gasketed Joints: Join according to ASTM D 3212.
- L. PE Piping Heat-Fusion Joints: Clean and dry joining surfaces by wiping with clean cloth or paper towels. Join according to ASTM D 2657.
  - 1. Plain-End Pipe and Fittings: Use butt fusion.
  - 2. Plain-End Pipe and Socket Fittings: Use socket fusion.
- M. Fiberglass Bonded Joints: Prepare pipe ends and fittings, apply adhesive, and join according to pipe manufacturer's written instructions.
- N. Mechanical Joints: Prepare pipe ends and fittings, apply coupling, and join according to joint manufacturer's written instructions.

#### 3.3 PIPING CONNECTIONS

- A. Make connections according to the following, unless otherwise indicated:
  - 1. Install unions, in piping 2" and smaller, one adjacent to each valve and at final connections to each piece of equipment.
  - 2. Install flanges, in piping NPS 2-1/2" and larger, adjacent to final connections to each piece of equipment.
  - 3. Install dielectric unions or flanges for connections of dissimilar metals.

Arlington County, Virginia Architect's Project No: 563007

# 3.4 EQUIPMENT INSTALLATION - COMMON REQUIREMENTS

- A. Install equipment to allow maximum possible headroom unless specific mounting heights are indicated.
- B. Install equipment level and plumb, parallel and perpendicular to other building systems and components in exposed interior spaces, unless otherwise indicated.
- C. Install plumbing equipment to facilitate service, maintenance, and repair or replacement of components. Connect equipment for ease of disconnecting, with minimum interference to other installations. Extend grease fittings to accessible locations.
- D. Install equipment to allow right of way for piping installed at required slope.

#### 3.5 PAINTING

A. Damage and Touchup: Repair marred and damaged factory-painted finishes with materials and procedures to match original factory finish.

END OF SECTION 220500

Arlington County, Virginia Architect's Project No: 563007

#### SECTION 220517 - SLEEVES AND SLEEVE SEALS FOR PLUMBING PIPING

# PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

#### 1.2 SUBMITTALS

A. Product Data: For each type of product indicated.

#### PART 2 - PRODUCTS

#### 2.1 SLEEVES

- A. Cast-Iron Wall Pipes: Cast or fabricated of cast or ductile iron and equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop unless otherwise indicated.
- B. Galvanized-Steel Wall Pipes: ASTM A 53/A 53M, Schedule 40, with plain ends and welded steel collar: zinc coated.
- C. Galvanized-Steel-Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, zinc coated, with plain ends.
- D. Galvanized-Steel-Sheet Sleeves: 0.0239-inch (0.6-mm) minimum thickness; round tube closed with welded longitudinal joint.

#### 2.2 STACK-SLEEVE FITTINGS

- A. Available Manufacturers:
  - 1. Smith, Jay R. Mfg. Co.
  - 2. Wade
  - 3. Zurn Specification Drainage Operation; Zurn Plumbing Products Group.
- B. Description: Manufactured, cast-iron sleeve with integral clamping flange. Include clamping ring, bolts, and nuts for membrane flashing.
  - 1. Underdeck Clamp: Clamping ring with setscrews.

Arlington County, Virginia Architect's Project No: 563007

#### 2.3 MECHANICAL SLEEVE SEALS

- A. Description: Modular sealing element unit, designed for field assembly, to fill annular space between pipe and sleeve.
  - 1. Available Manufacturers:
    - a. Advance Products & Systems, Inc.
    - b. Calpico, Inc.
    - c. GPT, EnPro Industries
    - d. Metraflex Co.
    - e. Pipeline Seal and Insulator, Inc.
  - 2. Sealing Elements: EPDM interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
  - 3. Pressure Plates: Plastic. Include two for each sealing element.
  - 4. Connecting Bolts and Nuts: Stainless steel of length required to secure pressure plates to sealing elements.

#### PART 3 - EXECUTION

#### 3.1 SLEEVE INSTALLATION

- A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.
- B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch annular clear space between piping and concrete slabs and walls.
  - 1. Sleeves are not required for core-drilled holes.
- C. Install sleeves in concrete floors, concrete roof slabs, and concrete walls as new slabs and walls are constructed.
  - 1. Permanent sleeves are not required for holes in slabs formed by molded-PE or -PP sleeves.
  - 2. Cut sleeves to length for mounting flush with both surfaces.
    - a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level.
  - 3. Using grout, seal the space outside of sleeves in slabs and walls without sleeve-seal system.
- D. Install sleeves for pipes passing through interior partitions.
  - 1. Cut sleeves to length for mounting flush with both surfaces.
  - 2. Install sleeves that are large enough to provide ½" clear space between sleeve and pipe or pipe insulation.

Arlington County, Virginia Architect's Project No: 563007

- 3. Seal annular space between sleeve and piping or piping insulation; use joint sealants appropriate for size, depth, and location of joint. Comply with requirements for sealants.
- E. Fire Ratings: Maintain indicated fire rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with firestop materials.

# 3.2 STACK-SLEEVE-FITTING INSTALLATION

- A. Install stack-sleeve fittings in new slabs as slabs are constructed.
  - 1. Install fittings that are large enough to provide 1/4" clear space between sleeve and pipe or pipe insulation.
  - 2. Secure flashing between clamping flanges for pipes penetrating floors with membrane waterproofing. Comply with requirements for flashing specified in Division 07 Section "Sheet Metal Flashing and Trim."
  - 3. Install section of cast-iron soil pipe to extend sleeve to 2 inches above finished floor level.
  - 4. Extend cast-iron sleeve fittings below floor slab as required to secure clamping ring if ring is specified.
  - 5. Using grout, seal the space around outside of stack-sleeve fittings.
- B. Fire Rating: Maintain indicated fire rating at pipe penetrations. Seal pipe penetrations with firestop materials.

END OF SECTION 220517

Arlington County, Virginia Architect's Project No: 563007

#### SECTION 220523 – GENERAL DUTY VALVES FOR PLUMBING PIPING

#### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

#### 1.2 DEFINITIONS

- A. The following are standard abbreviations for valves:
  - 1. CWP: Cold working pressure.
  - 2. EPDM: Ethylene-propylene-diene terpolymer rubber.
  - 3. MPTFE: Modified polytetrafluoroethylene plastic.
  - 4. NBR: Acrylonitrile-butadiene rubber.
  - 5. PTFE: Polytetrafluoroethylene plastic.
  - 6. RPTFE: Reinforced polytetrafluoroethylene plastic.
  - 7. SWP: Steam working pressure.
  - 8. TFE: Tetrafluoroethylene plastic.
  - 9. WOG: Water Oil Gas.

#### 1.3 SUBMITTALS

A. Product Data: For each type of valve proposed. Include body, seating, and trim materials; valve design; pressure and temperature classifications; end connections; arrangement; dimensions; and required clearances. Include proposed specialties and accessories.

#### 1.4 QUALITY ASSURANCE

- A. ASME Compliance: ASME B31.1 for power piping valves and ASME B31.9 for building services piping valves.
  - 1. Exceptions: Domestic hot- and cold-water valves unless referenced.
- B. ASME Compliance for Ferrous Valves: ASME B16.10 and ASME B16.34 for dimension and design criteria.
- C. NSF Compliance:
  - 1. NSF 61 for valve materials for potable-water service.
  - 2. NSF 372 for Lead content requirements in drinking water system components.

# 1.5 DELIVERY, STORAGE, AND HANDLING

- A. Prepare valves for shipping as follows:
  - 1. Protect internal parts against rust and corrosion.

Arlington County, Virginia Architect's Project No: 563007

- 2. Protect threads, flange faces, grooves, and weld ends.
- 3. Set ball valves open to minimize exposure of functional surfaces.
- 4. Set butterfly valves closed or slightly open.
- 5. Block check valves in either closed or open position.
- B. Use the following precautions during storage:
  - 1. Maintain valve end protection.
  - 2. Store valves indoors and maintain at higher than ambient dew-point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.
- C. Use sling to handle large valves; rig sling to avoid damage to exposed parts. Do not use handwheels or stems as lifting or rigging points.

#### PART 2 - PRODUCTS

# 2.1 VALVES, GENERAL

- A. Refer to Part 3 "Valve Applications" Article for applications of valves.
- B. Bronze & Brass: Shall be dezincification resistant. (Zinc content shall be less than 15%)
- C. Bronze Valves: 2" and smaller with threaded or soldered ends, unless otherwise indicated.
- D. Ferrous Valves: 2-1/2" and larger with flanged ends, unless otherwise indicated.
- E. Valve Pressure and Temperature Ratings: Not less than indicated for system pressure and temperature.
- F. Valve Sizes: Same as the larger of the upstream or downstream pipe, unless otherwise indicated.
- G. Valve Actuators:
  - 1. As indicated in other Part 2 articles.
  - 2. Where indicated, provide a chain actuator.
  - 3. Chain Actuator: For attachment to valves of size and mounting height indicated.
  - 4. Wrench: For plug valves with square heads. Furnish Owner with 1 wrench for every 10 plug valves, for each size square plug head.
- H. Extended Valve Stems: Provide on insulated valves.
- I. Valve Flanges: Provide ASME B16.1 for cast-iron valves, ASME B16.5 for steel, and ASME B16.24 for bronze.
- J. Valve Grooved Ends: AWWA C606.
- K. Threaded: With threads according to ASME B1.20.1.

Arlington County, Virginia Architect's Project No: 563007

L. Valve Bypass and Drain Connections: MSS SP-45.

# 2.2 COPPER-ALLOY BALL VALVES

- A. Two-Piece, Copper-Alloy Ball Valves (Full Port) (1/4" to 2-1/2"):
  - 1. Conbraco Industries-Apollo 77CLF series with stainless steel ball & stem (Un-insulated piping)
  - 2. Conbraco Industries-Apollo 77CLF series with stainless steel ball & stem. Provide 2 1/4" stem extension (Insulated piping)
  - 3. Other Manufacturers:
    - a. Milwaukee
    - b. Watts
    - c. Nibco
  - 4. Handle Nut: Zinc plated steel or 300 series stainless steel.
  - 5. Handle: Zinc plated steel, clear chromate plastic, or vinyl coated.
  - 6. Threaded Pack Gland: Brass ASTM B-16
  - 7. Packing: MPTFE or TFE
  - 8. Stem (Blowout Proof): ASTM A-276 type 316 stainless steel. Provide 2 <sup>1</sup>/<sub>4</sub>" stem extension for Insulated piping.
  - 9. Thrust Washer: MPTFE or RPTFE
  - 10. Ball: Full-port, ASTM A-276 Type 316 stainless steel.
  - 11. Seats: MPTFE or Reinforced TFE (RPTFE)
  - 12. Body: Bronze ASTM B-584 for solder or threaded connection.
  - 13. Body End Piece: Bronze ASTM B-584 for solder or threaded connection.
  - 14. Rating: 150 psig saturated steam, 600 psig non-shock cold water, oil, and gas.
  - 15. Conform To: MSS SP-110
- B. Two-Piece, Bronze Ball Valves UL listed for shut-off gas service (Up to 2 ½"):
  - 1. Conbraco Industries-Apollo 80-100 series (Un-insulated piping).
  - 2. Conbraco Industries-Apollo 80-100 series with stainless steel ball & stem. Provide 2 ¼" stem extension (Insulated piping)
  - 3. Other Manufacturers:
    - a. Milwaukee
    - b. Watts
    - c. Nibco
  - 4. Handle Nut: Zinc plated steel or 300 series stainless steel.
  - 5. Handle: Zinc plated steel, clear chromate plastic, or vinyl coated.
  - 6. Threaded Pack Gland: Brass ASTM B-16
  - 7. Packing: MPTFE or TFE
  - 8. Stem (Blowout Proof): ASTM A-276 type 316 stainless steel. Provide 2 1/4" stem extension for Insulated piping.
  - 9. Thrust Washer: MPTFE or RPTFE
  - 10. Ball: Brass ASTM B-16, chrome plated.
  - 11. Seats: MPTFE or Reinforced TFE (RPTFE)
  - 12. Body: Bronze ASTM B-584 for threaded connection.
  - 13. Body End Piece: Bronze ASTM B-584 for threaded connection.
  - 14. Rating: 150 psig saturated steam, 250 psi gas, vacuum service to 29".
  - 15. Conform To: MSS SP-110

Arlington County, Virginia Architect's Project No: 563007

#### **PART 3 - EXECUTION**

#### 3.1 EXAMINATION

- A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.
- B. Operate valves in positions from fully-open to fully-closed. Examine guides and seats made accessible by such operations.
- C. Examine threads on valve and mating pipe for form and cleanliness.
- D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.
- E. Do not attempt to repair defective valves; replace with new valves.

# 3.2 VALVE INSTALLATION

- A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.
- B. Locate valves for easy access.
- C. Install valves in horizontal piping with stem at or above center of pipe.
- D. Install valves in position to allow full stem movement.
- E. Install chainwheels on operators for ball and butterfly valves 4" and larger and more than 96 inches above finished floor. Extend chains to 60 inches above finished floor.
- F. Install check valves for proper direction of flow and as follows:
  - 1. Swing Check Valves: In horizontal position with hinge pin level.
  - 2. Center-Guided and Plate-Type Check Valves: In horizontal or vertical position, between flanges.
  - 3. Lift Check Valves: With stem upright and plumb.
- G. Shutoff valves shall be located on each floor, on takeoffs from all vertical risers, branch lines from the mains, and at the connection to each fixture.

#### 3.3 ADJUSTING

A. Adjust valve packing after piping systems have been tested and put into service but before final testing and balancing. Replace valves if persistent leaking occurs.

Arlington County, Virginia Architect's Project No: 563007

#### 3.4 VALVE APPLICATIONS

- A. Refer to piping Sections for specific valve applications. If valve applications are not indicated, use the following:
  - 1. Shutoff Service: Ball or butterfly valves.
  - 2. Throttling Service: Ball or butterfly valves.
  - 3. Pump Discharge: Spring-loaded, lift-disc check valves and ball or butterfly valves.
- B. If valves with specified SWP classes or CWP ratings are not available, the same types of valves with higher SWP class or CWP ratings may be substituted.
- C. Domestic Water Piping: Use the following types of valves:
  - 1. Valves, NPS 2" and Smaller: Two-Piece, Copper-Alloy Ball Valves (Full Port).
  - 2. Valves, NPS 2-1/2" and 3":
    - a. Two-piece or three-piece, Copper-Alloy Ball Valves (Full Port).
    - b. Wafer-Lug, grooved-end, or flanged butterfly valves.
  - 3. Valves, NPS 4" and Larger: Wafer-Lug, grooved-end, or flanged butterfly valves.
  - 4. Pump Discharge Check Valves (Horizontal or Vertical), NPS 2" and Smaller: Bronze, Inline Lift Check Valves.
  - 5. Horizontal Check Valves, NPS 2" and Smaller: Bronze, Horizontal Swing Check Valves.
  - 6. Vertical Check Valves, NPS 2" and Smaller: Bronze, Inline Lift Check Valves.
  - 7. Pump Discharge Check Valves (Horizontal or Vertical), NPS 2-1/2" and Larger: Grooved-End, Ductile-Iron Spring Assisted Check Valves or Spring Actuated Silent Check Valves.
  - 8. Horizontal Check Valves, NPS 2-1/2" and Larger: Bronze, Horizontal Swing Check Valves.
  - 9. Vertical Check Valves, NPS 2-1/2" and Larger: Grooved-End, Ductile-Iron Spring Assisted Check Valves or Spring Actuated Silent Check Valves.

**END OF SECTION 220523** 

Arlington County, Virginia Architect's Project No: 563007

# SECTION 220529 - HANGERS AND SUPPORTS FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

# 1.2 DEFINITIONS

- A. MSS: Manufacturers Standardization Society of the Valve and Fittings Industry Inc.
- B. Terminology: As defined in MSS SP-90, "Guidelines on Terminology for Pipe Hangers and Supports."

# 1.3 PERFORMANCE REQUIREMENTS

- A. Design Requirement: Design trapeze pipe hangers and equipment supports, including comprehensive engineering analysis by a qualified professional engineer where using methods other than indicated.
- B. Structural Performance: Hangers and supports for Plumbing piping and equipment shall withstand the effects of gravity loads and stresses within limits and under conditions indicated according to ASCE/SEI 7.
  - 1. Design supports for multiple pipes, including pipe stands, capable of supporting combined weight of supported systems, system contents, and test medium.
  - 2. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.

# 1.4 QUALITY ASSURANCE

- A. Structural Steel Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code Steel."
- B. Pipe Welding Qualifications: Qualify procedures and operators according to ASME Boiler and Pressure Vessel Code.

Arlington County, Virginia Architect's Project No: 563007

#### PART 2 - PRODUCTS

# 2.1 METAL PIPE HANGERS AND SUPPORTS

- A. Copper Pipe Hangers:
  - 1. Description: MSS SP-58, Types 1 through 58, copper-coated-steel, factory-fabricated components.
  - 2. Hanger Rods: Continuous-thread rod, nuts, and washer made of copper-coated steel.

# 2.2 TRAPEZE PIPE HANGERS

- A. Description: MSS SP-69, Type 59, shop- or field-fabricated pipe-support assembly made from structural carbon-steel shapes with MSS SP-58 carbon-steel hanger rods, nuts, saddles, and U-bolts.
- B. Trapeze Pipe Hanger Installation: Arrange for grouping of parallel runs of piping and support together on field-assembled channel systems.
  - 1. Assemble and provide according to manufacturer's written instructions. Center piping on channel to evenly distribute load.
  - 2. Pipe sizes and numbers shall be in accordance with the following:

TRAPEZE PIPE HANGER TABLE								
PIPE SIZE	4"	3"	2 ½"	2"	1 1/2"	1 1/4"	1"	TOTAL # of PIPES
NUMBER OF PIPES PERMITTED IN ONE CHANNEL SUPPORT	2	0	0	0	0	0	0	2
	0	2	2	0	0	0	0	4
	0	2	0	4	0	0	0	6
	0	2	0	0	6	0	0	8
	0	0	4	2	0	0	0	6
	0	0	4	0	2	2	0	8
	0	0	4	0	0	8	0	12
	0	0	0	6	2	2	2	12
	0	0	0	8	0	2	0	10
	0	0	0	0	14	0	0	14
	0	0	0	0	0	16	0	16

Arlington County, Virginia Architect's Project No: 563007

#### Notes:

- 1. Piping larger than 4" in diameter is not permitted in a channel support system.
- 2. Channel support systems shall be limited to eight (8) pipes per channel and two (2) channels (levels) per support system.
- 3. Smaller pipes can be substituted for larger pipes. For example two ¾" pipes may be installed in lieu of two 1" pipes, or 2" in lieu of 3", etc.
- 4. Spacing shall be in accordance with requirements for the smallest supported pipe. Refer to other specification sections for spacing requirements. If spacing requirements are not indicated comply with MSS SP-69.

# C. Metal Framing Systems:

- 1. Available Manufacturers:
  - a. Anvil International; a subsidiary of Mueller Water Products Inc.
  - b. Empire Industries, Inc.
  - c. ERICO International Corporation.
  - d. Haydon Corporation; H-Strut Division.
  - e. NIBCO INC.
  - f. PHD Manufacturing, Inc.
  - g. PHS Industries, Inc.
- 2. Description: Shop- or field-fabricated pipe-support assembly made of steel channels, accessories, fittings, and other components for supporting multiple parallel pipes.
- 3. Standard: Comply with MFMA-4.
- 4. Channels: Continuous slotted steel channel with in-turned lips.
- 5. Channel Nuts: Formed or stamped steel nuts or other devices designed to fit into channel slot and, when tightened, prevent slipping along channel.
- 6. Hanger Rods: Continuous-thread rod, nuts, and washer made of carbon steel.
- 7. Coating: Zinc.

# PART 3 - EXECUTION

# 3.1 HANGER AND SUPPORT INSTALLATION

- A. Metal Pipe-Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Provide hangers, supports, clamps, and attachments as required to properly support piping from the building structure.
- B. Metal Trapeze Pipe-Hanger Installation: Comply with MSS SP-69, MSS SP-89, and Table above. Arrange for grouping of parallel runs of horizontal piping, and support together on field-fabricated trapeze pipe hangers.

Arlington County, Virginia Architect's Project No: 563007

- C. Metal Framing System Installation: Arrange for grouping of parallel runs of piping, and support together on field-assembled metal framing systems.
- D. Thermal-Hanger Shield Installation: Provide in pipe hanger or shield for insulated piping.
- E. Pipe Stand Installation: Assemble components and mount on smooth roof surface. Do not penetrate roof membrane.
- F. Provide hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.
- G. Equipment Support Installation: Fabricate from welded-structural-steel shapes.
- H. Provide lateral bracing with pipe hangers and supports to prevent swaying.
- I. Provide building attachments within concrete slabs or attach to structural steel. Building attachments may not used on steel joists unless otherwise indicated. Provide additional attachments at concentrated loads, including valves, flanges, and strainers, 2-1/2" and larger and at changes in direction of piping. Provide concrete inserts before concrete is placed; fasten inserts to forms and provide reinforcing bars through openings at top of inserts.
- J. Load Distribution: Provide hangers and supports so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.
- K. Pipe Slopes: Provide hangers and supports to provide indicated pipe slopes and to not exceed maximum pipe deflections allowed by ASME B31.9 for building services piping.
- L. Insulated Piping:
  - 1. Attach clamps and spacers to piping.
    - a. Piping Operating above Ambient Air Temperature: Clamp may project through insulation.
    - b. Piping Operating below Ambient Air Temperature: Provide thermal-hanger shield insert with clamp sized to match OD of insert.
    - c. Do not exceed pipe stress limits allowed by ASME B31.9 for building services piping.
  - 2. Provide MSS SP-58, Type 39, protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.
  - 3. Provide MSS SP-58, Type 40, protective shields on cold piping with vapor barrier. Shields shall span an arc of 180 degrees.
  - 4. Shield Dimensions for Pipe: Not less than the following:
    - a. Pipe  $\frac{1}{4}$ " to  $3-\frac{1}{2}$ ": 12 inches long and 0.048 inch thick.
    - b. Pipe 4": 12 inches long and 0.06 inch thick.
    - c. Pipe 5" and 6": 18 inches long and 0.06 inch thick.
    - d. Pipe 8" to 14": 24 inches long and 0.075 inch thick.

Arlington County, Virginia Architect's Project No: 563007

- 5. Pipes 8" and Larger: Include wood or reinforced calcium-silicate-insulation inserts of length at least as long as protective shield.
- 6. Thermal-Hanger Shields: Provide with insulation same thickness as piping insulation.

#### 3.2 ADJUSTING

- A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.
- B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

#### 3.3 PAINTING

- A. Touchup: Unless otherwise indicated clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Provide same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
  - 1. Apply paint by brush or spray to provide a minimum dry film thickness of 2.0 mils.
- B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and immediately apply galvanizing-repair paint. Paint shall comply with ASTM A 780.

#### 3.4 HANGER AND SUPPORT SCHEDULE

- A. Specific hanger and support requirements are in Sections specifying piping systems and equipment.
- B. Comply with MSS SP-69 for pipe-hanger selections and applications that are not specified in piping system Sections.
- C. Provide hangers and supports with galvanized metallic coatings for piping and equipment that will not have field-applied finish.
- D. Provide nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.
- E. Provide copper-plated pipe hangers and copper attachments for copper piping and tubing.
- F. Provide padded hangers for piping that is subject to scratching.
- G. Provide thermal-hanger shield inserts for insulated piping and tubing.
- H. Horizontal-Piping Hangers and Supports: Unless otherwise indicated provide the following:
  - 1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of stationary pipes ½" to 30".

Arlington County, Virginia Architect's Project No: 563007

- 2. Yoke-Type Pipe Clamps (MSS Type 2): For suspension of up to 1050 deg F pipes 4" to 14", requiring up to 4" of insulation.
- 3. Carbon- or Alloy-Steel, Double-Bolt Pipe Clamps (MSS Type 3): For suspension of pipes <sup>3</sup>/<sub>4</sub>" to 14", requiring clamp flexibility and up to 4 inches of insulation.
- 4. Steel Pipe Clamps (MSS Type 4): For suspension of cold and hot pipes ½" to 14" if little or no insulation is required.
- 5. Pipe Hangers (MSS Type 5): For suspension of pipes ½" to 4", to allow off-center closure for hanger installation before pipe erection.
- 6. Adjustable, Swivel Split- or Solid-Ring Hangers (MSS Type 6): For suspension of noninsulated, stationary pipes 3/4" to 8".
- 7. Adjustable, Steel Band Hangers (MSS Type 7): For suspension of noninsulated, stationary pipes ½" to 8".
- 8. Adjustable Band Hangers (MSS Type 9): For suspension of noninsulated, stationary pipes ½" to 8".
- 9. Adjustable, Swivel-Ring Band Hangers (MSS Type 10): For suspension of noninsulated, stationary pipes ½" to 8".
- 10. Split Pipe Ring with or without Turnbuckle Hangers (MSS Type 11): For suspension of noninsulated, stationary pipes ½" to 8".
- 11. Extension Hinged or Two-Bolt Split Pipe Clamps (MSS Type 12): For suspension of noninsulated, stationary pipes NPS ½" to 3".
- 12. U-Bolts (MSS Type 24): For support of heavy pipes ½" to 14".
- 13. Clips (MSS Type 26): For support of insulated pipes not subject to expansion or contraction.
- 14. Pipe Saddle Supports (MSS Type 36): For support of pipes 4" to 14", with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate.
- 15. Pipe Stanchion Saddles (MSS Type 37): For support of pipes 4" to 14", with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate, and with U-bolt to retain pipe.
- 16. Adjustable Pipe Saddle Supports (MSS Type 38): For stanchion-type support for pipes 2-½" to 14" if vertical adjustment is required, with steel-pipe base stanchion support and cast-iron floor flange.
- 17. Single-Pipe Rolls (MSS Type 41): For suspension of pipes 1" to 14", from two rods if longitudinal movement caused by expansion and contraction might occur.
- 18. Adjustable Roller Hangers (MSS Type 43): For suspension of pipes 2-½" to 14", from single rod if horizontal movement caused by expansion and contraction might occur.
- 19. Complete Pipe Rolls (MSS Type 44): For support of pipes 2" to 14" if longitudinal movement caused by expansion and contraction might occur but vertical adjustment is not necessary.
- 20. Pipe Roll and Plate Units (MSS Type 45): For support of pipes 2" to 14" if small horizontal movement caused by expansion and contraction might occur and vertical adjustment is not necessary.
- 21. Adjustable Pipe Roll and Base Units (MSS Type 46): For support of pipes 2" to 14"if vertical and lateral adjustment during installation might be required in addition to expansion and contraction.
- I. Vertical-Piping Clamps: Unless otherwise indicated provide the following:
  - 1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers 3/4" to 14".
  - 2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers <sup>3</sup>/<sub>4</sub>" to 14" if longer ends are required for riser clamps.

Arlington County, Virginia Architect's Project No: 563007

- J. Hanger-Rod Attachments: Unless otherwise indicated provide the following:
  - 1. Steel Turnbuckles (MSS Type 13): For adjustment up to 6 inches for heavy loads.
  - 2. Steel Clevises (MSS Type 14): For 120 to 450 deg F piping installations.
  - 3. Swivel Turnbuckles (MSS Type 15): For use with MSS Type 11, split pipe rings.
  - 4. Malleable-Iron Sockets (MSS Type 16): For attaching hanger rods to various types of building attachments.
  - 5. Steel Weldless Eye Nuts (MSS Type 17): For 120 to 450 deg F piping installations.
  - 6. Flat Plate, Double Nut, and Washer as Detailed on Structural Drawings: For attaching to bar joists. Method of attachment to bar joists must be approved by the structural engineer and joist manufacturer.
- K. Building Attachments: Unless otherwise indicated provide the following:
  - 1. Steel or Malleable Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.
  - 2. Flat Plate, Double Nuts, and Washer as Detailed on Structural Drawings: For use under roof installations with bar-joist construction to attach to bottom chord of joist.
  - 3. Side-Beam or Channel Clamps (MSS Type 20): For attaching to bottom flange of beams, channels, or angles.
  - 4. Center-Beam Clamps (MSS Type 21): For attaching to center of bottom flange of beams.
  - 5. Welded Beam Attachments (MSS Type 22): For attaching to bottom of beams if loads are considerable and rod sizes are large.
  - 6. C-Clamps (MSS Type 23): For structural shapes.
  - 7. Top-Beam Clamps (MSS Type 25): For top of beams if hanger rod is required tangent to flange edge.
  - 8. Side-Beam Clamps (MSS Type 27): For bottom of steel I-beams.
  - 9. Steel-Beam Clamps with Eye Nuts (MSS Type 28): For attaching to bottom of steel I-beams for heavy loads.
  - 10. Linked-Steel Clamps with Eye Nuts (MSS Type 29): For attaching to bottom of steel I-beams for heavy loads, with link extensions.
  - 11. Malleable-Beam Clamps with Extension Pieces (MSS Type 30): For attaching to structural steel.
  - 12. Welded-Steel Brackets: For support of pipes from below or for suspending from above by using clip and rod. Provide one of the following for indicated loads:
    - a. Light (MSS Type 31): 750 lb.
    - b. Medium (MSS Type 32): 1500 lb.
    - c. Heavy (MSS Type 33): 3000 lb.
  - 13. Side-Beam Brackets (MSS Type 34): For sides of steel or wooden beams.
  - 14. Plate Lugs (MSS Type 57): For attaching to steel beams if flexibility at beam is required.
  - 15. Horizontal Travelers (MSS Type 58): For supporting piping systems subject to linear horizontal movement where headroom is limited.
- L. Saddles and Shields: Unless otherwise indicated provide the followings:
  - 1. Steel-Pipe-Covering Protection Saddles (MSS Type 39): To fill interior voids with insulation that matches adjoining insulation.

Arlington County, Virginia Architect's Project No: 563007

- 2. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
- 3. Thermal-Hanger Shield Inserts: For supporting insulated pipe.
- M. Spring Hangers and Supports: Unless otherwise indicated provide the following:
  - 1. Restraint-Control Devices (MSS Type 47): To control pipe movement.
  - 2. Spring Cushions (MSS Type 48): For light loads if vertical movement does not exceed 1-1/4 inches
  - 3. Spring-Cushion Roll Hangers (MSS Type 49): For equipping Type 41, roll hanger with springs.
  - 4. Spring Sway Braces (MSS Type 50): To retard sway, shock, vibration, or thermal expansion in piping systems.
  - 5. Variable-Spring Hangers (MSS Type 51): Preset to indicated load and limit variability factor to 25 percent to allow expansion and contraction of piping system from hanger.
  - 6. Variable-Spring Base Supports (MSS Type 52): Preset to indicated load and limit variability factor to 25 percent to allow expansion and contraction of piping system from base support.
  - 7. Variable-Spring Trapeze Hangers (MSS Type 53): Preset to indicated load and limit variability factor to 25 percent to allow expansion and contraction of piping system from trapeze support.
  - 8. Constant Supports: For critical piping stress and if necessary to avoid transfer of stress from one support to another support, critical terminal, or connected equipment. Include auxiliary stops for erection, hydrostatic test, and load-adjustment capability. These supports include the following types:
    - a. Horizontal (MSS Type 54): Mounted horizontally.
    - b. Vertical (MSS Type 55): Mounted vertically.
    - c. Trapeze (MSS Type 56): Two vertical-type supports and one trapeze member.
- N. Comply with MSS SP-69 for trapeze pipe-hanger selections and applications that are not specified in piping system Sections.
- O. Comply with MFMA-103 for metal framing system selections and applications that are not specified in piping system Sections.
- P. Provide powder-actuated fasteners or mechanical-expansion anchors instead of building attachments where indicated in concrete construction.

END OF SECTION 220529

Arlington County, Virginia Architect's Project No: 563007

## SECTION 220553 - IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT

## PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

## 1.2 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Equipment Label Schedule: Include a listing of all equipment to be labeled with the proposed content for each label.
- C. Valve Schedules: For each piping system to include in maintenance manuals.
- D. 1/16" = 1'-0" scale drawing showing all valve locations to include in maintenance manuals.

## 1.3 QUALITY ASSURANCE

A. ASME Compliance: Comply with ASME A13.1, "Scheme for the Identification of Piping Systems," for letter size, length of color field, colors, and viewing angles of identification devices for piping.

## 1.4 COORDINATION

- A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- B. Coordinate installation of identifying devices with locations of access panels and doors.
- C. Install identifying devices before installing acoustical ceilings and similar concealment.

## PART 2 - PRODUCTS

## 2.1 EQUIPMENT LABELS

## A. Metal Labels for Equipment:

- 1. Material and Thickness: Brass, Aluminum, or anodized aluminum, 0.032-inch minimum thickness, and having predrilled or stamped holes for attachment hardware.
- 2. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.

Arlington County, Virginia Architect's Project No: 563007

- 3. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
- 4. Fasteners: Stainless-steel rivets or self-tapping screws.
- 5. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.

## B. Plastic Labels for Equipment:

- 1. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/16-inch-thick, and having predrilled holes for attachment hardware.
- 2. Letter Color: White.
- 3. Background Color: Black.
- 4. Maximum Temperature: Able to withstand temperatures up to 160 deg F.
- 5. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
- 6. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
- 7. Fasteners: Stainless-steel rivets or self-tapping screws.
- 8. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- C. Label Content: Include equipment's Drawing designation or unique equipment number, Drawing numbers where equipment is indicated (plans, details, and schedules), plus the Specification Section number and title where equipment is specified.
- D. Equipment Label Schedule: For each item of equipment to be labeled, on 8-1/2-by-11-inch bond paper. Tabulate equipment identification number and identify Drawing numbers where equipment is indicated (plans, details, and schedules), plus the Specification Section number and title where equipment is specified. Equipment schedule shall be included in operation and maintenance data.

## 2.2 WARNING SIGNS AND LABELS

- A. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/16-inch-thick, and having predrilled holes for attachment hardware.
- B. Letter Color: White.
- C. Background Color: Red.
- D. Maximum Temperature: Able to withstand temperatures up to 160 deg F.
- E. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.

Arlington County, Virginia Architect's Project No: 563007

- F. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
- G. Fasteners: Stainless-steel rivets or self-tapping screws.
- H. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- I. Label Content: Include caution and warning information, plus emergency notification instructions.

## 2.3 PIPE LABELS

- A. General Requirements for Manufactured Pipe Labels: Preprinted, color-coded, with lettering indicating service, and showing flow direction.
- B. Pretensioned Pipe Labels: Precoiled, semirigid plastic formed to cover full circumference of pipe and to attach to pipe without fasteners or adhesive.
- C. Self-Adhesive Pipe Labels: Printed plastic with contact-type, permanent-adhesive backing.
- D. Pipe Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings, pipe size, and an arrow indicating flow direction.
  - 1. Flow-Direction Arrows: Integral with piping system service lettering to accommodate both directions, or as separate unit on each pipe label to indicate flow direction.
  - 2. Lettering Size: At least 1-1/2 inches high.

### 2.4 STENCILS

- A. Stencils: Prepared with letter sizes according to ASME A13.1 for piping; minimum letter height of 1-1/4 inches for ducts; and minimum letter height of 3/4 inch for access panel and door markers, equipment markers, equipment signs, and similar operational instructions.
  - 1. Stencil Material: Metal or fiberboard.
  - 2. Stencil Paint: Exterior, gloss, black, unless otherwise indicated. Paint shall be low VOC and shall meet the requirements of section 09910. Paint may be in pressurized spray-can form.
  - 3. Identification Paint: Exterior, in colors according to ASME A13.1, unless otherwise indicated. Paint shall be low VOC and shall meet the requirements of section 09910.

## 2.5 [VALVE TAGS

A. Valve Tags: Stamped or engraved with 1/4-inch letters for piping system abbreviation and 1/2-inch numbers, numbering scheme approved by Architect. Provide 5/32-inch hole for fastener.

Arlington County, Virginia Architect's Project No: 563007

- 1. Material: 0.032-inch- thick brass or
- 2. Material: 0.0375-inch- thick stainless steel or
- 3. Material: 3/32-inch- thick laminated plastic with 2 black surfaces and white inner layer.
- B. Valve-Tag Fasteners: Brass wire-link or beaded chain; or S-hook.

## 2.6 VALVE SCHEDULES

- A. Valve Schedules: For each piping system, on standard-size bond paper. Tabulate valve number, piping system, system abbreviation (as shown on valve tag), location of valve (room or space), normal-operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.
  - 1. Valve-Schedule Frames: Glazed display frame for removable mounting on masonry walls for each page of valve schedule. Include mounting screws and hangers.
  - 2. Frame: Finished hardwood or extruded aluminum.
  - 3. Glazing: ASTM C 1036, Type I, Class 1, Glazing Quality B, 2.5-mm, single-thickness glass.

## 2.7 VALVE PLAN

- A. Valve Plan: Prepare a scale drawing. Provide the location and identity of each valve.
  - 1. Valve Plan Frames: Glazed display frame for removable mounting on masonry walls for each page of valve plan. Include mounting screws and hangers.
  - 2. Frame: Finished hardwood or extruded aluminum.
  - 3. Glazing: ASTM C 1036, Type I, Class 1, Glazing Quality B, 2.5-mm, single-thickness glass.]

## 2.8 WARNING TAGS

- A. Warning Tags: Preprinted or partially preprinted, accident-prevention tags, of plasticized card stock with matte finish suitable for writing.
  - 1. Size: 3 by 5-1/4 inches minimum.
  - 2. Fasteners: Brass grommet and wire.
  - 3. Nomenclature: Large-size primary caption such as "DANGER," "CAUTION," or "DO NOT OPERATE."
  - 4. Color: Yellow background with black lettering.

Arlington County, Virginia Architect's Project No: 563007

### PART 3 - EXECUTION

## 3.1 PREPARATION

A. Clean piping and equipment surfaces of substances that could impair bond of identification devices, including dirt, oil, grease, release agents, and incompatible primers, paints, and encapsulants.

## 3.2 PIPE LABEL INSTALLATION

- A. Piping Color-Coding: Painting of piping is specified in other sections.
- B. Stenciled Pipe Label Option: Stenciled labels may be provided instead of manufactured pipe labels, at Installer's option. Install stenciled pipe labels with painted, color-coded bands or rectangles on each piping system.
  - 1. Identification Paint: Use for contrasting background.
  - 2. Stencil Paint: Use for pipe marking.
- C. Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:
  - 1. Near each valve and control device.
  - 2. Near each branch connection, excluding short takeoffs for fixtures and terminal units. Where flow pattern is not obvious, mark each pipe at branch.
  - 3. Near penetrations through walls, floors, ceilings, and inaccessible enclosures.
  - 4. At access doors, manholes, and similar access points that permit view of concealed piping.
  - 5. Near major equipment items and other points of origination and termination.
  - 6. Spaced at maximum intervals of 25 feet.
  - 7. On piping above removable acoustical ceilings. Omit intermediately spaced labels.

## D. Pipe Label Color Schedule:

- 1. Domestic Cold Water Piping:
  - a. Background Color: Green.
  - b. Letter Color: White.
- 2. Domestic Hot Water and Hot Water Return Piping:
  - a. Background Color: Green.
  - b. Letter Color: White.
- 3. Sanitary Waste and Storm Drainage Piping:

Arlington County, Virginia Architect's Project No: 563007

- a. Background Color: Green.
- b. Letter Color: White.

### 3.3 VALVE-TAG INSTALLATION

- A. Install tags on valves and control devices in piping systems, except check valves; valves within factory-fabricated equipment units; plumbing fixture supply stops; shutoff valves; faucets; convenience and lawn-watering hose connections; and HVAC terminal devices and similar roughing-in connections of end-use fixtures and units. List tagged valves in a valve schedule.
- B. Valve-Tag Application Schedule: Tag valves according to size, shape, and color scheme and with captions similar to those indicated in the following:
  - 1. Valve-Tag Size and Shape:
    - a. Domestic Cold Water: 1 ½", round.
    - b. Domestic Hot Water: 1 ½", round.
    - c. Domestic Hot Water Recirculation: 1 ½", round.
  - 2. Valve-Tag Color:
    - a. Domestic Cold Water: Blue.
    - b. Domestic Hot Water: Red.
    - c. Domestic Hot Water Recirculation: Red.
  - 3. Letter Color:
    - a. Domestic Cold Water: Black.
    - b. Domestic Hot Water: White.
    - c. Domestic Hot Water Recirculation: White.

## 3.4 VALVE SCHEDULE INSTALLATION

A. Mount valve schedules on wall in accessible location in each major equipment room and where directed by owner.

## 3.5 VALVE PLAN INSTALLATION

A. Mount valve plans on wall in accessible location in each major equipment room and where directed by owner.

### 3.6 WARNING-TAG INSTALLATION

A. Write required message on, and attach warning tags to, equipment and other items where required.

## 3.7 ADJUSTING

A. Relocate mechanical identification materials and devices that have become visually blocked by other work.

### 3.8 CLEANING

Arlington County, Virginia Architect's Project No: 563007

A. Clean faces of mechanical identification devices and glass fronts of valve schedules and plans.

END OF SECTION 220553

Arlington County, Virginia Architect's Project No: 563007

### SECTION 220700 - PLUMBING INSULATION

### PART 1 - GENERAL

### 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

## 1.2 DEFINITIONS

- A. Plenum: An unoccupied space or void, on the conditioned side of the building insulation and vapor barrier, being used to return conditioned air to the inlet side of a return or exhaust fan either directly or via a duct connection. An example would be a space with air handling light fixtures or openings in the ceiling used to transport air through the ceiling and then to an open duct located above the ceiling in another location.
- B. Indirectly Conditioned Space: A space having no direct conditioning but, due to air movement induced by an exhaust, or return opening, is conditioned by makeup air from an adjacent space. An example would be a small toilet. Boiler rooms, fan rooms, and mechanical rooms do not qualify as indirectly conditioned spaces.
- C. Inside the Building Insulation Envelope: For the purposes of this section, boiler rooms, fan rooms, and mechanical rooms are considered to be OUTSIDE the building insulation envelope.
- D. Exposed: Visible from any angle without removal of building element or equipment.
- E. Concealed: Enclosed in building element or above ceiling such that it is not visible from any angle without removal of building element or equipment.

## 1.3 SUBMITTALS

- A. Product Data: Identify thermal conductivity, thickness, and jackets (both factory and field applied, if any), for each type of product indicated.
- B. Shop Drawings: Show fabrication and installation details for the following:
  - 1. Detail application of removable insulation covers.
  - 2. Detail application of protective shields, saddles, and inserts at hangers for each type of insulation and hanger.
  - 3. Detail attachment and covering of heat tracing inside insulation.
  - 4. Detail insulation application at pipe expansion joints for each type of insulation.
  - 5. Detail insulation application at elbows, fittings, flanges, valves, and specialties for each type of insulation.
  - 6. Detail removable insulation at piping specialties, equipment connections, and access panels.
  - 7. Detail application of field-applied jackets.
  - 8. Detail application at linkages of control devices.
  - 9. Detail field application for each equipment type.

Arlington County, Virginia Architect's Project No: 563007

## 1.4 QUALITY ASSURANCE

- A. Fire-Test-Response Characteristics: Insulation and related materials shall have fire-test-response characteristics indicated, as determined by testing identical products per ASTM E 84, by a testing and inspecting agency acceptable to authorities having jurisdiction. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers, with appropriate markings of applicable testing and inspecting agency.
  - 1. Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less
  - 2. Insulation Installed Outdoors: Flame-spread index of 75 or less, and smoke-developed index of 150 or less

## 1.5 DELIVERY, STORAGE, AND HANDLING

- A. Packaging: Ship insulation materials in containers marked by manufacturer with type, grade, and maximum use temperature.
- B. Ship Insulated Piping System Components on pallets and wood supports. Securely fasten and protect from damage. Store off the ground and cover with opaque waterproof tarp to protect materials from sunlight and rain.

### 1.6 COORDINATION

- A. Coordinate size and location of supports, hangers, and insulation shields specified in Section "Hangers and Supports for HVAC Piping and Equipment."
- B. Coordinate clearance requirements with piping installer for piping insulation, duct installer for duct insulation, and equipment installer for equipment insulation.
- C. Maintain clearances required for maintenance.
- D. Coordinate installation and testing of heat tracing.

## PART 2 - PRODUCTS

## 2.1 MANUFACTURERS

- A. Available Manufacturers:
  - 1. Mineral-Fiber Insulation:
    - a. CertainTeed Manson.
    - b. Johns Manville
    - c. Knauf FiberGlass GmbH.
    - d. Owens-Corning Fiberglas Corp.
    - e. Schuller International, Inc.
  - 2. Flexible Elastomeric Thermal Insulation:
    - a. Armstrong World Industries, Inc.
    - b. Rubatex Corp.
  - 3. Polyolefin Insulation:
    - a. Armstrong World Industries, Inc.
    - b. IMCOA.

Arlington County, Virginia Architect's Project No: 563007

- 4. Closed-Cell Phenolic-Foam Insulation:
  - a. Kooltherm Insulation Products, Ltd.
- 5. Removable Insulation Covers:
  - a. Advance Thermal Corp.

## 2.2 INSULATION MATERIALS

- A. Comply with requirements in Part 3 schedule articles for where insulating materials shall be applied.
- B. Products shall not contain asbestos, lead, mercury, or mercury compounds.
- C. Products that come in contact with stainless steel shall have a leachable chloride content of less than 50 ppm when tested according to ASTM C 871.
- D. Insulation materials for use on austenitic stainless steel shall be qualified as acceptable according to ASTM C 795.
- E. Foam insulation materials shall not use CFC or HCFC blowing agents in the manufacturing process.
- F. Mineral-Fiber Board: Glass fibers bonded with a thermosetting resin. Comply with ASTM C 612, Type IB, with factory applied FSK Jacket. Meet the requirements of ASTM C 1290, Type III, inorganic glass fibers bonded by a thermosetting resin to maximum service temperature of 250°F. Faced insulation shall not exceed 25 Flame Spread, 50 Smoke Developed when tested in accordance with ASTM E84.
- G. Semi-Rigid Mineral-Fiber Board: Glass fibers bonded with a thermosetting resin. Comply with ASTM C 1136, Type I, II, III, & IV with factory applied all-service jacket (ASJ) or Type II, IV with factory applied Foil Scrim Kraft (FSK) jacket.
- H. Mineral-Fiber Blanket with Factory Applied FSK Jacket: Meet the requirements of ASTM C 1290, Type III, inorganic glass fibers bonded by a thermosetting resin with a multi-purpose foil-scrim kraft (FSK) jacket to maximum service temperature of 250°F. FSK shall meet the requirements of ASTM C 1136, Type II, when surface burning characteristics are determined in accordance with ASTM E 84 with the foil surface of the material exposed to the flame as it is in the final composite. Composite (insulation, facing and adhesive) shall not exceed 25 Flame Spread, 50 Smoke Developed when tested in accordance with ASTM E 84. Insulation properties shall be as follows:
  - 1. Thickness: 1-1/2"
    - a. Density: 0.75 pcf
    - b. Minimum uncompressed R value: 5.0
    - c. Minimum installed R value assuming 25% compression: 4.0
  - 2. Thickness: 2"
    - a. Density: 1.0 pcf
    - b. Minimum uncompressed R value: 7.4
    - c. Minimum installed R value assuming 25% compression: 6.0
  - 3. Alternate to 2" 1.0 pcf: Thickness: 2.2"
    - a. Density: 0.75 pcf
    - b. Minimum uncompressed R value: 7.4
    - c. Minimum installed R value assuming 25% compression: 6.0

Arlington County, Virginia Architect's Project No: 563007

- 4. Thickness: 3"
  - a. Density: 0.75 pcf
  - b. Minimum uncompressed R value: 10.0
  - c. Minimum installed R value assuming 25% compression: 8.3
- I. Medium Temperature Mineral-Fiber Blanket for Operating Temperatures from 250 to 850 deg F: Glass fibers bonded with a thermosetting resin. Comply with ASTM C 553, Type II, without facing and with all-service jacket manufactured from kraft paper, reinforcing scrim, aluminum foil, and vinyl film.
- J. High Temperature Mineral-Fiber Blanket for Temperatures above 850 deg F: Glass fibers bonded with a thermosetting resin. Comply with ASTM C 553, Type V, without facing and with all-service jacket manufactured from kraft paper, reinforcing scrim, aluminum foil, and vinyl film.
- K. Mineral-Fiber Pipe Insulation: Glass fibers bonded with a thermosetting resin complying with the following:
  - 1. Preformed Pipe Insulation: Comply with ASTM C 547, Type 1, with factory-applied, all-purpose, vapor-retarder jacket.
  - 2. Semi-Rigid Mineral-Fiber Board: Glass fibers bonded with a thermosetting resin. Comply with ASTM C 1136, Type I, II, III, IV with factory applied all-service jacket (ASJ) or Type II, IV with factory applied Foil Scrim Kraft (FSK) jacket.
  - 3. Blanket Insulation: Comply with ASTM C 553, Type II, without facing.
  - 4. Mineral-Fiber Insulating Cements: Comply with ASTM C 195.
  - 5. Expanded or Exfoliated Vermiculite Insulating Cements: Comply with ASTM C 196.
  - 6. Mineral-Fiber, Hydraulic-Setting Insulating and Finishing Cement: Comply with ASTM C 449/C 449M.
- L. Flexible Elastomeric: Closed-cell, sponge- or expanded-rubber materials. Comply with ASTM C 534, Type I for tubular materials and Type II for sheet materials.
  - 1. Adhesive: As recommended by insulation material manufacturer.
  - 2. Ultraviolet-Protective Coating: As recommended by insulation manufacturer.
- M. Closed-Cell Phenolic-Foam: Block insulation of rigid, expanded, closed-cell structure. Comply with ASTM C 1126, Type II, Grade 1.
- N. Prefabricated Thermal Insulating Fitting Covers: Comply with ASTM C 450 for dimensions used in preforming insulation to cover valves, elbows, tees, and flanges.

## 2.3 FIELD-APPLIED JACKETS

- A. General: ASTM C 921, Type 1, unless otherwise indicated.
- B. Glass Cloth: Woven glass-fiber fabric, plain weave, minimum 8 ounces per square yard.
- C. Foil and Paper Jacket: Laminated, glass-fiber-reinforced, flame-retardant kraft paper and aluminum foil.
- D. PVC Jacket: High-impact, ultraviolet-resistant PVC; 20 mils thick; roll stock ready for shop or field cutting and forming.
  - 1. Adhesive: As recommended by insulation material manufacturer.
  - 2. PVC Duct Jacket Color: White or gray.

Arlington County, Virginia Architect's Project No: 563007

- 3. PVC Pipe Jacket Color: Color-code piping jackets based on materials contained within the piping system.
- E. Aluminum Jacket: Deep corrugated sheets manufactured from aluminum alloy complying with ASTM B 209, and having an integrally bonded moisture barrier over entire surface in contact with insulation. Factory cut and rolled to indicated sizes. Comply with ASTM B 209, 3003 alloy, H-14 temper.
  - 1. Finish and Thickness: Stucco-embossed finish, 0.016 inch thick.
  - 2. Moisture Barrier: 1-mil- thick, heat-bonded polyethylene and kraft paper.
  - 3. Elbows: Preformed, 45- and 90-degree, short- and long-radius elbows; same material, finish, and thickness as jacket.
- F. Standard PVC Pipe Fitting Covers: Factory-fabricated fitting covers manufactured from 20-mil- thick, high-impact, ultraviolet-resistant PVC.
  - 1. Shapes: 45- and 90-degree, short- and long-radius elbows, tees, valves, flanges, reducers, end caps, soil-pipe hubs, traps, mechanical joints, and P-trap and supply covers for lavatories for the disabled.
  - 2. Adhesive: As recommended by insulation material manufacturer.

## 2.4 REMOVABLE INSULATION COVERS

A. Pre-manufactured easily removable insulation cover/blanket intended for insulation of equipment and devices requiring periodic maintenance.

## 2.5 ACCESSORIES AND ATTACHMENTS

- A. Glass Cloth and Tape: Comply with MIL-C-20079H, Type I for cloth and Type II for tape. Woven glass-fiber fabrics, plain weave, presized a minimum of 8 oz. /sq. yd.
  - 1. Tape Width: 4 inches.
- B. Bands: 3/4 inch wide, in one of the following materials compatible with jacket:
  - 1. Stainless Steel: ASTM A 666, Type 304; 0.020 inch thick.
  - 2. Galvanized Steel: 0.005 inch thick.
  - 3. Aluminum: 0.007 inch thick.
  - 4. Brass: 0.010 inch thick.
  - 5. Nickel-Copper Alloy: 0.005 inch thick.
- C. Wire: 0.080-inch, nickel-copper alloy; 0.062-inch, soft-annealed, stainless steel; or 0.062-inch, soft-annealed, galvanized steel.
- D. Weld-Attached Anchor Pins and Washers: Copper-coated steel pin for capacitor-discharge welding and galvanized speed washer. Pin length sufficient for insulation thickness indicated.
  - 1. Welded Pin Holding Capacity: 100 lb for direct pull perpendicular to the attached surface.
- E. Adhesive-Attached Anchor Pins and Speed Washers: Galvanized steel plate, pin, and washer manufactured for attachment to duct, pipe, plenum and breeching with adhesive. Pin length sufficient for insulation thickness indicated.

Arlington County, Virginia Architect's Project No: 563007

- 1. Adhesive: Recommended by the anchor pin manufacturer as appropriate for surface temperatures of ducts, pipes, plenums, and breechings; and to achieve a holding capacity of 100 lb. for direct pull perpendicular to the adhered surface.
- F. Self-Adhesive Anchor Pins and Speed Washers: Galvanized steel plate, pin, and washer manufactured for attachment to duct, pipe, and plenum with adhesive. Pin length sufficient for insulation thickness indicated.

## 2.6 VAPOR RETARDERS

A. Mastics: Materials recommended by insulation material manufacturer that are compatible with insulation materials, jackets, and substrates.

## 2.7 REMOVABLE INSULATION COVERS

A. Pre-manufactured easily removable insulation cover/blanket intended for insulation of equipment and devices requiring periodic maintenance.

## PART 3 - EXECUTION

## 3.1 EXAMINATION

- A. Examine substrates and conditions for compliance with requirements for installation and other conditions affecting performance of insulation application.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

## 3.2 PREPARATION

A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

## 3.3 GENERAL APPLICATION REQUIREMENTS

- A. Apply insulation materials, accessories, and finishes according to the manufacturer's written instructions; with smooth, straight, and even surfaces; and free of voids throughout the length of piping, and fittings.
- B. Refer to schedules at the end of this Section for materials, forms, jackets, and thickness required for each system.
- C. Use accessories compatible with insulation materials and suitable for the service. Use accessories that do not corrode, soften, or otherwise attack insulation or jacket in either wet or dry state.
- D. Apply multiple layers of insulation with seams staggered.
- E. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.
- F. Seal joints and seams with vapor-retarder mastic on insulation indicated to receive a vapor retarder.

Arlington County, Virginia Architect's Project No: 563007

- G. Keep insulation materials dry at all times. Insulation that becomes wet or is otherwise damaged beyond repair shall be removed immediately and replaced. Replacement material and installation shall be in accordance with these specifications.
- H. Apply insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by the insulation material manufacturer.
- I. Apply insulation with the minimum number of joints practical.
- J. Apply insulation over fittings, valves, and specialties, with continuous thermal and vapor-retarder integrity, unless otherwise indicated.
- K. Refer to special instructions for applying insulation over fittings, valves, and specialties.
- L. Hangers and Anchors: Where vapor retarder is indicated, seal penetrations in insulation at hangers, supports, anchors, and other projections with vapor-retarder mastic.
  - 1. Apply insulation continuously through hangers and around anchor attachments.
  - 2. For insulation application where vapor retarders are indicated, extend insulation on anchor legs at least 12 inches from point of attachment to pipe and taper insulation ends. Seal tapered ends with a compound recommended by the insulation material manufacturer to maintain vapor retarder.
  - 3. Install insert materials and apply insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by the insulation material manufacturer.
  - 4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect the jacket from tear or puncture by the hanger, support, and shield.
- M. Insulation Terminations: For insulation application where vapor retarders are indicated, seal ends with a compound recommended by the insulation material manufacturer to maintain vapor retarder.
- N. Apply insulation with integral jackets as follows:
  - 1. Pull jacket tight and smooth.
  - 2. Joints and Seams: Cover with tape and vapor retarder as recommended by insulation material manufacturer to maintain vapor seal.
  - 3. Vapor-Retarder Mastics: Where vapor retarders are indicated, apply mastic on seams and joints and at ends adjacent to pipe joints and fittings.
- O. Cut insulation according to manufacturer's written instructions to prevent compressing insulation to less than 75 percent of its nominal thickness.
- P. Install vapor-retarder mastic on pipes and equipment.
  - 1. Pipes and equipment with vapor retarders: Overlap insulation facing at seams and seal with vapor-retarder mastic and pressure-sensitive tape having same facing as insulation. Repair punctures, tears, and penetrations with tape or mastic to maintain vapor-retarder seal.
  - 2. Pipes and equipment without vapor retarders: Overlap insulation facing at seams and secure with outward clinching staples and pressure-sensitive tape having same facing as insulation.

Arlington County, Virginia Architect's Project No: 563007

- Q. Interior Wall and Partition Penetrations: Apply insulation continuously through walls and partitions, except fire-rated walls and partitions.
- R. Fire-Rated Wall and Partition Penetrations: Terminate insulation at fire/smoke damper sleeves for fire-rated wall and partition penetrations.
- S. Floor Penetrations: Terminate insulation at underside of floor assembly and at floor support at top of floor.
  - 1. For insulation indicated to have vapor retarders, taper termination and seal insulation ends with vapor-retarder mastic.

## 3.4 MINERAL-FIBER INSULATION APPLICATION

- A. Blanket Applications for Pipes: Secure blanket insulation with adhesive, and anchor pins with speed washers.
  - 1. Apply adhesives according to manufacturer's recommended coverage rates per square foot, for 100 percent coverage of pipe surfaces.
  - 2. Apply adhesive to entire circumference of pipes and to all surfaces of fittings and transitions.
  - 3. Install anchor pins and speed washers on sides, top, and bottom of horizontal pipes.
  - 4. Impale insulation over anchors and attach speed washers.
  - 5. Cut excess portion of pins extending beyond speed washers. Cover exposed pins and washers with tape matching insulation facing.
  - 6. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation segment with 1/2-inch staples, 1-inch o.c., and cover with pressure-sensitive tape having same facing as insulation.
  - 7. Overlap unfaced blankets a minimum of 2 inches on longitudinal seams and end joints. Secure with steel band at end joints and spaced a maximum of 18 inches o.c.
  - 8. Apply insulation on pipe fittings and transitions with a full insulation segment for each surface. Apply insulation on pipe elbows with individually mitered gores cut to fit the elbow.
  - 9. Insulate pipe hangers and flanges that protrude beyond the insulation surface with 6-inch- wide strips of the same material as insulation. Secure on alternating sides of stiffener, hanger, and flange with anchor pins spaced 6 inches o.c.
  - 10. Apply vapor-retarder mastic to open joints, breaks, and punctures for insulation indicated to receive vapor retarder.

## 3.5 FLEXIBLE ELASTOMERIC THERMAL INSULATION APPLICATION

- A. Apply insulation to ducts, plenums, and equipment as follows:
  - 1. Follow the manufacturer's written instructions for applying insulation.
  - 2. Seal longitudinal seams and end joints with manufacturer's recommended adhesive. Cement to avoid openings in insulation that will allow passage of air to the duct, plenum, and equipment surface.

## 3.6 APPLICATIONS

A. Insulation materials and thickness are specified at the end of this Section.

## Arlington County, Virginia Architect's Project No: 563007

- B. Insulate all pipe and equipment:
  - 1. Insulate pipe in accordance with the application schedule(s) below.
  - 2. Exceptions: Unless otherwise indicated, do not apply insulation to the following systems, materials, and equipment:
    - a. Vibration-control devices.
    - b. Testing agency labels and stamps.
    - c. Nameplates and data plates.
    - d. Manholes.
    - e. Handholes.
    - f. Cleanouts.
    - g. Plastic Condensate Drain piping.
    - h. Factory-insulated equipment.
    - i. Flexible connectors.

## 3.7 INDOOR APPLICATION SCHEDULE (ABOVE GRADE):

- A. Service: Domestic hot water and domestic circulated hot water.
  - 1. Insulation Material: Mineral fiber preformed or flexible elastomeric pipe insulation.
  - 2. Insulation Thickness: Apply the following insulation thicknesses:
    - a. Copper Pipe, ½" through 1½" in diameter: 1"
    - b. Copper Pipe, 1½" through 3" in diameter: 1½"
    - c. Copper Pipe, larger than 3" in diameter: 2"
  - 3. Vapor Retarder Required: No.
  - 4. Finish: Exposed = Painted, concealed = none.
- B. Service: Domestic cold water.
  - 1. Insulation Material: Mineral fiber preformed or flexible elastomeric pipe insulation.
  - 2. Insulation Thickness: ½"
  - 3. Vapor Retarder Required: Yes.
  - 4. Finish: Exposed = Painted, concealed = none.
- C. Service: Floor Drains, Traps, and Sanitary Drain Piping within 10 Feet of Drain Receiving Drainage from any Equipment. Measurement shall be pipe length.
  - 1. Insulation Material: Mineral fiber preformed pipe insulation with Factory Applied FSK Jacket.
  - 2. Insulation Thickness: 1"
  - 3. Vapor Retarder Required: Yes.
  - 4. Finish: Exposed = Painted, concealed = none.
- D. Service: Condensate Drains, & Traps.
  - 1. Insulation Material: Mineral fiber preformed pipe insulation with Factory Applied FSK Jacket.
  - 2. Insulation Thickness: 1"
  - 3. Vapor Retarder Required: Yes.
  - 4. Finish: Exposed = Painted, concealed = none.
- E. Service: Equipment Non-condensate Drains, & Traps.

Arlington County, Virginia Architect's Project No: 563007

- 1. Insulation Material: Mineral fiber preformed pipe insulation with Factory Applied FSK Jacket.
- 2. Insulation Thickness: 1"
- 3. Vapor Retarder Required: Yes.
- 4. Finish: Exposed = Painted, concealed = none.

END OF SECTION 220700

Arlington County, Virginia Architect's Project No: 563007

### SECTION 221116 - DOMESTIC WATER PIPING

## PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

## 1.2 PERFORMANCE REQUIREMENTS

- A. Provide components and installation capable of producing domestic water piping systems with the following minimum working-pressure ratings, unless otherwise indicated:
  - 1. Domestic Water Service Piping: 160 psig.
  - 2. Domestic Water Distribution Piping: 125 psig.
- B. Seismic Performance: Refer to structural drawings for seismic category. Domestic water piping, support, and installation shall withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7, state, and local codes.

## 1.3 SUBMITTALS

- A. Product Data: For pipe, tube, fittings, and couplings.
- B. Water Samples: Specified in "Cleaning" Article.
- C. Coordination Drawings: For piping in equipment rooms and other congested areas, drawn to scale, on which the following items are shown and coordinated with each other, using input from Installers of the items involved:
  - 1. Fire-suppression-water piping.
  - 2. Domestic water piping.
  - 3. HVAC hydronic piping.
- D. Field quality-control reports.

## 1.4 QUALITY ASSURANCE

- A. Piping materials shall bear label, stamp, or other markings of specified testing agency.
- B. NSF/ANSI Compliance:
  - 1. NSF/ANSI 14, "Plastic Piping System Components and Related Materials"
  - 2. NSF/ANSI 61, "Drinking Water System Components Health Effects"
  - 3. NSF/ANSI 372, "Drinking Water System Components Lead Content"

Arlington County, Virginia Architect's Project No: 563007

### PART 2 - PRODUCTS

## 2.1 PIPING MATERIALS

A. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.

## 2.2 COPPER TUBE AND FITTINGS

- A. Hard Copper Tube: ASTM B 88, Type L and ASTM B 88, Type M water tube, drawn temper.
  - 1. Cast-Copper Solder-Joint Fittings: ASME B16.18, pressure fittings.
  - 2. Wrought-Copper Solder-Joint Fittings: ASME B16.22, wrought-copper pressure fittings.
  - 3. Bronze Flanges: ASME B16.24, Class 150, with solder-joint ends.
  - 4. Copper Unions: MSS SP-123, cast-copper-alloy, hexagonal-stock body, with ball-and-socket, metal-to-metal seating surfaces, and solder-joint or threaded ends.
  - 5. Copper Pressure-Seal-Joint Fittings:
    - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
      - 1) Conex Banninger
      - 2) Elkhart Products Corporation; Industrial Division.
      - 3) Mueller Industries
      - 4) NIBCO INC.
      - 5) Viega; Plumbing and Heating Systems.
    - b. NPS 2 and Smaller: Wrought-copper fitting with EPDM-rubber O-ring seal in each end.
    - c. NPS 2-1/2 to NPS 4: Cast-bronze or wrought-copper fitting with EPDM-rubber O-ring seal in each end.
  - 6. Copper Push-on-Joint Fittings:
    - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
      - 1) NVent LLC.
    - b. Description: Cast-copper fitting complying with ASME B16.18 or wrought-copper fitting complying with ASME B 16.22; with stainless-steel teeth and EPDM-rubber O-ring seal in each end instead of solder-joint ends.
  - 7. Copper-Tube Extruded-Tee Connections:

Arlington County, Virginia Architect's Project No: 563007

- a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
  - 1) T-DRILL Industries Inc.
- b. Description: Tee formed in copper tube according to ASTM F 2014.
- 8. Grooved-Joint Copper-Tube Appurtenances:
  - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
    - 1) Anvil International.
    - 2) Shurjoint Piping Products.
    - 3) Victaulic Company.
  - b. Copper Grooved-End Fittings: ASTM B 75 copper tube or ASTM B 584 bronze castings.
  - c. Grooved-End-Tube Couplings: Copper-tube dimensions and design similar to AWWA C606. Include ferrous housing sections, EPDM-rubber gaskets suitable for hot and cold water, and bolts and nuts.
- B. Soft Copper Tube: ASTM B 88, Type K and ASTM B 88, Type L water tube, annealed temper.
  - 1. Copper Solder-Joint Fittings: ASME B16.22, wrought-copper pressure fittings.
  - 2. Copper Pressure-Seal-Joint Fittings:
    - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
      - 1) Conex Banninger
      - 2) Elkhart Products Corporation; Industrial Division.
      - 3) Mueller Industries
      - 4) NIBCO INC.
      - 5) Viega; Plumbing and Heating Systems.
    - b. NPS 2and Smaller: Wrought-copper fitting with EPDM-rubber O-ring seal in each end.
    - c. NPS 3 and NPS 4: Cast-bronze or wrought-copper fitting with EPDM-rubber O-ring seal in each end.

Arlington County, Virginia Architect's Project No: 563007

## 2.3 [DUCTILE-IRON PIPE AND FITTINGS

- A. Piping for fire-suppression applications shall be listed for fire-protection service.
- B. Mechanical-Joint, Ductile-Iron Pipe: AWWA C151, with mechanical-joint bell and plain spigot end unless grooved or flanged ends are indicated.
  - 1. Standard-Pattern, Mechanical-Joint Fittings: AWWA C110, ductile or gray iron.
  - 2. Compact-Pattern, Mechanical-Joint Fittings: AWWA C153, ductile iron.
    - a. Glands, Gaskets, and Bolts: AWWA C111, ductile- or gray-iron glands, rubber gaskets, and steel bolts.
- C. Push-on-Joint, Ductile-Iron Pipe: AWWA C151, with push-on-joint bell and plain spigot end unless grooved or flanged ends are indicated.
  - 1. Standard-Pattern, Push-on-Joint Fittings: AWWA C110, ductile or gray iron.
    - a. Gaskets: AWWA C111, rubber.
  - 2. Compact-Pattern, Push-on-Joint Fittings: AWWA C153, ductile iron.
    - a. Gaskets: AWWA C111, rubber.
- D. Plain-End, Ductile-Iron Pipe: AWWA C151.
  - 1. Grooved-Joint, Ductile-Iron-Pipe Appurtenances:
    - a. Manufacturers: Subject to compliance with requirements, [provide products by one of the following] [available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:
      - 1) Anvil International.
      - 2) Shurjoint Piping Products.
      - 3) Star Pipe Products.
      - 4) Victaulic Company.
    - b. Grooved-End, Ductile-Iron Fittings: ASTM A 47/A 47M, malleable-iron castings or ASTM A 536, ductile-iron castings with dimensions matching pipe.
    - c. Grooved-End, Ductile-Iron-Pipe Couplings: AWWA C606 for ductile-iron-pipe dimensions. Include ferrous housing sections, EPDM-rubber gaskets suitable for hot and cold water, and bolts and nuts.]

## 2.4 PIPING JOINING MATERIALS

- A. Pipe-Flange Gasket Materials: AWWA C110, rubber, flat face, 1/8 inch thick or ASME B16.21, nonmetallic and asbestos free, unless otherwise indicated; full-face or ring type unless otherwise indicated.
- B. Metal, Pipe-Flange Bolts and Nuts: ASME B18.2.1, carbon steel unless otherwise indicated.

Arlington County, Virginia Architect's Project No: 563007

- C. Solder Filler Metals: ASTM B 32, lead-free alloys. Include water-flushable flux according to ASTM B 813.
- D. [Brazing Filler Metals: AWS A5.8/A5.8M, BCuP Series, copper-phosphorus alloys for general-duty brazing unless otherwise indicated.]

## PART 3 - EXECUTION

## 3.1 EXCAVATION

A. Refer to other sections for excavating, trenching, and backfilling.

## 3.2 PIPING APPLICATIONS

- A. Transition and special fittings with pressure ratings at least equal to piping rating may be used in applications below, unless otherwise indicated.
- B. Flanges may be used on aboveground piping, unless otherwise indicated.
- C. Grooved joints may be used on aboveground grooved-end piping.
- D. Fitting Options:
  - 1. Mechanically formed tee-branch outlets (T-Drill) and brazed joints may be used on aboveground copper tubing.
  - 2. Press Fittings: Mechanically crimped fittings with neoprene gasket.
- E. Underground Domestic Water Service Piping: Match civil materials to first flange.
- F. Aboveground Domestic Water Piping: Use the following piping materials for each size range:
  - 1. 2" and Smaller:
    - a. Hard copper tube, Type L copper pressure fittings; and soldered joints.
  - 2. 2-1/2" and above":
    - a. Hard copper tube, Type L copper pressure fittings; and soldered joints.
    - b. Hard copper tube, Type L with grooved ends; copper grooved-end fittings; copper-tubing, keyed couplings; and grooved joints.

## 3.3 VALVE APPLICATIONS

- A. Drawings indicate valve types to be used. Where specific valve types are not indicated, the following requirements apply:
  - 1. Shutoff Duty: Use bronze ball valves for piping NPS 2 and smaller. Use cast-iron butterfly valves with flanged ends for piping NPS 2-1/2 and larger.

Arlington County, Virginia Architect's Project No: 563007

- 2. Throttling Duty: Use bronze ball valves for piping NPS 2 and smaller. Use cast-iron butterfly valves with flanged ends for piping NPS 2-1/2 and larger.
- 3. Hot-Water-Piping, Balancing Duty: Use automatic flow control valves.
- 4. Drain Duty: Hose-end drain valves.
- B. Grooved-end valves may be used with grooved-end piping.

## 3.4 PIPING INSTALLATION

- A. Extend domestic water service piping to exterior water distribution piping in sizes and locations indicated.
- B. Install underground ductile-iron piping according to AWWA C600, and AWWA M41. Install buried piping inside building between wall and floor penetrations and connection to water service piping outside building with restrained joints. Anchor pipe to wall or floor. Install thrust-block supports at vertical and horizontal offsets.
  - 1. Encase piping with polyethylene film according to ASTM A 674 or AWWA C105.
- C. Install underground copper according to CDA's "Copper Tube Handbook."
- D. Install cast-iron sleeve with water stop and mechanical sleeve seal at each service pipe penetration through foundation wall. Select number of interlocking rubber links required to make installation watertight.
- E. Install water-pressure regulators downstream from shutoff valves.
- F. Install aboveground domestic water piping level and plumb.
- G. Fill water piping. Check components to determine that they are not air bound and that piping is full of water.
- H. Perform the following steps before operation:
  - 1. Close drain valves, hydrants, and hose bibbs.
  - 2. Open shutoff valves to fully open position.
  - 3. Open throttling valves to proper setting.
  - 4. Remove plugs used during testing of piping and plugs used for temporary sealing of piping during installation.
  - 5. Remove and clean strainer screens. Close drain valves and replace drain plugs.
  - 6. Remove filter cartridges from housings, and verify that cartridges are as specified for application where used and that cartridges are clean and ready for use.
- I. Check plumbing equipment and verify proper settings, adjustments, and operation. Do not operate water heaters before filling with water.
- J. Check plumbing specialties and verify proper settings, adjustments, and operation.
  - 1. Water-Pressure Regulators: Set outlet pressure at 80 psig maximum, unless otherwise indicated.

Arlington County, Virginia Architect's Project No: 563007

K. Energize pumps and verify proper operation.

Keep below for plastic piping and fittings only when plastic piping is allowed by owner.

- L. [Store and protect plastic piping and fittings in packaging with labeling in place.
  - 1. Pipe and fittings shall be kept in original packaging until required for installation.
  - 2. Do not expose pipe and fittings to ultraviolet (UV) light beyond exposure limits recommended by manufacturer.
  - 3. Protect products from exposure of contaminating materials. Install suitable plugs in open pipe ends until installation when necessary.
  - 4. Piping shall not be dragged across the ground or other surfaces and shall be stored on a flat surface with no sharp edges.
  - 5. Pipe and fittings shall be protected from other trades, oil, grease, paint, direct sunlight, and other elements as recommended by the manufacturer.]

## 3.5 JOINT CONSTRUCTION

- A. Soldered Joints: Use ASTM B 813, water-flushable, lead-free flux; ASTM B 32, lead-free-alloy solder; and ASTM B 828 procedure, unless otherwise indicated.
- B. Grooved Joints: Assemble joints with keyed-coupling housing, gasket, lubricant, and bolts according to coupling and fitting manufacturer's written instructions.
- C. Mechanically Formed Outlets: Form tee in copper tube according to equipment manufacturer's written instructions. Use tool designed for copper tube; drill pilot hole, form collar for outlet, dimple tube to form seating stop, and braze branch tube into collar.
- D. Mechanically crimped fittings shall be installed in accordance with manufacturer's installation instructions and by factory accredited installer.

## 3.6 VALVE INSTALLATION

- A. Install sectional valve close to water main on each branch and riser serving plumbing fixtures or equipment. Use ball valves for piping NPS 2 and smaller. Use butterfly valves for piping NPS 2-1/2 and larger.
- B. Install shutoff valve on each water supply to equipment and on each water supply to plumbing fixtures without supply stops. Use ball valves for piping NPS 2 and smaller. Use butterfly valves for piping NPS 2-1/2 and larger.
- C. Install balancing valve in each hot-water circulation return branch and discharge side of each pump and circulator. Use ball valves for piping NPS 2 and smaller and butterfly valves for piping NPS 2-1/2 and larger.

Arlington County, Virginia Architect's Project No: 563007

### 3.7 HANGER AND SUPPORT INSTALLATION

- A. Refer to Section 220529 "Hangers and Supports for Plumbing Piping" for pipe hanger and support devices.
- B. Install the following:
  - 1. Vertical Piping: MSS Type 8 or Type 42, clamps.
  - 2. Individual, Straight, Horizontal Piping Runs: According to the following:
    - a. 100 Feet and Less: MSS Type 1, adjustable, steel clevis hangers.
    - b. Longer Than 100 Feet: MSS Type 43, adjustable roller hangers.
    - c. Longer Than 100 Feet, if indicated: MSS Type 49, spring cushion rolls.
  - 3. Multiple, Straight, Horizontal Piping Runs 100 Feet or Longer: MSS Type 44, pipe rolls. Support pipe rolls on trapeze.
  - 4. Base of Vertical Piping: MSS Type 52, spring hangers.
- C. Support vertical piping and tubing at base and at each floor.
- D. Rod diameter may be reduced 1 size for double-rod hangers, to a minimum of 3/8 inch.
- E. Install hangers for copper tubing with the following maximum horizontal spacing and minimum rod diameters:
  - 1. NPS 3/4 and Smaller: 60 inches with 3/8-inch rod.
  - 2. NPS 1 and NPS 1-1/4: 72 inches with 3/8-inch rod.
  - 3. NPS 1-1/2 and NPS 2: 96 inches with 3/8-inch rod.
  - 4. NPS 2-1/2: 108 inches with 1/2-inch rod.
  - 5. NPS 3 to NPS 5: 10 feet with 1/2-inch rod.
  - 6. NPS 6: 10 feet with 5/8-inch rod.
  - 7. NPS 8: 10 feet with 3/4-inch rod.
- F. Where hangers for piping are to be suspended from open-web steel joists, install hangers at maximum spacing that will result in hanger loads that comply with the requirements on the structural drawings.
- G. Install supports for vertical copper tubing every 10 feet.
- H. Support piping and tubing not listed above according to MSS SP-69 and manufacturer's written instructions.
- I. Where bends in the pipe occur, place hangers 1/3 of the maximum allowed spacing distance of the bend (i.e. is the maximum span is 12 feet, the hanger shall be 4 feet from the bend. Pipe shall be supported from both sides of the bend.

## 3.8 CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties.

Arlington County, Virginia Architect's Project No: 563007

- B. Install piping adjacent to equipment and machines to allow service and maintenance.
- C. Connect domestic water piping to exterior water service piping. Use transition fitting to join dissimilar piping materials.

## 3.9 FIELD QUALITY CONTROL

- A. Inspect domestic water piping as follows:
  - 1. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.
  - 2. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction:
    - a. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in and before setting fixtures.
    - b. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.
  - 3. Reinspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections and arrange for reinspection.
  - 4. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.
- B. Test domestic water piping as follows:
  - 1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.
  - 2. Leave uncovered and unconcealed new, altered, extended, or replaced domestic water piping until it has been tested and approved. Expose work that was covered or concealed before it was tested.
  - 3. Cap and subject piping to static water pressure of 50 psig above operating pressure, without exceeding pressure rating of piping system materials. Isolate test source and allow to stand for four hours. Leaks and loss in test pressure constitute defects that must be repaired.
  - 4. Repair leaks and defects with new materials and retest piping or portion thereof until satisfactory results are obtained.
  - 5. Prepare reports for tests and required corrective action.

## 3.10 ADJUSTING

- A. Adjust balancing valves in hot-water-circulation return piping to provide adequate flow.
  - 1. Manually adjust ball-type balancing valves in hot-water-circulation return piping to provide flow of hot water in each branch.

Arlington County, Virginia Architect's Project No: 563007

### 3.11 CLEANING

- A. Clean interior of domestic water piping system. Remove dirt and debris as work progresses.
- B. Clean and disinfect potable domestic water piping as follows:
  - Purge new piping and parts of existing domestic water piping that have been altered, extended, or repaired before using.
  - 2. Use purging and disinfecting procedures prescribed by authorities having jurisdiction or, if methods are not prescribed, procedures described in AWWA C651, AWWA C652 or as described below:
    - a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
    - b. Fill and isolate system according to either of the following:
      - 1) Fill system or part thereof with water/chlorine solution with at least 50 ppm of chlorine. Isolate with valves and allow to stand for 24 hours.
      - 2) Fill system or part thereof with water/chlorine solution with at least 200 ppm of chlorine. Isolate and allow to stand for three hours.
    - c. Flush system with clean, potable water until no chlorine is in water coming from system after the standing time.
    - d. Submit water samples in sterile bottles to authorities having jurisdiction. Repeat procedures if biological examination shows contamination.
- C. Prepare and submit reports of purging and disinfecting activities to authorities having jurisdiction.

END OF SECTION 221116

Arlington County, Virginia Architect's Project No: 563007

### SECTION 221316 - SANITARY WASTE AND VENT PIPING

## PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

### 1.2 DEFINITIONS

- A. The following are industry abbreviations for plastic and rubber piping materials:
  - 1. EPDM: Ethylene-propylene-diene terpolymer.
  - 2. NBR: Acrylonitrile-butadiene rubber.
  - 3. PE: Polyethylene plastic.
  - 4. PVC: Polyvinyl chloride plastic.
  - 5. TPE: Thermoplastic elastomer.
  - 6. USGBC: United States Green Building Council

## 1.3 PERFORMANCE REQUIREMENTS

- A. Provide components and installation capable of producing piping systems with the following minimum working-pressure ratings, unless otherwise indicated:
  - 1. Soil, Waste, and Vent Piping: 10-foot head of water.

## 1.4 SUBMITTALS

A. Product Data: For pipe, tube, fittings, and couplings.

## 1.5 QUALITY ASSURANCE

- A. Piping materials shall bear label, stamp, or other markings of testing agency.
- B. Cast iron soil pipe shall be clearly marked with the manufacturer's name, county of origin, eight-digit date code, pipe diameter and length, relevant ASTM standard and registered trademark of third part certifier.
  - 1. Third party certifier shall be IAPMO, ICC, NSF, or other organization that is accredited as an ANSI Guide 65 organization. Reference www.ansi.org.

## PART 2 - PRODUCTS

Arlington County, Virginia Architect's Project No: 563007

### 2.1 PIPING MATERIALS

- A. Refer to Part 3 "Piping Applications" Article for applications of pipe, tube, fitting, and joining materials.
- B. Flexible Transition Couplings for Underground Non-Pressure Piping: ASTM C 1173 with elastomeric sleeve. Include ends of same sizes as piping to be joined and include corrosion-resistant metal band on each end.

## 2.2 CAST-IRON SOIL PIPING

- A. Pipe and Fittings: ASTM A 888 or CISPI 301.
- B. Hub-and-Spigot Gaskets: ASTM C 564, rubber.
- C. Hub-less Couplings:
  - 1. All hub-less couplings shall bear the NSF trademark.
  - 2. General: CISPI 310 and ASTM C 1277 assembly of stainless steel corrugated shield, stainless steel bands and fasteners, and ASTM C 564 rubber sleeve with integral, center pipe stop.
    - 1) Heavy-Duty, Type 304, Stainless-Steel Couplings: ASTM C 1540, Type 304, stainless-steel shield; stainless-steel bands; and ASTM C 564, rubber sleeve.
      - a) NPS 1-1/2 to NPS 4: 3-inch- wide shield with 4 bands.
      - b) NPS 5 to NPS 10: 4-inch- wide shield with 6 bands.
    - b. Heavy-Duty, Cast-Iron Couplings: ASTM A 48/A 48M, 2-piece, cast-iron housing; stainless-steel bolts and nuts; and ASTM C 564, rubber sleeve.

### D. Manufacturers:

- 1. AB&I Foundry
- 2. Charlotte Pipe & Foundry Co.
- 3. Tyler Pipe & Coupling

## 2.3 PVC PIPE AND FITTINGS

- A. Solid-Wall PVC Pipe: ASTM D 2665, drain, waste, and vent.
  - 1. PVC Socket Fittings: ASTM D 2665, socket type, made to ASTM D 3311, drain, waste, and vent patterns.
- B. Solvent Cement and Adhesive Primer:
  - 1. Use PVC solvent cement that has a VOC content of 510 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

Arlington County, Virginia Architect's Project No: 563007

2. Use adhesive primer that has a VOC content of 550 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

## **PART 3 - EXECUTION**

## 3.1 PIPING APPLICATIONS

- A. Transition fittings with pressure ratings at least equal to piping pressure ratings may be used in applications below, unless otherwise indicated.
- B. Aboveground, Soil, Waste, and Vent Piping located inside plenum: Hub-less cast-iron soil piping with heavy duty couplings.
- C. Aboveground, Soil, Waste, and Vent Piping located outside plenum: PVC pipe, PVC socket fittings, and solvent-cemented joints.

## 3.2 PIPING INSTALLATION

- A. Refer to Section "Facility Sanitary Sewers" for Project-site sanitary sewer piping.
- B. Refer to Section "Common Work Results for Plumbing" for basic installation.
- C. Install seismic restraints on piping when indicated. Seismic-restraint devices are not required in zones A & B. Seismic-restraint devices are specified in Section "Vibration and Seismic Controls for Plumbing Piping and Equipment".
- D. Install cleanouts at grade and extend to where building sanitary drains connect to building sanitary sewers.
- E. Install cleanout fitting with closure plug inside the building in sanitary force-main piping.
- F. Install seismic restraints on piping when indicated. Seismic-restraint devices are specified in Section "Vibration and Seismic Controls for Plumbing Piping and Equipment."
- G. Install cleanouts at grade and extend to where building sanitary drains connect to building sanitary sewers.
- H. Install cast-iron sleeve with water stop and mechanical sleeve seal at each service pipe penetration through foundation wall. Select number of interlocking rubber links required to make installation watertight.
- I. Install cast-iron soil piping according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings."
- J. Make changes in direction for soil and waste drainage and vent piping using appropriate branches, bends, and long-sweep bends. Sanitary tees and short-sweep 1/4 bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Use long-turn,

Arlington County, Virginia Architect's Project No: 563007

double Y-branch and 1/8-bend fittings if 2 fixtures are installed back to back or side by side with common drain pipe. Straight tees, elbows, and crosses may be used on vent lines. Do not change direction of flow more than 90 degrees. Use proper size of standard increasers and reducers if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.

- K. Lay buried building drainage piping beginning at low point of each system. Install true to grades and alignment indicated, with unbroken continuity of invert. Place hub ends of piping upstream. Install required gaskets according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements. Maintain swab in piping and pull past each joint as completed.
- L. Install soil and waste drainage and vent piping at the minimum slopes required by authorities having jurisdiction.
- M. Install PVC soil and waste drainage and vent piping according to ASTM D 2665.
- N. Install underground PVC soil and waste drainage piping according to ASTM D 2321.
- O. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.

## 3.3 JOINT CONSTRUCTION

- A. Refer to section "Common Work Results for Plumbing" for basic piping joint construction.
- B. Join hub-and-spigot, cast-iron soil piping with gasket joints according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.
- C. Join hub-less cast-iron soil piping according to CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hub-less-coupling joints.
- D. PVC Non-pressure Piping Joints: Join piping according to ASTM D 2665.

## 3.4 HANGER AND SUPPORT INSTALLATION

- A. Refer to Section "Vibration and Seismic Controls for Plumbing Piping and Equipment" for seismic-restraint devices in zones other than A & B.
- B. Join hubless cast-iron soil piping according to CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless-coupling joints.
- C. Install the following:
  - 1. Vertical Piping: MSS Type 8 or Type 42, clamps.
  - 2. Individual, Straight, Horizontal Piping Runs: According to the following:

Arlington County, Virginia Architect's Project No: 563007

- a. 100 Feet and Less: MSS Type 1, adjustable, steel clevis hangers.
- b. Longer Than 100 Feet: MSS Type 43, adjustable roller hangers.
- c. Longer Than 100 Feet, if indicated: MSS Type 49, spring cushion rolls.
- 3. Multiple, Straight, Horizontal Piping Runs 100 Feet or Longer: MSS Type 44, pipe rolls. Support pipe rolls on trapeze.
- 4. Base of Vertical Piping: MSS Type 52, spring hangers.
- D. Support vertical piping and tubing at base and at each floor.
- E. Rod diameter may be reduced 1 size for double-rod hangers, with 3/8-inch minimum rods.
- F. Install hangers for cast-iron soil piping with the following maximum horizontal spacing and minimum rod diameters:
  - 1. 1 ½" and 2": 60" with 3/8"rod.
  - 2. 3": 60" with ½"rod.
  - 3. 4" and NPS 5: 60" with 5/8" rod.
  - 4. 6": 60" with <sup>3</sup>/<sub>4</sub>" rod.
  - 5. 8" to 12": 60" with 7/8" rod.
  - 6. 15": 60" with 1" rod.
- G. Install supports for vertical cast-iron soil piping every 15 feet.
- H. Support piping and tubing not listed above according to MSS SP-69 and manufacturer's written instructions.

## 3.5 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Connect soil and waste piping to exterior sanitary sewerage piping. Use transition fitting to join dissimilar piping materials.
- C. Connect drainage and vent piping.

## 3.6 FIELD QUALITY CONTROL

- A. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.
  - 1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in and before setting fixtures.

Arlington County, Virginia Architect's Project No: 563007

- 2. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.
- B. Re-inspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections and arrange for re-inspection.
- C. Reports: Where required or indicated prepare inspection reports and have them signed by authorities having jurisdiction.
- D. Test sanitary drainage and vent piping according to procedures of authorities having jurisdiction or, in absence of published procedures, as follows:
  - 1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.
  - 2. Leave uncovered and unconcealed new, altered, extended, or replaced drainage and vent piping until it has been tested and approved. Expose work that was covered or concealed before it was tested.
  - 3. Roughing-in Plumbing Test Procedure: Test drainage and vent piping, except outside leaders, on completion of roughing-in. Close openings in piping system and fill with water to point of overflow, but not less than 10-foot head of water. From 15 minutes before inspection starts to completion of inspection, water level must not drop. Inspect joints for leaks.
  - 4. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
  - 5. Prepare reports for tests and required corrective action.

## 3.7 CLEANING

- A. Clean interior of piping. Remove dirt and debris as work progresses.
- B. Protect drains during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.
- C. Place plugs in ends of uncompleted piping at end of day and when work stops.

### 3.8 PROTECTION

- A. Protect drains during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.
- B. Exposed PVC Piping: Protect plumbing vents exposed to sunlight with two coats of water-based latex paint.

**END OF SECTION 221316** 

Arlington County, Virginia Architect's Project No: 563007

## SECTION 224000 - PLUMBING FIXTURES

### PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

## 1.2 DEFINITIONS

- A. ABS: Acrylonitrile-butadiene-styrene plastic.
- B. FRP: Fiberglass-reinforced plastic.
- C. PMMA: Polymethyl methacrylate (acrylic) plastic.
- D. PVC: Polyvinyl chloride plastic.
- E. RFI: Request for information.
- F. Accessible Fixture: Plumbing fixture that can be approached, entered, and used by people with disabilities.
- G. Cast Polymer: Cast-filled-polymer-plastic material. This material includes cultured-marble and solid-surface materials.
- H. Cultured Marble: Cast-filled-polymer-plastic material with surface coating.
- I. Fitting: Device that controls flow of water into or out of plumbing fixture. Fittings specified in this Section include supplies and stops, faucets and spouts, showerheads and tub spouts, drains and tailpieces, and traps and waste pipes.
- J. Solid Surface: Nonporous, homogeneous, cast-polymer-plastic material with heat-, impact-, scratch-, and stain-resistance qualities.
- K. Other Manufacturers: Use one of those listed.

## 1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
  - 1. Include construction details, material descriptions, dimensions of individual components and profiles, finishes, and security anchors for security plumbing fixtures.
  - 2. Include rated capacities, operating characteristics, and furnished specialties and accessories.
- B. Performance Submittals:
  - 1. Product Data:
    - a. Documentation indicating flow and water consumption requirements.

PLUMBING FIXTURES 224000 - 1

Arlington County, Virginia Architect's Project No: 563007

## 1.4 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For security plumbing fixtures and components to include in maintenance manuals.
- B. Faucet Cartridges, washers, aerators and O-Rings: Equal to five percent (5%) of amount of each type and size installed but not less than five (5) of each type and size.
- C. Flushometer Valve Repair Kits: Equal to ten percent (10%) of quantity of each type installed, or six (6), whichever is less.
- D. Provide Minimum number of key operators (wrenches/tools) for loose key stops, wall hydrants, aerators, security fasteners and any fixture where a key, security fastener, or special tool is required:
  - 1. One (1) for ten percent (10%) of each size or ten (10), whichever is less.

## 1.5 QUALITY ASSURANCE

- A. Source Limitations: Obtain plumbing fixtures, faucets, and other components of each category through one source from a single manufacturer.
  - 1. Exception: If fixtures, faucets, or other components are not available from a single manufacturer, obtain similar products from other manufacturers specified for that category.
- B. Electrical Components, Devices, and Accessories: Electrical components, devices, and accessories shall be listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- C. Regulatory Requirements: Comply with requirements in ICC A117.1, "Accessible and Usable Buildings and Facilities"; Public Law 90-480, "Architectural Barriers Act"; and Public Law 101-336, "Americans with Disabilities Act"; for plumbing fixtures for people with disabilities. Comply with requirements in Public Law 102-486, "Energy Policy Act," regarding water flow and consumption rates for plumbing fixtures.
- D. NSF Standard: Comply with NSF 61, "Drinking Water System Components--Health Effects," for fixture materials that will be in contact with potable water.
- E. EPA WaterSense: Provide fixtures with WaterSense labeling for all applicable and eligible fixtures and accessories.
- F. Select combinations of fixtures and trim, faucets, fittings, and other components that are compatible.
- G. Comply with the following standards and other requirements where applicable:
  - 1. Enameled, Cast-Iron Fixtures: ASME A112.19.1M.
  - 2. Porcelain-Enameled, Formed-Steel Fixtures: ASME A112.19.4M.
  - 3. Slip-Resistant Bathing Surfaces: ASTM F 462.
  - 4. Solid-Surface-Material Lavatories and Sinks: ANSI/ICPA SS-1.
  - 5. Stainless-Steel Commercial, Handwash Sinks: NSF 2 construction.
  - 6. Stainless-Steel Residential Sinks: ASME A112.19.3.
  - 7. Vitreous-China Fixtures: ASME A112.19.2M.
  - 8. Water-Closet, Flush Valve, Tank Trim: ASME A112.19.5.

## Arlington County, Virginia Architect's Project No: 563007

- 9. Water-Closet, Flushometer Tank Trim: ASSE 1037.
- 10. Backflow Protection Devices for Faucets with Side Spray: ASME A112.18.3M.
- 11. Backflow Protection Devices for Faucets with Hose-Thread Outlet: ASME A112.18.3M.
- 12. Diverter Valves for Faucets with Hose Spray: ASSE 1025.
- 13. Faucets: ASME A112.18.1.
- 14. Hose-Connection Vacuum Breakers: ASSE 1011.
- 15. Hose-Coupling Threads: ASME B1.20.7.
- 16. Integral, Atmospheric Vacuum Breakers: ASSE 1001.
- 17. NSF Potable-Water Materials: NSF 61.
- 18. Pipe Threads: ASME B1.20.1.
- 19. Sensor-Actuated Faucets and Electrical Devices: UL 1951.
- 20. Supply Fittings: ASME A112.18.1.
- 21. Brass Waste Fittings: ASME A112.18.2.
- 22. Backflow Protection Devices for Hand-Held Showers: ASME A112.18.3M.
- 23. Combination, Pressure-Equalizing and Thermostatic-Control Antiscald Faucets: ASSE 1016.
- 24. Deck-Mounted Bath/Shower Transfer Valves: ASME 18.7.
- 25. Faucets: ASME A112.18.1.
- 26. Hand-Held Showers: ASSE 1014.
- 27. High-Temperature-Limit Controls for Thermal-Shock-Preventing Devices: ASTM F 445.
- 28. Hose-Coupling Threads: ASME B1.20.7.
- 29. Manual-Control Antiscald Faucets: ASTM F 444.
- 30. Pipe Threads: ASME B1.20.1.
- 31. Pressure-Equalizing-Control Antiscald Faucets: ASTM F 444 and ASSE 1016.
- 32. Sensor-Actuated Faucets and Electrical Devices: UL 1951.
- 33. Thermostatic-Control Antiscald Faucets: ASTM F 444 and ASSE 1016.
- 34. Atmospheric Vacuum Breakers: ASSE 1001.
- 35. Brass and Copper Supplies: ASME A112.18.1.
- 36. Dishwasher Air-Gap Fittings: ASSE 1021.
- 37. Manual-Operation Flushometers: ASSE 1037.
- 38. Plastic Tubular Fittings: ASTM F 409.
- 39. Brass Waste Fittings: ASME A112.18.2.
- 40. Sensor-Operation Flushometers: ASSE 1037 and UL 1951.
- 41. Disposers: ASSE 1008 and UL 430.
- 42. Dishwasher Air-Gap Fittings: ASSE 1021.
- 43. Flexible Water Connectors: ASME A112.18.6.
- 44. Floor Drains: ASME A112.6.3.
- 45. Grab Bars: ASTM F 446.
- 46. Hose-Coupling Threads: ASME B1.20.7.
- 47. Hot-Water Dispensers: ASSE 1023 and UL 499.
- 48. Off-Floor Fixture Supports: ASME A112.6.1M.
- 49. Pipe Threads: ASME B1.20.1.
- 50. Plastic Shower Receptors: ANSI Z124.2.
- 51. Plastic Toilet Seats: ANSI Z124.5.
- 52. Supply and Drain Protective Shielding Guards: ICC A117.1.
- 53. Whirlpool Bathtub Equipment: UL 1795.

Arlington County, Virginia Architect's Project No: 563007

#### 1.6 COORDINATION

- A. Coordinate all accessories. Ensure items fit and work together as an assembly. Provide additional accessories to accommodate final installed field conditions; to include, but not limited to, offsets and other items required for ADA compliance. Provide necessary accessories and components for complete installation.
- B. Coordinate roughing-in and final plumbing fixture locations and verify that fixtures can be installed to comply with design.
- C. Model numbers are intended to identify families of fixtures and may be incomplete. Refer to other contract documents for hand.
- D. Where fixtures or its associated components are installed in rated floors, walls, or ceilings; provide rated fixtures, accessories, and components of equal rating.
- E. Where the flush valve assembly height would conflict with the rear grab bar installation (including the minimum 1-1/2" clearance to the bottom of the grab bar), the vacuum breaker flush tube shall be shortened. Shortening of the vacuum breaker flush tube shall not exceed the manufacturer's requirements for maintaining proper operation, including the CL (critical line) markings on the flush tube if provided by the manufacturer to indicate shortening limitations.

## 1.7 EXTRA MATERIALS

- A. Furnish extra materials described below that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
  - 1. Faucet Cartridges, washers, aerators and O-Rings: Equal to 5 percent of amount of each type and size installed but not less than 5 of each type and size.
  - 2. Flushometer Valve, Repair Kits: 5 of each type.

## PART 2 - PRODUCTS

## 2.1 **SK-1** (SINK (ACCESSIBLE))

- A. Manufacturer & Model Number: Elkay LRAD2219
  - 1. Overall Length (left to right):22.00"
  - 2. Overall Width (front to back): 19-1/2"
  - 3. Inside Bowl Depth: 6.0"
  - 4. Material: 18 Gauge Stainless Steel
  - 5. Number of Bowls: 1
  - 6. Drain location: Off-center, rear
  - 7. Mounting: Inside hole ratchet system equal to Elkay Quick-Clip® mounting system. Systems requiring access from below shall not be permitted.
  - 8. Deck Hole drilling configuration:
    - a. 3 holes, 4" apart, centered.
- B. Faucet: Chicago 1100-G2E35-317AB
  - 1. Hole configuration: 3 Hole installation, 4" centers.

# Arlington County, Virginia Architect's Project No: 563007

- 2. Spout: 5.25" gooseneck swing spout.
- 3. Handles: 4" wristblade.
- 4. Aerator: Vandal resistant, pressure compensating, 1.5 gpm
- 5. Cartridges: Ceramic or compression ½ turn.
- 6. Meets ADA requirements: Yes
- 7. Other:
  - a. Red & blue temperature indicators. Red = Hot, blue = cold.
- C. Basket Strainer & Tail Piece: McGuire Part Number 151
  - 1. Material: Forged brass, chrome plated.
  - 2. Tailpiece: 1-1/2" x 4" 20 gauge seamless brass, chrome plated.
  - 3. Nuts: Cast brass lock, slip, and coupling, chrome plated
- D. Trap: McGuire Part Number 8912-C-F
  - 1. Size:1-1/2"x 1-1/2"
  - 2. Material: Polished chrome plated cast brass.
  - 3. Cleanout plug: Yes
  - 4. Nuts: Polished chrome plated brass.
  - 5. Wall bend: 17-gauge seamless tubular chrome plated brass.
  - 6. Wall flange: Chrome plated brass with setscrew. Where pipe protrudes from wall contractor may provide deep flange.
- E. Supplies: McGuire Part Number 2167-N3-F
  - 1. Inlet: ½" IPS
  - 2. Outlet: ½" OD compression.
  - 3. Nipple: ½" x 3" chrome plated brass.
  - 4. Wall flange: Heavy brass chrome plated with set-screw
- F. Insulation: Tru-Bro Lav Guard #102
  - 1. Insulate P-trap, hot and cold angle valves, hot and cold risers.
- G. Other Manufacturers: Provide products, features, and accessories equal to those specified above.
  - 1. Sink
    - a. Advance Tabco
    - b. Kohler
    - c. Just
    - d. Eagle Group
    - e. Elkay
  - 2. Faucet:
    - a. Speakman
    - b. Cambridge Brass
    - c. T&S Brass
    - d. Moen
  - 3. Basket Strainer & Tail Piece:
    - a. Kohler
    - b. Cambridge Brass
  - 4. Trap:
    - a. Kohler

# Arlington County, Virginia Architect's Project No: 563007

- b. Cambridge Brass
- 5. Supplies:
  - a. Chicago
  - b. Cambridge Brass
  - c. T&S

## 2.2 **BFS-1** (BOTTLE FILLING STATION (ACCESSIBLE)):

## A. Manufacturer & Model Number: Elkay Model LZWSSM

- 1. Surface mount wall hung filter non-refrigerated Stainless bottle filler station.
- 2. Antimicrobial, hands free.
- 3. Filter is certified to NSF 42 and 53 for lead, particulate, chlorine, taste and odor reduction. 3,000 gal. capacity.
- 4. Green ticker: Informs user of number of 20 oz plastic water bottles saved from waste.
- 5. Laminar flow provides clean fill with minimal splash.
- 6. Real drain system eliminates standing water.
- 7. Visual filter monitor.
- 8. No bubbler.
- 9. Electronic bottle filler sensor.
- 10. Non-refrigerated.
- 11. Provide quick connect fittings.
- 12. Material: Stainless steel.
- 13. Color: Manufacturer's standard.
- 14. Electrical: 115V, 1 PH, 60 HZ, 15 Watts.

## B. Manufacturer & Model Number: (1)Elkay Model ECH8 chiller serving (2) BFS

- 1. Remote electric refrigerated water chiller unit serving 2 stations.
- 2. Chilling capacity of 8.0 GPH of 50°F drinking water based on 80°F inlet water and 90°F ambient, per ASHRAE 18 testing.
- 3. Lead free design unit which is certified to NSF/ANSI 61 & 372.
- 4. Cabinet construction: Rust-resistant galvanized steel.
- 5. Electrical: 115V, 1 PH, 60 HZ, 370 Watts.

# C. Supply: McGuire Part Number 2165-N3-F

- 1. ½" IPS x 3/8" OD
- 2. ½" x 3" chrome plated brass nipple.
- 3. Heavy brass chrome plated wall flange with set-screw
- 4. Provide dielectric connection.
- D. Provide 1½"diameter plastic tailpiece extension. Electrically isolate cooler from drainage and vent system.
- E. Trap: McGuire Part Number 8912-C-F

Arlington County, Virginia Architect's Project No: 563007

- 1. Size:1-1/2"x 1-1/2"
- 2. Material: Polished chrome plated cast brass.
- 3. Cleanout plug: Yes
- 4. Nuts: Polished chrome plated brass.
- 5. Wall bend: 17-gauge seamless tubular chrome plated brass.
- 6. Wall flange: Chrome plated brass with setscrew. Where drain pipe connection protrudes from wall contractor may provide deep flange.
- F. Other Manufacturers: Provide products, features, and accessories equal to those specified above.
  - 1. Bottle Filling Station:
    - a. Halsey Taylor
    - b. Haws Corp
    - c. Oasis
  - 2. Trap:
    - a. Kohler
    - b. Cambridge Brass

## 2.3 WSB-1 (OUTLET BOX)

- A. Manufacturer: Oatey
- B. General: Recessed-mounting, 20 gauge steel, outlet box& faceplate with supply fitting complying with ASME A112.18.1M. Include box with faceplate, supply valve, and reinforcement
- C. Supply valve: ½" IPS (or copper sweat) x 3/8" OD
- D. Available Manufacturers
  - 1. Guy Gray
  - 2. Water-Tite
  - 3. LSP Products Group.

## PART 3 - EXECUTION

## 3.1 EXAMINATION

- A. Examine roughing-in for water soil and for waste piping systems and supports to verify actual locations and sizes of piping connections and that locations and types of supports match those indicated, before plumbing fixture installation. Manufacturer's roughing-in data overrides all other indicated data.
- B. Examine walls, floors, and cabinets for suitable conditions where fixtures are to be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

Arlington County, Virginia Architect's Project No: 563007

## 3.2 FIXTURE INSTALLATION

- A. Assemble fixtures, trim, fittings, and other components according to manufacturers' written instructions.
- B. For wall-hanging fixtures, install off-floor supports affixed to building substrate.
- C. Install back-outlet, wall hanging fixtures onto waste fitting seals and attach to supports.
- D. Install floor-mounting fixtures on closet flanges or other attachments to piping or building substrate.
- E. Install wall-hanging fixtures with tubular waste piping attached to supports.
- F. Install floor-mounting, back-outlet water closets attached to building floor substrate and wall bracket and onto waste fitting seals.
- G. Install counter-mounted fixtures in and attached to casework.
- H. Install fixtures level and plumb according to manufacturers' written instructions and roughing-in drawings.
- I. Install water-supply piping with stop on each supply to each fixture to be connected to water distribution piping. Attach supplies to supports or substrate within pipe spaces behind fixtures. Install stops in locations where they can be easily reached for operation.
  - 1. Exception: Use ball valve if stops are not specified with fixture. Refer to Section "Valves".
- J. Install trap and waste piping on drain outlet of each fixture to be directly connected to sanitary drainage system.
- K. Install waste piping on drain outlet of each fixture to be indirectly connected to drainage system.
- L. Install flushometer valves for accessible water closets and urinals with handle mounted on wide side of compartment. Install other actuators in locations that are easy for people with disabilities to reach.
- M. Install tanks for accessible, tank-type water closets with lever handle mounted on wide side of compartment.
- N. Install toilet seats on water closets.
- O. Install faucet-spout fittings with specified flow rates and patterns in faucet spouts if faucets are not available with required rates and patterns. Include adapters if required.
- P. Install water supply, flow-control fittings with specified flow rates in fixture supplies at stop valves.
- Q. Install faucet, flow-control fittings with specified flow rates and patterns in faucet spouts if faucets are not available with required rates and patterns. Include adapters if required.
- R. Install shower, flow-control fittings with specified maximum flow rates in shower arms.
- S. Install traps on fixture outlets.
  - 1. Exception: Omit trap on fixtures with integral traps.
  - 2. Exception: Omit trap on indirect wastes, unless otherwise indicated.

Arlington County, Virginia Architect's Project No: 563007

- T. Install disposer in outlet of sinks indicated to have disposer. Install switch where indicated or in wall adjacent to sink if location is not indicated.
- U. Install hot-water dispensers in back top surface of sink or in counter with spout over sink.
- V. Install escutcheons at piping wall-ceiling penetrations in exposed, finished locations and within cabinets and millwork. Use deep-pattern escutcheons if required to conceal protruding fittings. Refer to Division 22 Section "Common Work Results For Plumbing" for escutcheons.
- W. Set shower receptors, and service basins in leveling bed of cement grout. Refer to Division 22 Section "Common Work Results For Plumbing" for grout.
- X. Refer to Section "Joint Sealants" for sealant and installation requirements.
- Y. Provide connection to automatic lavatories & flush valves as required via low-voltage transformer(s). Mount transformer(s) above accessible ceiling. Connect to local 120V receptacle circuit with disconnect switch adjacent to transformer. All circuitry (including low voltage) shall be run concealed & in conduit. Coordinate connection requirements.

#### 3.3 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Connect water supplies from water distribution piping to fixtures.
- C. Connect drain piping from fixtures to drainage piping.
- D. Supply and Waste Connections to Plumbing Fixtures: Connect fixtures with water supplies, stops, risers, traps, and waste piping. Use sizes required to match fixtures. Connect to plumbing piping.
- E. Supply and Waste Connections to Fixtures and Equipment Specified in Other Sections: Connect fixtures and equipment with water supplies, stops, risers, traps, and waste piping. Use size fittings required to match fixtures and equipment. Connect to plumbing piping.
- F. Ground equipment: Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A and UL 486B.

## 3.4 FIELD QUALITY CONTROL

- A. Verify that installed fixtures are categories and types specified for locations where installed.
- B. Check that fixtures are complete with trim, faucets, fittings, and other specified components.
- C. Inspect installed fixtures for damage. Replace damaged fixtures and components.
- D. Test installed fixtures after water systems are pressurized for proper operation. Replace malfunctioning fixtures and components, then retest. Repeat procedure until units operate properly.
- E. Install fresh batteries in sensor-operated mechanisms.

Arlington County, Virginia Architect's Project No: 563007

## 3.5 ADJUSTING

A. Replace washers and seals or cartridges of leaking and dripping faucets, stops, and valves.

## 3.6 CLEANING

- A. Clean fixtures, faucets, and other fittings with manufacturers' recommended cleaning methods and materials. Do the following:
  - 1. Remove faucet spouts and strainers, remove sediment and debris, and reinstall strainers and spouts.
  - 2. Remove sediment and debris from drains.

## 3.7 PROTECTION

- A. Provide protective covering for installed fixtures and fittings.
- B. Do not allow use of fixtures for temporary facilities unless approved in writing by Owner.

END OF SECTION 224000

Arlington County, Virginia Architect's Project No: 563007

#### SECTION 230500 - COMMON WORK RESULTS FOR HVAC

## PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

## 1.2 DEFINITIONS

- A. Finished Spaces: Spaces other than mechanical and electrical equipment rooms, furred spaces, pipe chases, unheated spaces immediately below roof, spaces above ceilings, unexcavated spaces, crawlspaces, and tunnels.
- B. Exposed, Interior Installations: Exposed to view indoors. Examples include finished occupied spaces and mechanical equipment rooms.
- C. Exposed, Exterior Installations: Exposed to view outdoors or subject to outdoor ambient temperatures and weather conditions. Examples include rooftop locations.
- D. Concealed, Interior Installations: Concealed from view and protected from physical contact by building occupants. Examples include above ceilings and in chases.
- E. Concealed, Exterior Installations: Concealed from view and protected from weather conditions and physical contact by building occupants but subject to outdoor ambient temperatures. Examples include installations within unheated shelters.
- F. The following are industry abbreviations for rubber materials:
  - 1. EPDM: Ethylene-propylene-diene terpolymer rubber.
  - 2. NBR: Acrylonitrile-butadiene rubber.

## 1.3 SUBMITTALS

- A. Product Data: For the following:
  - 1. Transition fittings.
  - 2. Dielectric fittings.
  - 3. Mechanical sleeve seals.
  - 4. Escutcheons.

Arlington County, Virginia Architect's Project No: 563007

## 1.4 QUALITY ASSURANCE

- A. Equipment and appliances comprising portions of the mechanical systems regulated by the applicable building codes shall be listed and labeled in accordance with the current edition of those codes.
- B. Equipment and appliances comprising portions of the mechanical systems shall be installed in accordance with the listing, manufacturer's installation instructions, and the applicable building codes. Manufacturer's installation instructions shall be available on the job site for use and inspection.
- C. Steel Support Welding: Qualify processes and operators according to AWS D1.1, "Structural Welding Code--Steel."
- D. Steel Pipe Welding: Qualify processes and operators according to ASME Boiler and Pressure Vessel Code: Section IX, "Welding and Brazing Qualifications."
  - 1. Comply with provisions in ASME B31 Series, "Code for Pressure Piping."
  - 2. Certify that each welder has passed AWS qualification tests for welding processes involved and that certification is current.
- E. Electrical Characteristics for HVAC Equipment: Equipment of higher electrical characteristics may be furnished provided such proposed equipment is approved in writing and connecting electrical services, circuit breakers, and conduit sizes are appropriately modified. If minimum energy ratings or efficiencies are specified, equipment shall comply with requirements.

## 1.5 DELIVERY, STORAGE, AND HANDLING

A. Deliver pipes and tubes with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe end damage and to prevent entrance of dirt, debris, and moisture.

## 1.6 COORDINATION

- A. Arrange for pipe spaces, chases, slots, and openings in building structure during progress of construction, to allow for HVAC installations.
- B. Coordinate installation of required supporting devices and set sleeves in poured-in-place concrete and other structural components as they are constructed.
- C. Coordinate requirements for access panels and doors for HVAC items requiring access that are concealed behind finished surfaces. Access panels and doors are specified in Division 08 Section "Access Doors and Frames."

Arlington County, Virginia Architect's Project No: 563007

#### 1.7 INTENT OF CONTRACT DOCUMENTS

- A. Mechanical and HVAC drawings are diagrammatic, indicating general locations and arrangements of pipe, duct, and equipment. Not necessarily indicating all offsets, conditions, and appurtenances required to provide clearances for maximum practical accessibility to perform maintenance.
- B. Coordinate work in order to achieve proper operation and to provide a maintainable installed condition
- C. Notify the Architect's representative immediately of conditions which do not comply or will not produce this result.
- D. Indicated configurations were used to size pipes, pumps, expansion tanks and other devices. Install piping, duct, and equipment generally as indicated. Minor deviations are permitted in the course of necessary coordination. Major changes shall be submitted for approval by the Architect's representative. Additional fittings and offsets not indicated are expected, anticipated by the design, and shall be provided. If more than 5% of the indicated number of fittings are required or if one change in direction is within six inches of another change in direction and this "Z" shape is not indicated notify the Architect's representative immediately. Provide necessary additional fittings and offsets. Changes in pipe size shall be made only with written approval from the Architect's representative.

## PART 2 - PRODUCTS

## 2.1 PIPE, TUBE, AND FITTINGS

- A. PVC Plastic Pipe: ASTM D 1785, with wall thickness as indicated in "Piping Applications" Article.
  - 1. PVC Plastic Pipe Fittings: Socket-type pipe fittings, ASTM D 2466 for Schedule 40 pipe; ASTM D 2467 for Schedule 80 pipe.
- B. Pipe Threads: ASME B1.20.1 for factory-threaded pipe and pipe fittings.

## 2.2 JOINING MATERIALS

- A. Refer to individual Division 23 piping sections for joining materials not listed below.
- B. Pipe-Flange Gasket Materials: Suitable for chemical and thermal conditions inside & outside pipe and:
  - 1. ASME B16.21, non-metallic, flat, asbestos-free, 1/8-inch maximum thickness unless thickness or specific material is otherwise indicated.
    - a. Full-Face Type: For flat-face, Class 125, cast-iron and cast-bronze flanges.
    - b. Narrow-Face Type: For raised-face, Class 250, cast-iron and steel flanges.

Arlington County, Virginia Architect's Project No: 563007

- 2. AWWA C110, rubber, flat face, 1/8 inch thick, unless otherwise indicated, and full-face or ring type, unless otherwise indicated.
- C. Solder Filler Metals: ASTM B 32, lead-free (95% Tin, 5% Antimony) alloy. Include water-flushable flux according to ASTM B 813.
- D. Brazing Filler Metals: AWS A5.8, BCuP Series, copper-phosphorus alloys for general-duty brazing, unless otherwise indicated; and AWS A5.8, BAg-5, silver alloy for refrigerant piping, unless otherwise indicated.

## 2.3 MECHANICAL SLEEVE SEALS

- A. Description: Modular sealing element unit, designed for field assembly, to fill annular space between pipe and sleeve.
  - 1. Available Manufacturers:
    - a. Advance Products & Systems, Inc.
    - b. Calpico, Inc.
    - c. Metraflex Co.
    - d. Pipeline Seal and Insulator, Inc.
  - 2. Sealing Elements: EPDM interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
  - 3. Pressure Plates: Plastic. Include two for each sealing element.
  - 4. Connecting Bolts and Nuts: Stainless steel of length required to secure pressure plates to sealing elements.

# 2.4 SLEEVES

- A. Galvanized-Steel Sheet: 0.0239-inch minimum thickness; round tube closed with welded longitudinal joint.
- B. Steel Pipe: ASTM A 53, Type E, Grade B, Schedule 40, galvanized, plain ends.
- C. Cast Iron: Cast or fabricated "wall pipe" equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop, unless otherwise indicated.
- D. Stack Sleeve Fittings: Manufactured, cast-iron sleeve with integral clamping flange. Include clamping ring and bolts and nuts for membrane flashing.
  - 1. Underdeck Clamp: Clamping ring with set screws.
- E. Molded PE: Reusable, PE, tapered cup-shaped and smooth-outer surface with nailing flange for attaching to wooden forms.

Arlington County, Virginia Architect's Project No: 563007

#### 2.5 ESCUTCHEONS

- A. Description: Manufactured wall and ceiling escutcheons and floor plates, with an ID to closely fit around pipe, tube, and insulation of insulated piping and an OD that completely covers opening.
- B. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with polished chrome-plated finish.
- C. One-Piece, Cast-Brass Type: With set screw.
  - 1. Finish: Polished chrome-plated.
- D. Split-Casting, Cast-Brass Type: With concealed hinge and set screw.
  - 1. Finish: Polished chrome-plated.
- E. One-Piece, Floor-Plate Type: Cast-iron floor plate.
- F. Split-Casting, Floor-Plate Type: Cast brass with concealed hinge and set screw.

## 2.6 GROUT

- A. Description: ASTM C 1107, Grade B, non-shrink and non-metallic, dry hydraulic cement grout.
  - 1. Characteristics: Post-hardening, volume-adjusting, non-staining, non-corrosive, non-gaseous, and recommended for interior and exterior applications.
  - 2. Design Mix: 5000-psi, 28-day compressive strength.
  - 3. Packaging: Premixed and factory packaged.

## **PART 3 - EXECUTION**

# 3.1 PIPING SYSTEMS - COMMON REQUIREMENTS

- A. Install piping according to the following and Division 23 Sections specifying piping systems.
- B. Condensate-Drain Piping: Schedule 40 PVC or CPVC plastic pipe and fittings with solvent-welded joints.
- C. Install piping in concealed locations, unless otherwise indicated and except in equipment rooms and service areas.
- D. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated.
- E. Install piping above accessible ceilings allowing sufficient space for ceiling panel removal.

Arlington County, Virginia Architect's Project No: 563007

- F. Install piping to permit valve operation & servicing.
- G. Install condensate drain piping at 1% slope.
- H. Install piping free of sags and bends.
- I. Install fittings for changes in direction and branch connections unless otherwise indicated.
- J. Install piping leaving room for installation of insulation.
- K. Install system components with pressure rating equal to or greater than system operating pressure.
- L. Install escutcheons for penetrations of walls, ceilings, and floors according to the following:
  - 1. Exposed, Interior Installations/Piping with Fitting or Sleeve Protruding from Wall: One-piece, deep-pattern type.
  - 2. Exposed, Interior Installations/Chrome-Plated Piping: One-piece, cast-brass type with polished chrome-plated finish and set-screw.
  - 3. Exposed, Interior Installations/Insulated Piping: One-piece, cast-brass type with polished chrome-plated finish.
  - 4. Exposed, Interior Installations/Bare Piping at Wall and Floor Penetrations in Finished Spaces: One-piece, cast-brass type with finish to match surrounding surfaces.
  - 5. Exposed, Interior Installations/Bare Piping at Ceiling Penetrations in Finished Spaces: One-piece or split-casting, cast-brass type with finish to match surrounding surfaces.
  - 6. Exposed, Interior Installations/Piping in Unfinished Service Spaces: None, provide sealant.
  - 7. Exposed, Interior Installations/Piping in Equipment Rooms: None, provide sealant.
  - 8. Exposed, Interior Installations/Piping at Floor Penetrations in Equipment Rooms, Fan Rooms, or similar wet spaces: None provide sealant and sleeve extending 2" above floor to prevent liquid leaking to floor below.
- M. Provide seal around piping penetrations of full height interior walls, both rated and non-rated, that occur above ceilings. Refer to Section 079200 Joint Sealants.
- N. Sleeves are not required for core-drilled holes.
  - 1. Exception: Exposed, Interior Installations at Floor Penetrations in Equipment Rooms, Fan Rooms, or similar wet spaces.
- O. Permanent sleeves are not required for holes formed by removable PE sleeves.
  - 1. Exception: Exposed, Interior Installations at Floor Penetrations in Equipment Rooms, Fan Rooms, or similar wet spaces.
- P. Install sleeves for pipes passing through walls, floors, or roofs.
  - 1. Cut sleeves to length for mounting flush with both surfaces.

Arlington County, Virginia Architect's Project No: 563007

- a. Exception: Extend sleeves installed in floors of mechanical equipment rooms, fan rooms or other similar wet areas 2 inches above finished floor level. Extend cast-iron sleeve fittings below floor slab as required to secure clamping ring.
- 2. Install sleeves as walls and slabs are constructed.
  - a. PVC Pipe Sleeves: Permitted for pipes smaller than 6" except aboveground, exteriorwalls
  - b. Steel Sheet Sleeves: Permitted for pipes 6" and larger, penetrating gypsum-board partitions except aboveground, exterior-walls.
  - c. Seal space outside sleeve fittings with grout and sealant.
- 3. Except for penetrations where mechanical sleeve seals are used, seal annular space between sleeve and pipe or pipe insulation, using joint sealants appropriate for size, depth, and location of joint. Refer to Section "Joint Sealants".
- Q. Aboveground Exterior Penetrations: Seal penetrations using sleeves and mechanical sleeve seals. Select sleeve size to allow for annular clear space required by the mechanical sleeve seal manufacturer between pipe and sleeve for installing mechanical sleeve seals.
  - 1. Install steel pipe for sleeves smaller than 6 inches in diameter.
  - 2. Install cast-iron "wall pipes" for sleeves 6 inches and larger in diameter.
  - 3. Mechanical Sleeve Seal Installation: Select type and number of sealing elements required for pipe material and size. Position pipe in center of sleeve. Assemble mechanical sleeve seals and install in annular space between pipe and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.
  - 4. Sleeves from an approved sleeve seal manufacturer shall be acceptable.
- R. Underground Exterior Penetrations: Install cast-iron "wall pipes" for sleeves. Seal pipe penetrations using mechanical sleeve seals. Select sleeve size to allow for annular clear space required by the mechanical sleeve seal manufacturer between pipe and sleeve for installing mechanical sleeve seals.
- S. Mechanical Sleeve Seal Installation: Select type and number of sealing elements required for pipe material and size. Position pipe in center of sleeve. Assemble mechanical sleeve seals and install in annular space between pipe and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.
- T. Fire-Barrier Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with firestop materials. Refer to Section "Penetration Firestopping" for materials.
- U. Verify final equipment locations for roughing-in.
- V. Refer to equipment specifications in other Sections of these Specifications for roughing-in requirements.

Arlington County, Virginia Architect's Project No: 563007

#### 3.2 PIPING JOINT CONSTRUCTION

- A. Join pipe and fittings according to the following requirements and Division 22 Sections specifying piping systems.
- B. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
- C. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.
- D. Soldered Joints: Apply water-flushable flux, unless otherwise indicated, to tube end. Construct joints using lead-free solder alloy.
- E. Brazed Joints: Construct joints using copper-phosphorus brazing filler metal.
- F. Threaded Joints: Thread pipe with tapered pipe threads. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
  - 1. Apply appropriate tape or thread compound to external pipe threads unless otherwise indicated.
- G. Welded Joints: Construct joints using qualified processes and welding operators.
- H. Flanged Joints: Select appropriate gasket material, size, type, and thickness for service application. Install gasket concentrically positioned. Use suitable lubricants on bolt threads.
- I. Mechanical Joints: Prepare pipe ends and fittings, apply coupling, and join according to joint manufacturer's written instructions.

## 3.3 PIPING CONNECTIONS

- A. Make connections according to the following, unless otherwise indicated:
  - 1. Install unions, in piping 2" and smaller, one adjacent to each valve and at final connections to each piece of equipment.
  - 2. Install flanges, in piping NPS 2-1/2" and larger, adjacent to final connections to each piece of equipment.
  - 3. Install dielectric unions or flanges for connections of dissimilar metals.

# 3.4 EQUIPMENT INSTALLATION - COMMON REQUIREMENTS

- A. Install equipment to allow maximum possible headroom unless specific mounting heights are indicated.
- B. Install equipment level and plumb, parallel and perpendicular to other building systems and components in exposed interior spaces, unless otherwise indicated.

Arlington County, Virginia Architect's Project No: 563007

- C. Install HVAC equipment to facilitate service, maintenance, and repair or replacement of components. Connect equipment for ease of disconnecting, with minimum interference to other installations. Extend grease fittings to service side of equipment.
- D. Install equipment to allow space for other systems.

## 3.5 PAINTING

A. Damage and Touchup: Repair marred and damaged factory-painted finishes with materials and procedures to match original factory finish.

# 3.6 HOUSEKEEPING PADS AND EQUIPMENT PADS

- A. Housekeeping pads and equipment pads: Anchor equipment to concrete according to equipment manufacturer's written instructions and according to seismic codes at project location.
  - 1. Construct concrete pads in accordance with drawing details.
  - 2. Details may be found on structural drawings. If details are not provided comply with the following:
    - a. Housekeeping pads inside the building shall be 6" thick and 6" larger all around than supported equipment. Provide #4 rebar at 12" on center each way at mid-depth of slab. Provide a 3/4" chamfer on all edges.
    - b. Equipment pads outside the building shall be 8" thick with a 12" deep and 20" wide turndown (footing) all around the outside edge of the pad. Provide #5 rebar at 16" on center each way at mid-depth of slab. Pad shall be 6" larger all around than supported equipment.
    - c. Install epoxy-coated anchor bolts. For equipment on housekeeping pads bolts shall extend through housekeeping pad, and anchor into structural concrete floor.
    - d. Place and secure anchor bolts using supported equipment manufacturer's setting drawings, templates, diagrams, instructions, and directions for placement.
    - e. Install anchor bolts to elevations required for proper attachment to supported equipment.
    - f. Install anchor bolts according to anchor bolt manufacturer's written instructions.
    - g. Use 3000-psi, 28-day compressive-strength concrete and reinforcement as specified in Section "Cast-in-Place Concrete".

## 3.7 ERECTION OF METAL SUPPORTS AND ANCHORAGES

- A. Refer to Section "Metal Fabrications" for structural steel.
- B. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor HVAC materials and equipment.
- C. Field Welding: Comply with AWS D1.1.

Arlington County, Virginia Architect's Project No: 563007

## 3.8 GROUTING

- A. Mix and install grout for HVAC equipment base bearing surfaces, pump and other equipment base plates, and anchors.
- B. Clean surfaces that will come into contact with grout.
- C. Provide forms as required for placement of grout.
- D. Avoid air entrapment during placement of grout.
- E. Place grout, completely filling equipment bases.
- F. Place grout on concrete bases and provide smooth bearing surface for equipment.
- G. Place grout around anchors.
- H. Cure placed grout.

END OF SECTION 230500

Arlington County, Virginia Architect's Project No: 563007

## SECTION 230513 – MOTORS FOR HVAC EQUIPMENT

## PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

## 1.2 SUBMITTALS

A. Manufacturer's catalog and efficiency data.

## 1.3 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- B. Comply with NFPA 70.

#### 1.4 COORDINATION

- A. All motors are required to be equipped with overload protection located near the motor.
  - 1. Overload protection shall:
    - a. Be located between the circuit breaker or fuse provided under Division 26 and the motor windings.
    - b. Meet one of the options specified in the following paragraph.
  - 2. Overload protection may be:
    - a. Located in the motor installed by the motor manufacturer. (preferred)
    - b. A separate device located near the motor.
    - c. Located in, or with, a disconnect switch provided by the equipment manufacturer. Provision of this switch shall not modify, change, or eliminate any Division 26 requirement. This means some equipment shall be provided or specified with two disconnecting means.
- B. Coordinate features of motors, installed units, and accessory devices. Provide motors that are:
  - 1. Compatible with controller
  - 2. Matched to torque and horsepower requirements of the load.
  - 3. Matched to ratings and characteristics of supply circuit and required control sequence.
- C. Coordinate motor support with requirements for driven load; access for maintenance and motor replacement; installation of accessories, belts, belt guards; and adjustment of sliding rails for belt tensioning.
- D. Belt tension must be wrench and socket adjustable.
- E. Belt tensioning device must accommodate adjustable sheaves.

Arlington County, Virginia Architect's Project No: 563007

## **PART 2 - PRODUCTS**

## 2.1 MOTOR REQUIREMENTS

- A. Motor requirements apply except as follows:
  - 1. Ratings, performance, or characteristics for a motor are specified in another Section or are scheduled on the drawings.
  - 2. Motor manufacturer requires ratings, performance, or characteristics, other than those specified to meet indicated performance.

## 2.2 MOTOR CHARACTERISTICS

- A. Frequency Rating: 60 Hz.
- B. Voltage Rating: NEMA standard voltage selected to operate on nominal circuit voltage to which motor is connected.
- C. Duty: Continuous at 105 deg F and 3300 feet above sea level.
- D. Capacity and Torque sufficient to:
  - 1. Start, accelerate, and operate connected load.
  - 2. Maintain designated speeds.
  - 3. Operate at installed altitude and environment.
  - 4. Operate with indicated operating sequence.
  - 5. Operate without exceeding nameplate ratings.
  - 6. Operate without utilizing service factor.
- E. Enclosure: Open drip-proof unless otherwise indicated.
- F. Minimum Service Factor: 1.15 unless otherwise indicated.

## 2.3 POLYPHASE MOTORS

- A. Description: NEMA MG 1, Design B, medium induction motor.
- B. NEMA Premium efficiency motors shall meet the following full load efficiency:

HP	ODP			TEFC				
	6 Pole	4 Pole	2 Pole	6 Pole	4 Pole	2 Pole		
1	82.5	85.5	77.0	82.5	85.5	77.0		
1.5	86.5	86.5	84.0	87.5	86.5	84.0		
2	87.5	86.5	85.5	88.5	86.5	85.5		
3	88.5	89.5	85.5	89.5	89.5	86.5		
5	89.5	89.5	86.5	89.5	89.5	88.5		
7.5	90.2	91.0	88.5	91.0	91.7	89.5		
10	91.7	91.7	89.5	91.0	91.7	90.2		
15	91.7	93.0	90.2	91.7	92.4	91.0		
20	92.4	93.0	91.0	91.7	93.0	91.0		
25	93.0	93.6	91.7	93.0	93.6	91.7		

Arlington County, Virginia Architect's Project No: 563007

30	93.6	94.1	91.7	93.0	93.6	91.7
40	94.1	94.1	92.4	94.1	94.1	92.4
50	94.1	94.5	93.0	94.1	94.5	93.0
60	94.5	95.0	93.6	94.5	95.0	93.6
75	94.5	95.0	93.6	94.5	95.4	93.6
100	95.0	95.4	93.6	95.0	95.4	94.1
125	95.0	95.4	94.1	95.0	95.4	95.0
150	95.4	95.8	94.1	95.8	95.8	95.0

- C. Efficiency: NEMA Premium
- D. Stator: Copper windings, unless otherwise indicated.
- E. Rotor: Squirrel cage, unless otherwise indicated.
- F. Bearings: Double-shielded, pre-lubricated ball bearings suitable for radial and thrust loading.
- G. Temperature Rise: Match insulation rating, unless otherwise indicated.
- H. Insulation: Class F, unless otherwise indicated.
- I. Code Letter Designation: NEMA starting Code F or G.
- J. Enclosure: Cast iron.
- K. Finish: Gray enamel.
- L. Motors Used with Reduced-Inrush Controllers: Match wiring connection requirements for controller with required motor leads. Provide terminals in motor terminal box, suited to control method.
- M. Motors Used with Variable Speed Drives: Ratings, characteristics, and features coordinated with and approved by controller manufacturer.
  - 1. Windings: Copper magnet wire with moisture-resistant insulation varnish, designed and tested to resist transient spikes, high frequencies, and short time rise pulses produced by pulse-width modulated inverters.
  - 2. Premium Efficiency Motors: Class B temperature rise, Class F insulation.
  - 3. Inverter-Duty Motors: Class F temperature rise, Class H insulation.
  - 4. Thermal Protection: Comply with NEMA MG 1 requirements for thermally-protected motors.
  - 5. Shaft Grounding: Provide AEGIS bearing protection ring or approved equal.
    - a. All motors operated on variable frequency drives shall be equipped with a maintenance free, conductive micro fiber, shaft grounding ring with a minimum of two rows of circumferential micro fibers to discharge electrical shaft currents within the motor and/or its bearings.
    - b. Motors up to 100 HP shall be provided with a minimum of one shaft grounding ring installed either on the drive end or non-drive end. Motors over 100 HP shall be provided with an insulated bearing on the non-drive end and a shaft grounding ring on the drive end of the motor.
    - c. Grounding rings shall be provided and installed by the motor manufacturer in accordance with the shaft grounding ring manufacturer's recommendations.

# Arlington County, Virginia Architect's Project No: 563007

- N. Source Quality Control: Perform the following tests on each motor according to NEMA MG 1:
  - 1. Measure winding resistance.
  - 2. Read no-load current and speed at rated voltage and frequency.
  - 3. Measure locked rotor current at rated frequency.
  - 4. Perform high-potential test.

#### **PART 3 - EXECUTION**

## 3.1 FIELD QUALITY CONTROL

- A. Perform the following:
  - 1. Run each motor with its controller at load.
  - 2. Demonstrate correct rotation, alignment, and speed.
  - 3. Test interlocks and control features for proper operation.
  - 4. Verify that current in each phase is within nameplate rating.
  - 5. Verify RPM is in accordance with nameplate.
  - 6. Where a generator is provided, run each motor on the generator with its controller and load. Demonstrate correct rotation, alignment, and speed.

## 3.2 ADJUSTING

A. Align motors, bases, and shafts.

## 3.3 CLEANING

A. After completing equipment installation, inspect unit components. Remove paint splatters and other spots, dirt, and debris. Repair damaged finish to match original finish.

**END OF SECTION 230513** 

Arlington County, Virginia Architect's Project No: 563007

## SECTION 230529 - HANGERS AND SUPPORTS FOR HVAC PIPING AND EQUIPMENT

## PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

## 1.2 DEFINITIONS

- A. MSS: Manufacturers Standardization Society of the Valve and Fittings Industry Inc.
- B. Terminology as defined in MSS SP-90, "Guidelines on Terminology for Pipe Hangers and Supports."

## 1.3 PERFORMANCE REQUIREMENTS

- A. Design Requirement: Design trapeze pipe hangers and equipment supports, including comprehensive engineering analysis by a qualified professional engineer where using methods other than indicated.
- B. Structural Performance: Hangers and supports for HVAC piping and equipment shall withstand the effects of gravity loads and stresses within limits and under conditions indicated according to ASCE/SEI 7.
  - 1. Design supports for multiple pipes, including pipe stands, capable of supporting combined weight of supported systems, system contents, and test medium.
  - 2. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.

## 1.4 QUALITY ASSURANCE

- A. Structural Steel Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code Steel."
- B. Pipe Welding Qualifications: Qualify procedures and operators according to ASME Boiler and Pressure Vessel Code.

Arlington County, Virginia Architect's Project No: 563007

#### PART 2 - PRODUCTS

## 2.1 METAL PIPE HANGERS AND SUPPORTS

- A. Carbon-Steel Pipe Hangers and Supports:
  - 1. Description: MSS SP-58, Types 1 through 58, factory-fabricated components.
  - 2. Galvanized Metallic Coatings: Pre-galvanized or hot dipped.
  - 3. Nonmetallic Coatings: Plastic coating, jacket, or liner.
  - 4. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion to support bearing surface of piping.
  - 5. Hanger Rods: Continuous-thread rod, nuts, and washer made of carbon steel.
- B. Copper Pipe Hangers:
  - 1. Description: MSS SP-58, Types 1 through 58, copper-coated-steel, factory-fabricated components.
  - 2. Hanger Rods: Continuous-thread rod, nuts, and washer made of copper-coated steel.

## 2.2 TRAPEZE PIPE HANGERS

- A. Description: MSS SP-69, Type 59, shop- or field-fabricated pipe-support assembly made from structural carbon-steel shapes with MSS SP-58 carbon-steel hanger rods, nuts, saddles, and U-bolts.
- B. Trapeze Pipe Hanger Installation: Arrange for grouping of parallel runs of piping and support together on field-assembled channel systems.
  - 1. Assemble and provide according to manufacturer's written instructions. Center piping on channel to evenly distribute load.
  - 2. Pipe sizes and numbers shall be in accordance with the following:

TRAPEZE PIPE HANGER TABLE									
PIPE SIZE	4"	3"	2 ½"	2"	1 ½"	1 1⁄4"	1"	TOTAL # of PIPES	
NUMBER OF PIPES PERMITTED IN ONE CHANNEL SUPPORT	2	0	0	0	0	0	0	2	
	0	2	2	0	0	0	0	4	
	0	2	0	4	0	0	0	6	
	0	2	0	0	6	0	0	8	
	0	0	4	2	0	0	0	6	
	0	0	4	0	2	2	0	8	

Arlington County, Virginia Architect's Project No: 563007

0	0	4	0	0	8	0	12
0	0	0	6	2	2	2	12
0	0	0	8	0	2	0	10
0	0	0	0	14	0	0	14
0	0	0	0	0	16	0	16

## Notes:

- 1. Piping larger than 4" in diameter is not permitted in a channel support system.
- 2. Channel support systems shall be limited to eight (8) pipes per channel and two (2) channels (levels) per support system.
- 3. Smaller pipes can be substituted for larger pipes. For example two ¾" pipes may be installed in lieu of two 1" pipes, or 2" in lieu of 3", etc.
- 4. Spacing shall be in accordance with requirements for the smallest supported pipe. Refer to other specification sections for spacing requirements. If spacing requirements are not indicated comply with MSS SP-69.

# C. Metal Framing Systems:

- 1. Available Manufacturers:
  - a. Anvil International; a subsidiary of Mueller Water Products Inc.
  - b. Empire Industries, Inc.
  - c. ERICO International Corporation.
  - d. Haydon Corporation; H-Strut Division.
  - e. NIBCO INC.
  - f. PHD Manufacturing, Inc.
  - g. PHS Industries, Inc.
- 2. Description: Shop- or field-fabricated pipe-support assembly made of steel channels, accessories, fittings, and other components for supporting multiple parallel pipes.
- 3. Standard: Comply with MFMA-4.
- 4. Channels: Continuous slotted steel channel with inturned lips.
- 5. Channel Nuts: Formed or stamped steel nuts or other devices designed to fit into channel slot and, when tightened, prevent slipping along channel.
- 6. Hanger Rods: Continuous-thread rod, nuts, and washer made of carbon steel.
- 7. Coating: Zinc.

## 2.3 THERMAL-HANGER SHIELD INSERTS

- A. Available Manufacturers:
  - 1. Carpenter & Paterson, Inc.
  - 2. Clement Support Services.

Arlington County, Virginia Architect's Project No: 563007

- 3. ERICO International Corporation.
- 4. National Pipe Hanger Corporation.
- 5. PHS Industries, Inc.
- 6. Pipe Shields, Inc.; a subsidiary of Piping Technology & Products, Inc.
- 7. Piping Technology & Products, Inc.
- 8. Rilco Manufacturing Co., Inc.
- 9. Value Engineered Products, Inc.
- B. Insulation-Insert Material for Cold Piping: ASTM C 552, Type II cellular glass with 100-psig or ASTM C 591, Type VI, Grade 1 polyisocyanurate with 125-psig minimum compressive strength and vapor barrier.
- C. Insulation-Insert Material for Hot Piping: Water-repellent treated, ASTM C 533, Type I calcium silicate with 100-psig, ASTM C 552, Type II cellular glass with 100-psig, or ASTM C 591, Type VI, Grade 1 polyisocyanurate with 125-psig minimum compressive strength.
- D. For Trapeze or Clamped Systems: Insert and shield shall cover entire circumference of pipe.
- E. For Clevis or Band Hangers: Insert and shield shall cover lower 180 degrees of pipe.
- F. Insert Length: Extend 2" beyond sheet metal shield for piping operating below ambient air temperature.

## 2.4 PIPE STANDS

- A. General Requirements for Pipe Stands: Shop- or field-fabricated assemblies made of manufactured corrosion-resistant components to support roof-mounted piping.
  - 1. Available Manufacturers:
    - a. Cooper B-Line Dura-Blok
    - b. MAPA Products
    - c. Mifab, Inc. C-Port
    - d. Miro Industries, Inc.
    - e. OMG, Inc.
    - f. PHP Systems/Design
    - g. Pipe Prop
    - h. Roof Top Blox
    - i. Rooftop Support Systems Eberl Iron Works, Inc.
  - 2. Provide pipe supports for supporting gas, condensate, refrigeration lines, or hydronic piping on flat roof surfaces. Support shall rest on roof surface without penetrating the roof surface. Supports for condensate piping shall be adjustable vertically to ensure pipe slopes as required.
- B. Compact Pipe Stand: One-piece plastic unit with integral-rod roller, pipe clamps, or V-shaped cradle to support pipe, for roof installation without membrane penetration.

Arlington County, Virginia Architect's Project No: 563007

C. Curb Mounted Pipe Stands: Shop- or field-fabricated pipe supports made from structural-steel shapes, continuous-thread rods, and rollers, for mounting on permanent stationary roof curb.

## 2.5 EQUIPMENT SUPPORTS/RAILS

- A. Description: Welded, shop or field fabricated equipment support made from structural carbonsteel shapes unless indicated otherwise.
  - 1. Available Manufacturers:
    - a. Curbs Plus, Inc. CPES-X
    - b. Kees Equipment Support Model SF
    - c. Pate Company Equipment Support ES-2
    - d. Portals Plus ER-2A
    - e. Roof Products and Systems Equipment Rails ER-2B
    - f. Thybar Corporation TEMS 3

## 2. Construction:

- a. Minimum 18 gauge, G90 galvanized steel. Fully mitered and welded corners. Integral base plate. 3" Cant style support. All welds prime painted after fabrication. Full-depth internal C-channel reinforcing on 12" centers and 6" spreader channels on alternating 12" centers. 18 Gauge counterflashing factory-installed with tekscrews and neoprene washers. Factory-installed 2'x4" pressure-treated wood nailer.
- b. Minimum height of 12" above finished roof or as noted.

## 2.6 MISCELLANEOUS MATERIALS

- A. Structural Steel: ASTM A 36/A 36M, carbon-steel plates, shapes, and bars; black and galvanized.
- B. Grout: ASTM C 1107, factory-mixed and -packaged, dry, hydraulic-cement, non-shrink and nonmetallic grout; suitable for interior and exterior applications.
  - 1. Properties: Non-staining, noncorrosive, and nongaseous.
  - 2. Design Mix: 5000-psi, 28-day compressive strength.

# **PART 3 - EXECUTION**

## 3.1 HANGER AND SUPPORT INSTALLATION

A. Metal Pipe-Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Provide hangers, supports, clamps, and attachments as required to properly support piping from the building structure.

Arlington County, Virginia Architect's Project No: 563007

- B. Metal Trapeze Pipe-Hanger Installation: Comply with MSS SP-69, MSS SP-89, and Table above. Arrange for grouping of parallel runs of horizontal piping, and support together on field-fabricated trapeze pipe hangers.
- C. Metal Framing System Installation: Arrange for grouping of parallel runs of piping, and support together on field-assembled metal framing systems.
- D. Thermal-Hanger Shield Installation: Provide in pipe hanger or shield for insulated piping.
- E. Pipe Stand Installation:
  - 1. Pipe Stand Types except Curb-Mounted Type: Assemble components and mount on smooth roof surface. Do not penetrate roof membrane.
  - 2. Curb-Mounted-Type Pipe Stands: Assemble components or fabricate pipe stand and mount on permanent, stationary roof curb. See Division 07 Section "Roof Accessories" for curbs.
- F. Provide hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.
- G. Equipment Support Installation: Fabricate from welded-structural-steel shapes.
- H. Provide hangers and supports to allow controlled thermal movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.
- I. Provide lateral bracing with pipe hangers and supports to prevent swaying.
- J. Provide building attachments within concrete slabs or attach to structural steel. Building attachments may not used on steel joists unless otherwise indicated. Provide additional attachments at concentrated loads, including valves, flanges, and strainers, 2-1/2" and larger and at changes in direction of piping. Provide concrete inserts before concrete is placed; fasten inserts to forms and provide reinforcing bars through openings at top of inserts.
- K. Load Distribution: Provide hangers and supports so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.
- L. Pipe Slopes: Provide hangers and supports to provide indicated pipe slopes and to not exceed maximum pipe deflections allowed by ASME B31.9 for building services piping.
- M. Insulated Piping:
  - 1. Attach clamps and spacers to piping.
    - a. Piping Operating above Ambient Air Temperature: Clamp may project through insulation.
    - b. Piping Operating below Ambient Air Temperature: Provide thermal-hanger shield insert with clamp sized to match OD of insert.

Arlington County, Virginia Architect's Project No: 563007

- c. Do not exceed pipe stress limits allowed by ASME B31.9 for building services piping.
- 2. Provide MSS SP-58, Type 39, protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.
- 3. Provide MSS SP-58, Type 40, protective shields on cold piping with vapor barrier. Shields shall span an arc of 180 degrees.
- 4. Shield Dimensions for Pipe: Not less than the following:
  - a. Pipe  $\frac{1}{4}$ " to  $3-\frac{1}{2}$ ": 12 inches long and 0.048 inch thick.
  - b. Pipe 4": 12 inches long and 0.06 inch thick.
  - c. Pipe 5" and 6": 18 inches long and 0.06 inch thick.
  - d. Pipe 8" to 14": 24 inches long and 0.075 inch thick.
- 5. Pipes 8" and Larger: Include wood or reinforced calcium-silicate-insulation inserts of length at least as long as protective shield.
- 6. Thermal-Hanger Shields: Provide with insulation same thickness as piping insulation.

# 3.2 EQUIPMENT SUPPORTS

- A. Fabricate structural-steel stands to suspend equipment from structure overhead or to support equipment above floor.
- B. Grouting: Place grout under supports for equipment and make bearing surface smooth.
- C. Provide lateral bracing, to prevent swaying, for equipment supports.

## 3.3 ROOF EQUIPMENT SUPPORTS

- A. Equipment supports must span a minimum of two structural roof members.
- B. No load shall be applied to a cantilever exceeding 12" in length.
- C. Fasten base flange to roof steel or deck with stitch weld or mechanical fastener not exceeding 18" on center in accordance with NRCA specifications.

## 3.4 METAL FABRICATIONS

- A. Cut, drill, and fit miscellaneous metal fabrications for trapeze pipe hangers and equipment supports.
- B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.
- C. Field Welding: Comply with AWS D1.1/D1.1M procedures for shielded, metal arc welding; appearance and quality of welds; and methods used in correcting welding work; and with the following:
  - 1. Provide materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
  - 2. Obtain fusion without undercut or overlap.
  - 3. Remove welding flux immediately.

Arlington County, Virginia Architect's Project No: 563007

4. Finish welds at exposed connections so no roughness shows after finishing and so contours of welded surfaces match adjacent contours.

## 3.5 ADJUSTING

- A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.
- B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

## 3.6 PAINTING

- A. Touchup: Unless otherwise indicated clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Provide same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
  - 1. Apply paint by brush or spray to provide a minimum dry film thickness of 2.0 mils.
- B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and immediately apply galvanizing-repair paint. Paint shall comply with ASTM A 780.

#### 3.7 HANGER AND SUPPORT SCHEDULE

- A. Specific hanger and support requirements are in Sections specifying piping systems and equipment.
- B. Comply with MSS SP-69 for pipe-hanger selections and applications that are not specified in piping system Sections.
- C. Provide hangers and supports with galvanized metallic coatings for piping and equipment that will not have field-applied finish.
- D. Provide nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.
- E. Provide copper-plated pipe hangers and copper attachments for copper piping and tubing.
- F. Provide padded hangers for piping that is subject to scratching.
- G. Provide thermal-hanger shield inserts for insulated piping and tubing.
- H. Horizontal-Piping Hangers and Supports: Unless otherwise indicated provide the following:
  - 1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of stationary pipes ½" to 30".

Arlington County, Virginia Architect's Project No: 563007

- 2. Yoke-Type Pipe Clamps (MSS Type 2): For suspension of up to 1050 deg F pipes 4" to 14", requiring up to 4" of insulation.
- 3. Carbon- or Alloy-Steel, Double-Bolt Pipe Clamps (MSS Type 3): For suspension of pipes <sup>3</sup>/<sub>4</sub>" to 14", requiring clamp flexibility and up to 4 inches of insulation.
- 4. Steel Pipe Clamps (MSS Type 4): For suspension of cold and hot pipes ½" to 14" if little or no insulation is required.
- 5. Pipe Hangers (MSS Type 5): For suspension of pipes ½" to 4", to allow off-center closure for hanger installation before pipe erection.
- 6. Adjustable, Swivel Split- or Solid-Ring Hangers (MSS Type 6): For suspension of noninsulated, stationary pipes <sup>3</sup>/<sub>4</sub>" to 8".
- 7. Adjustable, Steel Band Hangers (MSS Type 7): For suspension of noninsulated, stationary pipes ½" to 8".
- 8. Adjustable Band Hangers (MSS Type 9): For suspension of noninsulated, stationary pipes ½" to 8".
- 9. Adjustable, Swivel-Ring Band Hangers (MSS Type 10): For suspension of noninsulated, stationary pipes ½" to 8".
- 10. Split Pipe Ring with or without Turnbuckle Hangers (MSS Type 11): For suspension of noninsulated, stationary pipes ½" to 8".
- 11. Extension Hinged or Two-Bolt Split Pipe Clamps (MSS Type 12): For suspension of noninsulated, stationary pipes NPS ½" to 3".
- 12. U-Bolts (MSS Type 24): For support of heavy pipes ½" to 14".
- 13. Clips (MSS Type 26): For support of insulated pipes not subject to expansion or contraction.
- 14. Pipe Saddle Supports (MSS Type 36): For support of pipes 4" to 14", with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate.
- 15. Pipe Stanchion Saddles (MSS Type 37): For support of pipes 4" to 14", with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate, and with U-bolt to retain pipe.
- 16. Adjustable Pipe Saddle Supports (MSS Type 38): For stanchion-type support for pipes 2-1/2" to 14" if vertical adjustment is required, with steel-pipe base stanchion support and cast-iron floor flange.
- 17. Single-Pipe Rolls (MSS Type 41): For suspension of pipes 1" to 14", from two rods if longitudinal movement caused by expansion and contraction might occur.
- 18. Adjustable Roller Hangers (MSS Type 43): For suspension of pipes 2-½" to 14", from single rod if horizontal movement caused by expansion and contraction might occur.
- 19. Complete Pipe Rolls (MSS Type 44): For support of pipes 2" to 14" if longitudinal movement caused by expansion and contraction might occur but vertical adjustment is not necessary.
- 20. Pipe Roll and Plate Units (MSS Type 45): For support of pipes 2" to 14" if small horizontal movement caused by expansion and contraction might occur and vertical adjustment is not necessary.
- 21. Adjustable Pipe Roll and Base Units (MSS Type 46): For support of pipes 2" to 14"if vertical and lateral adjustment during installation might be required in addition to expansion and contraction.
- I. Vertical-Piping Clamps: Unless otherwise indicated provide the following:
  - 1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers 3/4" to 14".

Arlington County, Virginia Architect's Project No: 563007

- 2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers <sup>3</sup>/<sub>4</sub>" to 14" if longer ends are required for riser clamps.
- J. Hanger-Rod Attachments: Unless otherwise indicated provide the following:
  - 1. Steel Turnbuckles (MSS Type 13): For adjustment up to 6 inches for heavy loads.
  - 2. Steel Clevises (MSS Type 14): For 120 to 450 deg F piping installations.
  - 3. Swivel Turnbuckles (MSS Type 15): For use with MSS Type 11, split pipe rings.
  - 4. Malleable-Iron Sockets (MSS Type 16): For attaching hanger rods to various types of building attachments.
  - 5. Steel Weldless Eye Nuts (MSS Type 17): For 120 to 450 deg F piping installations.
  - 6. Flat Plate, Double Nut, and Washer as Detailed on Structural Drawings: For attaching to bar joists. Method of attachment to bar joists must be approved by the structural engineer and joist manufacturer.
- K. Building Attachments: Unless otherwise indicated provide the following:
  - 1. Steel or Malleable Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.
  - 2. Flat Plate, Double Nuts, and Washer as Detailed on Structural Drawings: For use under roof installations with bar-joist construction to attach to bottom chord of joist.
  - 3. Side-Beam or Channel Clamps (MSS Type 20): For attaching to bottom flange of beams, channels, or angles.
  - 4. Center-Beam Clamps (MSS Type 21): For attaching to center of bottom flange of beams.
  - 5. Welded Beam Attachments (MSS Type 22): For attaching to bottom of beams if loads are considerable and rod sizes are large.
  - 6. C-Clamps (MSS Type 23): For steel I-beams. Only allowed for open web joists if load does not exceed 50 lbs.
  - 7. Top-Beam Clamps (MSS Type 25): For top of beams if hanger rod is required tangent to flange edge.
  - 8. Side-Beam Clamps (MSS Type 27): For bottom of steel I-beams.
  - 9. Steel-Beam Clamps with Eye Nuts (MSS Type 28): For attaching to bottom of steel Ibeams for heavy loads.
  - 10. Linked-Steel Clamps with Eye Nuts (MSS Type 29): For attaching to bottom of steel I-beams for heavy loads, with link extensions.
  - 11. Malleable-Beam Clamps with Extension Pieces (MSS Type 30): For attaching to structural steel.
  - 12. Welded-Steel Brackets: For support of pipes from below or for suspending from above by using clip and rod. Provide one of the following for indicated loads:
    - a. Light (MSS Type 31): 750 lb.
    - b. Medium (MSS Type 32): 1500 lb.
    - c. Heavy (MSS Type 33): 3000 lb.
  - 13. Side-Beam Brackets (MSS Type 34): For sides of steel or wooden beams.
  - 14. Plate Lugs (MSS Type 57): For attaching to steel beams if flexibility at beam is required.
  - 15. Horizontal Travelers (MSS Type 58): For supporting piping systems subject to linear horizontal movement where headroom is limited.

Arlington County, Virginia Architect's Project No: 563007

- 16. For sloping structure, provide clamp with swivel such that required threaded rod is vertical. Bending of threaded rod is not acceptable.
- L. Saddles and Shields: Unless otherwise indicated provide the followings:
  - 1. Steel-Pipe-Covering Protection Saddles (MSS Type 39): To fill interior voids with insulation that matches adjoining insulation.
  - 2. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
  - 3. Thermal-Hanger Shield Inserts: For supporting insulated pipe.
- M. Spring Hangers and Supports: Unless otherwise indicated provide the following:
  - 1. Restraint-Control Devices (MSS Type 47): To control pipe movement.
  - 2. Spring Cushions (MSS Type 48): For light loads if vertical movement does not exceed 1-1/4 inches.
  - 3. Spring-Cushion Roll Hangers (MSS Type 49): For equipping Type 41, roll hanger with springs.
  - 4. Spring Sway Braces (MSS Type 50): To retard sway, shock, vibration, or thermal expansion in piping systems.
  - 5. Variable-Spring Hangers (MSS Type 51): Preset to indicated load and limit variability factor to 25 percent to allow expansion and contraction of piping system from hanger.
  - 6. Variable-Spring Base Supports (MSS Type 52): Preset to indicated load and limit variability factor to 25 percent to allow expansion and contraction of piping system from base support.
  - 7. Variable-Spring Trapeze Hangers (MSS Type 53): Preset to indicated load and limit variability factor to 25 percent to allow expansion and contraction of piping system from trapeze support.
  - 8. Constant Supports: For critical piping stress and if necessary to avoid transfer of stress from one support to another support, critical terminal, or connected equipment. Include auxiliary stops for erection, hydrostatic test, and load-adjustment capability. These supports include the following types:
    - a. Horizontal (MSS Type 54): Mounted horizontally.
    - b. Vertical (MSS Type 55): Mounted vertically.
    - c. Trapeze (MSS Type 56): Two vertical-type supports and one trapeze member.
- N. Comply with MSS SP-69 for trapeze pipe-hanger selections and applications that are not specified in piping system Sections.
- O. Comply with MFMA-103 for metal framing system selections and applications that are not specified in piping system Sections.
- P. Provide powder-actuated fasteners or mechanical-expansion anchors instead of building attachments where indicated in concrete construction.

**END OF SECTION 230529** 

Arlington County, Virginia Architect's Project No: 563007

## SECTION 230548 - VIBRATION CONTROL FOR HVAC

#### PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

## 1.2 DEFINITIONS

- A. IBC: International Building Code.
- B. ICC-ES: ICC-Evaluation Service.
- C. OSHPD: Office of Statewide Health Planning & Development for the State of California.
- D. ASCE: American Society of Civil Engineers

## 1.3 RESPONSIBILITIES:

- A. The manufacturer of vibration isolation systems and devices shall:
  - 1. Determine the sizes and locations of isolators and provide equipment isolation as indicated.
  - 2. Guarantee indicated isolation system deflections.
  - 3. Provide installation instructions and drawings.
  - 4. Certify correctness of installation upon completion.
- B. The Contractor shall cause all vibration isolation systems, including the isolators, and flexible connectors between the isolated equipment and associated piping, ducting, and electrical work to be designed by a manufacturer experienced in this type of work.

## 1.4 SUBMITTALS

## A. Product Data:

- 1. Include rated load, rated deflection, and overload capacity for each vibration isolation device.
- 2. Wind-Restraint Details:
  - a. Design Analysis: To support selection and arrangement of wind restraints. Include calculations of combined tensile and shear loads.
  - b. Details: Coordinate vibration isolation details with wind-restraint details required for equipment mounted outdoors.

Arlington County, Virginia Architect's Project No: 563007

- B. Coordination Drawings: For areas indicated at 1/4" = 1'0" and where sections are cut on contract drawings, indicate coordination of HVAC piping and equipment with other systems and equipment in the vicinity, include supports and restraints.
- C. Qualification Data: For testing agency.
- D. Shop Drawings:
  - 1. Vibration Isolation Base Details: Detail fabrication, including anchorages, attachments to structure, and to supported equipment. Include auxiliary motor slides and rails, base weights, equipment static loads, power transmission, component misalignment, and cantilever loads.
  - 2. Dimensioned Outline Drawings for Each Scheduled Piece of Equipment: Identify center of gravity.
  - 3. Dimensioned Outline Drawings for Each Scheduled Piece of Equipment: Locate and describe mounting and anchorage provisions.

## 1.5 QUALITY ASSURANCE

- A. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code Steel."
- B. Testing Agency Qualifications: An independent agency, with the experience and capability to conduct the testing indicated, that is a nationally recognized testing laboratory (NRTL) as defined by OSHA in 29 CFR 1910.7, and that is acceptable to authorities having jurisdiction.

## PART 2 - PRODUCTS

## 2.1 VIBRATION ISOLATORS

- A. Available Manufacturers:
  - 1. Amber/Booth Company, Inc.
  - 2. B-Line Systems, Inc.
  - 3. Kinetics Noise Control.
  - 4. Mason Industries.
  - 5. Vibration Mountings & Controls, Inc.
  - 6. Vibro-Acoustics, Inc.
- B. Pads: Oil- and water-resistant elastomer or natural rubber, arranged in single or multiple layers, molded with a nonslip pattern and galvanized steel baseplates of sufficient stiffness for uniform loading over pad area, and factory cut to sizes that match requirements of supported equipment.
  - 1. Resilient Material: Oil- and water-resistant neoprene.
  - 2. Durometer Rating: Minimum 30.
  - 3. Number of Layers: 1 2 3 or 4.

Arlington County, Virginia Architect's Project No: 563007

- C. Mounts: Double-deflection type, with molded, oil-resistant rubber, or neoprene isolator elements with factory-drilled, encapsulated top plate for bolting to equipment and with baseplate for bolting to structure. Color-code or otherwise identify to indicate capacity range.
  - 1. Durometer Rating: Minimum 30.
  - 2. Materials: Cast-ductile-iron or welded steel housing containing two separate and opposing, oil-resistant rubber or neoprene elements that prevent central threaded element and attachment hardware from contacting the housing during normal operation.
  - 3. Neoprene: Shock-absorbing materials compounded according to the standard for bridge-bearing neoprene as defined by AASHTO.
- D. Restrained Mounts: All-directional mountings with wind restraint.
  - 1. Materials: Cast-ductile-iron or welded steel housing containing two separate and opposing, oil-resistant rubber or neoprene elements that prevent central threaded element and attachment hardware from contacting the housing during normal operation.
  - 2. Neoprene: Shock-absorbing materials compounded according to the standard for bridge-bearing neoprene as defined by AASHTO.
- E. Spring Isolators: Freestanding, laterally stable, open-spring isolators.
  - 1. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
  - 2. Minimum Additional Travel: 50 percent of the required deflection at rated load.
  - 3. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
  - 4. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
  - 5. Baseplates: Factory drilled for bolting to structure and bonded to ½" thick, rubber isolator pad attached to baseplate underside. Baseplates shall limit floor load to 500 psig.
  - 6. Top Plate and Adjustment Bolt: Threaded top plate with adjustment bolt and cap screw to fasten and level equipment.
- F. Restrained Spring Isolators: Freestanding, steel, open-spring isolators with limit-stop restraint.
  - 1. Housing: Steel with resilient vertical-limit stops to prevent spring extension due to weight being removed; factory-drilled baseplate bonded to ¼" thick, neoprene or rubber isolator pad attached to baseplate underside; and adjustable equipment mounting and leveling bolt that acts as blocking during installation.
  - 2. Restraint: Limit stop as required for equipment and authorities having jurisdiction.
  - 3. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
  - 4. Minimum Additional Travel: 50 percent of the required deflection at rated load.
  - 5. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
  - 6. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
- G. Housed Spring Mounts: Housed spring isolators.
  - 1. Housing: Ductile-iron or steel housing to provide all-directional restraint.
  - 2. Base: Factory drilled for bolting to structure.

Arlington County, Virginia Architect's Project No: 563007

- 3. Snubbers: Vertically adjustable to allow a maximum of 1/4" travel up or down before contacting a resilient collar.
- H. Elastomeric Hangers: Double-deflection type, with molded, oil-resistant rubber or neoprene isolator elements bonded to steel housings with threaded connections for hanger rods. Color-code or otherwise identify to indicate capacity range.
- I. Spring Hangers: Combination coil-spring and elastomeric-insert hanger with spring and insert in compression.
  - 1. Frame: Steel, fabricated for connection to threaded hanger rods and to allow for a maximum of 30 degrees of angular hanger-rod misalignment without binding or reducing isolation efficiency.
  - 2. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
  - 3. Minimum Additional Travel: 50 percent of the required deflection at rated load.
  - 4. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
  - 5. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
  - 6. Elastomeric Element: Molded, oil-resistant rubber or neoprene. Steel-washer-reinforced cup to support spring and bushing projecting through bottom of frame.
  - 7. Self-centering hanger rod cap to ensure concentricity between hanger rod and support spring coil.
- J. Spring Hangers with Vertical-Limit Stop: Combination coil-spring and elastomeric-insert hanger with spring and insert in compression and with a vertical-limit stop.
  - 1. Frame: Steel, fabricated for connection to threaded hanger rods and to allow for a maximum of 30 degrees of angular hanger-rod misalignment without binding or reducing isolation efficiency.
  - 2. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
  - 3. Minimum Additional Travel: 50 percent of the required deflection at rated load.
  - 4. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
  - 5. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
  - 6. Elastomeric Element: Molded, oil-resistant rubber or neoprene.
  - 7. Adjustable Vertical Stop: Steel washer with neoprene washer "up-stop" on lower threaded rod.
  - 8. Self-centering hanger rod cap to ensure concentricity between hanger rod and support spring coil.
- K. Thrust Limits: Combination coil spring and elastomeric insert with spring and insert in compression and with a load stop. Include rod and angle-iron brackets for attaching to equipment.
  - 1. Frame: Steel, fabricated for connection to threaded rods and to allow for a maximum of 30 degrees of angular rod misalignment without binding or reducing isolation efficiency.

Arlington County, Virginia Architect's Project No: 563007

- 2. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
- 3. Minimum Additional Travel: 50 percent of the required deflection at rated load.
- 4. Lateral Stiffness: More than 80 percent of the rated vertical stiffness.
- 5. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
- 6. Elastomeric Element: Molded, oil-resistant rubber or neoprene.
- 7. Coil Spring: Factory set and field adjustable for a maximum of 1/4-inch movement at start and stop.
- L. Pipe Riser Resilient Support: All-directional, acoustical pipe anchor consisting of 2 steel tubes separated by a minimum of 1/2-inch- thick, 60-durometer neoprene. Include steel and neoprene vertical-limit stops arranged to prevent vertical travel in both directions. Design support for a maximum load on the isolation material of 500 psig and for equal resistance in all directions.
- M. Resilient Pipe Guides: Telescopic arrangement of 2 steel tubes separated by a minimum of 1/2-inch-thick, 60-durometer neoprene. Factory set guide height with a shear pin to allow vertical motion due to pipe expansion and contraction. Shear pin shall be removable and reinsertable to allow for selection of pipe movement. Guides shall be capable of motion to meet location requirements.

#### 2.2 FACTORY FINISHES

- A. Finish: Manufacturer's standard paint applied to factory-assembled and -tested equipment before shipping.
  - 1. Powder coating on springs and housings.
  - 2. All hardware shall be galvanized. Hot-dip-galvanize metal components for exterior use.
  - 3. Bake enamel or powder coat for metal components on isolators for interior use.
  - 4. Color-code or otherwise mark vibration isolation and wind control devices to indicate capacity range.

## PART 3 - EXECUTION

## 3.1 EXAMINATION

- A. Examine areas and equipment to receive vibration isolation and wind-control devices for compliance with requirements for installation tolerances and other conditions affecting performance.
- B. Examine roughing-in of reinforcement and cast-in-place anchors to verify actual locations before installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

# 3.2 APPLICATIONS

# Arlington County, Virginia Architect's Project No: 563007

- A. Multiple Pipe Supports: Secure pipes to trapeze member with clamps approved for application by an agency acceptable to authorities having jurisdiction.
- B. Strength of Support and Wind Restraint Assemblies: Where not indicated, select sizes of components so strength will be adequate to resist loads within loading limits.

## 3.3 VIBRATION-CONTROL DEVICE INSTALLATION

A. Comply with requirements indicated in the Contract Documents, in codes and ordinances, by Authority Having Jurisdiction, and by Manufacturer, for installation of all devices.

## 3.4 FIELD QUALITY CONTROL

- A. Perform tests.
- B. Tests:
  - 1. Provide evidence of recent calibration of test equipment by a testing agency acceptable to authorities having jurisdiction.
  - 2. Schedule test with Owner, through Architect, before connecting anchorage device to restrained component (unless postconnection testing has been approved), and with at least seven days' advance notice.
  - 3. Obtain Architect's approval before transmitting test loads to structure. Provide temporary load-spreading members.
  - 4. Test at least two of each type and size of installed anchors and fasteners.
  - 5. Test to 90 percent of rated proof load of device.
  - 6. Measure isolator restraint clearance.
  - 7. Measure isolator deflection.
  - 8. Verify snubber minimum clearances.
  - 9. If a device fails test, fix and retest until satisfactory results are achieved then modify all installations of same type to match.
- C. Prepare test reports.

# 3.5 ADJUSTING

- A. Adjust isolators after piping system is at operating weight.
- B. Adjust limit stops on restrained spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.
- C. Adjust active height of spring isolators.
- D. Adjust restraints to permit free movement of equipment within normal mode of operation.

## 3.6 VIBRATION ISOLATION SCHEDULE

Arlington County, Virginia Architect's Project No: 563007

## A. Ductwork

- 1. Flexible connectors shall be used for ductwork connections to air handling units. Refer to Section "Metal Duct Accessories." Ductwork shall be suspended with elastomeric hangers for a distance of 20 feet from air handling units.
- B. Indoor Air Handling Units
  - 1. Provide elastomeric hangers for units suspended from structure.
- C. Power Ventilators
  - 1. Provide elastomeric hangers for units suspended from structure.
- D. Fan-Powered Terminal Units
  - 1. Provide elastomeric hangers for units suspended from structure.

END OF SECTION

# Arlington County, Virginia Architect's Project No: 563007

## SECTION 230553 - IDENTIFICATION FOR HVAC PIPING AND EQUIPMENT

## PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

## 1.2 SUMMARY

#### A. Section Includes:

- 1. Equipment labels.
- 2. Warning signs and labels.
- 3. Pipe labels.
- 4. Duct labels.
- 5. Valve tags.
- 6. Warning tags.

# 1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Equipment Label Schedule: Include a listing of all equipment to be labeled with the proposed content for each label.
- C. Valve numbering scheme.
- D. Valve Schedules: For each piping system to include in maintenance manuals.

# 1.4 QUALITY ASSURANCE

A. ASME Compliance: Comply with ASME A13.1, "Scheme for the Identification of Piping Systems," for letter size, length of color field, colors, and viewing angles of identification devices for piping.

## 1.5 COORDINATION

- A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- B. Coordinate installation of identifying devices with location of access panels and doors.

Arlington County, Virginia Architect's Project No: 563007

C. Install identifying devices before installing acoustical ceilings and similar concealment.

## PART 2 - PRODUCTS

## 2.1 EQUIPMENT LABELS

- A. Equipment Nameplates: Metal, with data engraved or stamped, for permanent attachment on equipment.
  - 1. Data:
    - a. Manufacturer, product name, model number, and serial number.
    - b. Capacity, operating and power characteristics, and essential data.
    - c. Labels of tested compliances.
  - 2. Location: Accessible and visible.
  - 3. Fasteners: As required to mount on equipment.
- B. Equipment Markers: Engraved, color-coded laminated plastic. Include contact-type, permanent adhesive.
  - 1. Terminology: Match schedules as closely as possible.
  - 2. Data:
    - a. Name and plan number.
    - b. Equipment service.
    - c. Design capacity.
    - d. Other design parameters such as pressure drop, entering and leaving conditions, and speed.
  - 3. Size: 2-1/2 by 4 inches for control devices, dampers, and valves; 4-1/2 by 6 inches for equipment.
- C. Metal Labels for Equipment:
  - 1. Material and Thickness: Brass, 0.032-inch stainless steel, 0.025-inch aluminum, 0.032-inch or anodized aluminum, 0.032-inch minimum thickness, and having predrilled or stamped holes for attachment hardware.
  - 2. Letter Color: White or black.
  - 3. Background Color: Black or white.
  - 4. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
  - 5. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-quarters the size of principal lettering.
  - 6. Fasteners: Stainless-steel rivets or self-tapping screws.
  - 7. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- D. Plastic Labels for Equipment:

Arlington County, Virginia Architect's Project No: 563007

- 1. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/8-inchthick, and having predrilled holes for attachment hardware.
- 2. Letter Color: White or black.
- 3. Background Color: Black or white.
- 4. Maximum Temperature: Able to withstand temperatures up to 160 deg F.
- 5. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
- 6. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-quarters the size of principal lettering.
- 7. Fasteners: Stainless-steel rivets or self-tapping screws.
- 8. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- E. Access Panel and Door Markers: 1/16-inch-thick, engraved laminated plastic, with abbreviated terms and numbers corresponding to identification.
  - 1. Fasteners: Self-tapping, stainless-steel screws or contact-type, permanent adhesive.
- F. Label Content: Include equipment's drawing designation (tag) with unique equipment number as scheduled.

## 2.2 WARNING SIGNS AND LABELS

- A. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/8-inch thick, and having predrilled holes for attachment hardware.
- B. Letter Color: White or black.
- C. Background Color: Black or white.
- D. Maximum Temperature: Able to withstand temperatures up to 160 deg F.
- E. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
- F. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-quarters the size of principal lettering.
- G. Fasteners: Stainless-steel rivets or self-tapping screws.
- H. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- I. Label Content: Include equipment's drawing designation (tag) with unique equipment number as scheduled. Include caution and warning information plus emergency notification instructions.

Arlington County, Virginia Architect's Project No: 563007

#### 2.3 PIPE LABELS

- A. General Requirements for Manufactured Pipe Labels: Preprinted, color-coded, with lettering indicating service, and showing flow direction according to ASME A13.1.
- B. Pretensioned Pipe Labels: Pre-coiled, semi-rigid plastic formed to cover full circumference of pipe and to attach to pipe without fasteners or adhesive.
- C. Self-Adhesive Pipe Labels: Printed plastic with contact-type, permanent-adhesive backing.
- D. Pipe Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings; also include pipe size and an arrow indicating flow direction.
  - 1. Flow-Direction Arrows: Integral with piping system service lettering to accommodate both directions or as separate unit on each pipe label to indicate flow direction.
  - 2. Lettering Size: Size letters according to ASME A13.1 for piping.

## 2.4 DUCT LABELS

- A. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/8-inch-thick, and having predrilled holes for attachment hardware.
- B. Letter Color: White or black.
- C. Background Color: Black or white.
- D. Maximum Temperature: Able to withstand temperatures up to 160 deg F.
- E. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
- F. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-quarters the size of principal lettering.
- G. Fasteners: Stainless-steel rivets or self-tapping screws.
- H. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- I. Duct Label Contents: Include identification of duct service using same designations or abbreviations as used on Drawings; also include duct size and an arrow indicating flow direction.
  - 1. Flow-Direction Arrows: Integral with duct system service lettering to accommodate both directions or as separate unit on each duct label to indicate flow direction.

Arlington County, Virginia Architect's Project No: 563007

#### 2.5 VALVE TAGS

- A. Description: Stamped or engraved with 1/4-inch letters for piping system abbreviation and 1/2-inch numbers.
  - 1. Tag Material: Brass, 0.032-inch stainless steel, 0.025-inch aluminum, 0.032-inch or anodized aluminum, 0.032-inch minimum thickness, and having predrilled or stamped holes for attachment hardware.
  - 2. Fasteners: Brass wire-link chain or beaded chain or S-hook.
- B. Valve Schedules: For each piping system, on 8-1/2-by-11-inch bond paper. Tabulate valve number, piping system, system abbreviation (as shown on valve tag), location of valve (room or space), normal-operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.
  - 1. Valve-tag schedule shall be included in operation and maintenance data.

## 2.6 VALVE SCHEDULES

- A. Valve Schedules: For each piping system, on standard-size bond paper. Tabulate valve number, piping system, system abbreviation (as shown on valve tag), location of valve (room or space), normal-operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.
  - 1. Valve-Schedule Frames: Glazed display frame for removable mounting on masonry walls for each page of valve schedule. Include mounting screws.
  - 2. Frame: Finished hardwood or extruded aluminum.
  - 3. Glazing: ASTM C 1036, Type I, Class 1, Glazing Quality B, 2.5-mm, single-thickness glass.

## 2.7 WARNING TAGS

- A. Description: Preprinted or partially preprinted accident-prevention tags of plasticized card stock with matte finish suitable for writing.
  - 1. Size: 3 by 5-1/4 inches minimum.
  - 2. Fasteners: Reinforced grommet and wire or string.
  - 3. Nomenclature: Large-size primary caption such as "DANGER," "CAUTION," or "DO NOT OPERATE."
  - 4. Color: Safety-yellow background with black lettering.

## 2.8 ACOUSTICAL CEILING GRID MARKER

- A. General: Plastic tape a minimum of three one-thousandths of an inch thick (3.0 mils) with pressure-sensitive, permanent-type, self-adhesive back.
- B. Width: three quarters of an inch (3/4) or 22 millimeters.

# Arlington County, Virginia Architect's Project No: 563007

C. Letter Size: 1/4" minimum or 8 millimeters.

D. Letter Color: Black

E. Tape Color: White.

## PART 3 - EXECUTION

#### 3.1 PREPARATION

A. Clean piping and equipment surfaces of substances that could impair bond of identification devices, including dirt, oil, grease, release agents, and incompatible primers, paints, and encapsulants.

## 3.2 GENERAL INSTALLATION REQUIREMENTS

- A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- B. Coordinate installation of identifying devices with locations of access panels and doors.
- C. Install identifying devices before installing acoustical ceilings and similar concealment.

## 3.3 EQUIPMENT LABEL INSTALLATION

- A. Install or permanently fasten labels on each major item of mechanical equipment.
- B. Locate equipment labels where accessible and visible.

## 3.4 PIPE LABEL INSTALLATION

- A. Piping Color Coding: Painting of piping is specified in Section 099123 "Interior Painting."
- B. Pipe Label Locations: Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:
  - 1. Near each valve and control device.
  - 2. Near each branch connection, excluding short takeoffs for fixtures and terminal units. Where flow pattern is not obvious, mark each pipe at branch.
  - 3. Near penetrations and on both sides of through walls, floors, ceilings, and inaccessible enclosures.
  - 4. At access doors, manholes, and similar access points that permit view of concealed piping.
  - 5. Near major equipment items and other points of origination and termination.

Arlington County, Virginia Architect's Project No: 563007

- 6. Spaced at maximum intervals of 50 feet along each run. Reduce intervals to 25 feet in areas of congested piping and equipment.
- 7. On piping above removable acoustical ceilings, omit intermediately spaced labels.
- C. Directional Flow Arrows: Arrows shall be used to indicate direction of flow in pipes, including pipes where flow is allowed in both directions.
- D. Pipe Label Color Schedule:
  - 1. Refrigerant Piping: Black letters on a safety-orange background.

## 3.5 DUCT LABEL INSTALLATION

- A. Install duct markers with permanent adhesive on air ducts in colors complying with ASME A13.1.
- B. Install plastic-laminated or self-adhesive duct labels with permanent adhesive on air ducts in the following color codes:
  - 1. Blue: For cold-air supply ducts.
  - 2. Yellow: For hot-air supply ducts.
  - 3. Green: For exhaust-, outside-, relief-, return-, and mixed-air ducts.
- C. Locate labels near points where ducts enter into and exit from concealed spaces and at maximum intervals of 50 feet in each space where ducts are exposed or concealed by removable ceiling system.

## 3.6 VALVE-TAG INSTALLATION

- A. Install tags on valves and control devices in piping systems, except check valves, valves within factory-fabricated equipment units, shutoff valves, faucets, convenience and lawn-watering hose connections, and HVAC terminal devices and similar roughing-in connections of end-use fixtures and units. List tagged valves in a valve schedule.
- B. Valve-Tag Application Schedule: Tag valves according to size, shape, and color scheme and with captions similar to those indicated in the following subparagraphs:
  - 1. Valve-Tag Size and Shape:
    - a. Chilled Water: 1-1/2 inches, round.
    - b. Condenser Water: 1-1/2 inches, round.
    - c. Refrigerant: 1-1/2 inches, round.
    - d. Hot Water: 1-1/2 inches, round.
    - e. Gas: 1-1/2 inches, round.
    - f. Low-Pressure Steam: 1-1/2 inches, round.
    - g. High-Pressure Steam: 1-1/2 inches, round.
    - h. Steam Condensate: 1-1/2 inches, round.

Arlington County, Virginia Architect's Project No: 563007

## 2. Valve-Tag Colors:

- a. Toxic and Corrosive Fluids: Black letters on a safety-orange background.
- b. Flammable Fluids: Black letters on a safety-yellow background.
- c. Combustible Fluids: White letters on a safety-brown background.
- d. Potable and Other Water: White letters on a safety-green background.
- e. Compressed Air: White letters on a safety-blue background.
- f. Defined by User: White letters on a safety-purple background, black letters on a safety-white background, white letters on a safety-gray background, and white letters on a safety-black background

#### 3.7 FIRE AND SMOKE DAMPERS

A. Access points for fire, smoke and fire-smoke dampers shall be permanently identified on the exterior of the duct by a label or sign with letters not less than 1" in height reading: "FIRE/SMOKE DAMPER, SMOKE DAMPER, or FIRE DAMPER."

## 3.8 ACOUSTICAL CEILING GRID MARKER INSTALLATION

- A. Attach tape with indicated text to t-bar below item of equipment.
- B. Attach tape to grid.
- C. Prepare surface and attach tape in accordance with manufacturer' recommendations.
- D. Surfaces to receive tape shall be clean and free of scale, dirt, and grease.
- E. Center tape on support grid. Tape shall be visible from within space.
- F. Provide with lettering at equipment located above lay-in tile ceilings including but not limited to:
  - 1. Valves: Text = V
  - 2. Air Handling Units: Text = AHU
  - 3. Air Removal Devices: Text = ARD
  - 4. Strainers: Text = S
  - 5. Terminal Units (VAV boxes): Text = TU
  - 6. Fan Coil Units: Text = FCU
  - 7. Blower Coils: Text = BC
  - 8. Coils: Text = C
  - 9. Heat Pumps: Text = HP
  - 10. Cabinet Unit Heaters: Text = CUH
  - 11. Fans: Text = F
  - 12. Damper operators: Text = D

## 3.9 VALVE-SCHEDULE INSTALLATION

Arlington County, Virginia Architect's Project No: 563007

A. Mount valve schedule on wall in accessible location in each major equipment room.

# 3.10 WARNING-TAG INSTALLATION

A. Write required message on, and attach warning tags to, equipment and other items where required.

# 3.11 ADJUSTING

A. Relocate mechanical identification materials and devices that have become visually blocked by other work.

# 3.12 CLEANING

A. Clean faces of mechanical identification devices.

END OF SECTION 230553

Arlington County, Virginia Architect's Project No: 563007

#### SECTION 230700 - HVAC INSULATION

## PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

#### 1.2 DEFINITIONS

- A. Outdoor duct and pipe: Duct conveying untreated outside air at ambient temperature and humidity.
- B. Outdoor pipe: Pipe located outside the building insulation envelope.
- C. Supply air duct: Duct conveying air on the discharge side of an air handling unit or fan which will be delivered to a space in a building through a diffuser or connection to the return duct of another unit. Ductwork on the discharge side of a 100% outside air unit is considered to be Supply air duct.
- D. Return air duct: Duct conveying air from a space or plenum that will return to an air handling unit or energy transfer device. The air may be returned to the supply air duct after being conditioned, or it may be exhausted after passing through an energy transfer device. Typical examples of an energy transfer devices are plate heat exchangers, runaround coils, heat pipes, and energy wheels.
- E. Exhaust air duct: Duct conveying air from a space or plenum that will be exhausted from the building without being passed through an energy transfer device.
- F. Plenum: An unoccupied space or void, on the conditioned side of the building insulation and vapor barrier, being used to return conditioned air to the inlet side of a return or exhaust fan either directly or via a duct connection. An example would be a space with air handling light fixtures or openings in the ceiling used to transport air through the ceiling and then to an open duct located above the ceiling in another location.
- G. Indirectly Conditioned Space: A space having no direct conditioning but, due to air movement induced by an exhaust, or return opening, is conditioned by makeup air from an adjacent space. An example would be a small toilet. Boiler rooms, fan rooms, and mechanical rooms do not qualify as indirectly conditioned spaces.
- H. Inside the Building Insulation Envelope: For the purposes of this section, boiler rooms, fan rooms, and mechanical rooms are considered to be OUTSIDE the building insulation envelope.

## 1.3 SUBMITTALS

- A. Product Data: Identify thermal conductivity, thickness, and jackets (both factory and field applied, if any), for each type of product indicated.
- B. Shop Drawings: Show fabrication and installation details for the following:
  - 1. Detail application of removable insulation covers.
  - 2. Detail application of protective shields, saddles, and inserts at hangers for each type of insulation and hanger.

Arlington County, Virginia Architect's Project No: 563007

- 3. Detail attachment and covering of heat tracing inside insulation.
- 4. Detail insulation application at pipe expansion joints for each type of insulation.
- 5. Detail insulation application at elbows, fittings, flanges, valves, and specialties for each type of insulation.
- 6. Detail removable insulation at piping specialties, equipment connections, and access panels.
- 7. Detail application of field-applied jackets.
- 8. Detail application at linkages of control devices.
- 9. Detail field application for each equipment type.

## 1.4 QUALITY ASSURANCE

- A. Fire-Test-Response Characteristics: Insulation and related materials shall have fire-test-response characteristics indicated, as determined by testing identical products per ASTM E 84, by a testing and inspecting agency acceptable to authorities having jurisdiction. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers, with appropriate markings of applicable testing and inspecting agency.
  - 1. Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.
  - 2. Insulation Installed Outdoors: Flame-spread index of 75 or less, and smoke-developed index of 150 or less.

## 1.5 DELIVERY, STORAGE, AND HANDLING

- A. Packaging: Ship insulation materials in containers marked by manufacturer with type, grade, and maximum use temperature.
- B. Ship Insulated Piping System Components on pallets and wood supports. Securely fasten and protect from damage. Store off the ground and cover with opaque waterproof tarp to protect materials from sunlight and rain.

## 1.6 COORDINATION

- A. Coordinate size and location of supports, hangers, and insulation shields specified in Section "Hangers and Supports for HVAC Piping and Equipment."
- B. Coordinate clearance requirements with piping Installer for piping insulation, duct Installer for duct insulation, and equipment Installer for equipment insulation.
- C. Maintain clearances required for maintenance.
- D. Coordinate installation and testing of heat tracing.

## PART 2 - PRODUCTS

# 2.1 MANUFACTURERS

- A. Available Manufacturers:
  - 1. Mineral-Fiber Insulation:
    - a. CertainTeed Corporation.
    - b. Johns Manville.

Arlington County, Virginia Architect's Project No: 563007

- c. Knauf Insulation.
- d. Owens Corning.
- 2. Flexible Elastomeric Thermal Insulation:
  - a. Aeroflex USA, Inc.
  - b. Armacell, LLC.
  - c. K-Flex USA.
  - d. Rubatex Corp.
- B. Comply with requirements in Part 3 schedule articles for where insulating materials shall be applied.
- C. Products shall not contain asbestos, lead, mercury, or mercury compounds.
- D. Products that come in contact with stainless steel shall have a leachable chloride content of less than 50 ppm when tested according to ASTM C 871.
- E. Insulation materials for use on austenitic stainless steel shall be qualified as acceptable according to ASTM C 795.
- F. Foam insulation materials shall not use CFC or HCFC blowing agents in the manufacturing process.
- G. Duct Liner: Refer to specification section "Metal Ducts"
- H. Mineral-Fiber Board: Glass fibers bonded with a thermosetting resin. Comply with ASTM C 612, Type IB, with factory applied FSK Jacket. Meet the requirements of ASTM C 1290, Type III, inorganic glass fibers bonded by a thermosetting resin to maximum service temperature of 250°F. Faced insulation shall not exceed 25 Flame Spread, 50 Smoke Developed when tested in accordance with ASTM E84.
- I. Semi-Rigid Mineral-Fiber Board: Glass fibers bonded with a thermosetting resin. Comply with ASTM C 1136, Type I, II, III, & IV with factory applied all-service jacket (ASJ) or Type II, IV with factory applied Foil Scrim Kraft (FSK) jacket.
- J. Mineral-Fiber Blanket with Factory Applied FSK Jacket: Meet the requirements of ASTM C 1290, Type III, inorganic glass fibers bonded by a thermosetting resin with a multi-purpose foil-scrim kraft (FSK) jacket to maximum service temperature of 250°F. FSK shall meet the requirements of ASTM C 1136, Type II, when surface burning characteristics are determined in accordance with ASTM E 84 with the foil surface of the material exposed to the flame as it is in the final composite. Composite (insulation, facing and adhesive) shall not exceed 25 Flame Spread, 50 Smoke Developed when tested in accordance with ASTM E 84. Insulation properties shall be as follows:
  - 1. Thickness: 1-1/2"
    - a. Density: 0.75 pcf
    - b. Minimum uncompressed R value: 5.1
    - c. Minimum installed R value assuming 25% compression: 4.2
  - 2. Thickness: 2"
    - a. Density: 1.0 pcf
    - b. Minimum uncompressed R value: 7.4
    - c. Minimum installed R value assuming 25% compression: 6.0

Arlington County, Virginia Architect's Project No: 563007

- 3. Alternate to 2" 1.0 pcf: Thickness: 2.2"
  - a. Density: 0.75 pcf
  - b. Minimum uncompressed R value: 7.4
  - c. Minimum installed R value assuming 25% compression: 6.0
- 4. Thickness: 3"
  - a. Density: 0.75 pcf
  - b. Minimum uncompressed R value: 10.2
  - c. Minimum installed R value assuming 25% compression: 8.3
- K. Medium Temperature Mineral-Fiber Blanket for Operating Temperatures from 250 to 850 deg F: Glass fibers bonded with a thermosetting resin. Comply with ASTM C 553, Type II, without facing and with all-service jacket manufactured from kraft paper, reinforcing scrim, aluminum foil, and vinyl film.
- L. High Temperature Mineral-Fiber Blanket for Temperatures above 850 deg F: Glass fibers bonded with a thermosetting resin. Comply with ASTM C 553, Type V, without facing and with all-service jacket manufactured from kraft paper, reinforcing scrim, aluminum foil, and vinyl film.
- M. Mineral-Fiber Pipe Insulation: Glass fibers bonded with a thermosetting resin complying with the following:
  - 1. Preformed Pipe Insulation: Comply with ASTM C 547, Type 1, with factory-applied, all-purpose, vapor-retarder jacket.
  - 2. Semi-Rigid Mineral-Fiber Board: Glass fibers bonded with a thermosetting resin. Comply with ASTM C 1136, Type I, II, III, IV with factory applied all-service jacket (ASJ) or Type II, IV with factory applied Foil Scrim Kraft (FSK) jacket.
  - 3. Blanket Insulation: Comply with ASTM C 553, Type II, without facing.
  - 4. Fire-Resistant Adhesive: Comply with MIL-A-3316C in the following classes and grades:
    - a. Class 1, Grade A for bonding glass cloth and tape to unfaced glass-fiber insulation, for sealing edges of glass-fiber insulation, and for bonding lagging cloth to unfaced glass-fiber insulation.
    - b. Class 2, Grade A for bonding glass-fiber insulation to metal surfaces.
  - 5. Vapor-Retarder Mastics: Fire- and water-resistant, vapor-retarder mastic for indoor applications. Comply with MIL-C-19565C, Type II.
  - 6. Mineral-Fiber Insulating Cements: Comply with ASTM C 195.
  - 7. Expanded or Exfoliated Vermiculite Insulating Cements: Comply with ASTM C 196.
  - 8. Mineral-Fiber, Hydraulic-Setting Insulating and Finishing Cement: Comply with ASTM C 449/C 449M.
- N. Flexible Elastomeric: Closed-cell, sponge- or expanded-rubber materials. Comply with ASTM C 534, Type I for tubular materials and Type II for sheet materials.
  - 1. Adhesive: As recommended by insulation material manufacturer.
  - 2. Ultraviolet-Protective Coating: As recommended by insulation manufacturer.

## 2.2 FIELD-APPLIED JACKETS

- A. General: ASTM C 921, Type 1, unless otherwise indicated.
- B. Glass Cloth: Woven glass-fiber fabric, plain weave, minimum 8 ounces per square yard.

Arlington County, Virginia Architect's Project No: 563007

- C. Foil and Paper Jacket: Laminated, glass-fiber-reinforced, flame-retardant kraft paper and aluminum foil.
- D. PVC Jacket: High-impact, ultraviolet-resistant PVC; 20 mils thick; roll stock ready for shop or field cutting and forming.
  - 1. Adhesive: As recommended by insulation material manufacturer.
  - 2. PVC Duct Jacket Color: White or gray.
  - 3. PVC Pipe Jacket Color: Color-code piping jackets based on materials contained within the piping system.
- E. Aluminum Jacket: Deep corrugated sheets manufactured from aluminum alloy complying with ASTM B 209, and having an integrally bonded moisture barrier over entire surface in contact with insulation. Factory cut and rolled to indicated sizes. Comply with ASTM B 209, 3003 alloy, H-14 temper.
  - 1. Finish and Thickness: Stucco-embossed finish, 0.016 inch thick.
  - 2. Moisture Barrier: 1-mil-thick, heat-bonded polyethylene and kraft paper.
  - 3. Elbows: Preformed, 45- and 90-degree, short- and long-radius elbows; same material, finish, and thickness as jacket.
- F. Stainless-Steel Jacket: Deep corrugated sheets of stainless steel complying with ASTM A 666, Type 304 or 316; 0.10 inch thick; and roll stock ready for shop or field cutting and forming to indicated sizes.
  - 1. Moisture Barrier: 1-mil- thick, heat-bonded polyethylene and kraft paper.
  - 2. Elbows: Gore type, for 45- and 90-degree elbows in same material, finish, and thickness as jacket.
  - 3. Jacket Bands: Stainless steel, Type 304, 3/4 inch wide.
- G. Heavy PVC Pipe Fitting Covers: Factory-fabricated fitting covers manufactured from 30-milthick, high-impact, ultraviolet-resistant PVC.
  - 1. Shapes: 45- and 90-degree, short- and long-radius elbows, tees, valves, flanges, reducers, end caps, soil-pipe hubs, traps, mechanical joints, and P-trap and supply covers for lavatories for the disabled.
  - 2. Adhesive: As recommended by insulation material manufacturer.
- H. Standard PVC Pipe Fitting Covers: Factory-fabricated fitting covers manufactured from 20-mil-thick, high-impact, ultraviolet-resistant PVC.
  - 1. Shapes: 45- and 90-degree, short- and long-radius elbows, tees, valves, flanges, reducers, end caps, soil-pipe hubs, traps, mechanical joints, and P-trap and supply covers for lavatories for the disabled.
  - 2. Adhesive: As recommended by insulation material manufacturer.

# 2.3 REMOVABLE INSULATION COVERS

- A. Pre-manufactured easily removable insulation cover/blanket intended for insulation of equipment and devices requiring periodic maintenance.
- B. For chilled water pumps, provide min 22-gauge stainless steel box around suction diffuser and pump housing with 2" thick close cell elastomeric insulation liner adhered to inside of box. The box shall be designed to be in two (2) halves with latching clips/ latches for easy removal and re-installation. Where the two halves come together, there should be gasketing material for

Arlington County, Virginia Architect's Project No: 563007

tight seal and along base. Alternative acceptable approaches are the use of pump insulation covers manufactured by Fit Tight Covers design for removable pump insulation covers.

## 2.4 ACCESSORIES AND ATTACHMENTS

- A. Glass Cloth and Tape: Comply with MIL-C-20079H, Type I for cloth and Type II for tape. Woven glass-fiber fabrics, plain weave, presized a minimum of 8 oz./sq. yd..
  - 1. Tape Width: 4 inches.
- B. Bands: 3/4 inch wide, in one of the following materials compatible with jacket:
  - 1. Stainless Steel: ASTM A 666, Type 304; 0.020 inch thick.
  - 2. Galvanized Steel: 0.005 inch thick.
  - 3. Aluminum: 0.007 inch thick.
  - 4. Brass: 0.010 inch thick.
  - 5. Nickel-Copper Alloy: 0.005 inch thick.
- C. Wire: 0.080-inch, nickel-copper alloy; 0.062-inch, soft-annealed, stainless steel; or 0.062-inch, soft-annealed, galvanized steel.
- D. Weld-Attached Anchor Pins and Washers: Copper-coated steel pin for capacitor-discharge welding and galvanized speed washer. Pin length sufficient for insulation thickness indicated.
  - 1. Welded Pin Holding Capacity: 100 lb for direct pull perpendicular to the attached surface.
- E. Adhesive-Attached Anchor Pins and Speed Washers: Galvanized steel plate, pin, and washer manufactured for attachment to duct, pipe, plenum and breeching with adhesive. Pin length sufficient for insulation thickness indicated.
  - 1. Adhesive: Recommended by the anchor pin manufacturer as appropriate for surface temperatures of ducts, pipes, plenums, and breechings; and to achieve a holding capacity of 100 lb. for direct pull perpendicular to the adhered surface.
- F. Self-Adhesive Anchor Pins and Speed Washers: Galvanized steel plate, pin, and washer manufactured for attachment to duct, pipe, and plenum with adhesive. Pin length sufficient for insulation thickness indicated.

## 2.5 VAPOR RETARDERS

A. Mastics: Materials that are compatible with insulation materials, jackets, and substrates.

# 2.6 REMOVABLE INSULATION COVERS

A. Pre-manufactured easily removable insulation cover/blanket intended for insulation of equipment and devices requiring periodic maintenance.

## PART 3 - EXECUTION

#### 3.1 EXAMINATION

A. Examine substrates and conditions for compliance with requirements for installation and other conditions affecting performance of insulation application.

Arlington County, Virginia Architect's Project No: 563007

B. Proceed with installation only after unsatisfactory conditions have been corrected.

#### 3.2 PREPARATION

A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

# 3.3 GENERAL APPLICATION REQUIREMENTS

- A. Apply insulation materials, accessories, and finishes according to the manufacturer's written instructions; with smooth, straight, and even surfaces; and free of voids throughout the length of ducts, piping, and fittings.
- B. Refer to schedules at the end of this Section for materials, forms, jackets, and thickness required for each system.
- C. Use accessories compatible with insulation materials and suitable for the service. Use accessories that do not corrode, soften, or otherwise attack insulation or jacket in either wet or dry state.
- D. Apply multiple layers of insulation with longitudinal and end seams staggered.
- E. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.
- F. Seal joints and seams with vapor-retarder mastic on insulation indicated to receive a vapor retarder.
- G. Keep insulation materials dry at all times. Insulation that becomes wet or is otherwise damaged beyond repair, shall be removed immediately and replaced. Replacement material and installation shall be in accordance with these specifications.
- H. Apply insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by the insulation material manufacturer.
- I. Apply insulation with the minimum number of joints practical.
- J. Apply insulation over fittings, valves, and specialties, with continuous thermal and vaporretarder integrity, unless otherwise indicated.
- K. Refer to special instructions for applying insulation over fittings, valves, and specialties.
- L. Hangers and Anchors: Where vapor retarder is indicated, seal penetrations in insulation at hangers, supports, anchors, and other projections with vapor-retarder mastic.
  - 1. Apply insulation continuously through hangers and around anchor attachments.
  - 2. For insulation application where vapor retarders are indicated, extend insulation on anchor legs at least 12 inches from point of attachment to pipe and taper insulation ends. Seal tapered ends with a compound recommended by the insulation material manufacturer to maintain vapor retarder.
  - 3. Install insert materials and apply insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by the insulation material manufacturer.
  - 4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect the jacket from tear or puncture by the hanger, support, and shield.

Arlington County, Virginia Architect's Project No: 563007

- M. Insulation Terminations: For insulation application where vapor retarders are indicated, seal ends with a compound recommended by the insulation material manufacturer to maintain vapor retarder.
- N. Apply insulation with integral jackets as follows:
  - 1. Pull jacket tight and smooth.
  - 2. Joints and Seams: Cover with tape and vapor retarder to maintain vapor seal.
  - 3. Vapor-Retarder Mastics: Where vapor retarders are indicated, apply mastic on seams and joints and at ends adjacent to duct flanges, pipe joints, and fittings.
- O. Cut insulation according to manufacturer's written instructions to prevent compressing insulation to less than 75 percent of its nominal thickness.
- P. Install vapor-retarder mastic on ducts, pipes, plenums, and equipment.
  - 1. Ducts, pipes, plenums, and equipment with Vapor Retarders: Overlap insulation facing at seams and seal with vapor-retarder mastic and pressure-sensitive tape having same facing as insulation. Repair punctures, tears, and penetrations with tape and mastic to maintain vapor-retarder seal.
  - 2. Ducts, pipes, plenums, and equipment without Vapor Retarders: Overlap insulation facing at seams and secure with outward clinching staples and pressure-sensitive tape having same facing as insulation.
- Q. Roof Penetrations: Apply insulation for interior applications to a point even with top of roof flashing.
  - 1. Seal penetrations with vapor-retarder mastic.
  - 2. Apply insulation for exterior applications tightly joined to interior insulation ends.
  - 3. Seal insulation to roof flashing with vapor-retarder mastic.
- R. Interior Wall and Partition Penetrations: Apply insulation continuously through walls and partitions, except fire-rated walls and partitions.
- S. Fire-Rated Wall and Partition Penetrations: Terminate insulation at fire/smoke damper sleeves for fire-rated wall and partition penetrations.
- T. Floor Penetrations: Terminate insulation at underside of floor assembly and at floor support at top of floor.
  - 1. For insulation indicated to have vapor retarders, taper termination and seal insulation ends with vapor-retarder mastic.

#### 3.4 MINERAL-FIBER INSULATION APPLICATION

- A. Blanket Applications for Ducts, Pipes, and Plenums: Secure blanket insulation with adhesive, and anchor pins with speed washers.
  - 1. Apply adhesives according to manufacturer's recommended coverage rates per square foot, for 100 percent coverage of duct, pipe, and plenum surfaces.
  - 2. Apply adhesive to entire circumference of ducts & pipes and to all surfaces of fittings and transitions. Adhesive may be omitted from the top of horizontal rectangular ducts.
  - 3. Install anchor pins and speed washers on sides and bottom of horizontal ducts and sides of vertical ducts as follows:

Arlington County, Virginia Architect's Project No: 563007

- a. On duct sides with dimensions 18 inches and smaller, along longitudinal centerline of duct. Space 3 inches maximum from insulation end joints, and 16 inches o.c.
- b. On duct sides with dimensions larger than 18 inches. Space 16 inches o.c. each way, and 3 inches maximum from insulation joints. Apply additional pins and clips to hold insulation tightly against surface at cross bracing.
- c. Anchor pins may be omitted from top surface of horizontal, rectangular ducts and plenums.
- d. Do not compress insulation to less than 75% of its original thickness during installation.
- 4. Install anchor pins and speed washers on sides, top, and bottom of horizontal pipes.
- 5. Impale insulation over anchors and attach speed washers.
- 6. Cut excess portion of pins extending beyond speed washers. Cover exposed pins and washers with tape matching insulation facing.
- 7. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation segment with 1/2-inch staples, 1-inch o.c., and cover with pressure-sensitive tape having same facing as insulation.
- 8. Overlap unfaced blankets a minimum of 2 inches on longitudinal seams and end joints. Secure with steel band at end joints and spaced a maximum of 18 inches o.c.
- 9. Apply insulation on rectangular duct elbows, pipe fittings, and transitions with a full insulation segment for each surface. Apply insulation on round and flat-oval duct elbows, and pipe elbows, with individually mitered gores cut to fit the elbow.
- 10. Insulate duct and pipe stiffeners, hangers, and flanges that protrude beyond the insulation surface with 6-inch- wide strips of the same material as insulation. Secure on alternating sides of stiffener, hanger, and flange with anchor pins spaced 6 inches o.c.
- 11. Apply vapor-retarder mastic to open joints, breaks, and punctures for insulation indicated to receive vapor retarder.
- B. Board Applications for Ducts, Plenums, & Equipment: Secure board insulation with adhesive and anchor pins and speed washers.
  - 1. Apply adhesives according to manufacturer's recommended coverage rates per square foot, for 100 percent coverage of duct, plenum, & equipment surfaces.
  - 2. Apply adhesive to entire circumference of ducts and to all surfaces of fittings, transitions, and equipment. Adhesive may be omitted from top surface of horizontal rectangular ducts.
  - 3. Space anchor pins as follows:
    - a. On duct & equipment sides with dimensions 18 inches and smaller, along longitudinal centerline of duct. Space 3 inches maximum from insulation end joints, and 16 inches o.c.
    - b. On duct & equipment sides with dimensions larger than 18 inches. Space 16 inches o.c. each way, and 3 inches maximum from insulation joints. Apply additional pins and clips to hold insulation tightly against surface at bracing.
    - c. Anchor pins may be omitted from top surface of horizontal, rectangular ducts and plenums.
    - d. Do not compress insulation to less than 75% of its original thickness during installation.
  - 4. Cut excess portion of pins extending beyond speed washers. Cover exposed pins and washers with tape matching insulation facing.

Arlington County, Virginia Architect's Project No: 563007

- 5. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation segment with 1/2-inch staples, 1-inch o.c., and cover with pressure-sensitive tape having same facing as insulation.
- 6. Apply insulation on rectangular duct elbows and transitions with a full insulation segment for each surface. Groove and score insulation to fit as closely as possible to outside and inside radius of elbows. Apply insulation on round and flat-oval duct elbows with individually mitered gores cut to fit the elbow.
- 7. Insulate duct and equipment stiffeners, hangers, and flanges that protrude beyond the insulation surface with 6" wide strips of the insulating materia. Secure on alternating sides of stiffener, hanger, and flange with anchor pins spaced 6 inches o.c.
- 8. Apply vapor-retarder mastic to open joints, breaks, and punctures for insulation indicated to receive vapor retarder.

## 3.5 FLEXIBLE ELASTOMERIC THERMAL INSULATION APPLICATION

- A. Apply insulation to ducts, plenums, and equipment as follows:
  - 1. Follow the manufacturer's written instructions for applying insulation.
  - 2. Seal longitudinal seams and end joints with manufacturer's recommended adhesive. Cement to avoid openings in insulation that will allow passage of air to the duct, plenum, and equipment surface.

## 3.6 FIELD-APPLIED JACKET APPLICATION

- A. Apply glass-cloth jacket, where indicated, directly over bare insulation or insulation with factory-applied jackets.
  - 1. Apply jacket smooth and tight to surface with 2-inch overlap at seams and joints.
  - 2. Embed glass cloth between two 0.062-inch- thick coats of jacket manufacturer's recommended adhesive.
  - 3. Completely encapsulate insulation with jacket, leaving no exposed raw insulation.

# 3.7 FINISHES

- A. Glass-Cloth Jacketed Insulation: Paint insulation finished with glass-cloth jacket as specified in Division 9 Section "Paints."
- B. Flexible Elastomeric Thermal Insulation: After adhesive has fully cured, apply two coats of insulation manufacturer's recommended protective coating.
- C. Color: Final color shall be as selected by Architect. Vary first and second coats to allow visual inspection of the completed Work.

#### 3.8 DIFFUSER APPLICATIONS

- A. Insulate exposed metal surfaces on top of all supply diffusers. Where diffusers are mounted in a metal pan insulate the top of the metal pan.
  - 1. Material: Mineral-Fiber Blanket Thermal Insulation with Factory Applied FSK Jacket.
  - 2. Thickness: 1 inch.
  - 3. Vapor Retarder Required: Yes.

# Arlington County, Virginia Architect's Project No: 563007

## 3.9 APPLICATIONS

- A. Insulation materials and thickness are specified at the end of this Section.
- B. Insulate all ductwork, pipe and equipment:
  - 1. Insulate ductwork in accordance with the application schedule(s) below.
  - 2. Exceptions: Unless otherwise indicated, do not apply insulation to the following systems, materials, and equipment:
    - a. Vibration-control devices.
    - b. Testing agency labels and stamps.
    - c. Nameplates and data plates.
    - d. Manholes.
    - e. Handholes.
    - f. Cleanouts.
    - g. Plastic condensate drain piping.
    - h. Pipe-mounted condensate sensors.
    - i. Return ductwork inside the building insulation envelope.
    - j. Indoor exposed return air ductwork.
    - k. Exhaust ductwork.
      - 1) Exception: Duct beginning 18" upstream of backdraft damper and continuing to building envelope insulation.
    - 1. Metal ducts with duct liner.
    - m. Factory-insulated flexible ducts.
    - n. Factory-insulated plenums, casings, terminal boxes, and filter boxes and sections.
    - o. Flexible connectors.
    - p. Access panels and doors in air-distribution systems.

## 3.10 INDOOR APPLICATION SCHEDULE

- A. Service: Condensate drain piping except plastic.
  - 1. Insulation Material: Mineral fiber preformed pipe insulation.
  - 2. Insulation Thickness: 1"
  - 3. Vapor Retarder Required: Yes.
  - 4. Finish: Finished Spaces = Painted, concealed = none.
- B. Refrigerant Suction and Hot-Gas Piping/Tubing:
  - 1. Insulation Material and Thickness:
    - a. Cellular Glass: 1-1/2 inches thick.
    - b. Flexible Elastomeric: 1 inch thick.
    - c. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.
- C. Service: Unless otherwise indicated provide the following:
  - 1. Concealed Ducts and Plenums:
    - a. Material: Mineral-Fiber Blanket.
    - b. Thickness: 2 inches.
    - c. Vapor Retarder Required: Yes.
  - 2. Ducts and Plenums in Finished Spaces:
    - a. Material: Mineral-Fiber Board.

Arlington County, Virginia Architect's Project No: 563007

- b. Thickness: 1-1/2 inches.
- c. Field-Applied Jacket: Glass cloth.
- d. Vapor Retarder Required: Yes.
- e. Paint: Color as selected by architect. Refer to section "Painting".
- D. Service: Round and flat oval, supply-air ducts, concealed and within the building insulation envelope.
  - 1. Material: Mineral-Fiber Blanket Thermal Insulation with Factory Applied FSK Jacket.
  - 2. Thickness: 1-1/2 inches.
  - 3. Vapor Retarder Required: Yes.
- E. Service: Rectangular, supply-air ducts, concealed and within the building insulation envelope.
  - 1. Material: Mineral-Fiber Blanket Thermal Insulation with Factory Applied FSK Jacket.
  - 2. Thickness: 1-1/2 inches.
  - 3. Vapor Retarder Required: Yes.
- F. Service: Round and flat oval, supply-air ducts, exposed.
  - 1. Refer to section "Metal Ducts"
- G. Service: Round and flat oval, outside-air ducts, exposed.
  - Refer to section "Metal Ducts"
- H. Service: Rectangular, supply-air ducts, in Finished Spaces.
  - 1. Material: Mineral-Fiber Board Thermal Insulation, Unfaced
  - 2. Thickness: 1-1/2 inches.
  - 3. Field-Applied Jacket: Glass cloth.
  - 4. Vapor Retarder Required: Yes.
  - 5. Paint: Color as selected by architect. Refer to section "Painting".
- I. Service: Rectangular, outside-air ducts, in Finished Spaces.
  - 1. Material: Mineral-Fiber Board Thermal Insulation, Unfaced
  - 2. Thickness: 2 inches
  - 3. Field-Applied Jacket: Glass cloth.
  - 4. Vapor Retarder Required: Yes.
  - 5. Paint: Color as selected by architect. Refer to section "Painting".

## 3.11 OUTDOOR APPLICATION SCHEDULE

- A. Insulation shall be applied after heat tracing and temperature sensors are in place and have been tested.
- B. Refrigerant Suction and Hot-Gas Piping:
  - 1. Insulation Material and Thickness:
    - a. Cellular Glass: 2 inches thick.
    - b. Flexible Elastomeric: 2 inches thick.
    - c. Mineral-Fiber, Preformed Pipe Insulation, Type I: 2 inches thick.
  - 2. Finish: Two coats of UV coating or mastic protectant recommended by the insulation manufacturer or outdoor aluminum jacket.

Arlington County, Virginia Architect's Project No: 563007

END OF SECTION 230700

Arlington County, Virginia Architect's Project No: 563007

## SECTION 232113 - HYDRONIC PIPING

#### PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

#### 1.2 SUBMITTALS

- A. Pre-submittal meeting: The contractor performing work under this section of the specifications shall attend a meeting for the purpose of coordinating with the control system. The meeting shall be held on the project site in the contractor's trailer or other location acceptable to the contractor. The contractor shall be responsible for arranging the meeting. Submittals shall be essentially complete at the time of the meeting so detailed coordination items can be discussed.
- B. Product Data: For each type of the following:
  - 1. Pressure-seal fittings.
  - 2. Valves-Include flow and pressure drop curves/information based on manufacturer's testing for calibrated-orifice balancing valves and automatic flow control valves.
  - 3. Air control devices.
  - 4. Chemical treatment.
  - 5. Hydronic specialties.

# C. [Shop Drawings:

- 1. Provide Insulated Piping System layout, elbow details, expansion loop details, anchor details, heat trace channel and pull plug details.
- 2. Provide trenching and backfill requirements.]
- D. Maintenance Data: For hydronic specialties, balancing valves, automatic flow control valves, and special-duty valves to include in maintenance manuals.

## 1.3 QUALITY ASSURANCE

A. ASME Compliance: Comply with ASME B31.9, "Building Services Piping," for materials, products, and installation. Safety valves and pressure vessels shall bear the appropriate ASME label. Fabricate and stamp air separators and expansion tanks to comply with the ASME Boiler and Pressure Vessel Code, Section VIII, Division 1.

## 1.4 COORDINATION

A. Coordinate layout and installation of hydronic piping and suspension system components with other construction, including light fixtures, HVAC equipment, fire-suppression-system components, and partition assemblies.

Arlington County, Virginia Architect's Project No: 563007

- B. Coordinate pipe sleeve installations for foundation wall penetrations.
- C. Coordinate piping installation with roof curbs, equipment supports, and roof penetrations. Roof specialties are specified in Division 7 Sections.
- D. Coordinate pipe fitting pressure classes with products specified in related Sections.
- E. Coordinate size and location of concrete bases. Cast anchor-bolt inserts into base. Concrete, reinforcement, and formwork requirements are specified in Division 3 Sections.
- F. Coordinate installation of pipe sleeves for penetrations through exterior walls and floor assemblies. Coordinate with requirements for firestopping specified in Division 7 Section "Penetration Firestopping Systems" for fire and smoke wall and floor assemblies.

## 1.5 BUILDING AUTOMATION SYSTEM COORDINATION:

A. If indicated, all wells, valves, taps, dampers, flow stations, etc. furnished under Section "Building Automation System" shall be installed under this Section.

## PART 2 - PRODUCTS

## 2.1 PERFORMANCE REQUIREMENTS

A. Hydronic piping, components, and installation shall withstand the following minimum working pressure and temperature unless otherwise indicated: 150 psig at 200 degrees F.

## 2.2 PIPING MATERIALS

A. General: Refer to Part 3 "Piping Applications" Article for applications of pipe and fitting materials.

## 2.3 COPPER TUBE AND FITTINGS

- A. Drawn-Temper Copper Tubing: ASTM B 88, Type L.
- B. DWV Copper Tubing: ASTM B 306, Type DWV.
- C. Wrought-Copper Fittings: ASME B16.22.
- D. Wrought-Copper Unions: ASME B16.22.

## 2.4 STEEL PIPE AND FITTINGS

A. Steel Pipe: ASTM A 53/A 53M, black steel with plain ends; welded and seamless, Grade B, and wall thickness as indicated in "Piping Applications" Article.

Arlington County, Virginia Architect's Project No: 563007

- B. Cast-Iron Threaded Fittings: ASME B16.4; Classes 125 and 250 as indicated in "Piping Applications" Article.
- C. Malleable-Iron Threaded Fittings: ASME B16.3, Classes 150 and 300 as indicated in "Piping Applications" Article.
- D. Malleable-Iron Unions: ASME B16.39; Classes 150, 250, and 300 as indicated in "Piping Applications" Article.
- E. Cast-Iron Pipe Flanges and Flanged Fittings: ASME B16.1, Classes 25, 125, and 250; raised ground face, and bolt holes spot faced as indicated in "Piping Applications" Article.
- F. Wrought-Steel Fittings: ASTM A 234/A 234M, wall thickness to match adjoining pipe.
- G. Wrought Cast- and Forged-Steel Flanges and Flanged Fittings: ASME B16.5, including bolts, nuts, and gaskets of the following material group, end connections, and facings:
  - 1. Material Group: 1.1.
  - 2. End Connections: Butt welding.
  - 3. Facings: Raised face.
- H. Flexible Connectors: Stainless-steel bellows with woven, flexible, bronze, wire-reinforcing protective jacket; 150-psig minimum working pressure and 250 deg F maximum operating temperature. Connectors shall have flanged or threaded-end connections to match equipment connected and shall be capable of 3/4-inch misalignment.
- I. Spherical, Rubber, Flexible Connectors: Fiber-reinforced rubber body with steel flanges drilled to align with Classes 150 and 300 steel flanges; operating temperatures up to 250 deg F and pressures up to 150 psig.
- J. Steel Pipe Nipples: ASTM A 733, made of same materials and wall thicknesses as pipe in which they are installed.

## 2.5 JOINING MATERIALS

- A. Pipe-Flange Gasket Materials: Suitable for chemical and thermal conditions of piping system contents.
  - 1. ASME B16.21, nonmetallic, flat, asbestos free, 1/8-inch maximum thickness unless otherwise indicated.
    - a. Full-Face Type: For flat-face, Class 125, cast-iron and cast-bronze flanges.
    - b. Narrow-Face Type: For raised-face, Class 250, cast-iron and steel flanges.
- B. Flange Bolts and Nuts: ASME B18.2.1, carbon steel, unless otherwise indicated.
- C. Plastic, Pipe-Flange Gasket, Bolts, and Nuts: Type and material recommended by piping system manufacturer unless otherwise indicated.
- D. Solder Filler Metals: ASTM B 32, lead-free alloys. Include water-flushable flux according to ASTM B 813.

Arlington County, Virginia Architect's Project No: 563007

- E. Brazing Filler Metals: AWS A5.8/A5.8M, BCuP Series, copper-phosphorus alloys for joining copper with copper; or BAg-1, silver alloy for joining copper with bronze or steel.
- F. Welding Filler Metals: Comply with AWS D10.12M/D10.12 for welding materials appropriate for wall thickness and chemical analysis of steel pipe being welded.
- G. Solvent Cements for CPVC Piping: ASTM F 493.
- H. Solvent Cements for PVC Piping: ASTM D 2564. Include primer according to ASTM F 656.

## 2.6 TRANSITION FITTINGS

- A. Plastic-to-Metal Transition Fittings:
  - 1. One-piece fitting with one threaded brass or copper insert and one solvent-cement-joint end of material and wall thickness to match plastic pipe material.
- B. Plastic-to-Metal Transition Unions:
  - 1. Brass or copper end, solvent-cement-joint end of material and wall thickness to match plastic pipe material, rubber gasket, and threaded union.

## 2.7 DIELECTRIC FITTINGS

- B. General Requirements: Assembly of copper alloy and ferrous materials with separating nonconductive insulating material. Include end connections compatible with pipes to be joined.
- C. Dielectric Unions:
  - 1. Available Manufacturers:
    - a. Capitol Manufacturing Company.
    - b. Matco-Norca.
    - c. Watts Water Technologies, Inc.
    - d. Zurn Industries, LLC.

# 2. Description:

- a. Standard: ASSE 1079.
- b. Pressure Rating: 150 psig.
- c. End Connections: Solder-joint copper alloy and threaded ferrous.

## 3. Description:

- a. Standard: ASSE 1079.
- b. Factory-fabricated, bolted, companion-flange assembly.
- c. Pressure Rating: 150 psig.
- d. End Connections: Solder-joint copper alloy and threaded ferrous; threaded solder-joint copper alloy and threaded ferrous.

Arlington County, Virginia Architect's Project No: 563007

# D. Dielectric-Flange Insulating Kits:

- 1. Available Manufacturers:
  - a. Advance Products and Systems, Inc.
  - b. Calpico, Inc.
  - c. Central Plastics Company.
  - d. Pipeline Seal and Insulator, Inc.

# 2. Description:

- a. Nonconducting materials for field assembly of companion flanges.
- b. Pressure Rating: 150 psig.
- c. Gasket: Neoprene or phenolic.
- d. Bolt Sleeves: Phenolic or polyethylene.
- e. Washers: Phenolic with steel backing washers.

## E. Dielectric Nipples:

- 1. Available Manufacturers:
  - a. Elster Perfection Corporation.
  - b. Grinnell Mechanical Products.
  - c. Matco-Norca.
  - d. Precision Plumbing Products, Inc.

# 2. Description:

- a. Standard: IAPMO PS 66.
- b. Electroplated steel nipple, complying with ASTM F 1545.
- c. Pressure Rating: 300 psig at 225 deg F.
- d. End Connections: Male threaded.
- e. Lining: Inert and noncorrosive, propylene.

## 2.8 VALVES

- A. Valves are specified in Division 23 Section "General-Duty Valves for HVAC Piping."
- B. Refer to Part 3 "Valve Applications" Article for applications of each valve.
- C. Calibrated Balancing Valves:
  - 1. Available Manufacturers:
    - a. NIBCO
    - b. Armstrong Pumps, Inc.
    - c. Flow Design, Inc.
    - d. Griswold Controls.
    - e. ITT Bell & Gossett; ITT Fluid Technology Corp.

Arlington County, Virginia Architect's Project No: 563007

- f. Nexus Valve.
- g. NuTech Hydronic Specialty Products
- h. Taco, Inc.
- 2. NPS 2 and Smaller: Bronze body, ball type, 125-psig working pressure, 250 deg F maximum operating temperature, and having threaded ends. Valves shall have calibrated orifice or venturi, connections for portable differential pressure meter with integral seals, and be equipped with a memory stop to retain set position.
- 3. NPS 2-1/2 and Larger: Cast-iron or steel body, ball type, 125-psig working pressure, 250 deg F maximum operating temperature, and having flanged connections. Valves shall have calibrated orifice or venturi, connections for portable differential pressure meter with integral seals, and be equipped with a memory stop to retain set position.
- D. Pressure-Reducing Valves: Diaphragm-operated, bronze or brass body with low inlet pressure check valve, inlet strainer removable without system shutdown, and noncorrosive valve seat and stem. Select valve size, capacity, and operating pressure to suit system. Valve shall be factory set at operating pressure and have capability for field adjustment.
- E. Pressure Relief Valves and Temperature & Pressure Relief Valves:
  - 1. Available Manufacturers
    - a. Amtrol, Inc.
    - b. Armstrong Pumps, Inc.
    - c. Conbraco Industries, Inc.
    - d. ITT McDonnell & Miller Div.; ITT Fluid Technology Corp.
    - e. Kunkle Valve Division.
    - f. NuTech Hydronic Specialty Products
    - g. Spence Engineering Company, Inc. Pressure-Reducing Valves:
    - h. Watts Industries, Inc.; Watts Regulators.
  - 2. Diaphragm-operated, bronze or brass body with brass and rubber, wetted, internal working parts; shall suit system pressure and heat capacity and shall comply with the ASME Boiler and Pressure Vessel Code, Section IV.

## **PART 3 - EXECUTION**

## 3.1 PIPING APPLICATIONS

- A. Heating Hot Water, Chilled Water, Heat Pump Loop Water, and Condenser Water 2" and Smaller:
  - 1. Aboveground shall be either:
    - a. Type L drawn-temper copper tubing with wrought-copper fittings and soldered joints.
    - b. Schedule 40 steel pipe; Class 125 cast iron or Class 150 malleable iron fittings; cast iron flanges and flange fittings; and threaded joints.
  - 2. Belowground and below slabs:

Arlington County, Virginia Architect's Project No: 563007

- B. Type K annealed-temper copper tubing, wrought-copper fittings, and soldered joints. Use the fewest possible joints.
- C. Heating Hot Water, Chilled Water, Heat Pump Loop Water, and Condenser Water 2-1/2" and Larger:
  - 1. Inside building and aboveground:
    - a. Schedule 40 steel pipe, wrought steel fittings and wrought cast or forged steel flanges and flange fittings, and welded and flanged joints.
    - b. Type L drawn-temper copper tubing, wrought copper fittings, and soldered joints or mechanical-joint couplings.
  - 2. Belowground and below slabs:
    - a. Type K annealed-temper copper tubing, wrought-copper fittings, and soldered joints. Use fewest joints possible.
    - b. Schedule 80 CPVC plastic pipe and fittings and solvent-welded joints.

## 3.2 VALVE APPLICATIONS

- A. General-Duty Valve Applications: Unless otherwise indicated, use the following valve types:
  - 1. Shutoff Duty: Ball, and butterfly valves.
  - 2. Throttling Duty: Ball, and butterfly valves.
- B. Install shutoff duty valves at each branch connection to supply mains, unless only one piece of equipment is connected in the branch lines, and at supply connections to each piece of equipment. Install manual flow control device where indicated at branch piping.
- C. Install Automatic Flow Control Valves in the return water line of each heating or cooling element, each piece of equipment, and as indicated.
- D. Install check valves at each pump discharge and elsewhere to control flow direction.
- E. Install safety valves on hot-water generators and as required by the ASME Boiler and Pressure Vessel Code. Install safety-valve discharge piping without valves. Comply with the ASME Boiler and Pressure Vessel Code, Section VIII, Division 1.
- F. Install pressure-reducing valves on makeup water piping to regulate system pressure.

## 3.3 PIPING INSTALLATIONS

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Install piping as indicated unless deviations to layout are approved in writing on Coordination Drawings.
- B. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.

Arlington County, Virginia Architect's Project No: 563007

- C. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- D. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- E. Install piping to permit valve servicing.
- F. Install piping at indicated slopes.
- G. Install piping free of sags and bends.
- H. Install fittings for changes in direction and branch connections.
- I. Install piping to allow application of insulation.
- J. Select system components with pressure rating equal to or greater than system operating pressure.
- K. Install groups of pipes parallel to each other, spaced to permit applying insulation and servicing of valves.
- L. Install drains, consisting of a tee fitting, NPS 3/4 ball valve, and 8" NPS 3/4 threaded nipple with cap, at low points in piping system mains and elsewhere as required for system drainage.
- M. Install piping at a uniform grade of 0.2 percent upward in direction of flow.
- N. Install branch connections to mains using tee fittings in main pipe, with the branch connected to the bottom of the main pipe. For up-feed risers, connect the branch to the top of the main pipe.
- O. Install unions in piping, NPS 2 and smaller, adjacent to valves, at final connections of equipment, and elsewhere as indicated.
- P. Install flanges in piping, NPS 2-1/2 and larger, at final connections of equipment and elsewhere as indicated.
- Q. Install all wells, valves, taps, flow stations, etc. furnished under Section "Building Automation System."
- R. Install exterior piping at a uniform grade of 0.2 percent upward in direction of flow. Interior piping may be installed level.
- S. Install condensate drain piping at a minimum uniform slope of 1" in 10'-0"in the direction of flow.
- T. Reduce pipe sizes using concentric reducers, or eccentric reducers installed with level side up.
- U. Provide branch connections with the takeoff coming off the top of the main.
- V. Install strainers on supply side of each control valve, pressure-reducing valve, solenoid valve, in-line pump, and as indicated. Install 3/4" diameter by 8" long nipple and ball valve in

Arlington County, Virginia Architect's Project No: 563007

blowdown connection of strainers 3/4" and larger. Match size of strainer blow-down connection for strainers smaller than 3/4".

- W. Provide seal around piping penetrations of full height interior walls, both rated and non-rated, that occur above ceilings. Refer to Section 079200 Joint Sealants.
- X. Where piping penetrates a non-fire-resistance-rated floor or floor/ceiling assembly or ceiling membrane of a non-fire-resistance-rated roof/ceiling assembly, provide the following:
  - 1. For noncombustible piping that connects not more than five stories, protect the annular space around the piping with an approved, noncombustible material to resist the free passage of flame and the products of combustion or with a tested and classified throughpenetration firestop system.
  - 2. For piping that connects not more than two stories, protect the annular space around the piping with an approved, noncombustible material to resist the free passage of flame and the products of combustion.
  - 3. For piping that penetrates a non-rated wall, protect the annular space around the penetrating piping with an approved, non-combustible materials that resists the free passage of flame and the products of combustion.

## 3.4 PIPE JOINT CONSTRUCTION

- A. Join pipe and fittings according to the following requirements and Division 23 Sections specifying piping systems.
- B. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
- C. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.
- D. Soldered Joints: Apply ASTM B 813, water-flushable flux to tube end. Construct joints according to ASTM B 828 or CDA's "Copper Tube Handbook," using lead-free solder alloy complying with ASTM B 32.
- E. Brazed Joints: Construct joints according to AWS's "Brazing Handbook," "Pipe and Tube" Chapter, using copper-phosphorus brazing filler metal complying with AWS A5.8.
- F. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
  - 1. Apply appropriate tape or thread compound to external pipe threads.
  - 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are damaged.
  - 3. Damaged Welds: Do not use pipe sections that have cracked or open welds.
- G. Flanged Joints: Select appropriate gasket material, size, type, and thickness for service application. Install gasket concentrically positioned.

## 3.5 HANGERS AND SUPPORTS

Arlington County, Virginia Architect's Project No: 563007

- A. Hanger, support, and anchor devices are specified in Division 23 Section "Hangers and Supports." Comply with requirements below for maximum spacing of supports.
- B. Install hangers for steel piping with the following maximum spacing and minimum rod sizes:
  - 1. <sup>3</sup>/<sub>4</sub>": Maximum span, 7'-0"; minimum rod size, <sup>1</sup>/<sub>4</sub>".
  - 2. 1": Maximum span, 7'-0"; minimum rod size, ½".
  - 3. 1½": Maximum span, 9'-0"; minimum rod size, 3/8".
  - 4. 2": Maximum span, 10'-0"; minimum rod size, 3/8".
  - 5. 2½": Maximum span, 11'-0"; minimum rod size, 3/8".
  - 6. 3": Maximum span, 12'-0"; minimum rod size, 3/8".
  - 7. 4": Maximum span, 14'-0"; minimum rod size, ½".
  - 8. 6": Maximum span, 17'-0"; minimum rod size, ½".
  - 9. 8": Maximum span, 19'-0"; minimum rod size, 5/8".
  - 10. 10": Maximum span, 20'-0"; minimum rod size, <sup>3</sup>/<sub>4</sub>".
  - 11. 12": Maximum span, 23'-0"; minimum rod size, 7/8".
  - 12. 14": Maximum span, 25'-0"; minimum rod size, 1".
  - 13. 16": Maximum span, 27'-0"; minimum rod size, 1".
  - 14. 18": Maximum span, 28'-0"; minimum rod size, 11/4".
  - 15. 20": Maximum span, 30'-0"; minimum rod size, 11/4".
- C. Where hangers for steel piping are to be suspended from open-web steel joists, install hangers at maximum spacing that will result in hanger loads that comply with the requirements on the structural drawings.
- D. Install hangers for copper piping with the following maximum spacing and minimum rod sizes:
  - 1. 3/4": Maximum span, 5'-0"; minimum rod size, 1/4".
  - 2. 1": Maximum span, 6'-0"; minimum rod size, ½".
  - 3. 1½": Maximum span, 8'-0"; minimum rod size, 3/8".
  - 4. 2": Maximum span, 8'-0"; minimum rod size, 3/8".
  - 5. 2½": Maximum span, 9'-0"; minimum rod size, 3/8".
  - 6. 3": Maximum span, 10'-0"; minimum rod size, 3/8".
- E. Plastic Piping Hanger Spacing: Space hangers according to pipe manufacturer's written instructions for service conditions. Avoid point loading. Space and install hangers with the fewest practical rigid anchor points.
- F. Support vertical runs at roof, at each floor, and at 10-foot intervals between floors.
- Where changes in direction or tees occur, place hangers 1/3 of the maximum allowed spacing distance from the change in direction or tee (i.e. if the maximum span is 12 feet, the hanger shall be 4feet from the change in direction or tee). Pipe shall be supported from both sides of a change in direction.

# 3.7 HYDRONIC SPECIALTIES INSTALLATION

A. Install manual air vents at high points in piping, at coils, and elsewhere as required for system air venting.

HYDRONIC PIPING 232113 - 10

Arlington County, Virginia Architect's Project No: 563007

- B. [Install automatic air vents in mechanical equipment rooms only at high points of system for air venting.]
- C. Install in-line air separators in pump suction lines. Install piping to compression tank with a 2 percent minimum upward slope toward tank.
  - 1. Install drain valve on units NPS 2 and larger.

# 3.8 TERMINAL EQUIPMENT CONNECTIONS

- A. Size for supply and return piping connections shall be <sup>3</sup>/<sub>4</sub>" or match equipment connection size or as indicated on the drawings, whichever is greater.
- B. Install control valves in accessible locations near connected equipment.
- C. Install ports for pressure and temperature gages at equipment and coil inlet and outlet connections.

# 3.9 FIELD QUALITY CONTROL

- A. Prepare hydronic piping according to ASME B31.9 and as follows:
  - 1. Leave joints, including welds, uninsulated and exposed for examination during testing.
  - 2. Provide temporary restraints for expansion joints that cannot sustain reactions due to test pressure. If temporary restraints are impractical, isolate expansion joints from testing.
  - 3. Flush system with clean water. Clean strainers.
  - 4. Isolate equipment from piping. If a valve is used to isolate equipment, its closure shall be capable of sealing against test pressure without damage to valve.
  - 5. Install safety valve, set at a pressure no more than one-third higher than test pressure, to protect against damage by expanding liquid or other source of overpressure during test.
- B. Perform the following tests on hydronic piping:
  - 1. Use ambient temperature water as a testing medium unless there is risk of damage due to freezing. Another liquid that is safe for workers and compatible with piping may be used.
  - 2. While filling system, use vents installed at high points of system to release trapped air. Use drains installed at low points for complete draining of liquid.
  - 3. Check expansion tanks to determine that they are not air bound and that system is full of water.
  - 4. Subject piping system to hydrostatic test pressure that is not less than 1.5 times the design pressure. Test pressure shall not exceed maximum pressure for any vessel, pump, valve, or other component in system under test.
  - 5. After hydrostatic test pressure has been applied for at least 10 minutes, examine piping, joints, and connections for leakage. Eliminate leaks by tightening, repairing, or replacing components and repeat hydrostatic test until there are no leaks.
  - 6. Prepare written report of testing.

## 3.10 ADJUSTING

HYDRONIC PIPING 232113 - 11

Arlington County, Virginia Architect's Project No: 563007

- A. Mark calibrated nameplates of pump discharge valves after hydronic system balancing has been completed, to permanently indicate final balanced position.
- B. Perform these adjustments before operating the system:
  - 1. Open valves to fully open position. Close coil bypass valves.
  - 2. Check pump for proper direction of rotation.
  - 3. Set automatic fill valves for required system pressure.
  - 4. Check air vents at high points of system and determine if all are installed and operating freely (automatic type), or bleed air completely (manual type).
  - 5. Set temperature controls so all coils and equipment are calling for full flow.
  - 6. Check and set equipment operating temperatures to design requirements.
  - 7. Lubricate motors and bearings.

## 3.11 CLEANING

A. Remove and clean or replace strainer screens. After cleaning and flushing hydronic piping systems, but before balancing, remove disposable fine-mesh strainers.

END OF SECTION 232113

HYDRONIC PIPING 232113 - 12

Arlington County, Virginia Architect's Project No: 563007

#### SECTION 233113 - METAL DUCTS

# PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

# 1.2 PERFORMANCE REQUIREMENTS

- A. Seal all ducts to seal class A as defined in SMACNA's HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005:
  - 1. Seal all longitudinal joints.
  - 2. Seal all transverse joints.
  - 3. Seal all penetrations.
- B. Seal Class: A
- C. Duct Construction: Duct construction, including sheet metal thicknesses, seam and joint construction, reinforcements, and hangers and supports, shall comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005" and performance requirements and design criteria indicated in "Duct Schedule" Article.
- D. Liner Airstream Surfaces: Liner surfaces in contact with the airstream shall comply with ASHRAE 62.1-2007, paragraph 5.5.
- E. Cleanliness: All factory fabricated duct shall be cleaned with a non-toxic, biodegradable cleaner/degreaser and shall be shrink wrapped prior to shipment.

## 1.3 ABBREVIATIONS

- A. BAS Building Automation System
- B. NRTL Nationally Recognized Testing Laboratory
- C. SMACNA Sheet Metal and Air Conditioning Contractors' National Association
- D. WC Water Column

#### 1.4 DEFINITIONS:

- A. Duct System: For the purposes of this section "duct system" shall mean all metal supply, return, and exhaust duct and fittings between the air moving device and the space.
- B. Low Pressure: Plus two (2.0) inches WC to minus one (1.0) inches WC
- C. Medium Pressure: More than two (2.0) inches WC to plus ten (10.0) inches WC or more than minus one (1.0) inch to minus ten (10.0) inches WC
- D. High Pressure: More than plus or minus ten (10.0) inches WC.

Arlington County, Virginia Architect's Project No: 563007

## 1.5 SUBMITTALS

- A. Product Data / Documentation: For each of the following:
  - 1. Sheet metal thicknesses.
  - 2. Liners and adhesives.
  - 3. Pre-manufactured ductwork.
  - 4. Sealants and gaskets.
  - 5. VOC content for adhesives and sealants.

# 1.6 QUALITY ASSURANCE

- A. Provide work in compliance with applicable Building Code requirements.
- B. Welding Qualifications: Qualify procedures and personnel according to the following:
- C. AWS D1.1/D1.1M, "Structural Welding Code Steel," for hangers and supports.
- D. AWS D1.2/D1.2M, "Structural Welding Code Aluminum," for aluminum supports.
- E. AWS D9.1M/D9.1, "Sheet Metal Welding Code," for duct joint and seam welding.
- F. ASHRAE Compliance: Comply with applicable requirements in ASHRAE 62.1-2007, Section 5 "Systems and Equipment" and Section 7 "Construction and System Start-Up."
- G. ASHRAE/IESNA Compliance: Comply with applicable requirements in ASHRAE/IESNA 90.1-2007, Section 6.4.4 "HVAC System Construction and Insulation."

## PART 2 - PRODUCTS

## 2.1 SINGLE-WALL RECTANGULAR DUCTS AND FITTINGS

- A. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005" based on indicated static-pressure class unless otherwise indicated.
- B. Transverse Joints: Select joint types and fabricate according to SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Figure 2-1, "Transverse (Girth) Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005."
- C. Longitudinal Seams: Select seam types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible, Third Edition 2005," Figure 2-2, "Rectangular Duct/Longitudinal Seams" for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible, Third Edition 2005."
- D. Elbows, Transitions, Offsets, Branch Connections, and Other Duct Construction: Select types and fabricate according to SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Chapter 4, "Fittings and Other Construction," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other

Arlington County, Virginia Architect's Project No: 563007

provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible, Third Edition 2005."

## 2.2 LOW PRESSURE SINGLE-WALL ROUND DUCTS AND FITTINGS –CONCEALED

- A. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Chapter 3, "Round, Oval, and Flexible Duct," based on specified static-pressure class unless otherwise indicated.
- B. Snap-Lock Round Pipe
  - 1. Meet SMACNA Class 3 Leakage standards and SMACNA Seal Class A with external, mastic duct sealant. Provide ASTM A653 galvanized steel, 26 gauge, G-60 coating. Product shall meet pressure rating of -1" wg to +2" wg.
  - 2. Available Manufacturers:
    - a. GreenSeam Industries (GreenSeam Plus)

## C. Manufacturers:

- 1. Eastern Sheet Metal.
- 2. Hamlin Sheet Metal.
- 3. Linx Industries Lindab.
- 4. McGill AirFlow LLC.
- 5. MKT Metal Manufacturing
- 6. Semco, Inc.
- 7. Sheet Metal Connectors, Inc.
- 8. Spiral Manufacturing Co., Inc.
- D. Transverse Joints: Select joint types and fabricate according to SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Figure 3-1, "Round Duct Transverse Joints"
  - 1. Transverse Joints in Ducts Equal to or Larger Than 48" in Diameter: Flanged.
  - 2. Gasketed, EPDM, self-sealing Joints such as Eastern Tight or Spiro Safe may be used for ducts smaller than 48" in diameter.
  - 3. Flanges may be substituted in ducts smaller than 48" in diameter.
- E. Duct support intervals, and other provisions: In accordance with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005."
- F. Longitudinal Seams: Select seam types and fabricate according to SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Figure 3-2, "Seams Round Duct and Fittings," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005."
- G. Tees and Laterals: Select types and fabricate according to SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Figure 3-5, "90° Tees and Laterals," and Figure 3-6, "Conical Tees," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005." Adjustable elbows are not permitted.

Arlington County, Virginia Architect's Project No: 563007

H. All round duct shall not be less than 26-gauge.

## 2.3 SHEET METAL MATERIALS

- A. General Material Requirements: Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005" for acceptable materials, material thicknesses, and duct construction methods unless otherwise indicated. Sheet metal materials shall be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.
- B. Galvanized Sheet Steel: Comply with ASTM A 653/A 653M.
  - 1. Galvanized Coating Designation: G90.
  - 2. Finishes for Surfaces Exposed to View: Mill phosphatized.
- C. Reinforcement Shapes and Plates: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.
- D. Where black- and galvanized-steel shapes and plates are used to reinforce aluminum ducts, isolate the different metals with butyl rubber, neoprene, or EPDM gasket materials.
- E. Tie Rods: Galvanized steel, 1/4-inch minimum diameter for lengths 36 inches or less; 3/8-inch minimum diameter for lengths longer than 36 inches.

## 2.4 DUCT LINER

A. No duct liner to be used on this project.

## 2.5 SEALANT AND GASKETS

- A. General Sealant and Gasket Requirements: Surface-burning characteristics for sealants and gaskets shall be a maximum flame-spread index of 25 and a maximum smoke-developed index of 50 when tested according to UL 723.
  - 1. Materials: Certified by a NRTL.
- B. Tape sealing systems are not permitted.
- C. Water-Based Joint and Seam Sealant:
  - 1. Application Method: Brush on.
  - 2. Solids Content: Minimum 65 percent.
  - 3. Shore A Hardness: Minimum 20.
  - 4. Water resistant.
  - 5. Mold and mildew resistant.
  - 6. VOC: Maximum 75 g/L (less water).
  - 7. Maximum Static-Pressure Class: 10-inch wg, positive and negative.
  - 8. Service: Indoor or outdoor.
  - 9. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum sheets.
  - 10. Indoor applications: Sealant with VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
  - 11. Maximum Static-Pressure Class: 10-inch wg, positive or negative.

Arlington County, Virginia Architect's Project No: 563007

- 12. Service: Indoor or outdoor.
- 13. Substrate: Compatible with galvanized sheet steel, stainless steel, or aluminum sheets.
- D. Flanged Joint Sealant: Comply with ASTM C 920.
  - 1. General: Single-component, acid-curing, silicone, elastomeric.
  - 2. Type: S.
  - 3. Grade: NS.
  - 4. Class: 25.
  - 5. Use: O.
  - 6. Indoor applications: Sealant with VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- E. Flange Gaskets: Butyl rubber, neoprene, or EPDM polymer with polyisobutylene plasticizer.

## 2.6 HANGERS AND SUPPORTS

- A. Hanger Rods: Galvanized, all-thread.
- B. Strap and Rod Sizes: Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct."
- C. Steel Cables for Galvanized-Steel Ducts: Galvanized steel complying with ASTM A 603.
- D. Steel Cables for Stainless-Steel Ducts: Stainless steel complying with ASTM A 492.
- E. Steel Cable End Connections: Cadmium-plated steel assemblies with brackets, swivel, and bolts designed for duct hanger service; with an automatic-locking and clamping device.
- F. Duct Attachments: Sheet metal screws, blind rivets, or self-tapping metal screws; compatible with duct materials.
- G. Trapeze and Riser Supports:
  - 1. Supports for Galvanized-Steel Ducts: Galvanized-steel shapes and plates.
  - 2. Supports for Stainless-Steel Ducts: Stainless-steel shapes and plates.
  - 3. Supports for Aluminum Ducts: Aluminum or galvanized steel coated with zinc chromate.

#### PART 3 - EXECUTION

# 3.1 DUCT INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of duct system. Duct locations, configurations, and arrangements were used to size ducts and calculate friction loss for airhandling equipment sizing and for other design considerations. Install duct systems as indicated unless deviations to layout are approved by Architect in writing.
- B. Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005" unless otherwise indicated.
- C. Install ducts with fewest possible joints.

Arlington County, Virginia Architect's Project No: 563007

- D. Install factory-fabricated fittings for changes in direction, size, and shape and for branch connections.
- E. Unless otherwise indicated, install ducts vertically or horizontally, and parallel or perpendicular to building lines.
- F. Install ducts close to walls, overhead construction, columns, and other structural and permanent enclosure elements of building. Maintain clearances for equipment maintenance.
- G. Install ducts with a clearance of 1 inch, plus allowance for installation of insulation at specified thickness.
- H. Do not route ducts through transformer vaults, electrical equipment rooms, elevator equipment rooms or electrical enclosures.
- I. Where ducts pass through non-fire-rated interior partitions and exterior walls and are exposed to view, cover the opening between the partition and duct or duct insulation with sheet metal flanges of same metal thickness as the duct. Overlap openings on four sides by at least 1-1/2 inches.
- J. Provide fire dampers where ducts pass through fire-rated interior partitions, fire-rated exterior walls, fire-rated floor assemblies, or fire-rated shaft enclosures.
- K. Protect duct interiors from moisture, construction debris, dust, and other foreign materials. Comply with SMACNA's "Duct Cleanliness for New Construction Guidelines."

#### 3.2 INSTALLATION OF EXPOSED DUCTWORK

- A. Protect ducts exposed in finished spaces from being dented, scratched, or damaged.
- B. Trim duct sealants flush with metal. Create a smooth and uniform exposed bead. Do not use two-part tape sealing system.
- C. Grind welds to provide smooth surface free of burrs, sharp edges, and weld splatter. When welding stainless steel with a No. 3 or 4 finish, grind the welds flush, polish the exposed welds, and treat the welds to remove discoloration caused by welding. Do not weld or grind lined ductwork.
- D. Maintain consistency, symmetry, and uniformity in the arrangement and fabrication of duct, fittings, hangers, supports, accessories, and air outlets.
- E. Repair or replace damaged sections and finished work that does not comply with these requirements.

## 3.3 DUCT SEALING

- A. Seal all ducts to seal class A as defined in SMACNA's HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005:
  - 1. Seal all longitudinal joints.
  - 2. Seal all transverse joints.
  - 3. Seal all penetrations.

Arlington County, Virginia Architect's Project No: 563007

#### 3.4 HANGER AND SUPPORT INSTALLATION

- A. Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Chapter 5, "Hangers and Supports."
- B. Building Attachments: Unless indicated otherwise, provide concrete inserts, powder-actuated fasteners, or structural-steel fasteners appropriate for construction materials to which hangers are being attached.
  - 1. Where practical, install concrete inserts before placing concrete.
  - 2. Do not use powder-actuated concrete fasteners for lightweight-aggregate concrete or for slabs less than 4 inches thick.
- C. Hanger Spacing: Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct," for maximum hanger spacing; install hangers and supports within 24 inches of each elbow and within 48 inches of each branch intersection.
- D. Hangers Exposed to View: Threaded rod and channel supports.
- E. Support vertical ducts with channel secured to the sides of the duct with welds, bolts, sheet metal screws, or blind rivets; support at each floor or at a maximum interval of 18 feet.
- F. Install upper attachments to structures. Select and size upper attachments with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

## 3.5 CONNECTIONS

- A. Make connections to equipment with flexible connectors.
- B. Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005" for branch, outlet, inlet, and terminal unit connections unless otherwise indicated.

## 3.6 PAINTING

A. Paint interior of metal ducts that are visible through registers and grilles and that do not have duct liner. Apply two coats of flat black, latex paint over a compatible galvanized-steel primer.

## 3.7 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
- B. Visually inspect, for proper seal application, all ductwork not tested prior to insulation application. Prepare inspection report.

## 3.8 START UP

A. Air Balance: Comply with requirements in Division 23 Section "Testing, Adjusting, and Balancing for HVAC."

Arlington County, Virginia Architect's Project No: 563007

## 3.9 DUCT SCHEDULE

- A. Fabricate ducts with galvanized sheet steel except as otherwise indicated and as follows:
- B. Elbow Configuration:
  - 1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Figure 4-2, "Rectangular Elbows."
    - a. Velocity less than 1500 fpm or lower:
      - 1) Radius Type RE 1. Centerline radius = 3W/2.
      - 2) Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."
      - 3) Transfer ducts indicated with mitered elbows do not require turning vanes.
    - b. Velocity 1500 fpm or Higher:
      - 1) Radius Type RE 3. Centerline radius = 3w/2 and three vanes.
      - 2) Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Figure 2-3, "Vanes and Vane Runners," and Figure 2-4, "Vane Support in Elbows."
  - 2. Round Duct: Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Figure 3-4, "Round Duct Elbows."
    - a. Minimum centerline radius-to-diameter ratio shall be 1.5 with a maximum of 5 Elbow Segments. Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Table 3-1, "Mitered Elbows." Elbows with less than a 90 degree change of direction shall have segments per Table 3-1 in SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005".
    - b. Round Elbows, 12 Inches and Smaller in Diameter: Stamped, segmented, spiral or pleated. Adjustable elbows not acceptable.
    - c. Round Elbows, 14 Inches and Larger in Diameter: Standing seam, segmented, or spiral.
  - 3. Flat Oval Duct: Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Figure 3-7, "Flat Oval Ducts" for elbows.
- C. Branch Configuration:
  - 1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Figure 4-6, "Branch Connections."
    - a. Rectangular Main to Rectangular Branch: 45-degree entry.
    - b. Rectangular Main to Round Branch: Conical or bell mouth. No flanged or spin-in fittings permitted.
  - 2. Round and Flat Oval: Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible, Third Edition 2005," Figure 3-6, "Conical Tees."
    - a. Conical fitting.
    - b. Conical saddle taps.
    - c. No 90 degree taps or 90 degree saddle taps permitted.

Arlington County, Virginia Architect's Project No: 563007

# D. Divided Flow Branches:

1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards – Metal and Flexible, Third Edition 2005, "Figure 4-5 Divided Flow Branches."

# 3.10 Duct Pressure Classes:

A. Supply, Return and Exhaust ducts: 0.5 inch WC.

END OF SECTION 233113

Arlington County, Virginia Architect's Project No: 563007

## SECTION 233300 - AIR DUCT ACCESSORIES

# PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

# 1.2 SUBMITTALS

- A. Product Data: For the following:
  - 1. Radius forming braces
  - 2. Volume dampers.
  - 3. Motorized control dampers.
  - 4. Flange connectors.
  - 5. Duct-mounted access doors.
  - 6. Flexible connectors.
  - 7. Flexible ducts.
- B. Wiring Diagrams: For power, signal, and control wiring.
- C. Operation and Maintenance Data: For air duct accessories to include in operation and maintenance manuals.

# 1.3 QUALITY ASSURANCE

- A. Comply with NFPA 90A, "Installation of Air Conditioning and Ventilating Systems," and with NFPA 90B, "Installation of Warm Air Heating and Air Conditioning Systems."
- B. Comply with AMCA 500-D testing for damper rating.
- C. Comply with SMACNA standards for manual airflow regulators (dampers).

# 1.4 EXTRA MATERIALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
  - 1. Fusible Links: Furnish quantity equal to 10 percent of amount installed. Minimum 1 of each type used.

# PART 2 - PRODUCTS

#### 2.1 MATERIALS

A. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods unless otherwise

Arlington County, Virginia Architect's Project No: 563007

- indicated. Sheet metal materials shall be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.
- B. Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible" for acceptable duct installation methods unless otherwise indicated.
- C. Galvanized Sheet Steel: Comply with ASTM A 653/A 653M.
  - 1. Galvanized Coating Designation: G90.
  - 2. Exposed-Surface Finish: Mill phosphatized.
- D. Stainless-Steel Sheets: Comply with ASTM A 480/A 480M, Type 304, and having a NO 2 finish for concealed ducts and NO 4 finish for exposed ducts.
- E. Aluminum Sheets: Comply with ASTM B 209, Alloy 3003, temper H14; with mill finish for concealed ducts and standard, 1-side bright finish for exposed ducts.
- F. Extruded Aluminum: Comply with ASTM B 221, Alloy 6063, Temper T6.
- G. Reinforcement Shapes and Plates: Galvanized-steel reinforcement where installed on galvanized sheet metal ducts; compatible materials for aluminum and stainless-steel ducts.
- H. Tie Rods: Galvanized steel, 1/4-inch minimum diameter for lengths 36 inches or less; 3/8-inch minimum diameter for lengths longer than 36 inches; compatible materials for aluminum and stainless-steel ducts.

## 2.2 RADIUS FORMING BRACES

- A. Available manufacturers:
  - 1. Titus, FlexRight (Basis of Design)
  - 2. Flexible Technologies, Inc., Thermaflex Division, FlexFlow
  - 3. Hart & Cooley, Smart Flow Elbow
- B. General: UL-2043 listed or NRTL approved product constructed of metal or plastic manufactured for use with flexible duct to form a kink free elbow using the flexible duct. Any flexible duct used in forming the elbow shall be included in the maximum permitted length. Resulting flexible duct shall comply with SMACNA HVAC Duct Construction Standards.
- C. Duct Size: 6" through 16" in diameter.
- D. Inside (Bend) Radius: Minimum of one duct diameter along centerline.
- E. Attachments: Plastic zip ties or stainless steel worm gear clamps.
- F. Support to Overhead: Shall meet SMACNA requirements. Use of specified attachments for support shall not be permitted.

## 2.3 MANUAL VOLUME DAMPERS

- A. Standard, Steel, Manual Volume Dampers:
  - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
    - a. Rossi HVAC hardware

Arlington County, Virginia Architect's Project No: 563007

- 2. Suitable for horizontal or vertical applications.
- 3. Locking Hardware Component: Everlock damper handle by Rossi.
  - a. Bracket: Cold Rolled Steel (ASTM A-1008), 18-gauge nominal thickness. Single cut and formed bracket for use with 1.5" or 2.0" insulation wrapping or any other such stand-off applications. Finished with a white Chromate plating process.
  - b. Handle and Thumb Trigger: Polyamide 66 (PA66), flame retardant, glass reinforced, "Zytel," from Dupont.
  - c. Compression Spring: Stainless steel type 302-OD 0.25 wire 0.026 free length of 7/8" (0.875").
  - d. Retaining Spring: Ext. self-lock TX-75ST-ZF Carbon Steel SAE 1074 with Zink Bright Plating. C-Scale Rockwell Hardness 47 to 51.
- 4. Blades (or Discs):
  - a. 4" to 16" Diameter single blade (or disc). ASTM-A527 LFO G90, 22 gauge reinforced to equal strength of 20-gauge material. 3/8" Full length bar fits through formed channel in center of damper blade.
- 5. Bars: 3/8" square Aluminum bar
- 6. Bearings:
  - a. Snap-in bearings by Rossi for medium and low pressure systems. Polyamide 66 (PA66), Flame Retardant, Glass Reinforced, "Zytel" by Dupont.
  - b. Clip-on bearings by Rossi for higher pressure systems. Polyamide 66 (PA66), Flame Retardant, Glass Reinforced, "Zytel" by Dupont.
  - c. B-Lined bearings by Rossi for lined duct. Polyamide 66 (PA66), Flame Retardant, Glass Reinforced, "Zytel" by Dupont.
- B. Damper Hardware for Other Dampers:
  - 1. Locking Hardware Component: Everlock damper handle by Rossi.
    - a. Bracket: Cold Rolled Steel (ASTM A-1008), 18-gauge nominal thickness of 0.0478 with tolerance range of 0.0438 to 0.0518. Single cut and formed bracket for use with 1.5" or 2.0" insulation wrapping or any other such stand-off applications. Finished with a white Chromate plating process which provides durable corrosion resistance. Auto Planting ASTM B-633 Type II (white) class FE/ZN8 or SC2 Thickness of 0.0003.
    - b. Handle and Thumb Trigger: Polyamide 66 (PA66), Flame Retardant, Glass Reinforced, "Zytel," by Dupont.
    - c. Compression Spring: Stainless Steel Type 302-OD 0.25 wire 0.026 free length of 7/8" (0.875").
    - d. Retaining Spring: Ext. Self-Lock TX-75ST-ZF Carbon Steel SAE 1074 with Zink Bright Plating. C-Scale Rockwell Hardness 47 to 51.

Arlington County, Virginia Architect's Project No: 563007

# C. Steel, Manual Volume Dampers:

- 1. Manufacturers:
  - a. Air Balance Inc.: a division of Mestek, Inc.
  - b. American Warming and Ventilating; a division of Mestek, Inc.
  - c. Elgen Manufacturing.
  - d. Greenheck Fan Corporation.
  - e. McGill AirFlow LLC.
  - f. Nailor Industries.
  - g. PCI Industries Pottorff
  - h. Ruskin Company.
- 2. Standard leakage rating, with linkage outside airstream.
- 3. Suitable for horizontal or vertical applications.
- 4. Frames:
  - a. Hat-shaped, 0.094-inch thick galvanized or 0.05-inch stainless-steel, match duct material.
  - b. Mitered and welded corners.
  - c. Flanges for attaching to walls and flangeless frames for installing in ducts.

## 5. Blades:

- a. Multiple or single blade.
- b. Opposed-blade design.
- c. Stiffen damper blades for stability.
- d. Galvanized or stainless-steel channels, match duct material.
- 6. Blade Axles: Galvanized steel or stainless steel. Dampers over 12" width/diameter shall include continuous axles. Dampers 12" and less may have non-continuous axles. Comply with SMACNA HVAC Duct Construction Standards Metal and Flexible Third Edition Figure 7-4.
- 7. Bearings:
  - a. Molded synthetic. Provide bearing at both duct wall penetrations.
- 8. Tie Bars and Brackets: Galvanized steel.

# 2.4 MOTORIZED CONTROL DAMPERS

- A. Parallel Blades shall be used for two position applications (Open or Closed) unless otherwise indicated.
  - 1. Manufacturers:
    - a. American Warming and Ventilating; a division of Mestek, Inc.
    - **b.** Arrow United Industries; a division of Mestek, Inc.
    - c. Cesco Products; a division of Mestek, Inc.
    - d. Duro Dyne Corporation.

Arlington County, Virginia Architect's Project No: 563007

- e. Flexmaster U.S.A., Inc.
- **f.** Greenheck Fan Corporation.
- **g.** McGill AirFlow LLC.
- **h.** METALAIRE, Inc.
- i. PCI Industries Pottorff
- **j.** Ruskin Company.
- k. Young Regulator Company.
- 2. Low leakage or ultra-low leakage rating, with linkage outside airstream, and having AMCA's Certified Ratings Seal for both air performance and air leakage.
- 3. Ratings:
  - **a.** Pressure Differential Range:0.0" WC 6.0" WC.
  - **b.** Velocity Range: 0 FPM to 4000 FPM.
  - **c.** Leakage:
    - 1) 6 CFM/Sq. Ft @ 4" WC.
    - 2) 3 CFM/Sq. Ft @ 1" WC.
  - **d.** Temperature: Minimum 165° F.
- 4. Frames:
  - a. Galvanized steel channels.
  - **b.** Mitered and welded corners.
- 5. Blades:
  - a. Air foil
  - **b.** Multiple blade
  - c. Maximum blade width (not including seals): 8"
  - **d.** Parallel blade design.
  - e. Galvanized steel.
  - f. Edge Seal: Silicone blade edge seals.
  - 1) Temperature Range: From a minimum of minus 50 to a maximum of plus 300 degrees F.
- 6. Blade Axles: 1/2-inch- diameter; galvanized or stainless steel.
- 7. Linkage: Galvanized or stainless steel out of airstream.
- 8. Jamb Seal: Stainless steel.
- 9. Damper Actuator: 120V, sized to open and close damper, two-position, spring closed, power open.
- 10. Bearings:
  - a. Bronze.
  - **b.** Dampers shall have axles running the full length of the damper blades shall have bearings at each end of the shaft.
  - **c.** Thrust bearings shall be located at each end of every blade.

## 2.5 FLANGE CONNECTORS

- A. Available Manufacturers:
  - 1. Ductmate Industries, Inc.
  - 2. Nexus PDQ; Division of Shilco Holdings Inc.
  - 3. Hart & Cooley, Inc.
- B. Description: Add-on or roll-formed, factory-fabricated, slide-on transverse flange connectors, gaskets, and components.

Arlington County, Virginia Architect's Project No: 563007

- C. Material: Match connecting ductwork.
- D. Gauge: 18, 20, or 24 as recommended by manufacturer or match connecting ductwork.

## 2.6 MANUFACTURED TURNING VANES

- A. Curved blades of galvanized sheet steel; support with bars perpendicular to blades set; set into vane runners suitable for duct mounting.
- B. General Requirements: Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible"; Figures 2-3, "Vanes and Vane Runners," and 2-4, "Vane Support in Elbows."
- C. Vane Construction: Single wall for ducts up to 48 inches wide and double wall for larger dimensions.

## 2.7 DUCT-MOUNTED ACCESS DOORS

- A. Available Manufacturers:
  - 1. Ductmate Industries, Inc.
  - 2. Flexmaster U.S.A., Inc.
  - 3. Greenheck Fan Corporation.
  - 4. Kees
  - 5. McGill AirFlow LLC.
- B. Duct-Mounted Access Doors: Fabricate access panels according to SMACNA's "HVAC Duct Construction Standards Metal and Flexible"; Figures 2-10, "Duct Access Doors and Panels," and 2-11, "Access Panels Round Duct."
  - 1. Door:
    - a. Double wall, rectangular.
    - b. Galvanized sheet metal with insulation fill and thickness as indicated for duct pressure class.
    - c. Hinges and Latches: 1-by-1-inch butt or piano hinge and cam latches.
    - d. Fabricate doors airtight and suitable for duct pressure class.
  - 2. Frame: Galvanized sheet steel, with bend-over tabs and foam gaskets.
  - 3. Number of Hinges and Locks:
    - a. Access Doors Less Than 12 Inches Square: No hinges and two sash locks.
    - b. Access Doors up to 18 Inches Square: Two hinges and two sash locks.
    - c. Access Doors up to 24 by 48 Inches: Three hinges and two compression latches with outside and inside handles.
    - d. Access Doors Larger Than 24 by 48 Inches: Four hinges and two compression latches with outside and inside handles.

## 2.8 FLEXIBLE CONNECTORS

- A. Do not use on smoke control/management fans. Install on all other fans and fan equipped units even when provided with internal isolation.
- B. Available Manufacturers:
  - 1. Ductmate Industries, Inc.
  - 2. Duro Dyne Corporation.

Arlington County, Virginia Architect's Project No: 563007

- 3. Ventfabrics, Inc.
- 4. Hart & Cooley, Inc.
- C. Materials: Flame-retardant or noncombustible fabrics.
- D. Coatings and Adhesives: Comply with UL 181, Class 1.
- E. Connector: Factory fabricated with a fabric strip 3½ to 4½ inches wide attached to 2 strips of 2½ to 4½ inches wide, 23 to 25 gauge "0.0269 to .0209 inch thick" galvanized sheet steel, stainless sheet steel, or aluminum sheets. Provide metal compatible with connected ducts.
- F. Indoor System, Flexible Connector Fabric: Glass fabric double-coated with neoprene.
  - 1. Minimum Weight: 26 oz/sq. yd.
  - 2. Tensile Strength: 480 lbf/inch in the warp and 360 lbf/inch in the filling.
  - 3. Service Temperature: Minus 40 to plus 200 deg F.
- G. Outdoor System, Flexible Connector Fabric: Glass fabric double-coated with weatherproof, synthetic rubber resistant to UV rays and ozone.
  - 1. Minimum Weight: 24 oz/sq. yd.
  - 2. Tensile Strength: 530 lbf/inch in the warp and 440 lbf/inch in the filling.
  - 3. Service Temperature: Minus 50 to plus 250 deg F.

#### H. Thrust Limiters:

- 1. Field fabricated cable restraints on equipment producing greater than 4.0" WC of positive pressure.
- 2. Field fabricated cable restraints as detailed. If not detailed; Provide restraint consisting of a 1/16 inch diameter vinyl coated steel cable at 24" maximum on center, attached to flange bolts on each side of flexible connector. Cable length shall be such that, when in tension, ½" of movement in the flexible connection is preserved. If flanges are not used, contractor may provide steel, stainless steel, or aluminum angles for attaching cables. Match duct material. Cables shall attach to screw or fastener holding angle to duct and shall be routed through a 3/16" diameter hole in the bracket offset approximately 1" from duct.
- 3. Direction of connector movement: Parallel with airflow, perpendicular to connector.

## 2.9 FLEXIBLE AIR DUCTS

# A. Manufacturers:

- 1. Flexmaster U.S.A., Inc. (Basis of design, Provide Type 1M)
- 2. Thermaflex
- 3. Hart & Cooley, Inc.
- B. Provide bead on connecting duct for sizes greater than 12" in diameter.
- C. Maximum Length: 6'-0" unless noted otherwise.
- D. Insulated, Flexible Duct: UL 181, Class 1 air duct with vinyl film supported by helically wound, spring-steel wire; fibrous-glass insulation; aluminized vapor-barrier film.
  - 1. Pressure Rating: 10-inch WC positive and 1.0-inch WC negative.
  - 2. Maximum Air Velocity: 5000 fpm.
  - 3. Vapor Barrier Permeance: 0.05 perm

Arlington County, Virginia Architect's Project No: 563007

- 4. Temperature Range: Minus 10 to plus 160 deg F.
- 5. Insulation R-value: 6.0
- E. Flexible Duct Connection Accessories:
  - 1. Low pressure (Not up stream of terminal units):
    - a. Clamps: Nylon strap in sizes 3 through 20", to suit duct size.
    - b. Sheet metal screws: No
    - c. Liquid adhesive: No
    - d. Tape: Yes
  - 2. Medium pressure (Up stream of terminal units):
    - a. Clamps: Stainless-steel band with cadmium-plated hex screw to tighten band with worm-gear action in sizes 3 through 20 inches, to suit duct size.
    - b. Sheet metal screws: No
    - c. Liquid adhesive: Yes
    - d. Tape: Yes

## 2.10 ACCESSORY HARDWARE

- A. Temporary Test Holes: Drilled in duct as required.
- B. Permanent Test Holes: Cast iron, or cast aluminum, to suit adjacent material, including cap and gasket. Size to allow insertion of pitot tube and other testing instruments and of length to suit wall + insulation thickness.
- C. Adhesives: High strength, quick setting, waterproof, and resistant to grease.

#### **PART 3 - EXECUTION**

#### 3.1 INSTALLATION

- A. Install duct accessories according to applicable details in SMACNA's "HVAC Duct Construction Standards Metal and Flexible."
- B. Install duct accessories of materials suited to duct materials; use galvanized-steel accessories in galvanized-steel and fibrous-glass ducts, stainless-steel accessories in stainless-steel ducts, and aluminum accessories in aluminum ducts.
- C. Radius Forming Braces:
  - 1. Connect flexible ducts to diffusers using a radius forming brace or rigid elbow. If using radius forming brace, deduct four duct diameters from the indicated maximum flexible duct length.

# D. Volume Dampers:

- 1. Install volume dampers at points on supply, return, and exhaust systems where branches extend from larger ducts. Locate at least two duct diameters from fittings and as far as possible from air outlets.
- 2. Where dampers are installed in ducts having duct liner, install dampers with hat channels of same depth as liner, and terminate liner with nosing at hat channel.

Arlington County, Virginia Architect's Project No: 563007

- 3. Set dampers to fully open position before testing, adjusting, and balancing.
  - a. Install steel volume dampers in steel ducts.
  - b. Install aluminum volume dampers in aluminum and stainless steel ducts.
- E. Install motorized control dampers where indicated.
- F. Install backdraft dampers at inlet of exhaust fans, exhaust ducts as close as possible to louver inlets, and where indicated.
- G. Connect ducts to duct silencers with flexible duct connectors.
- H. Turning Vanes:
  - 1. Install turning vanes in all duct elbows larger than 12" in height or width.
  - 2. Exceptions:
    - a. Where prohibited by the applicable code, laws, ordinances or local requirements.
    - b. Where specifically eliminated by Contract.

## I. Duct-Mounted Access Doors:

- 1. Install duct access doors on sides of ducts to allow for inspecting, adjusting, and maintaining accessories and equipment at the following locations:
  - a. On both sides of duct coils.
  - b. Upstream or downstream of duct filters.
  - c. At outdoor air intakes and mixed air plenums.
  - d. Downstream of control dampers and backdraft dampers.
  - e. Adjacent to fire or smoke dampers to allow reset and reinstallation of fusible links. Access doors for fire or smoke dampers having fusible links shall be pressure relief access doors and shall have outward operation for access doors installed upstream of dampers and inward operation for access doors installed downstream of dampers.
  - f. Upstream or downstream of duct silencers.
  - g. At control devices requiring inspection.
  - h. Elsewhere as indicated.
- 2. Install access doors with swing against duct static pressure except at fire, smoke, and combination fire and smoke dampers.
- 3. Access Door Size: Largest of the following permitted by duct dimensions:
  - a. One-Hand or Inspection Access: 8 by 5 inches.
  - b. Two-Hand Access: 12 by 6 inches.
  - c. Head and Hand Access: 18 by 10 inches.
  - d. Head and Shoulders Access: 21 by 14 inches.
  - e. Body Access: 25 by 14 inches.
  - f. Body plus Ladder Access: 25 by 17 inches.
- 4. Label access doors to indicate purpose in accordance with Section 230553 "Identification for HVAC Piping and Equipment."

## J. Flexible Connectors

1. Install flexible connectors to connect ducts to equipment- except smoke control/management equipment.

Arlington County, Virginia Architect's Project No: 563007

2. Where required, install thrust limiters at all flexible connectors consisting of a 1/16-inch diameter vinyl coated steel cable at 24" maximum on center, attached to flange bolts on each side of flexible connector. Cable length shall be such that, when in tension, 1/2" of movement in the flexible connection is preserved. If flanges are not used, provide steel, stainless steel, or aluminum angles for attaching cables. Match angle material to duct material. Cables shall attach to screw or fastener holding angle and shall be routed through a 3/16" diameter hole in the angle offset approximately 1" from duct.

# K. Connect flexible ducts to metal ducts as follows:

- 1. Low pressure (Not upstream of terminal units):
  - a. Clamps: Install in accordance with manufacturer's recommendations.
  - b. Tape: Install in accordance with manufacturer's recommendations.
  - c. Cable Ties (18 lb. strength): Install in accordance with manufacturer's recommendations.

## L. Flexible Ducts

- 1. Install flexible duct fully extended with no more than 1/2" compression or sag. Do not provide excess length for future relocation of components. Bends shall equal or exceed one duct diameter bend radius based on the inside duct diameter (no sharp corners or kinks). Tape and mastic for sealing flexible duct to metal fittings shall be listed and labeled to UL Standard 181B. Hanging straps, if used, shall include a saddle to avoid crimping the duct. For ducts 12 inches and smaller in diameter, provide a 3" wide saddle. For ducts larger than 12 inches in diameter, provide a 5" wide saddle.
- 2. Connect supply ceiling diffusers and return grilles to low pressure supply and/or return ductwork where indicated on drawings with [five] feet maximum length of flexible duct. Provide a radius forming elbow to support flexible duct at diffuser connection unless noted otherwise. Flexible duct not permitted on exhaust systems.

# 3.2 TESTING AND BALANCING

- A. Install permanent test holes at fan inlets and outlets within 6 inches of fan, where indicated, and where necessary for testing and balancing. Test holes not required at outlet of roof-mounted fans.
- B. Install temporary test hole plugs in temporary test holes. Repair insulation at temporary test holes.

# 3.3 FIELD QUALITY CONTROL

# A. Tests and Inspections:

- 1. Operate dampers to verify full range of movement without interference.
- 2. Inspect access doors. Verify that door can be opened and closed. Verify fire damper, and combination fire and smoke damper fusible links can be reset and changed. Verify fire damper, and combination fire and smoke damper doors open in the direction of air pressure (out on supply ducts and in on return and exhaust ducts).
- 3. Operate fire, smoke, and combination fire and smoke dampers to verify full range of movement, verify non-interference, and verify that the proper heat-response device is installed.
- 4. Inspect elbows for turning vanes. Verify they are installed where required.

Arlington County, Virginia Architect's Project No: 563007

- 5. Inspect turning vanes using access doors for proper and secure installation.
- 6. Operate remote damper operators prior to ceiling installation to verify full range of movement of operator and damper. Verify no interference with damper movement.

END OF SECTION 233300

Arlington County, Virginia Architect's Project No: 563007

#### SECTION 233600 - AIR TERMINAL UNITS

## PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

## 1.2 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Hangers and supports shall withstand the effects of gravity and seismic loads and stresses within limits and under conditions described in SMACNA's "HVAC Duct Construction Standards Metal and Flexible" and ASCE/SEI 7.
  - 1. Seismic Hazard Level A: Force to weight ratio = 0.48.
  - 2. Seismic Hazard Level B: Force to weight ratio = 0.30.
  - 3. Seismic Hazard Level C: Force to weight ratio = 0.15.

#### 1.3 ABBREVIATIONS

- A. BAS Building Automation System.
- B. CFM Cubic Feet per Minute.
- C. ECM Electronically Commutated Motor.
- D. PSIG Pounds per Square Inch Gauge.
- E. PSC Permanent Split Capacitor
- F. SCR Silicon Controlled Rectifier.
- G. VA Volt Amps. (A measure of transformer power)

#### 1.4 SUBMITTALS

A. Pre-submittal Meeting: A representative of the manufacturer producing equipment being provided under this section of the specifications shall attend a meeting for the purpose of coordinating with the contractor performing work under section "Building Automation System". The meeting shall be held at a location of the Contractor's choosing. The Contractor shall arrange the meeting. Submittals shall be essentially complete at the time of the meeting so detailed coordination items can be discussed.

Arlington County, Virginia Architect's Project No: 563007

- B. Product Data: For each type of the following products, including rated capacities, furnished specialties, sound-power ratings, and accessories.
  - 1. Air terminal units.
  - 2. Liners and adhesives.
  - 3. Sealants and gaskets.
  - 4. Seismic restraint devices.
- C. Shop Drawings: For air terminal units. Include plans, elevations, sections, details, and attachments to other work.
  - 1. Detail equipment assemblies and indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
  - 2. Wiring Diagrams: For power, signal, and control wiring.
  - 3. Hangers and supports, including methods for duct and building attachment, bracing, and vibration isolation.
- D. Operation and Maintenance Data: For air terminal units to include in emergency, operation, and maintenance manuals. In addition to items specified in Division 01 Section "Operation and Maintenance Data," include the following:
  - 1. Instructions for resetting minimum and maximum air volumes.
  - 2. Instructions for adjusting software set points.

# 1.5 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. ASHRAE Compliance: Applicable requirements in ASHRAE 62.1, Section 5 "Systems and Equipment" and Section 7 "Construction and System Start-Up."

## PART 2 - PRODUCTS

## 2.1 PARALLEL FAN POWERED AIR TERMINAL UNITS

- A. Manufacturers:
  - 1. Anemostat Products.
  - 2. MetalAire, Inc.
  - 3. Nailor Industries, Inc.
  - 4. Price Industries.
  - 5. Titus.
  - 6. Trane.

Arlington County, Virginia Architect's Project No: 563007

- B. Configuration: Volume-damper assembly and fan in parallel arrangement inside unit casing with control components inside a protective metal shroud.
- C. Casing: Single wall.
  - 1. Casing Lining: Adhesive attached, 1" thick fiberglass insulation complying with UL 181 erosion requirements, and having a maximum flame spread index of 25 and a maximum smoke developed index of 50, for both insulation and adhesive, when tested according to ASTM E 84.
  - 2. Air Inlets: Round stub connections or S-slip and drive connections for duct attachment.
  - 3. Air Outlet: S-slip and drive connections.
  - 4. Access: Removable panels for access to parts requiring service, adjustment, or maintenance; with airtight gasket and quarter-turn latches.
  - 5. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1.
- D. Motorized Volume Damper: Galvanized steel with flow sensing element, peripheral gasket, and bearings. Operating range shall be 90 degrees.
- E. Velocity Sensors: Multipoint array with velocity sensors in inlet duct connection.
- F. Motor: Refer to Division 23 Section "Common Motor Requirements for HVAC Equipment."
  - 1. Type: ECM.
  - 2. Type: PSC.
  - 3. Design: Designed for speed control. Use with a SCR or other technology for fan speed adjustment. Provide means of speed control on the terminal unit by the terminal unit manufacturer.
- G. Fan:
  - 1. Type: Forward curved centrifugal.
  - 2. Isolation: Rubber in shear.
  - 3. Speed Control: Infinitely adjustable.
- H. Filters: Where return is not ducted to unit, provide 1" thick, pleated filter, MERV 8, in filter rack at terminal unit inlet.
- I. When indicated provide a Hydronic Heating Coil: Copper tube, with mechanically bonded aluminum fins spaced no closer than 0.1", tested at 300 PSIG and rated for a minimum working pressure of 200 PSIG at a maximum entering-water temperature of 220° F. Include manual air vent and drain valve.
- J. Factory mounted and wired components:
  - 1. Electrical components and BAS unit controller mounted in control box with removable cover. Incorporate single point electrical connection to power source.

Arlington County, Virginia Architect's Project No: 563007

- Control Transformer: 50 VA minimum factory mounted transformer for control voltage. Input voltage shall match the circuit provided. Coordinate output voltage with contractor performing work under Section "Building Automation System". Provide terminal strip in control box and field wiring of BAS unit controller to terminal strip. Wiring shall be as indicated.
- 3. Wiring Terminations: Fan, heat, and controls to terminal strip. Terminal lugs to match quantities, sizes, and materials of branch-circuit conductors and BAS requirements. Enclose terminal lugs in terminal box sized according to NFPA 70.
- 4. Disconnect Switch: Factory mounted fused.
- K. Control Panel Enclosure: NEMA 250, Type 1, with access panel sealed from airflow and mounted on side of unit to enclose controller furnished under Section "Building Automation System".
- L. Electronic Controls: Provide bidirectional damper, integral airflow measurement device, and transducer. Control devices shall be compatible with temperature controls specified in Section "Building Automation System" and shall comply with the following:
  - 1. Install microprocessor based controller furnished under Section "Building Automation System"
  - 2. Install damper actuator provided under this section.
  - 3. Provide airflow transducer. Output shall be compatible with controller.
- M. Control Sequence:
  - 1. As indicated in Section "Sequences of Control."

## 2.2 SERIES FAN POWERED AIR TERMINAL UNITS

- A. Manufacturers:
  - 1. Anemostat Products.
  - 2. MetalAire, Inc.
  - 3. Nailor Industries, Inc.
  - 4. Price Industries.
  - 5. Titus.
  - 6. Trane.
- B. Configuration: Volume-damper assembly and fan in series arrangement inside unit casing with control components inside a protective metal shroud for installation above a ceiling.
- C. Casing: Single wall.
  - 1. Outer Casing: Galvanized sheet steel. Manufacturer's standard thickness.
  - 2. Lining: Adhesive attached, 1" thick fiberglass insulation complying with UL 181 erosion requirements, and having a maximum flame spread index of 25 and a maximum smoke developed index of 50, for both insulation and adhesive, when tested according to ASTM E 84.

Arlington County, Virginia Architect's Project No: 563007

- 3. Air Inlets: Round stub connections or S-slip and drive connections for duct attachment.
- 4. Air Outlet: S-slip and drive connections.
- 5. Access: Removable panels for access to parts requiring service, adjustment, or maintenance; with airtight gasket and quarter-turn latches.
- 6. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1.
- 7. Air Inlets: Round stub connections or S-slip and drive connections for duct attachment.
- 8. Air Outlet: S-slip and drive connections.
- 9. Access: Removable panels for access to parts requiring service, adjustment, or maintenance; with airtight gasket and quarter-turn latches.
- D. Fan:
  - 1. Type: Forward curved centrifugal.
  - 2. Isolation: Rubber in shear.
  - 3. Speed Control: Infinitely adjustable
- E. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1.
- F. Volume Damper: Galvanized steel with flow-sensing ring and peripheral gasket and self-lubricating bearings.
- G. Velocity Sensors: Multipoint array with velocity sensors in inlet(s).
- H. Motor: Refer to Division 23 Section "Common Motor Requirements for HVAC Equipment."
  - 1. Type: ECM.
  - 2. Type: PSC.
  - 3. Design: Designed for speed control. Use with a SCR or other technology for fan speed adjustment. Provide means of speed control on the terminal unit by the terminal unit manufacturer.
- I. Filters: Where return is not ducted to unit, provide 1" thick, pleated filter, MERV 8, in filter rack at terminal unit inlet.
- J. When indicated provide a Hydronic Heating Coil: Copper tube, with mechanically bonded aluminum fins spaced no closer than 0.1", tested at 300 PSIG and rated for a minimum working pressure of 200 PSIG at a maximum entering-water temperature of 220° F. Include manual air vent and drain valve.
- K. Control Panel Enclosure: NEMA 250, Type 1, with access panel sealed from airflow and mounted on side of unit.

Arlington County, Virginia Architect's Project No: 563007

- L. Electronic Controls: Bidirectional damper operator and microprocessor based controller with integral airflow transducer. Control devices shall be compatible with temperature controls specified in Section "Building Automation System" and shall have the following features:
  - 1. Occupied and unoccupied operating mode.
  - 2. Remote reset of airflow set point.
  - 3. Adjusting and monitoring with portable terminal connected to BAS temperature sensor in space served.
  - 4. Communication with BAS specified in Section "Building Automation System".

## M. Control Sequence:

1. As indicated in Section "Sequences of Control"

## 2.3 HANGERS AND SUPPORTS

- A. Hanger Rods: Cadmium-plated steel rods, neoprene 1/8" thick washers and nuts.
  - 1. Vibration isolation washers should be used on both sides of threaded rod attachment to box to prevent vibration transmission to structure.
- B. Steel Cable End Connections: Cadmium-plated steel assemblies with brackets, swivel, and bolts designed for duct hanger service; with an automatic-locking and clamping device.
- C. Air Terminal Unit Attachments: Sheet metal screws, blind rivets, or self-tapping metal screws; compatible with duct materials.
- D. Trapeze and Riser Supports: Steel shapes and plates for units with steel casings; aluminum for units with aluminum casings.

# 2.4 SOURCE QUALITY CONTROL

- A. Label each air terminal unit with tag, nominal airflow, maximum and minimum factory-set airflows, coil type if coil is included, and ARI certification seal.
- B. For hydronic coils include hose kit and control valve shrink wrapped and labeled with terminal unit tag.

## PART 3 - EXECUTION

## 3.1 INSTALLATION

- A. Install air terminal units according to NFPA 90A, "Standard for the Installation of Air Conditioning and Ventilating Systems."
- B. Install air terminal units level and plumb. Maintain sufficient clearance for normal service and maintenance.

Arlington County, Virginia Architect's Project No: 563007

# 3.2 HANGER AND SUPPORT INSTALLATION

- A. Comply with SMACNA's "HVAC Duct Construction Standards Metal and Flexible," Chapter 5, "Hangers and Supports."
- B. Hangers Exposed to View: Threaded rod and angle or channel supports.
- C. Install upper attachments to structures. Select and size upper attachments with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

# 3.3 CONNECTIONS

- A. Install piping adjacent to air terminal unit to allow service and maintenance.
- B. Hot-Water Piping: In addition to requirements in Division 23 Section "Hydronic Piping," connect heating coils to supply with shutoff valve, strainer, control valve, and union or flange; and to return with balancing valve and union or flange.
- C. Connect ducts to air terminal units according to division 23 duct specification sections for metal and flexible ducts.
- D. Make connections to air terminal units with flexible connectors complying with requirements in Division 23 Section "Air Duct Accessories."

## 3.4 IDENTIFICATION

A. Label each air terminal unit with tag, nominal airflow, and maximum and minimum factory set airflows. Comply with requirements in Division 23 Section "Identification for HVAC Piping and Equipment" for equipment labels and warning signs/labels.

# 3.5 FIELD QUALITY CONTROL

- A. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect, test, and adjust components, assemblies, and equipment installations, including connections.
- B. Tests and Inspections:
  - 1. After installing air terminal units and after electrical circuitry has been energized, test for compliance with requirements.
  - 2. Leak Test: After installation, fill water coils and test for leaks. Repair leaks and retest until no leaks exist.
  - 3. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
  - 4. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
- C. Air terminal unit will be considered defective if it does not pass tests and inspections.

Arlington County, Virginia Architect's Project No: 563007

D. Prepare test and inspection reports.

# 3.6 STARTUP SERVICE

- A. Engage a factory-authorized service representative to perform startup service.
  - 1. Complete installation and startup checks according to manufacturer's written instructions.
  - 2. Verify that inlet duct connections are as recommended by air terminal unit manufacturer to achieve proper performance.
  - 3. Verify that controls and control enclosure are accessible.
  - 4. Verify that control connections are complete.
  - 5. Verify that nameplate and identification tag are visible.
  - 6. Verify that controls respond to inputs as specified.

# 3.7 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain air terminal units.

END OF SECTION 233600

Arlington County, Virginia Architect's Project No: 563007

## SECTION 233713 - DIFFUSERS, REGISTERS, AND GRILLES

# PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

## 1.2 SUBMITTALS

- A. Product Data: For each type of product indicated, include the following:
  - 1. Data Sheet: Indicate materials of construction, finish, mounting details, and performance data including throw, drop, static pressure drop, and noise ratings.
  - 2. Diffuser, Register, and Grille Schedule: Indicate drawing designation, room location, quantity, model number, size, and accessories furnished.

#### PART 2 - PRODUCTS

# 2.1 DIFFUSERS, GRILLES, AND REGISTERS

# A. Manufacturers:

- 1. Anemostat.
- 2. Carnes.
- 3. Krueger.
- 4. MetalAire, Inc.
- 5. Nailor Industries.
- 6. Price Industries.
- 7. Titus.
- 8. Tuttle & Bailey.

## B. General:

- 1. The basis of design for each grille register and diffuser is indicated on the drawings. The contractor shall provide equivalent products by one of the listed manufacturers.
- 2. Where aluminum construction is indicated blades and frames shall be extruded.
- 3. All trim pieces shall be mechanically fastened. Friction fit trim rings/frames shall not be provided or shall be mechanically fastened in the field. Fasteners shall not be visible.
- 4. Units located on walls in heavy use areas including but not limited to basketball courts, gymnasiums, and shop areas shall be heavy duty steel.

Arlington County, Virginia Architect's Project No: 563007

- 5. Finish: Powder Coated or Baked enamel, white.
- 6. Filter Grille Mounting Frame: Shall accept a 2" deep MERV 8 (30%) pleated media filter. Refer to section "Filters" for filter requirements. Provide two sets of filters for each filter grille.
- 7. Mounting: As Scheduled.
- 8. Damper Type: Adjustable opposed-blade assembly where damper is indicated on the schedule.
- 9. All spiral mounted exposed grilles shall match ductwork curve similar to basis of design selections or equal.

## 2.2 SOURCE QUALITY CONTROL

A. Verification of Performance: Rate diffusers, registers, and grilles according to ASHRAE 70, "Method of Testing for Rating the Performance of Air Outlets and Inlets."

## **PART 3 - EXECUTION**

## 3.1 EXAMINATION

- A. Examine areas where diffusers, registers, and grilles are to be installed for installation tolerances and other conditions affecting performance.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

#### 3.2 INSTALLATION

- A. Install diffusers, registers, and grilles level and plumb.
- B. Install diffusers, registers, and grilles flush with ceiling unless otherwise indicated in contract documents.
- C. Ceiling-Mounted Outlets and Inlets: Drawings indicate general arrangement of ducts, fittings, and accessories. Air outlet and inlet locations have been indicated to achieve design requirements for air volume, noise criteria, airflow pattern, throw, and pressure drop. Install in locations indicated, as much as practical. For units installed in lay-in ceiling panels, center units in both directions in panel. Where architectural features or other items conflict with installation, notify Architect for a determination of final location.
- D. Diffusers, registers and grilles shall be supported independently of the ceiling system and shall not be supported from conduit, piping or unrelated ductwork.
- E. Install diffusers, registers, and grilles with airtight connections to ducts and to allow service and maintenance.

Arlington County, Virginia Architect's Project No: 563007

# 3.3 ADJUSTING

A. After installation, adjust diffusers, registers, and grilles to air patterns indicated, or as directed, before starting air balancing.

END OF SECTION 233713

Arlington County, Virginia Architect's Project No: 563007

# SECTION 260519 - LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

## PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

#### 1.2 SUMMARY

# A. Section Includes:

- 1. Building wires and cables rated 600 V and less.
- 2. Connectors, splices, and terminations rated 600 V and less.

# B. Related Requirements:

- 1. Section 260513 "Medium-Voltage Cables" for single-conductor and multiconductor cables, cable splices, and terminations for electrical distribution systems with 2001 to 35,000 V.
- 2. Section 260523 "Control-Voltage Electrical Power Cables" for control systems communications cables and Classes 1, 2 and 3 control cables.
- 3. Section 271500 "Communications Horizontal Cabling" for cabling used for voice and data circuits.

# 1.3 DEFINITIONS

A. VFC: Variable frequency controller.

## 1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

# 1.5 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

Arlington County, Virginia Architect's Project No: 563007

#### PART 2 - PRODUCTS

# 2.1 CONDUCTORS AND CABLES

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. Cerro Wire LLC.
  - 2. General Cable; General Cable Corporation.
  - 3. Southwire Company.
  - 4. Encore Wiring Corporation.
- B. Copper Conductors: Comply with NEMA WC 70/ICEA S-95-658.
- C. Conductor Insulation: Comply with NEMA WC 70/ICEA S-95-658 for Type THHN-2-THWN-2.
- D. Multiconductor Cable: Comply with NEMA WC 70/ICEA S-95-658 for metal-clad cable, Type MC with ground wire.

#### 2.2 CONNECTORS AND SPLICES

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. 3M.
  - 2. Hubbell Power Systems, Inc.
  - 3. ILSCO.
  - 4. Tyco Electronics Corp.
- B. Description: Factory-fabricated connectors and splices of size, ampacity rating, material, type, and class for application and service indicated.

## 2.3 SYSTEM DESCRIPTION

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Comply with NFPA 70.

Arlington County, Virginia Architect's Project No: 563007

#### **PART 3 - EXECUTION**

#### 3.1 CONDUCTOR MATERIAL APPLICATIONS

- A. Feeders: Copper. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.
- B. Branch Circuits: Copper. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger, except VFC cable, which shall be extra flexible stranded.

# 3.2 CONDUCTOR INSULATION AND MULTICONDUCTOR CABLE APPLICATIONS AND WIRING METHODS

- A. Service Entrance: Type THHN-2-THWN-2, single conductors in raceway.
- B. Exposed Feeders: Type THHN-2-THWN-2, single conductors in raceway.
- C. Feeders Concealed in Ceilings, Walls, Partitions, and Crawlspaces: Type THHN-2-THWN-2, single conductors in raceway.
- D. Feeders Concealed in Concrete, below Slabs-on-Grade, and Underground: Type THHN-2-THWN-2, single conductors in raceway.
- E. Branch Circuits Concealed in Ceilings, Walls, and Partitions: Type THHN-2-THWN-2, single conductors in raceway Metal-clad cable, Type MC.
- F. Branch Circuits Concealed in Concrete, below Slabs-on-Grade, and Underground: Type THHN-2-THWN-2, single conductors in raceway.
- G. Branch Circuits in Cable Tray: Metal-clad cable, Type MC.
- H. Cord Drops and Portable Appliance Connections: Type SO, hard service cord with stainless-steel, wire-mesh, strain relief device at terminations to suit application.

## 3.3 INSTALLATION OF CONDUCTORS AND CABLES

- A. Conceal cables in finished walls, ceilings, and floors unless otherwise indicated.
- B. Complete raceway installation between conductor and cable termination points according to Section 260533 "Raceways and Boxes for Electrical Systems" prior to pulling conductors and cables.
- C. Use manufacturer-approved pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.

Arlington County, Virginia Architect's Project No: 563007

- D. Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips, that will not damage cables or raceway.
- E. Install exposed cables parallel and perpendicular to surfaces of exposed structural members, and follow surface contours where possible.
- F. Branch Circuits Concealed in Casework: MC cable may be used to feed to outlet boxes fish concealed in built-in casework. Route cable supported tight in upper inside corners of casework, not in conflict with drawers or cabinet doors.
- G. Support cables according to Section 260529 "Hangers and Supports for Electrical Systems."
- H. Complete cable tray systems installation according to Section 260536 "Cable Trays for Electrical Systems" prior to installing conductors and cables.
- I. Whips from Junction Box Concealed in Ceilings to Lighting Fixtures:
  - 1. Type MC Cable or FMC, with minimum #12AWG copper THHN/THWN and full size equipment grounding conductor. Maximum whip length 72".
  - 2. MC Cable and FMC shall be supported within 24" of fixture connection so that whip is not in contact with ceiling or grid. Securing to <u>fixture support wires</u> with batwings is acceptable but not to ceiling support wires.
  - 3. Do not connect fixture whips from fixture to fixture (daisy chain). No more than 4 whips shall be connected to any one junction box.
- J. All single-phase circuits shall include a dedicated neutral (grounded) and grounding conductor, unless specifically noted otherwise.
  - 1. The intent of this is to eliminate multiwire branch circuits and allow disconnection of one circuit without requiring disconnection of other(s) as would be required to comply with NEC 210.4(B). Per NEC 310.15(B)(b) each of these neutral (grounded) conductor is not considered to be load-bearing so derating is not required.
- K. Contract drawings are based upon a maximum of 3 current-carrying conductors in a conduit. Contractor may rework indicated circuitry to install a maximum of (6) L-N circuits (120 or 277V) in a single conduit. There shall be no more than 2 each A, B, C phase conductors per homerun. Each shall have dedicated neutral (grounded) conductor.
  - 1. Do not group L-L circuits in a homerun, unless specifically indicated on the drawings.
  - 2. Where there are more than 3 current-carrying conductors in a conduit, derate conductor ampacities in accordance with NEC Table 310.15(B)(2)(a).
  - 3. When running more than 3 ungrounded conductors in a raceway, increase size of conduits beyond those indicated in contract documents, as required to not exceed NEC Chapter 9, Table 1 conduit-fill requirements. As-built drawings shall clearly indicate which circuits are grouped in homeruns.
- L. Unless otherwise indicated, minimum conductor size shall be 12 AWG.

Arlington County, Virginia Architect's Project No: 563007

#### 3.4 CONNECTIONS

- A. Tighten electrical connectors and terminals according to manufacturer's published torquetightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A-486B.
- B. Make splices, terminations, and taps that are compatible with conductor material and that possess equivalent or better mechanical strength and insulation ratings than unspliced conductors.
  - 1. Use oxide inhibitor in each splice, termination, and tap for aluminum conductors.
- C. Wiring at Outlets: Install conductor at each outlet, with at least 12 inches of slack.

#### 3.5 IDENTIFICATION

- A. Identify and color-code conductors and cables according to Section 260553 "Identification for Electrical Systems."
- B. Identify each spare conductor at each end with identity number and location of other end of conductor, and identify as spare conductor.

## 3.6 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR ELECTRICAL PENETRATIONS

A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies. Comply with requirements in Section 260544 "Sleeves and Sleeve Seals for Electrical Raceways and Cabling."

#### 3.7 FIRESTOPPING

A. Apply firestopping to electrical penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly according to Section 078413 "Penetration Firestopping."

#### 3.8 FIELD QUALITY CONTROL

- A. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.
- B. Perform the following tests and inspections:
  - 1. After installing conductors and cables and before electrical circuitry has been energized, test service entrance and feeder conductors for compliance with requirements.

Arlington County, Virginia Architect's Project No: 563007

- 2. Perform each visual and mechanical inspection and electrical test stated in NETA Acceptance Testing Specification. Certify compliance with test parameters.
- 3. Infrared Scanning: After Substantial Completion, but not more than 60 days after Final Acceptance, perform an infrared scan of each splice in conductors No. 3 AWG and larger. Remove box and equipment covers so splices are accessible to portable scanner. Correct deficiencies determined during the scan.
  - a. Follow-up Infrared Scanning: Perform an additional follow-up infrared scan of each splice 11 months after date of Substantial Completion.
  - b. Instrument: Use an infrared scanning device designed to measure temperature or to detect significant deviations from normal values. Provide calibration record for device.
  - c. Record of Infrared Scanning: Prepare a certified report that identifies splices checked and that describes scanning results. Include notation of deficiencies detected, remedial action taken, and observations after remedial action.
- C. Test and Inspection Reports: Prepare a written report to record the following:
  - 1. Procedures used.
  - 2. Results that comply with requirements.
  - 3. Results that do not comply with requirements and corrective action taken to achieve compliance with requirements.
- D. Cables will be considered defective if they do not pass tests and inspections.

END OF SECTION 260519

Arlington County, Virginia Architect's Project No: 563007

#### SECTION 260526 - GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

#### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

#### 1.2 SUMMARY

- A. Section includes grounding and bonding systems and equipment, plus the following special applications:
  - 1. Underground distribution grounding.
  - 2. Ground bonding common with lightning protection system.
  - 3. Foundation steel electrodes.

# 1.3 ACTION SUBMITTALS

A. Product Data: For each type of product indicated.

# 1.4 INFORMATIONAL SUBMITTALS

- A. As-Built Data: Plans showing dimensioned as-built locations of grounding features specified in "Field Quality Control" Article, including the following:
  - 1. Test wells.
  - 2. Ground rods.
  - 3. Ground rings.
  - 4. Grounding arrangements and connections for separately derived systems.
- B. Field quality-control reports.

## 1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For grounding to include in emergency, operation, and maintenance manuals.
  - 1. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:

Arlington County, Virginia Architect's Project No: 563007

- a. Instructions for periodic testing and inspection of grounding features at test wells grounding connections for separately derived systems based on NETA MTS.
  - Tests shall determine if ground-resistance or impedance values remain within specified maximums, and instructions shall recommend corrective action if values do not.
  - 2) Include recommended testing intervals.

# 1.6 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Comply with UL 467 for grounding and bonding materials and equipment.

#### **PART 2 - PRODUCTS**

#### 2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. Burndy; Part of Hubbell Electrical Systems.
  - 2. ERICO International Corporation.
  - 3. Galvan Industries, Inc.; Electrical Products Division, LLC.
  - 4. ILSCO.
  - 5. O-Z/Gedney; an EGS Electrical Group brand; an Emerson Industrial Automation business.

#### 2.2 SYSTEM DESCRIPTION

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Comply with UL 467 for grounding and bonding materials and equipment.

#### 2.3 CONDUCTORS

- A. Insulated Conductors: Copper wire or cable insulated for 600 V unless otherwise required by applicable Code or authorities having jurisdiction.
- B. Bare Copper Conductors:
  - 1. Solid Conductors: ASTM B 3.

Arlington County, Virginia Architect's Project No: 563007

- 2. Stranded Conductors: ASTM B 8.
- 3. Tinned Conductors: ASTM B 33.
- 4. Bonding Cable: 28 kcmil, 14 strands of No. 17 AWG conductor, 1/4 inch in diameter.
- 5. Bonding Conductor: No. 4 or No. 6 AWG, stranded conductor.
- 6. Bonding Jumper: Copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches wide and 1/16 inch thick.
- 7. Tinned Bonding Jumper: Tinned-copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches wide and 1/16 inch thick.
- C. Grounding Bus: Predrilled rectangular bars of annealed copper, 1/4 by 4 inches in cross section, with 9/32-inch holes spaced 1-1/8 inches apart. Stand-off insulators for mounting shall comply with UL 891 for use in switchboards, 600 V and shall be Lexan or PVC, impulse tested at 5000 V.

#### 2.4 CONNECTORS

- A. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.
- B. Bolted Connectors for Conductors and Pipes: Copper or copper alloy.
- C. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.
- D. Bus-Bar Connectors: Mechanical type, cast silicon bronze, solderless compression-type wire terminals, and long-barrel, two-bolt connection to ground bus bar.

## 2.5 GROUNDING ELECTRODES

- A. Ground Rods: Copper-clad steel; 3/4 inch by 10 feet.
- B. Chemical-Enhanced Grounding Electrodes: Copper tube, straight or L-shaped, charged with nonhazardous electrolytic chemical salts.
  - 1. Termination: Factory-attached No. 4/0 AWG bare conductor at least 48 inches long.
  - 2. Backfill Material: Electrode manufacturer's recommended material.

#### **PART 3 - EXECUTION**

# 3.1 APPLICATIONS

A. Conductors: Install solid conductor for No. 8 AWG and smaller, and stranded conductors for No. 6 AWG and larger unless otherwise indicated.

Arlington County, Virginia Architect's Project No: 563007

- B. Underground Grounding Conductors: Install bare copper conductor, No. 2/0 AWG minimum.
  - 1. Bury at least 24 inches below grade.
  - 2. Ductbank Grounding Conductor: Bury 12 inches above ductbank when indicated as part of duct-bank installation.
- C. Isolated Grounding Conductors: Green-colored insulation with continuous yellow stripe. On feeders with isolated ground, identify grounding conductor where visible to normal inspection, with alternating bands of green and yellow tape, with at least three bands of green and two bands of yellow.
- D. Grounding Bus: Install in electrical equipment rooms, in rooms housing service equipment, and elsewhere as indicated.
  - 1. Install bus horizontally, on insulated spacers 2 inches minimum from wall, 6 inches above finished floor unless otherwise indicated.
  - 2. Where indicated on both sides of doorways, route bus up to top of door frame, across top of doorway, and down; connect to horizontal bus.
- E. Conductor Terminations and Connections:
  - 1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
  - 2. Underground Connections: Welded connectors except at test wells and as otherwise indicated.
  - 3. Connections to Ground Rods at Test Wells: Bolted connectors.
  - 4. Connections to Structural Steel: Welded connectors.

# 3.2 GROUNDING AT THE SERVICE

A. Equipment grounding conductors and grounding electrode conductors shall be connected to the ground bus. Install a main bonding jumper between the neutral and ground buses.

# 3.3 GROUNDING SEPARATELY DERIVED SYSTEMS

A. Generator: Install grounding electrode(s) at the generator location. The electrode shall be connected to the equipment grounding conductor and to the frame of the generator.

# 3.4 GROUNDING UNDERGROUND DISTRIBUTION SYSTEM COMPONENTS

- A. Comply with IEEE C2 grounding requirements.
- B. Grounding Manholes and Handholes: Install a driven ground rod through manhole or handhole floor, close to wall, and set rod depth so 4 inches will extend above finished floor. If necessary, install ground rod before manhole is placed and provide No. 1/0 AWG bare, tinned-copper

Arlington County, Virginia Architect's Project No: 563007

conductor from ground rod into manhole through a waterproof sleeve in manhole wall. Protect ground rods passing through concrete floor with a double wrapping of pressure-sensitive insulating tape or heat-shrunk insulating sleeve from 2 inches above to 6 inches below concrete. Seal floor opening with waterproof, nonshrink grout.

- C. Grounding Connections to Manhole Components: Bond exposed-metal parts such as inserts, cable racks, pulling irons, ladders, and cable shields within each manhole or handhole, to ground rod or grounding conductor. Make connections with No. 4 AWG minimum, stranded, hard-drawn copper bonding conductor. Train conductors level or plumb around corners and fasten to manhole walls. Connect to cable armor and cable shields according to written instructions by manufacturer of splicing and termination kits.
- D. Padmounted Transformers and Switches: Install two ground rods and ground ring around the pad. Ground pad-mounted equipment and noncurrent-carrying metal items associated with substations by connecting them to underground cable and grounding electrodes. Install tinned-copper conductor not less than No. 2 AWG for ground ring and for taps to equipment grounding terminals. Bury ground ring not less than 6 inches from the foundation.

## 3.5 EQUIPMENT GROUNDING

- A. Install insulated equipment grounding conductors with all feeders and branch circuits.
- B. Install insulated equipment grounding conductors with the following items, in addition to those required by NFPA 70:
  - 1. Feeders and branch circuits.
  - 2. Lighting circuits.
  - 3. Receptacle circuits.
  - 4. Single-phase motor and appliance branch circuits.
  - 5. Three-phase motor and appliance branch circuits.
  - 6. Flexible raceway runs.
  - 7. Armored and metal-clad cable runs.
  - 8. Busway Supply Circuits: Install insulated equipment grounding conductor from grounding bus in the switchgear, switchboard, or distribution panel to equipment grounding bar terminal on busway.
  - 9. X-Ray Equipment Circuits: Install insulated equipment grounding conductor in circuits supplying x-ray equipment.
- C. Air-Duct Equipment Circuits: Install insulated equipment grounding conductor to duct-mounted electrical devices operating at 120 V and more, including air cleaners, heaters, dampers, humidifiers, and other duct electrical equipment. Bond conductor to each unit and to air duct and connected metallic piping.
- D. Water Heater, Heat-Tracing, and Antifrost Heating Cables: Install a separate insulated equipment grounding conductor to each electric water heater and heat-tracing cable. Bond conductor to heater units, piping, connected equipment, and components.

Arlington County, Virginia Architect's Project No: 563007

- E. Isolated Grounding Receptacle Circuits: Install an insulated equipment grounding conductor connected to the receptacle grounding terminal. Isolate conductor from raceway and from panelboard grounding terminals. Terminate at equipment grounding conductor terminal of the applicable derived system or service unless otherwise indicated.
- F. Isolated Equipment Enclosure Circuits: For designated equipment supplied by a branch circuit or feeder, isolate equipment enclosure from supply circuit raceway with a nonmetallic raceway fitting listed for the purpose. Install fitting where raceway enters enclosure, and install a separate insulated equipment grounding conductor. Isolate conductor from raceway and from panelboard grounding terminals. Terminate at equipment grounding conductor terminal of the applicable derived system or service unless otherwise indicated.
- G. Poles Supporting Outdoor Lighting Fixtures: Install grounding electrode and a separate insulated equipment grounding conductor in addition to grounding conductor installed with branch-circuit conductors.
- H. Metallic Fences: Comply with requirements of IEEE C2.
  - 1. Grounding Conductor: Bare copper, not less than No. 8 AWG.
  - 2. Gates: Shall be bonded to the grounding conductor with a flexible bonding jumper.
  - 3. Barbed Wire: Strands shall be bonded to the grounding conductor.

## 3.6 INSTALLATION

- A. Grounding Conductors: Route along shortest and straightest paths possible unless otherwise indicated or required by Code. Avoid obstructing access or placing conductors where they may be subjected to strain, impact, or damage.
- B. Ground Bonding Common with Lightning Protection System: Comply with NFPA 780 and UL 96 when interconnecting with lightning protection system. Bond electrical power system ground directly to lightning protection system grounding conductor at closest point to electrical service grounding electrode. Use bonding conductor sized same as system grounding electrode conductor, and install in conduit.
- C. Ground Rods: Drive rods until tops are 2 inches below finished floor or final grade unless otherwise indicated.
  - 1. Interconnect ground rods with grounding electrode conductor below grade and as otherwise indicated. Make connections without exposing steel or damaging coating if any.
  - 2. For grounding electrode system, install at least three rods spaced at least one-rod length from each other and located at least the same distance from other grounding electrodes, and connect to the service grounding electrode conductor.
- D. Test Wells: Ground rod driven through drilled hole in bottom of handhole. Handholes are specified in Section 260543 "Underground Ducts and Raceways for Electrical Systems," and shall be at least 12 inches deep, with cover.

Arlington County, Virginia Architect's Project No: 563007

- 1. Test Wells: Install at least one test well for each service unless otherwise indicated. Install at the ground rod electrically closest to service entrance. Set top of test well flush with finished grade or floor.
- E. Bonding Straps and Jumpers: Install in locations accessible for inspection and maintenance except where routed through short lengths of conduit.
  - 1. Bonding to Structure: Bond straps directly to basic structure, taking care not to penetrate any adjacent parts.
  - 2. Bonding to Equipment Mounted on Vibration Isolation Hangers and Supports: Install bonding so vibration is not transmitted to rigidly mounted equipment.
  - 3. Use exothermic-welded connectors for outdoor locations; if a disconnect-type connection is required, use a bolted clamp.
- F. Grounding and Bonding for Piping:
  - 1. Metal Water Service Pipe: Install insulated copper grounding conductors, in conduit, from building's main service equipment, or grounding bus, to main metal water service entrances to building. Connect grounding conductors to main metal water service pipes; use a bolted clamp connector or bolt a lug-type connector to a pipe flange by using one of the lug bolts of the flange. Where a dielectric main water fitting is installed, connect grounding conductor on street side of fitting. Bond metal grounding conductor conduit or sleeve to conductor at each end.
  - 2. Water Meter Piping: Use braided-type bonding jumpers to electrically bypass water meters. Connect to pipe with a bolted connector.
  - 3. Bond each aboveground portion of gas piping system downstream from equipment shutoff valve.
- G. Bonding Interior Metal Ducts: Bond metal air ducts to equipment grounding conductors of associated fans, blowers, electric heaters, and air cleaners. Install bonding jumper to bond across flexible duct connections to achieve continuity.
- H. Grounding for Steel Building Structure: Install a driven ground rod at base of each corner column and at intermediate exterior columns at distances not more than 60 feet apart.
- I. Ground Ring: Install a grounding conductor, electrically connected to each building structure ground rod and to each steel column, extending around the perimeter of building.
  - 1. Install tinned-copper conductor not less than No. 2/0 AWG for ground ring and for taps to building steel.
  - 2. Bury ground ring not less than 24 inches from building's foundation.
- J. Concrete-Encased Grounding Electrode (Ufer Ground): Fabricate according to NFPA 70; use a minimum of 20 feet of bare copper conductor not smaller than No. 4 AWG.
  - 1. If concrete foundation is less than 20 feet long, coil excess conductor within base of foundation.

Arlington County, Virginia Architect's Project No: 563007

2. Bond grounding conductor to reinforcing steel in at least four locations and to anchor bolts. Extend grounding conductor below grade and connect to building's grounding grid or to grounding electrode external to concrete.

# 3.7 FIELD QUALITY CONTROL

- A. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect, test, and adjust components, assemblies, and equipment installations, including connections.
- B. Perform tests and inspections.
- C. Tests and Inspections:
  - 1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
  - 2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
  - 3. Test completed grounding system at each location where a maximum ground-resistance level is specified, at service disconnect enclosure grounding terminal, at ground test wells. Make tests at ground rods before any conductors are connected.
    - a. Measure ground resistance no fewer than two full days after last trace of precipitation and without soil being moistened by any means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance.
    - b. Perform tests by fall-of-potential method according to IEEE 81.
  - 4. Prepare dimensioned Drawings locating each test well, ground rod and ground-rod assembly, and other grounding electrodes. Identify each by letter in alphabetical order, and key to the record of tests and observations. Include the number of rods driven and their depth at each location, and include observations of weather and other phenomena that may affect test results. Describe measures taken to improve test results.
- D. Grounding system will be considered defective if it does not pass tests and inspections.
- E. Prepare test and inspection reports.
- F. Report measured ground resistances that exceed the following values:
  - 1. Power and Lighting Equipment or System with Capacity of 500 kVA and Less: 10 ohms.
  - 2. Power and Lighting Equipment or System with Capacity of 500 to 1000 kVA: 5 ohms.
  - 3. Power and Lighting Equipment or System with Capacity More Than 1000 kVA: 3 ohms.
  - 4. Power Distribution Units or Panelboards Serving Electronic Equipment: 3 ohm(s).
  - 5. Substations and Pad-Mounted Equipment: 5 ohms.
  - 6. Manhole Grounds: 10 ohms.

Arlington County, Virginia Architect's Project No: 563007

G. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Architect promptly and include recommendations to reduce ground resistance.

END OF SECTION 260526

# Arlington County, Virginia Architect's Project No: 563007

#### SECTION 260529 - HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

#### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

#### 1.2 SUMMARY

- A. This Section includes the following:
  - 1. Hangers and supports for electrical equipment and systems.
  - 2. Construction requirements for concrete bases.

#### 1.3 DEFINITIONS

- A. EMT: Electrical metallic tubing.
- B. IMC: Intermediate metal conduit.
- C. RMC: Rigid metal conduit.

# 1.4 PERFORMANCE REQUIREMENTS

- A. Design supports for multiple raceways capable of supporting combined weight of supported systems and its contents.
- B. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.
- C. Rated Strength: Adequate in tension, shear, and pullout force to resist maximum loads calculated or imposed for this Project.

#### 1.5 ACTION SUBMITTALS

- A. Product Data: For the following:
  - 1. Steel slotted support systems.
  - 2. Nonmetallic slotted support systems.

Arlington County, Virginia Architect's Project No: 563007

# 1.6 QUALITY ASSURANCE

- A. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code Steel."
- B. Comply with NFPA 70.

#### 1.7 COORDINATION

- A. Coordinate size and location of concrete bases. Cast anchor-bolt inserts into bases. Concrete, reinforcement, and formwork requirements are specified together with concrete Specifications.
- B. Coordinate installation of roof curbs, equipment supports, and roof penetrations. These items are specified in Section 077200 "Roof Accessories."

#### **PART 2 - PRODUCTS**

# 2.1 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

- A. Steel Slotted Support Systems: Comply with MFMA-4, factory-fabricated components for field assembly.
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
    - a. Cooper B-Line, Inc.; a division of Cooper Industries.
    - b. ERICO International Corporation.
    - c. Thomas & Betts Corporation.
    - d. Unistrut; an Atkore International company.
  - 2. Metallic Coatings: Hot-dip galvanized after fabrication and applied according to MFMA-4.
  - 3. Channel Dimensions: Selected for applicable load criteria.
- B. Raceway and Cable Supports: As described in NECA 1 and NECA 101.
- C. Conduit and Cable Support Devices: Steel and malleable-iron hangers, clamps, and associated fittings, designed for types and sizes of raceway or cable to be supported.
- D. Support for Conductors in Vertical Conduit: Factory-fabricated assembly consisting of threaded body and insulating wedging plug or plugs for non-armored electrical conductors or cables in riser conduits. Plugs shall have number, size, and shape of conductor gripping pieces as required to suit individual conductors or cables supported. Body shall be malleable iron.

Arlington County, Virginia Architect's Project No: 563007

- E. Structural Steel for Fabricated Supports and Restraints: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.
- F. Mounting, Anchoring, and Attachment Components: Items for fastening electrical items or their supports to building surfaces include the following:
  - 1. Powder-Actuated Fasteners: Threaded-steel stud, for use in hardened Portland cement concrete, steel, or wood, with tension, shear, and pullout capacities appropriate for supported loads and building materials where used.
    - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
      - 1) Hilti, Inc.
      - 2) MKT Fastening, LLC.
      - 3) Simpson Strong-Tie Co., Inc.
  - 2. Mechanical-Expansion Anchors: Insert-wedge-type, stainless steel, for use in hardened portland cement concrete with tension, shear, and pullout capacities appropriate for supported loads and building materials in which used.
    - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
      - 1) Cooper B-Line, Inc.; a division of Cooper Industries.
      - 2) Hilti, Inc.
      - 3) MKT Fastening, LLC.
  - 3. Concrete Inserts: Steel or malleable-iron, slotted support system units similar to MSS Type 18; complying with MFMA-4 or MSS SP-58.
  - 4. Clamps for Attachment to Steel Structural Elements: MSS SP-58, type suitable for attached structural element.
  - 5. Through Bolts: Structural type, hex head, and high strength. Comply with ASTM A 325.
  - 6. Toggle Bolts: All-steel springhead type.
  - 7. Hanger Rods: Threaded steel.

# 2.2 FABRICATED METAL EQUIPMENT SUPPORT ASSEMBLIES

- A. Description: Welded or bolted, structural-steel shapes, shop or field fabricated to fit dimensions of supported equipment.
- B. Materials: Comply with requirements in Section 055000 "Metal Fabrications" for steel shapes and plates.

Arlington County, Virginia Architect's Project No: 563007

#### **PART 3 - EXECUTION**

#### 3.1 APPLICATION

- A. Comply with NECA 1 and NECA 101 for application of hangers and supports for electrical equipment and systems except if requirements in this Section are stricter.
- B. Maximum Support Spacing and Minimum Hanger Rod Size for Raceway: Space supports for EMT, IMC, and RMC as required by NFPA 70. Minimum rod size shall be 1/4 inch in diameter.
- C. Multiple Raceways or Cables: Install trapeze-type supports fabricated with steel slottedsupport system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits.
  - 1. Secure raceways and cables to these supports with two-bolt conduit clamps.
- D. Spring-steel clamps designed for supporting single conduits without bolts may be used for 1-1/2-inch and smaller raceways serving branch circuits and communication systems above suspended ceilings and for fastening raceways to trapeze supports.

#### 3.2 SUPPORT INSTALLATION

- A. Comply with NECA 1 and NECA 101 for installation requirements except as specified in this Article.
- B. Raceway Support Methods: In addition to methods described in NECA 1, EMT, IMC, and RMC may be supported by openings through structure members, as permitted in NFPA 70.
- C. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 200 lb.
- D. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten electrical items and their supports to building structural elements by the following methods unless otherwise indicated by code:
  - 1. To Wood: Fasten with lag screws or through bolts.
  - 2. To New Concrete: Bolt to concrete inserts.
  - 3. To Masonry: Approved toggle-type bolts on hollow masonry units and expansion anchor fasteners on solid masonry units.
  - 4. To Existing Concrete: Expansion anchor fasteners.
  - 5. Instead of expansion anchors, powder-actuated driven threaded studs provided with lock washers and nuts may be used in existing standard-weight concrete 4 inches thick or

Arlington County, Virginia Architect's Project No: 563007

- greater. Do not use for anchorage to lightweight-aggregate concrete or for slabs less than 4 inches thick.
- 6. To Steel: Beam clamps (MSS Type 19, 21, 23, 25, or 27) complying with MSS SP-69.
- 7. To Light Steel: Sheet metal screws.
- 8. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount cabinets, panelboards, disconnect switches, control enclosures, pull and junction boxes, transformers, and other devices on slotted-channel racks attached to substrate.
- E. Drill holes for expansion anchors in concrete at locations and to depths that avoid reinforcing bars.

#### 3.3 INSTALLATION OF FABRICATED METAL SUPPORTS

- A. Comply with installation requirements in Section 055000 "Metal Fabrications" for site-fabricated metal supports.
- B. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor electrical materials and equipment.
- C. Field Welding: Comply with AWS D1.1/D1.1M.

#### 3.4 CONCRETE BASES

- A. Construct concrete bases of dimensions indicated but not less than 4 inches larger in both directions than supported unit, and so anchors will be a minimum of 10 bolt diameters from edge of the base.
- B. Use 3000-psi, 28-day compressive-strength concrete. Concrete materials, reinforcement, and placement requirements are specified in Section 033000 "Cast-in-Place Concrete."
- C. Anchor equipment to concrete base.
  - 1. Place and secure anchorage devices. Use supported equipment manufacturer's setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
  - 2. Install anchor bolts to elevations required for proper attachment to supported equipment.
  - 3. Install anchor bolts according to anchor-bolt manufacturer's written instructions.

# 3.5 PAINTING

- A. Touchup: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
  - 1. Apply paint by brush or spray to provide minimum dry film thickness of 2.0 mils.

Arlington County, Virginia Architect's Project No: 563007

- B. Touchup: Comply with requirements in Division 9 for cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint on miscellaneous metal.
- C. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A 780.

END OF SECTION 260529

Arlington County, Virginia Architect's Project No: 563007

#### SECTION 260533 - RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS

#### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

#### 1.2 SUMMARY

- A. Section Includes:
  - 1. Metal conduits, tubing, and fittings.
  - 2. Nonmetal conduits, tubing, and fittings.
  - 3. Metal wireways and auxiliary gutters.
  - 4. Nonmetal wireways and auxiliary gutters.
  - 5. Surface raceways.
  - 6. Boxes, enclosures, and cabinets.
  - 7. Handholes and boxes for exterior underground cabling.
- B. Part 2 of this section includes material requirements for all raceways and boxes that may or may not be used on the project. Part 3 of this Section defines where a given type of product shall be or is permitted to be utilized.

# 1.3 DEFINITIONS

- A. ARC: Aluminum rigid conduit.
- B. GRC: Galvanized rigid steel conduit.
- C. IMC: Intermediate metal conduit.

# 1.4 ACTION SUBMITTALS

- A. Product Data: For surface raceways, wireways and fittings, floor boxes, hinged-cover enclosures, and cabinets.
- B. Shop Drawings: For custom enclosures and cabinets. Include plans, elevations, sections, and attachment details.

Arlington County, Virginia Architect's Project No: 563007

#### 1.5 INFORMATIONAL SUBMITTALS

A. Source quality-control reports.

#### PART 2 - PRODUCTS

# 2.1 METAL CONDUITS, TUBING, AND FITTINGS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. Allied Tube & Conduit.
  - 2. O-Z/Gedney; an EGS Electrical Group brand; an Emerson Industrial Automation business.
  - 3. Robroy Industries.
  - 4. Thomas & Betts Corporation.
- B. Listing and Labeling: Metal conduits, tubing, and fittings shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. GRC: Comply with ANSI C80.1 and UL 6.
- D. IMC: Comply with ANSI C80.6 and UL 1242.
- E. PVC-Coated Steel Conduit: PVC-coated rigid steel conduit.
  - 1. Comply with NEMA RN 1.
  - 2. Coating Thickness: 0.040 inch, minimum.
- F. EMT: Comply with ANSI C80.3 and UL 797.
- G. FMC: Comply with UL 1; zinc-coated steel.
- H. LFMC: Flexible steel conduit with PVC jacket and complying with UL 360.
- I. Fittings for Metal Conduit: Comply with NEMA FB 1 and UL 514B.
  - 1. Fittings for EMT:
    - a. Material: Steel.
    - b. Type: Setscrew.
  - 2. Expansion Fittings: PVC or steel to match conduit type, complying with UL 651, rated for environmental conditions where installed, and including flexible external bonding jumper.
  - 3. Coating for Fittings for PVC-Coated Conduit: Minimum thickness of 0.040 inch, with overlapping sleeves protecting threaded joints.

Arlington County, Virginia Architect's Project No: 563007

J. Joint Compound for IMC, GRC, or ARC: Approved, as defined in NFPA 70, by authorities having jurisdiction for use in conduit assemblies, and compounded for use to lubricate and protect threaded conduit joints from corrosion and to enhance their conductivity.

# 2.2 NONMETALLIC CONDUITS, TUBING, AND FITTINGS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. AFC Cable Systems, Inc.
  - 2. Electri-Flex Company.
  - 3. RACO; Hubbell.
  - 4. Thomas & Betts Corporation.
- B. Listing and Labeling: Nonmetallic conduits, tubing, and fittings shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. RNC: Type EPC-40-PVC, complying with NEMA TC 2 and UL 651 unless otherwise indicated.
- D. LFNC: Comply with UL 1660.
- E. Rigid HDPE: Comply with UL 651A.
- F. RTRC: Comply with UL 1684A and NEMA TC 14.
- G. Fittings for ENT and RNC: Comply with NEMA TC 3; match to conduit or tubing type and material.
- H. Fittings for LFNC: Comply with UL 514B.
- I. Solvent cements and adhesive primers shall have a VOC content of 510 and 550 g/L or less, respectively, when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

#### 2.3 METAL WIREWAYS AND AUXILIARY GUTTERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. Cooper B-Line, Inc.; a division of Cooper Industries.
  - 2. Hoffman; a brand of Pentair Equipment Protection.
  - 3. Square D.
- B. Description: Sheet metal, complying with UL 870 and NEMA 250, Type 1 unless otherwise indicated, and sized according to NFPA 70.

Arlington County, Virginia Architect's Project No: 563007

- 1. Metal wireways installed outdoors shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Fittings and Accessories: Include covers, couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for complete system.
- D. Wireway Covers: Hinged type unless otherwise indicated.
- E. Finish: Manufacturer's standard enamel finish.

#### 2.4 NONMETALLIC WIREWAYS AND AUXILIARY GUTTERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
  - 1. Allied Moulded Products, Inc.
  - 2. Hoffman; a brand of Pentair Equipment Protection.
  - 3. Lamson & Sessions.
- B. Listing and Labeling: Nonmetallic wireways and auxiliary gutters shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Description: PVC, extruded and fabricated to required size and shape, and having snap-on cover, mechanically coupled connections, and plastic fasteners.
- D. Fittings and Accessories: Couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings shall match and mate with wireways as required for complete system.
- E. Solvent cements and adhesive primers shall have a VOC content of 510 and 550 g/L or less, respectively, when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

# 2.5 SURFACE RACEWAYS

- A. Listing and Labeling: Surface raceways and tele-power poles shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Surface Metal Raceways: Galvanized steel with snap-on covers complying with UL 5. Manufacturer's standard enamel finish in color selected by Architect.
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

Arlington County, Virginia Architect's Project No: 563007

- a. MonoSystems, Inc.
- b. Panduit Corp.
- c. Wiremold / Legrand.
- C. Surface Nonmetallic Raceways: Two- or three-piece construction, complying with UL 5A, and manufactured of rigid PVC with texture and color selected by Architect from manufacturer's standard colors. Product shall comply with UL 94 V-0 requirements for self-extinguishing characteristics.
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
    - a. Hubbell Incorporated.
    - b. Panduit Corp.
    - c. Wiremold / Legrand.

# 2.6 BOXES, ENCLOSURES, AND CABINETS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. EGS/Appleton Electric.
  - 2. Erickson Electrical Equipment Company.
  - 3. Hoffman; a brand of Pentair Equipment Protection.
  - 4. Hubbell Incorporated.
  - 5. O-Z/Gedney; an EGS Electrical Group brand; an Emerson Industrial Automation business.
  - 6. RACO; Hubbell.
- B. General Requirements for Boxes, Enclosures, and Cabinets: Boxes, enclosures, and cabinets installed in wet locations shall be listed for use in wet locations.
- C. Sheet Metal Outlet and Device Boxes: Comply with NEMA OS 1 and UL 514A.
- D. Cast-Metal Outlet and Device Boxes: Comply with NEMA FB 1, aluminum, Type FD, with gasketed cover.
- E. Nonmetallic Outlet and Device Boxes: Comply with NEMA OS 2 and UL 514C.
- F. Metal Floor Boxes:
  - 1. Material: Cast metal.
  - 2. Type: Fully adjustable.
  - 3. Shape: Rectangular.

Arlington County, Virginia Architect's Project No: 563007

- 4. Listing and Labeling: Metal floor boxes shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- G. Luminaire Outlet Boxes: Nonadjustable, designed for attachment of luminaire weighing 50 lb. Outlet boxes designed for attachment of luminaires weighing more than 50 lb shall be listed and marked for the maximum allowable weight.
- H. Paddle Fan Outlet Boxes: Nonadjustable, designed for attachment of paddle fan weighing 70 lb.
  - 1. Listing and Labeling: Paddle fan outlet boxes shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- I. Small Sheet Metal Pull and Junction Boxes: NEMA OS 1.
- J. Cast-Metal Access, Pull, and Junction Boxes: Comply with NEMA FB 1 and UL 1773, galvanized, cast iron with gasketed cover.
- K. Box extensions used to accommodate new building finishes shall be of same material as recessed box.
- L. Device Box Dimensions: 4 inches square by 2-1/8 inches deep.
- M. Gangable boxes are prohibited.
- N. Hinged-Cover Enclosures: Comply with UL 50 and NEMA 250, Type 1 with continuous-hinge cover with flush latch unless otherwise indicated.
  - 1. Metal Enclosures: Steel, finished inside and out with manufacturer's standard enamel.
  - 2. Nonmetallic Enclosures: Plastic.
  - 3. Interior Panels: Steel; all sides finished with manufacturer's standard enamel.

# O. Cabinets:

- 1. NEMA 250, Type 1 galvanized-steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel.
- 2. Hinged door in front cover with flush latch and concealed hinge.
- 3. Key latch to match panelboards.
- 4. Metal barriers to separate wiring of different systems and voltage.
- 5. Accessory feet where required for freestanding equipment.
- 6. Nonmetallic cabinets shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

Arlington County, Virginia Architect's Project No: 563007

#### **PART 3 - EXECUTION**

# 3.1 RACEWAY APPLICATION

- A. Indoors: Apply raceway products as specified below unless otherwise indicated:
  - 1. Exposed, Not Subject to Physical Damage: EMT.
  - 2. Exposed, Not Subject to Severe Physical Damage: EMT.
  - 3. Exposed and Subject to Severe Physical Damage: GRC. Raceway locations include the following:
    - a. Loading dock.
    - b. Corridors used for traffic of mechanized carts, forklifts, and pallet-handling units.
    - c. Mechanical rooms.
    - d. Gymnasiums.
  - 4. Concealed in Ceilings and Interior Walls and Partitions: EMT.
  - 5. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): FMC, except use LFMC in damp or wet locations.
  - 6. Damp or Wet Locations: GRC.
  - 7. Boxes and Enclosures: NEMA 250, Type 1, except use NEMA 250, Type 4 stainless steel in institutional and commercial kitchens and damp or wet locations.
- B. Minimum Raceway Size: 3/4-inch trade size.
- C. Raceway Fittings: Compatible with raceways and suitable for use and location.
  - 1. Rigid and Intermediate Steel Conduit: Use threaded rigid steel conduit fittings unless otherwise indicated. Comply with NEMA FB 2.10.
  - 2. PVC Externally Coated, Rigid Steel Conduits: Use only fittings listed for use with this type of conduit. Patch and seal all joints, nicks, and scrapes in PVC coating after installing conduits and fittings. Use sealant recommended by fitting manufacturer and apply in thickness and number of coats recommended by manufacturer.
  - 3. EMT: Use setscrew, steel fittings. Comply with NEMA FB 2.10.
  - 4. Flexible Conduit: Use only fittings listed for use with flexible conduit. Comply with NEMA FB 2.20.
- D. Install nonferrous conduit or tubing for circuits operating above 60 Hz. Where aluminum raceways are installed for such circuits and pass through concrete, install in nonmetallic sleeve.
- E. Do not install aluminum conduits, boxes, or fittings in contact with concrete or earth.
- F. Install surface raceways only where indicated on Drawings.
- G. Do not install nonmetallic conduit where ambient temperature exceeds 120 deg F.

Arlington County, Virginia Architect's Project No: 563007

#### 3.2 INSTALLATION

- A. Comply with NECA 1 and NECA 101 for installation requirements except where requirements on Drawings or in this article are stricter. Comply with NECA 102 for aluminum conduits. Comply with NFPA 70 limitations for types of raceways allowed in specific occupancies and number of floors.
- B. Keep raceways at least 6 inches away from parallel runs of flues and steam or hot-water pipes. Install horizontal raceway runs above water and steam piping.
- C. Complete raceway installation before starting conductor installation.
- D. Comply with requirements in Section 260529 "Hangers and Supports for Electrical Systems" for hangers and supports.
- E. Arrange stub-ups so curved portions of bends are not visible above finished slab.
- F. Install no more than the equivalent of three 90-degree bends in any conduit run except for control wiring conduits, for which fewer bends are allowed. Support within 12 inches of changes in direction.
- G. Conceal conduit and EMT within finished walls, ceilings, and floors unless otherwise indicated. Install conduits parallel or perpendicular to building lines.
- H. All conduit to be installed on exterior masonry shall not run continuously within the wall cavity.
- I. Support conduit within 12 inches of enclosures to which attached.
- J. Raceways Embedded in Slabs:
  - 1. Are not permitted, except as required for entry into recessed floor boxes.
  - 2. Conduits run below slab on ground floor level shall be buried within the porous fill and stub-up at the required location. Transition from RNC to RGS with RGS elbow before rising above the floor. After RGS elbow, stub-up conduit shall be type indicated in Part 3.1 above.
  - 3. Where raceways are terminated with threaded hubs, screw raceways or fittings tightly into hub so end bears against wire protection shoulder. Where chase nipples are used, align raceways so coupling is square to box; tighten chase nipple so no threads are exposed.
  - 4. Do not embed threadless fittings in concrete unless specifically approved by Architect for each specific location.
  - 5. Change from ENT to GRC before rising above floor.
- K. Stub-ups to Above Recessed Ceilings:
  - 1. Use EMT, IMC, or RMC for raceways.
  - 2. Use a conduit bushing or insulated fitting to terminate stub-ups not terminated in hubs or in an enclosure.

Arlington County, Virginia Architect's Project No: 563007

- L. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound to threads of raceway and fittings before making up joints. Follow compound manufacturer's written instructions.
- M. Coat field-cut threads on PVC-coated raceway with a corrosion-preventing conductive compound prior to assembly.
- N. Raceway Terminations at Locations Subject to Moisture or Vibration: Use insulating bushings to protect conductors including conductors smaller than No. 4 AWG.
- O. Terminate threaded conduits into threaded hubs or with locknuts on inside and outside of boxes or cabinets. Install bushings on conduits up to 1-1/4-inch trade size and insulated throat metal bushings on 1-1/2-inch trade size and larger conduits terminated with locknuts. Install insulated throat metal grounding bushings on service conduits.
- P. Install raceways square to the enclosure and terminate at enclosures with locknuts. Install locknuts hand tight plus 1/4 turn more.
- Q. Do not rely on locknuts to penetrate nonconductive coatings on enclosures. Remove coatings in the locknut area prior to assembling conduit to enclosure to assure a continuous ground path.
- R. Cut conduit perpendicular to the length. For conduits 2-inch trade size and larger, use roll cutter or a guide to make cut straight and perpendicular to the length.
- S. Install pull wires in empty raceways. Use polypropylene or monofilament plastic line with not less than 200-lb tensile strength. Leave at least 12 inches of slack at each end of pull wire. Cap underground raceways designated as spare above grade alongside raceways in use.

# T. Surface Raceways:

- 1. Install surface raceway with a minimum 2-inchradius control at bend points.
- 2. Secure surface raceway with screws or other anchor-type devices at intervals not exceeding 48 inches and with no less than two supports per straight raceway section. Support surface raceway according to manufacturer's written instructions. Tape and glue are not acceptable support methods.
- U. Install raceway sealing fittings at accessible locations according to NFPA 70 and fill them with listed sealing compound. For concealed raceways, install each fitting in a flush steel box with a blank cover plate having a finish similar to that of adjacent plates or surfaces. Install raceway sealing fittings according to NFPA 70.
- V. Install devices to seal raceway interiors at accessible locations. Locate seals so no fittings or boxes are between the seal and the following changes of environments. Seal the interior of all raceways at the following points:
  - 1. Where conduits pass from warm to cold locations, such as boundaries of refrigerated spaces.
  - 2. Where an underground service raceway enters a building or structure.

Arlington County, Virginia Architect's Project No: 563007

- 3. Where otherwise required by NFPA 70.
- W. Comply with manufacturer's written instructions for solvent welding RNC and fittings.
- X. Expansion-Joint Fittings:
  - 1. Install in each run of aboveground RNC that is located where environmental temperature change may exceed 30 deg F and that has straight-run length that exceeds 25 feet. Install in each run of aboveground RMC and EMT conduit that is located where environmental temperature change may exceed 100 deg F and that has straight-run length that exceeds 100 feet.
  - 2. Install type and quantity of fittings that accommodate temperature change listed for each of the following locations:
    - a. Outdoor Locations Not Exposed to Direct Sunlight: 125 deg F temperature change.
    - b. Outdoor Locations Exposed to Direct Sunlight: 155 deg F temperature change.
    - c. Indoor Spaces Connected with Outdoors without Physical Separation: 125 deg F temperature change.
    - d. Attics: 135 deg F temperature change.
  - 3. Install fitting(s) that provide expansion and contraction for at least 0.00041 inch per foot of length of straight run per deg F of temperature change for PVC conduits. Install fitting(s) that provide expansion and contraction for at least 0.000078 inch per foot of length of straight run per deg F of temperature change for metal conduits.
  - 4. Install expansion fittings at all locations where conduits cross building or structure expansion joints.
  - 5. Install each expansion-joint fitting with position, mounting, and piston setting selected according to manufacturer's written instructions for conditions at specific location at time of installation. Install conduit supports to allow for expansion movement.
- Y. Flexible Conduit Connections: Comply with NEMA RV 3. Use a maximum of 72 inches of flexible conduit for recessed and semi-recessed luminaires, equipment subject to vibration, noise transmission, or movement; and for transformers and motors.
  - 1. Use LFMC in damp or wet locations subject to severe physical damage.
  - 2. Use LFMC or LFNC in damp or wet locations not subject to severe physical damage.
- Z. Mount boxes at heights indicated on Drawings. If mounting heights of boxes are not individually indicated, give priority to ADA requirements and also refer to Architectural elevations. Install boxes with height measured to center of box unless otherwise indicated.
- AA. Recessed Boxes in Masonry Walls: Saw-cut opening for box in center of cell of masonry block, and install box flush with surface of wall. Prepare block surfaces to provide a flat surface for a raintight connection between box and cover plate or supported equipment and box.
- BB. Horizontally separate boxes mounted on opposite sides of walls so they are not in the same vertical channel.

Arlington County, Virginia Architect's Project No: 563007

- CC. Locate boxes so that cover or plate will not span different building finishes.
- DD. Support boxes of three gangs or more from more than one side by spanning two framing members or mounting on brackets specifically designed for the purpose.
- EE. Fasten junction and pull boxes to or support from building structure. Do not support boxes by conduits.
- FF. Set metal floor boxes level and flush with finished floor surface.
- GG. Set nonmetallic floor boxes level. Trim after installation to fit flush with finished floor surface.

#### 3.3 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR ELECTRICAL PENETRATIONS

A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies. Comply with requirements in Section 260544 "Sleeves and Sleeve Seals for Electrical Raceways and Cabling."

# 3.4 FIRESTOPPING

A. Install firestopping at penetrations of fire-rated floor and wall assemblies. Comply with requirements in Division 07.

# 3.5 PROTECTION

- A. Protect coatings, finishes, and cabinets from damage and deterioration.
  - 1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
  - 2. Repair damage to PVC coatings or paint finishes with matching touchup coating recommended by manufacturer.

END OF SECTION 260533

Arlington County, Virginia Architect's Project No: 563007

SECTION 260544 - SLEEVES AND SLEEVE SEALS FOR ELECTRICAL RACEWAYS AND CABLING

#### PART 1 - GENERAL

# 1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

#### 1.2 SUMMARY

#### A. Section Includes:

- 1. Sleeves for raceway and cable penetration of non-fire-rated construction walls and floors.
- 2. Sleeve-seal systems.
- 3. Sleeve-seal fittings.
- 4. Grout.
- 5. Silicone sealants.

# B. Related Requirements:

1. Section 078413 "Penetration Firestopping" for penetration firestopping installed in fireresistance-rated walls, horizontal assemblies, and smoke barriers, with and without penetrating items.

# 1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

# PART 2 - PRODUCTS

# 2.1 SLEEVES

#### A. Wall Sleeves:

- 1. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, zinc coated, plain ends.
- 2. Cast-Iron Pipe Sleeves: Cast or fabricated "wall pipe," equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop unless otherwise indicated.

Arlington County, Virginia Architect's Project No: 563007

- B. Sleeves for Conduits Penetrating Non-Fire-Rated Gypsum Board Assemblies: Galvanized-steel sheet; 0.0239-inch minimum thickness; round tube closed with welded longitudinal joint, with tabs for screw-fastening the sleeve to the board.
- C. PVC-Pipe Sleeves: ASTM D 1785, Schedule 40.
- D. Molded-PVC Sleeves: With nailing flange for attaching to wooden forms.
- E. Molded-PE or -PP Sleeves: Removable, tapered-cup shaped, and smooth outer surface with nailing flange for attaching to wooden forms.
- F. Sleeves for Rectangular Openings:
  - 1. Material: Galvanized sheet steel.
  - 2. Minimum Metal Thickness:
    - a. For sleeve cross-section rectangle perimeter less than 50 inches and with no side larger than 16 inches, thickness shall be 0.052 inch.
    - b. For sleeve cross-section rectangle perimeter 50 inches or more and one or more sides larger than 16 inches, thickness shall be 0.138 inch.

# 2.2 SLEEVE-SEAL SYSTEMS

- A. Description: Modular sealing device, designed for field assembly, to fill annular space between sleeve and raceway or cable.
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
    - a. Advance Products & Systems, Inc.
    - b. Metraflex Company (The).
    - c. Proco Products, Inc.
  - 2. Sealing Elements: EPDM rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
  - 3. Pressure Plates: Carbon steel.
  - 4. Connecting Bolts and Nuts: Carbon steel, with corrosion-resistant coating, of length required to secure pressure plates to sealing elements.

#### 2.3 SLEEVE-SEAL FITTINGS

A. Description: Manufactured plastic, sleeve-type, waterstop assembly made for embedding in concrete slab or wall. Unit shall have plastic or rubber waterstop collar with center opening to match piping OD.

# Arlington County, Virginia Architect's Project No: 563007

- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - a. HOLDRITE.

#### 2.4 GROUT

- A. Description: Nonshrink; recommended for interior and exterior sealing openings in non-fire-rated walls or floors.
- B. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- C. Design Mix: 5000-psi, 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

#### 2.5 SILICONE SEALANTS

- A. Silicone Sealants: Single-component, silicone-based, neutral-curing elastomeric sealants of grade indicated below.
  - 1. Grade: Pourable (self-leveling) formulation for openings in floors and other horizontal surfaces that are not fire rated.
  - 2. Sealant shall have VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
  - 3. Sealant shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- B. Silicone Foams: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.

# **PART 3 - EXECUTION**

- 3.1 SLEEVE INSTALLATION FOR NON-FIRE-RATED ELECTRICAL PENETRATIONS
  - A. Comply with NECA 1.
  - B. Comply with NEMA VE 2 for cable tray and cable penetrations.
  - C. Sleeves for Conduits Penetrating Above-Grade Non-Fire-Rated Concrete and Masonry-Unit Floors and Walls:

Arlington County, Virginia Architect's Project No: 563007

- 1. Interior Penetrations of Non-Fire-Rated Walls and Floors:
  - a. Seal annular space between sleeve and raceway or cable, using joint sealant appropriate for size, depth, and location of joint. Comply with requirements in Section 079200 "Joint Sealants."
  - b. Seal space outside of sleeves with mortar or grout. Pack sealing material solidly between sleeve and wall so no voids remain. Tool exposed surfaces smooth; protect material while curing.
- 2. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.
- 3. Size pipe sleeves to provide 1/4-inch annular clear space between sleeve and raceway or cable unless sleeve seal is to be installed.
- 4. Install sleeves for wall penetrations unless core-drilled holes or formed openings are used. Install sleeves during erection of walls. Cut sleeves to length for mounting flush with both surfaces of walls. Deburr after cutting.
- 5. Install sleeves for floor penetrations. Extend sleeves installed in floors 2 inches above finished floor level. Install sleeves during erection of floors.
- D. Sleeves for Conduits Penetrating Non-Fire-Rated Gypsum Board Assemblies:
  - 1. Use circular metal sleeves unless penetration arrangement requires rectangular sleeved opening.
  - 2. Seal space outside of sleeves with approved joint compound for gypsum board assemblies.
- E. Roof-Penetration Sleeves: Seal penetration of individual raceways and cables with flexible boot-type flashing units applied in coordination with roofing work.
- F. Aboveground, Exterior-Wall Penetrations: Seal penetrations using steel pipe sleeves and mechanical sleeve seals. Select sleeve size to allow for 1-inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.
- G. Underground, Exterior-Wall and Floor Penetrations: Install cast-iron pipe sleeves. Size sleeves to allow for 1-inch annular clear space between raceway or cable and sleeve for installing sleeve-seal system.

## 3.2 SLEEVE-SEAL-SYSTEM INSTALLATION

- A. Install sleeve-seal systems in sleeves in exterior concrete walls and slabs-on-grade at raceway entries into building.
- B. Install type and number of sealing elements recommended by manufacturer for raceway or cable material and size. Position raceway or cable in center of sleeve. Assemble mechanical sleeve seals and install in annular space between raceway or cable and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

Arlington County, Virginia Architect's Project No: 563007

# 3.3 SLEEVE-SEAL-FITTING INSTALLATION

- A. Install sleeve-seal fittings in new walls and slabs as they are constructed.
- B. Assemble fitting components of length to be flush with both surfaces of concrete slabs and walls. Position waterstop flange to be centered in concrete slab or wall.
- C. Secure nailing flanges to concrete forms.
- D. Using grout, seal the space around outside of sleeve-seal fittings.

END OF SECTION 260544

Arlington County, Virginia Architect's Project No: 563007

#### SECTION 260553 - IDENTIFICATION FOR ELECTRICAL SYSTEMS

#### PART 1 - GENERAL

# 1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

#### 1.2 SUMMARY

# A. Section Includes:

- 1. Identification for raceways.
- 2. Identification of power and control cables.
- 3. Identification for conductors.
- 4. Underground-line warning tape.
- 5. Warning labels and signs.
- 6. Instruction signs.
- 7. Equipment identification labels.
- 8. Miscellaneous identification products.

#### 1.3 ACTION SUBMITTALS

A. Product Data: For each electrical identification product indicated.

# 1.4 QUALITY ASSURANCE

- A. Comply with ANSI A13.1 and IEEE C2.
- B. Comply with NFPA 70.
- C. Comply with 29 CFR 1910.144 and 29 CFR 1910.145.
- D. Comply with ANSI Z535.4 for safety signs and labels.
- E. Adhesive-attached labeling materials, including label stocks, laminating adhesives, and inks used by label printers, shall comply with UL 969.

Arlington County, Virginia Architect's Project No: 563007

#### 1.5 COORDINATION

- A. Coordinate identification names, abbreviations, colors, and other features with requirements in other Sections requiring identification applications, Drawings, Shop Drawings, manufacturer's wiring diagrams, and the Operation and Maintenance Manual; and with those required by codes, standards, and 29 CFR 1910.145. Use consistent designations throughout Project.
- B. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- C. Coordinate installation of identifying devices with location of access panels and doors.
- D. Install identifying devices before installing acoustical ceilings and similar concealment.

#### PART 2 - PRODUCTS

#### 2.1 POWER AND CONTROL RACEWAY IDENTIFICATION MATERIALS

- A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each raceway size.
- B. Colors for Raceways Carrying Circuits at 600 V or Less:
  - 1. Black letters on an orange field.
  - 2. Legend: Indicate voltage and system or service type.
- C. Colors for Raceways Carrying Circuits at More Than 600 V:
  - 1. Black letters on an orange field.
  - 2. Legend: "DANGER CONCEALED HIGH VOLTAGE WIRING."
- D. Vinyl Labels for Raceways Carrying Circuits at 600 V or Less: Preprinted, flexible label laminated with a clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing ends of legend label.
- E. Snap-Around Labels for Raceways Carrying Circuits at 600 V or Less: Slit, pretensioned, flexible, preprinted, color-coded acrylic sleeve, with diameter sized to suit diameter of raceway or cable it identifies and to stay in place by gripping action.
- F. Snap-Around, Color-Coding Bands for Raceways Carrying Circuits at 600 V or Less: Slit, pretensioned, flexible, solid-colored acrylic sleeve, 2 inches long, with diameter sized to suit diameter of raceway or cable it identifies and to stay in place by gripping action.
- G. Tape and Stencil for Raceways Carrying Circuits More Than 600 V: 4-inch- wide black stripes on 10-inch centers diagonally over orange background that extends full length of raceway or duct and is 12 inches wide. Stop stripes at legends.

Arlington County, Virginia Architect's Project No: 563007

- H. Metal Tags: Brass or aluminum, 2 by 2 by 0.05 inch, with stamped legend, punched for use with self-locking cable tie fastener.
- I. Write-On Tags: Polyester tag, 0.015 inch thick, with corrosion-resistant grommet and cable tie for attachment to conductor or cable.
  - 1. Marker for Tags: Permanent, waterproof, black ink marker recommended by tag manufacturer.
  - 2. Marker for Tags: Machine-printed, permanent, waterproof, black ink marker recommended by printer manufacturer.

#### 2.2 ARMORED AND METAL-CLAD CABLE IDENTIFICATION MATERIALS

- A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each cable size.
- B. Colors for Cables Carrying Circuits at 600 V and Less:
  - 1. Black letters on an orange field.
  - 2. Legend: Indicate voltage and system or service type.
- C. Colors for Cables Carrying Circuits at More Than 600 V:
  - 1. Black letters on an orange field.
  - 2. Legend: "DANGER HIGH VOLTAGE WIRING."
- D. Vinyl Labels: Preprinted, flexible label laminated with a clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing ends of legend label.
- E. Self-Adhesive Vinyl Tape: Colored, heavy duty, waterproof, fade resistant; 2 inches wide; compounded for outdoor use.
- F. Heat-Shrink Preprinted Tubes: Flame-retardant polyolefin tube with machine-printed identification label. Sized to suit diameter of and shrinks to fit firmly around cable it identifies. Full shrink recovery at a maximum of 200 deg F. Comply with UL 224.

## 2.3 POWER AND CONTROL CABLE IDENTIFICATION MATERIALS

- A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each cable size.
- B. Vinyl Labels: Preprinted, flexible label laminated with a clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing ends of legend label.
- C. Self-Adhesive, Self-Laminating Polyester Labels: Preprinted, 3-mil- thick flexible label with acrylic pressure-sensitive adhesive that provides a clear, weather- and chemical-resistant, self-

Arlington County, Virginia Architect's Project No: 563007

laminating, protective shield over the legend. Labels sized to fit the cable diameter such that the clear shield overlaps the entire printed legend.

- D. Heat-Shrink Preprinted Tubes: Flame-retardant polyolefin tube with machine-printed identification label. Sized to suit diameter of and shrinks to fit firmly around cable it identifies. Full shrink recovery at a maximum of 200 deg F. Comply with UL 224.
- E. Metal Tags: Brass or aluminum, 2 by 2 by 0.05 inch, with stamped legend, punched for use with self-locking cable tie fastener
- F. Write-On Tags: Polyester tag, 0.015 inch thick, with corrosion-resistant grommet and cable tie for attachment to conductor or cable.
  - 1. Marker for Tags: Permanent, waterproof, black ink marker recommended by tag manufacturer.
  - 2. Marker for Tags: Machine-printed, permanent, waterproof, black ink marker recommended by printer manufacturer.
- G. Snap-Around Labels: Slit, pretensioned, flexible, preprinted, color-coded acrylic sleeve, with diameter sized to suit diameter of cable it identifies and to stay in place by gripping action.
- H. Snap-Around, Color-Coding Bands: Slit, pretensioned, flexible, solid-colored acrylic sleeve, 2 inches long, with diameter sized to suit diameter of cable it identifies and to stay in place by gripping action.

## 2.4 CONDUCTOR IDENTIFICATION MATERIALS

- A. Color-Coding Conductor Tape: Colored, self-adhesive vinyl tape not less than 3 mils thick by 1 to 2 inches wide.
- B. Self-Adhesive, Self-Laminating Polyester Labels: Preprinted, 3-mil- thick flexible label with acrylic pressure-sensitive adhesive that provides a clear, weather- and chemical-resistant, self-laminating, protective shield over the legend. Labels sized to fit the conductor diameter such that the clear shield overlaps the entire printed legend.
- C. Snap-Around Labels: Slit, pretensioned, flexible, preprinted, color-coded acrylic sleeve, with diameter sized to suit diameter of conductor it identifies and to stay in place by gripping action.
- D. Snap-Around, Color-Coding Bands: Slit, pretensioned, flexible, solid-colored acrylic sleeve with diameter sized to suit diameter of conductor it identifies and to stay in place by gripping action.
- E. Heat-Shrink Preprinted Tubes: Flame-retardant polyolefin tube with machine-printed identification label. Sized to suit diameter of and shrinks to fit firmly around conductor it identifies. Full shrink recovery at a maximum of 200 deg F. Comply with UL 224.

Arlington County, Virginia Architect's Project No: 563007

- F. Marker Tapes: Vinyl or vinyl-cloth, self-adhesive wraparound type, with circuit identification legend machine printed by thermal transfer or equivalent process.
- G. Write-On Tags: Polyester tag, 0.015 inch thick, with corrosion-resistant grommet and cable tie for attachment to conductor or cable.
  - 1. Marker for Tags: Permanent, waterproof, black ink marker recommended by tag manufacturer.
  - 2. Labels for Tags: Self-adhesive label, machine-printed with permanent, waterproof, black ink recommended by printer manufacturer, sized for attachment to tag.

#### 2.5 FLOOR MARKING TAPE

A. 2-inch- wide, 5-mil pressure-sensitive vinyl tape, with yellow and black stripes and clear vinyl overlay.

#### 2.6 UNDERGROUND-LINE WARNING TAPE

#### A. Tape:

- 1. Recommended by manufacturer for the method of installation and suitable to identify and locate underground electrical and communications utility lines.
- 2. Printing on tape shall be permanent and shall not be damaged by burial operations.
- 3. Tape material and ink shall be chemically inert, and not subject to degrading when exposed to acids, alkalis, and other destructive substances commonly found in soils.

## B. Color and Printing:

- 1. Comply with ANSI Z535.1 through ANSI Z535.5.
- 2. Inscriptions for Red-Colored Tapes: ELECTRIC LINE, HIGH VOLTAGE,.
- 3. Inscriptions for Orange-Colored Tapes: TELEPHONE CABLE, CATV CABLE, COMMUNICATIONS CABLE, OPTICAL FIBER CABLE,.

## C. Warning Tape:

- 1. Detectable three-layer laminate, consisting of a printed pigmented polyolefin film, a solid aluminum-foil core, and a clear protective film that allows inspection of the continuity of the conductive core, bright-colored, continuous-printed on one side with the inscription of the utility, compounded for direct-burial service.
- 2. Overall Thickness: 5 mils.
- 3. Foil Core Thickness: 0.35 mil.
- 4. Weight: 28 lb/1000 sq. ft..
- 5. 3-Inch Tensile According to ASTM D 882: 70 lbf, and 4600 psi.

Arlington County, Virginia Architect's Project No: 563007

#### 2.7 WARNING LABELS AND SIGNS

- A. Comply with NFPA 70 and 29 CFR 1910.145.
- B. Self-Adhesive Warning Labels: Factory-printed, multicolor, pressure-sensitive adhesive labels, configured for display on front cover, door, or other access to equipment unless otherwise indicated.
- C. Baked-Enamel Warning Signs: Preprinted aluminum signs, punched or drilled for fasteners, with colors, legend, and size required for application. 1/4-inch grommets in corners for mounting. Nominal size, 7 by 10 inches.
- D. Metal-Backed, Butyrate Warning Signs: Weather-resistant, nonfading, preprinted, cellulose-acetate butyrate signs with 0.0396-inch galvanized-steel backing; and with colors, legend, and size required for application. 1/4-inch grommets in corners for mounting. Nominal size, 10 by 14 inches.
  - 1. Warning labels and signs shall include, but are not limited to, the following:
    - a. Multiple Power Source Warning: "DANGER ELECTRICAL SHOCK HAZARD EQUIPMENT HAS MULTIPLE POWER SOURCES."
    - b. Workspace Clearance Warning: "WARNING OSHA REGULATION AREA IN FRONT OF ELECTRICAL EQUIPMENT MUST BE KEPT CLEAR FOR 36 INCHES"
    - c. Arc Flash Hazard Warning: Refer to Section 260574 for requirements.

## 2.8 INSTRUCTION SIGNS

- A. Engraved, laminated acrylic or melamine plastic, minimum 1/16 inch thick for signs up to 20 sq. inches and 1/8 inch thick for larger sizes.
  - 1. Engraved legend with black letters on white face.
  - 2. Punched or drilled for mechanical fasteners.
  - 3. Framed with mitered acrylic molding and arranged for attachment at applicable equipment.
- B. Adhesive Film Label: Machine printed, in black, by thermal transfer or equivalent process. Minimum letter height shall be 3/8 inch.

## 2.9 EQUIPMENT IDENTIFICATION LABELS

A. Engraved, Laminated Acrylic or Melamine Label: Punched or drilled for screw mounting. White letters on a dark-gray background. Minimum letter height shall be 3/8 inch.

Arlington County, Virginia Architect's Project No: 563007

#### 2.10 CABLE TIES

- A. General-Purpose Cable Ties: Fungus inert, self extinguishing, one piece, self locking, Type 6/6 nylon.
  - 1. Minimum Width: 3/16 inch.
  - 2. Tensile Strength at 73 deg F, According to ASTM D 638: 12,000 psi.
  - 3. Temperature Range: Minus 40 to plus 185 deg F.
  - 4. Color: Black except where used for color-coding.
- B. UV-Stabilized Cable Ties: Fungus inert, designed for continuous exposure to exterior sunlight, self extinguishing, one piece, self locking, Type 6/6 nylon.
  - 1. Minimum Width: 3/16 inch.
  - 2. Tensile Strength at 73 deg F, According to ASTM D 638: 12,000 psi.
  - 3. Temperature Range: Minus 40 to plus 185 deg F.
  - 4. Color: Black.
- C. Plenum-Rated Cable Ties: Self extinguishing, UV stabilized, one piece, self locking.
  - 1. Minimum Width: 3/16 inch.
  - 2. Tensile Strength at 73 deg F, According to ASTM D 638: 7000 psi.
  - 3. UL 94 Flame Rating: 94V-0.
  - 4. Temperature Range: Minus 50 to plus 284 deg F.
  - 5. Color: Black.

## 2.11 MISCELLANEOUS IDENTIFICATION PRODUCTS

- A. Paint: Comply with requirements in painting Sections for paint materials and application requirements. Select paint system applicable for surface material and location (exterior or interior).
- B. Fasteners for Labels and Signs: Self-tapping, stainless-steel screws or stainless-steel machine screws with nuts and flat and lock washers.

## PART 3 - EXECUTION

## 3.1 INSTALLATION

- A. Verify identity of each item before installing identification products.
- B. Location: Install identification materials and devices at locations for most convenient viewing without interference with operation and maintenance of equipment.
- C. Apply identification devices to surfaces that require finish after completing finish work.

Arlington County, Virginia Architect's Project No: 563007

- D. Self-Adhesive Identification Products: Clean surfaces before application, using materials and methods recommended by manufacturer of identification device.
- E. Attach signs and plastic labels that are not self-adhesive type with mechanical fasteners appropriate to the location and substrate.
- F. System Identification Color-Coding Bands for Raceways and Cables: Each color-coding band shall completely encircle cable or conduit. Place adjacent bands of two-color markings in contact, side by side. Locate bands at changes in direction, at penetrations of walls and floors, at 50-foot maximum intervals in straight runs, and at 25-foot maximum intervals in congested areas.
- G. Aluminum Wraparound Marker Labels and Metal Tags: Secure tight to surface of conductor or cable at a location with high visibility and accessibility.
- H. Cable Ties: For attaching tags. Use general-purpose type, except as listed below:
  - 1. Outdoors: UV-stabilized nylon.
  - 2. In Spaces Handling Environmental Air: Plenum rated.
- I. Underground-Line Warning Tape: During backfilling of trenches install continuous underground-line warning tape directly above line at 6 to 8 inches below finished grade. Use multiple tapes where width of multiple lines installed in a common trench or concrete envelope exceeds 16 inches overall.
- J. Painted Identification: Comply with requirements in painting Sections for surface preparation and paint application.

## 3.2 IDENTIFICATION SCHEDULE

- A. Concealed Raceways and Ductbanks, more Than 600 V, within Buildings: Tape and stencil 4-inch- wide black stripes on 10-inch centers over orange background that extends full length of raceway or duct and is 12 inches wide. Stencil legend "DANGER CONCEALED HIGH VOLTAGE WIRING" with 3-inch- high black letters on 20-inch centers. Stop stripes at legends. Apply to the following finished surfaces:
  - 1. Floor surface directly above conduits running beneath and within 12 inches of a floor that is in contact with earth or is framed above unexcavated space.
  - 2. Wall surfaces directly external to raceways concealed within wall.
  - 3. Accessible surfaces of concrete envelope around raceways in vertical shafts, exposed in the building, or concealed above suspended ceilings.
- B. Accessible Raceways, Armored and Metal-Clad Cables, More Than 600 V: Self-adhesive vinyl labels. Install labels at 10-foot maximum intervals.

Arlington County, Virginia Architect's Project No: 563007

- C. Accessible Raceways and Metal-Clad Cables, 600 V or Less, for Service, Feeder, and Branch Circuits More Than 30 A, and 120 V to ground: Identify with self-adhesive vinyl label. Install labels at 10-foot maximum intervals.
- D. Accessible Raceways and Cables within Buildings: Identify the covers of each junction and pull box of the following systems with self-adhesive vinyl labels with the wiring system legend and system voltage. System legends shall be as follows:
  - 1. Emergency Power.
  - 2. Power.
  - 3. UPS.
- E. Power-Circuit Conductor Identification, 600 V or Less: For conductors in vaults, pull and junction boxes, manholes, and handholes, use color-coding conductor tape to identify the phase.
  - 1. Color-Coding for Phase and Voltage Level Identification, 600 V or Less: Use colors listed below for ungrounded service feeder and branch-circuit conductors.
    - a. Color shall be factory applied or field applied for sizes larger than No. 8 AWG, if authorities having jurisdiction permit.
    - b. Colors for 208/120-V Circuits:
      - 1) Phase A: Black.
      - 2) Phase B: Red.
      - 3) Phase C: Blue.
      - 4) Grounded (Neutral): White.
      - 5) Ground: Green.
    - c. Colors for 480/277-V Circuits:
      - 1) Phase A: Brown.
      - 2) Phase B: Orange.
      - 3) Phase C: Yellow.
      - 4) Grounded (Neutral): Gray.
      - 5) Ground: Green.
    - d. Field-Applied, Color-Coding Conductor Tape: Apply in half-lapped turns for a minimum distance of 6 inches from terminal points and in boxes where splices or taps are made. Apply last two turns of tape with no tension to prevent possible unwinding. Locate bands to avoid obscuring factory cable markings.
- F. Power-Circuit Conductor Identification, More than 600 V: For conductors in vaults, pull and junction boxes, manholes, and handholes, use nonmetallic plastic tag holder with adhesive-backed phase tags, and a separate tag with the circuit designation.
- G. Install instructional sign including the color-code for grounded and ungrounded conductors using adhesive-film-type labels.

Arlington County, Virginia Architect's Project No: 563007

- H. Control-Circuit Conductor Identification: For conductors and cables in pull and junction boxes, manholes, and handholes, use self-adhesive, self-laminating polyester labels with the conductor or cable designation, origin, and destination.
- I. Control-Circuit Conductor Termination Identification: For identification at terminations provide heat-shrink preprinted tubes or self-adhesive, self-laminating polyester labels with the conductor designation.
- J. Conductors to Be Extended in the Future: Attach marker tape to conductors and list source.
- K. Auxiliary Electrical Systems Conductor Identification: Identify field-installed alarm, control, and signal connections.
  - 1. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, and pull points. Identify by system and circuit designation.
  - 2. Use system of marker tape designations that is uniform and consistent with system used by manufacturer for factory-installed connections.
  - 3. Coordinate identification with Project Drawings, manufacturer's wiring diagrams, and the Operation and Maintenance Manual.
- L. Locations of Underground Lines: Identify with underground-line warning tape for power, lighting, communication, and control wiring and optical fiber cable.
  - 1. Limit use of underground-line warning tape to direct-buried cables.
  - 2. Install underground-line warning tape for both direct-buried cables and cables in raceway.
- M. Workspace Indication: Install floor marking tape to show working clearances in the direction of access to live parts. Workspace shall be as required by NFPA 70 and 29 CFR 1926.403 unless otherwise indicated. Do not install at flushmounted panelboards and similar equipment in finished spaces.
- N. Warning Labels for Indoor Cabinets, Boxes, and Enclosures for Power and Lighting: Self-adhesive warning labels.
  - 1. Comply with 29 CFR 1910.145.
  - 2. Identify system voltage with black letters on an orange background.
  - 3. Apply to exterior of door, cover, or other access.
  - 4. For equipment with multiple power or control sources, apply to door or cover of equipment including, but not limited to, the following:
    - a. Power transfer switches.
    - b. Controls with external control power connections.
- O. Operating Instruction Signs: Install instruction signs to facilitate proper operation and maintenance of electrical systems and items to which they connect. Install instruction signs with approved legend where instructions are needed for system or equipment operation.

Arlington County, Virginia Architect's Project No: 563007

- P. Emergency Operating Instruction Signs: Install instruction signs with white legend on a red background with minimum 3/8-inch- high letters for emergency instructions at equipment used for power transfer and load shedding.
- Q. Equipment Identification Labels: On each unit of equipment, install unique designation label that is consistent with wiring diagrams, schedules, and the Operation and Maintenance Manual. Apply labels to disconnect switches and protection equipment, central or master units, control panels, control stations, terminal cabinets, and racks of each system. Systems include power, lighting, control, communication, signal, monitoring, and alarm systems unless equipment is provided with its own identification.

### 1. Labeling Instructions:

- a. Indoor Equipment: Adhesive film label with clear protective overlay. Unless otherwise indicated, provide a single line of text with 1/2-inch- high letters on 1-1/2-inch- high label; where two lines of text are required, use labels 2 inches high.
- b. Outdoor Equipment: Engraved, laminated acrylic or melamine label.
- c. Elevated Components: Increase sizes of labels and letters to those appropriate for viewing from the floor.
- d. Unless provided with self-adhesive means of attachment, fasten labels with appropriate mechanical fasteners that do not change the NEMA or NRTL rating of the enclosure.

## 2. Equipment to Be Labeled:

- a. Panelboards: Typewritten directory of circuits in the location provided by panelboard manufacturer. Panelboard identification shall be, laminated acrylic or melamine label.
- b. Enclosures and electrical cabinets.
- c. Access doors and panels for concealed electrical items.
- d. Switchgear.
- e. Switchboards.
- f. Transformers: Label that includes tag designation shown on Drawings for the transformer, feeder, and panelboards or equipment supplied by the secondary.
- g. Substations.
- h. Emergency system boxes and enclosures.
- i. Motor-control centers.
- j. Enclosed switches.
- k. Enclosed circuit breakers.
- l. Enclosed controllers.
- m. Variable-speed controllers.
- n. Push-button stations.
- o. Power transfer equipment.
- p. Contactors
- q. Remote-controlled switches, dimmer modules, and control devices.
- r. Battery-inverter units.
- s. Battery racks.
- t. Power-generating units.

Arlington County, Virginia Architect's Project No: 563007

- u. Monitoring and control equipment.
- v. UPS equipment.

END OF SECTION 260553

Arlington County, Virginia Architect's Project No: 563007

#### SECTION 260923 - LIGHTING CONTROL DEVICES

#### PART 1 - GENERAL

## 1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

#### 1.2 SUMMARY

- A. Section Includes:
  - 1. Indoor occupancy sensors.
  - 2. Emergency shunt relays.

#### 1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: Show installation details for occupancy and light-level sensors.
  - 1. Include diagrams for power, signal, and control wiring.

## 1.4 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

#### 1.5 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For each type of lighting control device to include in emergency, operation, and maintenance manuals.

## PART 2 - PRODUCTS

#### 2.1 INDOOR OCCUPANCY SENSORS

- A. <u>Manufacturers:</u> Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. Hubbell Building Automation, Inc.
  - 2. <u>Leviton Manufacturing Co., Inc.</u>

Arlington County, Virginia Architect's Project No: 563007

- 3. Lithonia Lighting; Acuity Brands Lighting, Inc.
- 4. Lutron Electronics Co., Inc.
- 5. Sensor Switch, Inc.
- 6. <u>Watt Stopper</u>.
- B. General Requirements for Sensors: Wall- or ceiling-mounted, solid-state indoor occupancy sensors with a separate power pack.
  - 1. Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
  - 2. Operation: Unless otherwise indicated, turn lights on when coverage area is occupied, and turn them off when unoccupied; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.
  - 3. Sensor Output: Contacts rated to operate the connected relay, complying with UL 773A. Sensor is powered from the power pack.
  - 4. Power Pack: Dry contacts rated for 20-A ballast load at 120- and 277-V ac, for 13-A tungsten at 120-V ac, and for 1 hp at 120-V ac. Sensor has 24-V dc, 150-mA, Class 2 power source, as defined by NFPA 70.
  - 5. Mounting:
    - a. Sensor: Suitable for mounting in any position on a standard outlet box.
    - b. Relay: Externally mounted through a 1/2-inch knockout in a standard electrical enclosure.
    - c. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.
  - 6. Indicator: Digital display, to show when motion is detected during testing and normal operation of sensor
  - 7. Bypass Switch: Override the "on" function in case of sensor failure.
  - 8. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc; turn lights off when selected lighting level is present.
- C. Dual-Technology Type: Ceiling mounted; detect occupants in coverage area using PIR and ultrasonic detection methods. The particular technology or combination of technologies that control on-off functions is selectable in the field by operating controls on unit.
  - 1. Sensitivity Adjustment: Separate for each sensing technology.
  - 2. Detector Sensitivity: Detect occurrences of 6-inch- minimum movement of any portion of a human body that presents a target of not less than 36 sq. in., and detect a person of average size and weight moving not less than 12 inches in either a horizontal or a vertical manner at an approximate speed of 12 inches/s.
  - 3. Detection Coverage:
    - a. **Standard Height Units**: In areas that have ceiling heights of 12 feet or lower, provide Watt Stopper unit DT-300 (or approved equal): Detect occupancy anywhere within a circular area up to 2000 square feet. Detectors shall be networkable to allow coverage of larger or irregularly shaped areas.

Arlington County, Virginia Architect's Project No: 563007

#### 2.2 SWITCHBOX-MOUNTED OCCUPANCY SENSORS

- A. <u>Manufacturers:</u> Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. Hubbell Building Automation, Inc.
  - 2. Leviton Manufacturing Co., Inc.
  - 3. <u>Lutron Electronics Co., Inc.</u>
  - 4. <u>Sensor Switch, Inc.</u>
  - 5. Watt Stopper.
- B. General Requirements for Sensors: Automatic-wall-switch occupancy sensor, suitable for mounting in a single gang switchbox.
  - 1. Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
  - 2. Operating Ambient Conditions: Dry interior conditions, 32 to 120 deg F.
  - 3. Switch Rating: Not less than 800-VA fluorescent at 120 V, 1200-VA fluorescent at 277 V, and 800-W incandescent.

## 2.3 EMERGENCY SHUNT RELAY

- A. <u>Manufacturers:</u> Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. <u>Lighting Control and Design.</u>
  - 2. Watt Stopper.
- B. Description: Normally closed, electrically held relay, arranged for wiring in parallel with automatic switching contacts; complying with UL 924.
  - 1. Coil Rating: Same as lighting fixtures.

## 2.4 CONDUCTORS AND CABLES

- A. Power Wiring to Supply Side of Remote-Control Power Sources: Not smaller than No. 12 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
- B. Classes 2 and 3 Control Cable: Multiconductor cable with stranded-copper conductors not smaller than 18 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
- C. Class 1 Control Cable: Multiconductor cable with stranded-copper conductors not smaller thanNo. 14 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

Arlington County, Virginia Architect's Project No: 563007

#### PART 3 - EXECUTION

#### 3.1 SENSOR INSTALLATION

- A. Coordinate layout and installation of ceiling-mounted devices with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, smoke detectors, fire-suppression systems, and partition assemblies.
- B. Install and aim sensors in locations to achieve not less than 90 percent coverage of areas indicated. Do not exceed coverage limits specified in manufacturer's written instructions.

## 3.2 WIRING INSTALLATION

- A. Wiring Method: Comply with Section 260519 "Low-Voltage Electrical Power Conductors and Cables." Minimum conduit size is 1/2 inch.
- B. Wiring within Enclosures: Comply with NECA 1. Separate power-limited and non-power-limited conductors according to conductor manufacturer's written instructions.
- C. Size conductors according to lighting control device manufacturer's written instructions unless otherwise indicated.
- D. Splices, Taps, and Terminations: Make connections only on numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures.

### 3.3 IDENTIFICATION

- A. Identify components and power and control wiring according to Section 260553 "Identification for Electrical Systems."
  - 1. Identify controlled circuits in lighting contactors.
  - 2. Identify circuits or luminaires controlled by photoelectric and occupancy sensors at each sensor.
- B. Label time switches and contactors with a unique designation.

#### 3.4 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:
  - 1. Operational Test: After installing time switches and sensors, and after electrical circuitry has been energized, start units to confirm proper unit operation.
  - 2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

# ARLINGTON COUNTY COURHOUSE Arlington County, Virginia

Architect's Project No: 563007

- B. Lighting control devices will be considered defective if they do not pass tests and inspections.
- C. Prepare test and inspection reports.

## 3.5 ADJUSTING

- A. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting sensors to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.
  - 1. For occupancy and motion sensors, verify operation at outer limits of detector range. Set time delay to suit Owner's operations.
  - 2. For daylighting controls, adjust set points and deadband controls to suit Owner's operations.
  - 3. Align high-bay occupancy sensors using manufacturer's laser aiming tool.

#### 3.6 DEMONSTRATION

- A. Coordinate demonstration of products specified in this Section with demonstration requirements for low-voltage, programmable lighting control systems specified in Section 260943.13 "Addressable-Fixture Lighting Controls" and Section 260943.23 "Relay-Based Lighting Controls."
- B. Train Owner's maintenance personnel to adjust, operate, and maintain lighting control devices.

END OF SECTION 260923

Arlington County, Virginia Architect's Project No: 563007

## SECTION 262726 - WIRING DEVICES

#### PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

#### 1.2 SUMMARY

## A. Section Includes:

- 1. Receptacles, receptacles with integral GFCI, and associated device plates.
- 2. Twist-locking receptacles.
- 3. Receptacles with integral surge-suppression units.
- 4. Isolated-ground receptacles.
- 5. Hospital-grade receptacles.
- 6. Tamper-resistant receptacles.
- 7. Weather-resistant receptacles.
- 8. Snap switches and wall-box dimmers.
- 9. Solid-state fan speed controls.
- 10. Wall-switch and exterior occupancy sensors.
- 11. Communications outlets.
- 12. Pendant cord-connector devices.
- 13. Cord and plug sets.
- 14. Floor service outlets, poke-through assemblies, service poles, and multioutlet assemblies.

## 1.3 DEFINITIONS

- A. EMI: Electromagnetic interference.
- B. GFCI: Ground-fault circuit interrupter.
- C. Pigtail: Short lead used to connect a device to a branch-circuit conductor.
- D. RFI: Radio-frequency interference.
- E. SPD: Surge Protective Device.
- F. UTP: Unshielded twisted pair.

Arlington County, Virginia Architect's Project No: 563007

## 1.4 ADMINISTRATIVE REQUIREMENTS

#### A. Coordination:

- 1. Receptacles for Owner-Furnished Equipment: Match plug configurations.
- 2. Cord and Plug Sets: Match equipment requirements.

## 1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: List of legends and description of materials and process used for pre-marking wall plates.
- C. Samples: One for each type of device and wall plate specified, in each color specified.

#### 1.6 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

#### 1.7 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For wiring devices to include in all manufacturers' packing-label warnings and instruction manuals that include labeling conditions.

#### PART 2 - PRODUCTS

#### 2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. Cooper Wiring Devices, Inc.
  - 2. Hubbell.
  - 3. Leviton Manufacturing Co., Inc.
  - 4. Pass & Seymour/Legrand (Pass & Seymour).
- B. Source Limitations: Obtain each type of wiring device and associated wall plate from single source from single manufacturer.

Arlington County, Virginia Architect's Project No: 563007

## 2.2 GENERAL WIRING-DEVICE REQUIREMENTS

- A. Wiring Devices, Components, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Comply with NFPA 70.
- C. Devices that are manufactured for use with modular plug-in connectors may be substituted under the following conditions:
  - 1. Connectors shall comply with UL 2459 and shall be made with stranding building wire.
  - 2. Devices shall comply with the requirements in this Section.

### 2.3 STRAIGHT-BLADE RECEPTACLES

- A. Convenience Receptacles, 125 V, 20 A: Comply with NEMA WD 1, NEMA WD 6 Configuration 5-20R, UL 498, and FS W-C-596.
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
    - a. Cooper Wiring Devices, Inc.
    - b. Hubbell.
    - c. Leviton Manufacturing Co., Inc.
    - d. Pass & Seymour/Legrand (Pass & Seymour).
- B. Tamper-Resistant Convenience Receptacles, 125 V, 20 A: Comply with NEMA WD 1, NEMA WD 6 Configuration 5-20R, UL 498 Supplement sd, and FS W-C-596.
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
    - a. Cooper Wiring Devices, Inc.
    - b. Hubbell Premise Wiring.
    - c. Leviton Manufacturing Co., Inc.
    - d. Pass & Seymour/Legrand (Pass & Seymour).
  - 2. Description: Labeled shall comply with NFPA 70, "Health Care Facilities" Article, "Pediatric Locations" Section.

## 2.4 GFCI RECEPTACLES

A. General Description:

Arlington County, Virginia Architect's Project No: 563007

- 1. Straight blade, non-feed-through type.
- 2. Comply with NEMA WD 1, NEMA WD 6, UL 498, UL 943 Class A, and FS W-C-596.
- 3. Include indicator light that shows when the GFCI has malfunctioned and no longer provides proper GFCI protection.
- B. Duplex GFCI Convenience Receptacles, 125 V, 20 A:
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
    - a. Cooper Wiring Devices, Inc.
    - b. Hubbell.
    - c. Leviton Manufacturing Co., Inc.
    - d. Pass & Seymour/Legrand (Pass & Seymour).
- C. Tamper-Resistant GFCI Convenience Receptacles, 125 V, 20 A:
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
    - a. Hubbell.
    - b. Pass & Seymour/Legrand (Pass & Seymour).

## 2.5 TWIST-LOCKING RECEPTACLES

- A. Single Convenience Receptacles, 125 V, 20 A: Comply with NEMA WD 1, NEMA WD 6 Configuration L5-20R, and UL 498.
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
    - a. Cooper Wiring Devices, Inc.
    - b. Hubbell.
    - c. Leviton Manufacturing Co., Inc.
    - d. Pass & Seymour/Legrand (Pass & Seymour).

## 2.6 PENDANT CORD-CONNECTOR DEVICES

- A. Description:
  - 1. Matching, locking-type plug and receptacle body connector.
  - 2. NEMA WD 6 Configurations L5-20P and L5-20R, heavy-duty grade, and FS W-C-596.

Arlington County, Virginia Architect's Project No: 563007

3. Body: Nylon, with screw-open, cable-gripping jaws and provision for attaching external cable grip.

#### 2.7 CORD AND PLUG SETS

## A. Description:

- 1. Match voltage and current ratings and number of conductors to requirements of equipment being connected.
- 2. Cord: Rubber-insulated, stranded-copper conductors, with Type SOW-A jacket; with green-insulated grounding conductor and ampacity of at least 130 percent of the equipment rating.
- 3. Plug: Nylon body and integral cable-clamping jaws. Match cord and receptacle type for connection.

#### 2.8 TOGGLE SWITCHES

- A. Comply with NEMA WD 1, UL 20, and FS W-S-896.
- B. Switches, 120/277 V, 20 A:
  - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
    - a. Single Pole:
      - 1) Cooper; AH1221.
      - 2) Hubbell; HBL1221.
      - 3) Leviton; 1221-2.
      - 4) Pass & Seymour; CSB20AC1.
    - b. Two Pole:
      - 1) Cooper; AH1222.
      - 2) Hubbell; HBL1222.
      - 3) Leviton; 1222-2.
      - 4) Pass & Seymour; CSB20AC2.
    - c. Three Way:
      - 1) Cooper; AH1223.
      - 2) Hubbell; HBL1223.
      - 3) Leviton; 1223-2.
      - 4) Pass & Seymour; CSB20AC3.
    - d. Four Way:

Arlington County, Virginia Architect's Project No: 563007

- 1) Cooper; AH1224.
- 2) Hubbell; HBL1224.
- 3) Leviton; 1224-2.
- 4) Pass & Seymour; CSB20AC4.
- C. Pilot-Light Switches, 20 A:
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
    - a. Cooper Wiring Devices, Inc.
    - b. Hubbell.
    - c. Leviton Manufacturing Co., Inc.
    - d. Pass & Seymour/Legrand (Pass & Seymour).
  - 2. Description: Single pole, with neon-lighted handle, illuminated when switch is "off."
- D. Key-Operated Switches, 120/277 V, 20 A:
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
    - a. Cooper Wiring Devices, Inc.
    - b. Hubbell.
    - c. Leviton Manufacturing Co., Inc.
    - d. Pass & Seymour/Legrand (Pass & Seymour).
  - 2. Description: Single pole, with factory-supplied key in lieu of switch handle.
- E. Single-Pole, Double-Throw, Momentary-Contact, Center-off Switches: 120/277 V, 20 A; for use with mechanically held lighting contactors.
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
    - a. Cooper Wiring Devices, Inc.
    - b. Hubbell.
    - c. Leviton Manufacturing Co., Inc.
    - d. Pass & Seymour/Legrand (Pass & Seymour).
- F. Key-Operated, Single-Pole, Double-Throw, Momentary-Contact, Center-off Switches: 120/277 V, 20 A; for use with mechanically held lighting contactors, with factory-supplied key in lieu of switch handle.

Arlington County, Virginia Architect's Project No: 563007

- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - a. Cooper Wiring Devices, Inc.
  - b. Hubbell.
  - c. Leviton Manufacturing Co., Inc.
  - d. Pass & Seymour/Legrand (Pass & Seymour).

## 2.9 WALL-BOX DIMMERS

- A. Dimmer Switches: Modular, full-wave, solid-state units with integral, quiet on-off switches, with audible frequency and EMI/RFI suppression filters.
- B. Control: Continuously adjustable slider; with single-pole or three-way switching. Comply with UL 1472.
- C. LED Dimmer Switches: Modular; compatible with dimmer drivers; trim potentiometer to adjust low-end dimming; dimmer-driver combination capable of consistent dimming with low end not greater than 20 percent of full brightness.

#### 2.10 WALL PLATES

- A. Single and combination types shall match corresponding wiring devices.
  - 1. Plate-Securing Screws: Metal with head color to match plate finish.
  - 2. Material for Finished Spaces: 0.035-inch- thick, satin-finished, Type 302 stainless steel.
  - 3. Material for Unfinished Spaces: Galvanized steel.
  - 4. Material for Damp Locations: Cast aluminum with spring-loaded lift cover, and listed and labeled for use in wet and damp locations.
- B. Wet-Location, Weatherproof Cover Plates: NEMA 250, complying with Type 3R, weather-resistant, die-cast aluminum with lockable cover.

## 2.11 FINISHES

- A. Device Color:
  - 1. Wiring Devices Connected to Normal Power System: Ivory unless otherwise indicated or required by NFPA 70 or device listing.
  - 2. Wiring Devices Connected to Emergency Power System: Red.
- B. Wall Plate Color: For plastic covers, match device color.

Arlington County, Virginia Architect's Project No: 563007

#### **PART 3 - EXECUTION**

#### 3.1 INSTALLATION

A. Comply with NECA 1, including mounting heights listed in that standard, unless otherwise indicated.

#### B. Coordination with Other Trades:

- 1. Protect installed devices and their boxes. Do not place wall finish materials over device boxes and do not cut holes for boxes with routers that are guided by riding against outside of boxes
- 2. Keep outlet boxes free of plaster, drywall joint compound, mortar, cement, concrete, dust, paint, and other material that may contaminate the raceway system, conductors, and cables.
- 3. Install device boxes in brick or block walls so that the cover plate does not cross a joint unless the joint is troweled flush with the face of the wall.
- 4. Install wiring devices after all wall preparation, including painting, is complete.

## C. Conductors:

- 1. Do not strip insulation from conductors until right before they are spliced or terminated on devices
- 2. Strip insulation evenly around the conductor using tools designed for the purpose. Avoid scoring or nicking of solid wire or cutting strands from stranded wire.
- 3. The length of free conductors at outlets for devices shall meet provisions of NFPA 70, Article 300, without pigtails.
- 4. Existing Conductors:
  - a. Cut back and pigtail, or replace all damaged conductors.
  - b. Straighten conductors that remain and remove corrosion and foreign matter.
  - c. Pigtailing existing conductors is permitted, provided the outlet box is large enough.

#### D. Device Installation:

- 1. Replace devices that have been in temporary use during construction and that were installed before building finishing operations were complete.
- 2. Keep each wiring device in its package or otherwise protected until it is time to connect conductors.
- 3. Do not remove surface protection, such as plastic film and smudge covers, until the last possible moment.
- 4. Connect devices to branch circuits using pigtails that are not less than 6 inches in length.
- 5. When there is a choice, use side wiring with binding-head screw terminals. Wrap solid conductor tightly clockwise, two-thirds to three-fourths of the way around terminal screw.
- 6. Use a torque screwdriver when a torque is recommended or required by manufacturer.

Arlington County, Virginia Architect's Project No: 563007

- 7. When conductors larger than No. 12 AWG are installed on 15- or 20-A circuits, splice No. 12 AWG pigtails for device connections.
- 8. Tighten unused terminal screws on the device.
- 9. When mounting into metal boxes, remove the fiber or plastic washers used to hold device-mounting screws in yokes, allowing metal-to-metal contact.

## E. Receptacle Orientation:

- 1. Install ground pin of vertically mounted receptacles up, and on horizontally mounted receptacles to the right.
- 2. Install hospital-grade receptacles in patient-care areas with the ground pin or neutral blade at the top.
- F. Device Plates: Do not use oversized or extra-deep plates. Repair wall finishes and remount outlet boxes when standard device plates do not fit flush or do not cover rough wall opening.

## G. Dimmers:

- 1. Install dimmers within terms of their listing.
- 2. Verify that dimmers used for fan speed control are listed for that application.
- 3. Install unshared neutral conductors on line and load side of dimmers according to manufacturers' device listing conditions in the written instructions.
- H. Arrangement of Devices: Unless otherwise indicated, mount flush, with long dimension vertical and with grounding terminal of receptacles on top. Group adjacent switches under single, multigang wall plates.
- I. Adjust locations of floor service outlets and service poles to suit arrangement of partitions and furnishings.

#### 3.2 GFCI RECEPTACLES

A. Install non-feed-through-type GFCI receptacles where protection of downstream receptacles is not required.

## 3.3 IDENTIFICATION

- A. Comply with Section 260553 "Identification for Electrical Systems."
- B. Identify each receptacle with panelboard identification and circuit number. Use hot, stamped, or engraved machine printing with white-filled lettering on face of plate, and durable wire markers or tags inside outlet boxes.

Arlington County, Virginia Architect's Project No: 563007

## 3.4 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:
  - 1. In healthcare facilities, prepare reports that comply with recommendations in NFPA 99.
  - 2. Test Instruments: Use instruments that comply with UL 1436.
  - 3. Test Instrument for Convenience Receptacles: Digital wiring analyzer with digital readout or illuminated digital-display indicators of measurement.
- B. Tests for Convenience Receptacles:
  - 1. Line Voltage: Acceptable range is 105 to 132 V.
  - 2. Percent Voltage Drop under 15-A Load: A value of 6 percent or higher is unacceptable.
  - 3. Ground Impedance: Values of up to 2 ohms are acceptable.
  - 4. GFCI Trip: Test for tripping values specified in UL 1436 and UL 943.
  - 5. Using the test plug, verify that the device and its outlet box are securely mounted.
  - 6. Tests shall be diagnostic, indicating damaged conductors, high resistance at the circuit breaker, poor connections, inadequate fault current path, defective devices, or similar problems. Correct circuit conditions, remove malfunctioning units and replace with new ones, and retest as specified above.
- C. Wiring device will be considered defective if it does not pass tests and inspections.
- D. Prepare test and inspection reports.

END OF SECTION 262726

Arlington County, Virginia Architect's Project No: 563007

#### SECTION 262816 - ENCLOSED SWITCHES AND CIRCUIT BREAKERS

## PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

#### 1.2 SUMMARY

- A. Section Includes:
  - 1. Fusible switches.
  - 2. Nonfusible switches.
  - 3. Receptacle switches.
  - 4. Shunt trip switches.
  - 5. Molded-case circuit breakers (MCCBs).
  - 6. Molded-case switches.
  - 7. Enclosures.

## 1.3 DEFINITIONS

- A. NC: Normally closed.
- B. NO: Normally open.
- C. SPDT: Single pole, double throw.

## 1.4 ACTION SUBMITTALS

- A. Product Data: For each type of enclosed switch, circuit breaker, accessory, and component indicated. Include dimensioned elevations, sections, weights, and manufacturers' technical data on features, performance, electrical characteristics, ratings, accessories, and finishes.
  - 1. Enclosure types and details for types other than NEMA 250, Type 1.
  - 2. Current and voltage ratings.
  - 3. Short-circuit current ratings (interrupting and withstand, as appropriate).
  - 4. Include evidence of NRTL listing for series rating of installed devices.
  - 5. Detail features, characteristics, ratings, and factory settings of individual overcurrent protective devices, accessories, and auxiliary components.

Arlington County, Virginia Architect's Project No: 563007

- 6. Include time-current coordination curves (average melt) for each type and rating of overcurrent protective device; include selectable ranges for each type of overcurrent protective device.
- B. Shop Drawings: For enclosed switches and circuit breakers. Include plans, elevations, sections, details, and attachments to other work.
  - 1. Wiring Diagrams: For power, signal, and control wiring.

## 1.5 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.
  - 1. Test procedures used.
  - 2. Test results that comply with requirements.
  - 3. Results of failed tests and corrective action taken to achieve test results that comply with requirements.
- B. Manufacturer's field service report.

### 1.6 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For enclosed switches and circuit breakers to include in emergency, operation, and maintenance manuals. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:
  - 1. Manufacturer's written instructions for testing and adjusting enclosed switches and circuit breakers
  - 2. Time-current coordination curves (average melt) for each type and rating of overcurrent protective device; include selectable ranges for each type of overcurrent protective device.

## 1.7 QUALITY ASSURANCE

- A. Source Limitations: Obtain enclosed switches and circuit breakers, overcurrent protective devices, components, and accessories, within same product category, from single source from single manufacturer.
- B. Product Selection for Restricted Space: Drawings indicate maximum dimensions for enclosed switches and circuit breakers, including clearances between enclosures, and adjacent surfaces and other items. Comply with indicated maximum dimensions.
- C. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

Arlington County, Virginia Architect's Project No: 563007

D. Comply with NFPA 70.

#### 1.8 PROJECT CONDITIONS

- A. Environmental Limitations: Rate equipment for continuous operation under the following conditions unless otherwise indicated:
  - 1. Ambient Temperature: Not less than minus 22 deg F and not exceeding 104 deg F.
  - 2. Altitude: Not exceeding 6600 feet.
- B. Interruption of Existing Electric Service: Do not interrupt electric service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary electric service according to requirements indicated:
  - 1. Notify Owner no fewer than seven days in advance of proposed interruption of electric service.
  - 2. Indicate method of providing temporary electric service.
  - 3. Do not proceed with interruption of electric service without Owner's written permission.
  - 4. Comply with NFPA 70E.

#### 1.9 COORDINATION

A. Coordinate layout and installation of switches, circuit breakers, and components with equipment served and adjacent surfaces. Maintain required workspace clearances and required clearances for equipment access doors and panels.

## PART 2 - PRODUCTS

2.1 All panelboards, switchboards, circuit breakers, dry type transformers and disconnect switches shall be of the same manufacturer.

#### 2.2 FUSIBLE SWITCHES

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. Eaton Electrical Sector; Eaton Corporation.
  - 2. General Electric Company.
  - 3. Siemens Industry, Inc.
  - 4. Square D.

Arlington County, Virginia Architect's Project No: 563007

- B. Type HD, Heavy Duty, Single Throw, 240-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, with clips or bolt pads to accommodate specified fuses, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.
- C. Type HD, Heavy Duty, Six Pole, Single Throw, 240-V ac, 200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, with clips or bolt pads to accommodate specified fuses, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.
- D. Type HD, Heavy Duty, Double Throw, 240-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, with clips or bolt pads to accommodate specified fuses, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.

## 2.3 NONFUSIBLE SWITCHES

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. Eaton Electrical Sector; Eaton Corporation.
  - 2. General Electric Company.
  - 3. Siemens Industry, Inc.
  - 4. Square D.
- B. Type HD, Heavy Duty, Single Throw, 600-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.
- C. Type HD, Heavy Duty, Six Pole, Single Throw, 600-V ac, 200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.
- D. Type HD, Heavy Duty, Double Throw, 600-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.

## E. Accessories:

- 1. Equipment Ground Kit: Internally mounted and labeled for copper and aluminum ground conductors.
- 2. Neutral Kit: Internally mounted; insulated, capable of being grounded and bonded; labeled for copper and aluminum neutral conductors.
- 3. Isolated Ground Kit: Internally mounted; insulated, capable of being grounded and bonded; labeled for copper and aluminum neutral conductors.
- 4. Auxiliary Contact Kit: One NO/NC (Form "C") auxiliary contact(s), arranged to activate before switch blades open.
- 5. Hookstick Handle: Allows use of a hookstick to operate the handle.

Arlington County, Virginia Architect's Project No: 563007

6. Lugs: Mechanical type, suitable for number, size, and conductor material.

## 2.4 MOLDED-CASE CIRCUIT BREAKERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. Eaton Electrical Sector; Eaton Corporation.
  - 2. General Electric Company.
  - 3. Siemens Industry, Inc.
  - 4. Square D.
- B. General Requirements: Comply with UL 489, NEMA AB 1, and NEMA AB 3, with interrupting capacity to comply with available fault currents.
- C. Thermal-Magnetic Circuit Breakers: Inverse time-current element for low-level overloads and instantaneous magnetic trip element for short circuits. Adjustable magnetic trip setting for circuit-breaker frame sizes 250 A and larger.
- D. Adjustable, Instantaneous-Trip Circuit Breakers: Magnetic trip element with front-mounted, field-adjustable trip setting.
- E. Electronic Trip Circuit Breakers: Field-replaceable rating plug, rms sensing, with the following field-adjustable settings:
  - 1. Instantaneous trip.
  - 2. Long- and short-time pickup levels.
  - 3. Long- and short-time time adjustments.
  - 4. Ground-fault pickup level, time delay, and I<sup>2</sup>t response.
- F. Current-Limiting Circuit Breakers: Frame sizes 400 A and smaller, and let-through ratings less than NEMA FU 1, RK-5.
- G. Integrally Fused Circuit Breakers: Thermal-magnetic trip element with integral limiter-style fuse listed for use with circuit breaker and trip activation on fuse opening or on opening of fuse compartment door.
- H. Ground-Fault, Circuit-Interrupter (GFCI) Circuit Breakers: Single- and two-pole configurations with Class A ground-fault protection (6-mA trip).
- I. Ground-Fault, Equipment-Protection (GFEP) Circuit Breakers: With Class B ground-fault protection (30-mA trip).
- J. Features and Accessories:
  - 1. Standard frame sizes, trip ratings, and number of poles.
  - 2. Lugs: Mechanical type, suitable for number, size, trip ratings, and conductor material.

Arlington County, Virginia Architect's Project No: 563007

- 3. Application Listing: Appropriate for application; Type SWD for switching fluorescent lighting loads; Type HID for feeding fluorescent and high-intensity discharge lighting circuits.
- 4. Ground-Fault Protection: Comply with UL 1053; integrally mounted, self-powered type with mechanical ground-fault indicator; relay with adjustable pickup and time-delay settings, push-to-test feature, internal memory, and shunt trip unit; and three-phase, zero-sequence current transformer/sensor.
- 5. Communication Capability: Circuit-breaker-mounted communication module with functions and features compatible with power monitoring and control system, specified in Section 260913 "Electrical Power Monitoring and Control."
- 6. Shunt Trip: Trip coil energized from separate circuit, with coil-clearing contact.
- 7. Undervoltage Trip: Set to operate at 35 to 75 percent of rated voltage without intentional time delay.
- 8. Auxiliary Contacts: One SPDT switch with "a" and "b" contacts; "a" contacts mimic circuit-breaker contacts, "b" contacts operate in reverse of circuit-breaker contacts.
- 9. Alarm Switch: One NO contact that operates only when circuit breaker has tripped.
- 10. Key Interlock Kit: Externally mounted to prohibit circuit-breaker operation; key shall be removable only when circuit breaker is in off position.
- 11. Zone-Selective Interlocking: Integral with electronic trip unit; for interlocking ground-fault protection function.
- 12. Electrical Operator: Provide remote control for on, off, and reset operations.
- 13. Accessory Control Power Voltage: Integrally mounted, self-powered 120V.

## 2.5 MOLDED-CASE SWITCHES

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
  - 1. Eaton Electrical Sector; Eaton Corporation.
  - 2. General Electric Company.
  - 3. Siemens Industry, Inc.
  - 4. Square D.
- B. General Requirements: MCCB with fixed, high-set instantaneous trip only, and short-circuit withstand rating equal to equivalent breaker frame size interrupting rating.

#### C. Features and Accessories:

- 1. Standard frame sizes and number of poles.
- 2. Lugs: Mechanical type, suitable for number, size, trip ratings, and conductor material.
- 3. Ground-Fault Protection: Comply with UL 1053; remote-mounted and powered type with mechanical ground-fault indicator; relay with adjustable pickup and time-delay settings, push-to-test feature, internal memory, and shunt trip unit; and three-phase, zero-sequence current transformer/sensor.
- 4. Shunt Trip: Trip coil energized from separate circuit, with coil-clearing contact.
- 5. Undervoltage Trip: Set to operate at 35 to 75 percent of rated voltage without intentional time delay.

Arlington County, Virginia Architect's Project No: 563007

- 6. Auxiliary Contacts: One SPDT switch with "a" and "b" contacts; "a" contacts mimic switch contacts, "b" contacts operate in reverse of switch contacts.
- 7. Alarm Switch: One NO contact that operates only when switch has tripped.
- 8. Key Interlock Kit: Externally mounted to prohibit switch operation; key shall be removable only when switch is in off position.
- 9. Zone-Selective Interlocking: Integral with ground-fault shunt trip unit; for interlocking ground-fault protection function.
- 10. Electrical Operator: Provide remote control for on, off, and reset operations.
- 11. Accessory Control Power Voltage: Integrally mounted, self-powered; 120-V ac.

#### 2.6 ENCLOSURES

- A. Enclosed Switches and Circuit Breakers: NEMA AB 1, NEMA KS 1, NEMA 250, and UL 50, to comply with environmental conditions at installed location.
  - 1. Indoor, Dry and Clean Locations: NEMA 250, Type 1.
  - 2. Outdoor Locations: NEMA 250, Type 3R.
  - 3. Kitchen and Wash-Down Areas: NEMA 250, Type 4X, stainless steel.
  - 4. Other Wet or Damp, Indoor Locations: NEMA 250, Type 4.
  - 5. Indoor Locations Subject to Dust, Falling Dirt, and Dripping Noncorrosive Liquids: NEMA 250, Type 12.

## PART 3 - EXECUTION

#### 3.1 EXAMINATION

- A. Examine elements and surfaces to receive enclosed switches and circuit breakers for compliance with installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

## 3.2 INSTALLATION

- A. Install individual wall-mounted switches and circuit breakers with tops at uniform height unless otherwise indicated.
- B. Temporary Lifting Provisions: Remove temporary lifting eyes, channels, and brackets and temporary blocking of moving parts from enclosures and components.
- C. Install fuses in fusible devices.
- D. Comply with NECA 1.

Arlington County, Virginia Architect's Project No: 563007

#### 3.3 IDENTIFICATION

- A. Comply with requirements in Section 260553 "Identification for Electrical Systems."
  - 1. Identify field-installed conductors, interconnecting wiring, and components; provide warning signs.
  - 2. Label each enclosure with engraved metal or laminated-plastic nameplate.

### 3.4 FIELD QUALITY CONTROL

- A. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect, test, and adjust components, assemblies, and equipment installations, including connections.
- B. Perform tests and inspections.
- C. Acceptance Testing Preparation:
  - 1. Test insulation resistance for each enclosed switch and circuit breaker, component, connecting supply, feeder, and control circuit.
  - 2. Test continuity of each circuit.

## D. Tests and Inspections:

- 1. Perform each visual and mechanical inspection and electrical test stated in NETA Acceptance Testing Specification. Certify compliance with test parameters.
- 2. Correct malfunctioning units on-site, where possible, and retest to demonstrate compliance; otherwise, replace with new units and retest.
- 3. Perform the following infrared scan tests and inspections and prepare reports:
  - a. Initial Infrared Scanning: After Substantial Completion, but not more than 60 days after Final Acceptance, perform an infrared scan of each enclosed switch and circuit breaker. Remove front panels so joints and connections are accessible to portable scanner.
  - b. Follow-up Infrared Scanning: Perform an additional follow-up infrared scan of each enclosed switch and circuit breaker 11 months after date of Substantial Completion.
  - c. Instruments and Equipment: Use an infrared scanning device designed to measure temperature or to detect significant deviations from normal values. Provide calibration record for device.
- 4. Test and adjust controls, remote monitoring, and safeties. Replace damaged and malfunctioning controls and equipment.
- E. Enclosed switches and circuit breakers will be considered defective if they do not pass tests and inspections.

Arlington County, Virginia Architect's Project No: 563007

F. Prepare test and inspection reports, including a certified report that identifies enclosed switches and circuit breakers and that describes scanning results. Include notation of deficiencies detected, remedial action taken, and observations after remedial action.

## 3.5 ADJUSTING

- A. Adjust moving parts and operable components to function smoothly and lubricate as recommended by manufacturer.
- B. Set field-adjustable circuit-breaker trip ranges.

END OF SECTION 262816

# Arlington County, Virginia Architect's Project No: 563007

#### SECTION 265119 - LED INTERIOR LIGHTING

## PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

#### 1.2 SUMMARY

- A. Section Includes:
  - 1. Interior solid-state luminaires that use LED technology.
  - 2. Exit Signs
  - 3. Lighting fixture supports.

## B. Related Requirements:

1. Section 260923 "Lighting Control Devices" for automatic control of lighting, including time switches, photoelectric relays, occupancy sensors, and multipole lighting relays and contactors.

## 1.3 DEFINITIONS

- A. CCT: Correlated color temperature.
- B. CRI: Color Rendering Index.
- C. Fixture: See "Luminaire."
- D. IP: International Protection or Ingress Protection Rating.
- E. LED: Light-emitting diode.
- F. Lumen: Measured output of lamp and luminaire, or both.
- G. Luminaire: Complete lighting unit, including lamp, reflector, and housing.

#### 1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

Arlington County, Virginia Architect's Project No: 563007

- 1. Arrange in order of luminaire designation.
- 2. Include data on features, accessories, and finishes.
- 3. Include physical description and dimensions of luminaires.
- 4. Include emergency lighting units, including batteries and chargers.
- 5. Include life, output (lumens, CCT, and CRI), and energy efficiency data.
- 6. Photometric data and adjustment factors based on laboratory tests, complying with IESNA Lighting Measurements Testing and Calculation Guides, of each lighting fixture type. The adjustment factors shall be for lamps and accessories identical to those indicated for the lighting fixture as applied in this Project IES LM-79 and IES LM-80.
  - a. Manufacturers' Certified Data: Photometric data certified by manufacturer's laboratory with a current accreditation under the National Voluntary Laboratory Accreditation Program for Energy Efficient Lighting Products.
- B. Shop Drawings: For nonstandard or custom luminaires.
  - 1. Include plans, elevations, sections, and mounting and attachment details.
  - 2. Include details of luminaire assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
  - 3. Include diagrams for power, signal, and control wiring.
- C. Product Schedule: For luminaires and lamps. Use same designations indicated on Drawings.

#### 1.5 INFORMATIONAL SUBMITTALS

- A. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.
- B. Product Certificates: For each type of luminaire.
- C. Product Test Reports: For each luminaire, for tests performed by manufacturer and witnessed by a qualified testing agency.
- D. Sample warranty.

#### 1.6 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For luminaires and lighting systems to include in operation and maintenance manuals.
  - 1. Provide a list of all lamp types used on Project; use ANSI and manufacturers' codes.

Arlington County, Virginia Architect's Project No: 563007

## 1.7 QUALITY ASSURANCE

- A. Luminaire Photometric Data Testing Laboratory Qualifications: Luminaire manufacturer's laboratory that is accredited under the NVLAP for Energy Efficient Lighting Products.
- B. Provide luminaires from a single manufacturer for each luminaire type.
- C. Each luminaire type shall be binned within a three-step MacAdam Ellipse to ensure color consistency among luminaires.

## 1.8 DELIVERY, STORAGE, AND HANDLING

A. Protect finishes of exposed surfaces by applying a strippable, temporary protective covering before shipping.

#### 1.9 WARRANTY

- A. Warranty: Manufacturer and Installer agree to repair or replace components of luminaires that fail in materials or workmanship within specified warranty period.
- B. Warranty Period: Five year(s) from date of Substantial Completion.

#### 1.10 EXTRA MATERIALS

- A. Furnish extra materials described below that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
  - 1. Lamps: 10 for every 100 of each type and rating installed. Furnish at least one of each type.
  - 2. Battery and Charger Data: One for each emergency lighting unit.
  - 3. Ballasts: 1 for every 100 of each type and rating installed. Furnish at least one of each type.
  - 4. Drivers: 1 for every 100 of each type and rating installed. Furnish at least one of each type.
  - 5. Globes and Guards: 1 for every 20 of each type and rating installed. Furnish at least one of each type.
  - 6. Exit signs: Provide 10 additional exit signs (single face or double face, as needed) including 100' of conduit, boxes, wire, associated accessories and installation for each. Exit signs shall be installed as directed by the Architect, Owner, or Authority Having Jurisdiction (AHJ). Any unused additional exit signs shall be turned over to the Owner in their original boxes.

Arlington County, Virginia Architect's Project No: 563007

#### PART 2 - PRODUCTS

## 2.1 LUMINAIRE REQUIREMENTS

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. NRTL Compliance: Luminaires for hazardous locations shall be listed and labeled for indicated class and division of hazard by an NRTL.
- C. FM Global Compliance: Luminaires for hazardous locations shall be listed and labeled for indicated class and division of hazard by FM Global.
- D. Recessed Fixtures: Comply with NEMA LE 4.
- E. Bulb shape complying with ANSI C79.1.
- F. Lamp base complying with ANSI C81.61.
- G. CRI of minimum 80. CCT of 4100 K.
- H. Rated lamp life of 50,000 hours.
- I. Lamps dimmable from 100 percent to 0 percent of maximum light output.
- J. Internal driver:
  - 1. Minimum efficiency: 85% at full load.
  - 2. Minimum Operating Ambient Temperature: -20° C. (-4° F.).
  - 3. Input Voltage:  $120 277V (\pm 10\%)$  at 60 Hz.
  - 4. Integral short circuit, open circuit, and overload protection.
  - 5. Power Factor: > 0.95.
  - 6. Total Harmonic Distortion:  $\leq 20\%$ .
  - 7. Comply with FCC 47 CFR Part 15.

## K. LED Modules:

- 1. Comply with IES LM-79 and LM-80 requirements.
- 2. Minimum CRI 80 and color temperature 4200° K unless otherwise specified in LIGHTING FIXTURE SCHEDULE.
- 3. Minimum Rated Life: 50,000 hours per IES L70.
- 4. Light output lumens as indicated in the LIGHTING FIXTURE SCHEDULE.
- L. Nominal Operating Voltage: 277 V ac.
- M. Lens Thickness: At least 0.125 inch minimum unless otherwise indicated.
- N. Housings:

## Arlington County, Virginia Architect's Project No: 563007

- 1. Extruded-aluminum housing and heat sink.
- 2. Clear anodized powder-coat finish.

#### 2.2 CYLINDER

- A. Manufacturers: Subject to compliance with requirements, provide products as scheduled on the drawings.
- B. Minimum lumens as indicated on LIGHT FIXTURE SCHEDULE. Minimum allowable efficacy of 80 lumens per watt.
- C. With integral mounting provisions.

#### 2.3 DOWNLIGHT

- A. Manufacturers: Subject to compliance with requirements, provide products as scheduled on the drawings.
- B. Minimum lumens as indicated on LIGHT FIXTURE SCHEDULE. Minimum allowable efficacy of 80 lumens per watt.
- C. Universal mounting bracket.
- D. Integral junction box with conduit fittings.

#### 2.4 LINEAR INDUSTRIAL

- A. Manufacturers: Subject to compliance with requirements, provide products as scheduled on the drawings.
- B. Minimum lumens as indicated on LIGHT FIXTURE SCHEDULE. Minimum allowable efficacy of 80 lumens per watt.
- C. Housing and heat sink rated to the following:
  - 1. Class 1, Division 2 Group(s) A.
  - 2. NEMA 4X.
  - 3. IP 54.
  - 4. IP 66.
  - 5. Marine and wet locations.
  - 6. CSA C22.2 No 137.

Arlington County, Virginia Architect's Project No: 563007

#### 2.5 RECESSED LINEAR

- A. Manufacturers: Subject to compliance with requirements, provide products as scheduled on the drawings.
- B. Minimum lumens as indicated on LIGHT FIXTURE SCHEDULE. Minimum allowable efficacy of 85 lumens per watt.
- C. Integral junction box with conduit fittings.

#### 2.6 STRIP LIGHT

- A. Manufacturers: Subject to compliance with requirements, provide products as scheduled on the drawings.
- B. Minimum lumens as indicated on LIGHT FIXTURE SCHEDULE. Minimum allowable efficacy of 80 lumens per watt.
- C. Integral junction box with conduit fittings.

## 2.7 SURFACE MOUNT, LINEAR

- A. Manufacturers: Subject to compliance with requirements, provide products as scheduled on the drawings.
- B. Minimum lumens as indicated on LIGHT FIXTURE SCHEDULE. Minimum allowable efficacy of 80 lumens per watt.
- C. Integral junction box with conduit fittings.

## 2.8 SURFACE MOUNT, NONLINEAR

- A. Manufacturers: Subject to compliance with requirements, provide products as scheduled on the drawings.
- B. Minimum lumens as indicated on LIGHT FIXTURE SCHEDULE. Minimum allowable efficacy of 80 lumens per watt.
- C. Integral junction box with conduit fittings.

#### 2.9 SUSPENDED, LINEAR

A. Manufacturers: Subject to compliance with requirements, provide products as scheduled on the drawings.

Arlington County, Virginia Architect's Project No: 563007

B. Minimum lumens as indicated on LIGHT FIXTURE SCHEDULE. Minimum allowable efficacy of 85 lumens per watt.

#### 2.10 SUSPENDED, NONLINEAR

- A. Manufacturers: Subject to compliance with requirements, provide products as scheduled on the drawings.
- B. Minimum lumens as indicated on LIGHT FIXTURE SCHEDULE. Minimum allowable efficacy of 85 lumens per watt.
- C. Integral junction box with conduit fittings.

#### 2.11 EXIT SIGNS

- A. General Requirements for Exit Signs: Comply with UL 924; for sign colors, visibility, luminance, and lettering size, comply with authorities having jurisdiction.
- B. Internally Lighted Signs:
  - 1. Lamps for AC Operation: LEDs, 50,000 hours minimum rated lamp life.
  - 2. Self-Powered Exit Signs (Battery Type): Integral automatic charger in a self-contained power pack.
    - a. Battery: Sealed, maintenance-free, nickel-cadmium type.
    - b. Charger: Fully automatic, solid-state type with sealed transfer relay.
    - c. Operation: Relay automatically energizes lamp from battery when circuit voltage drops to 80 percent of nominal voltage or below. When normal voltage is restored, relay disconnects lamps from battery, and battery is automatically recharged and floated on charger.
    - d. Test Push Button: Push-to-test type, in unit housing, simulates loss of normal power and demonstrates unit operability.
    - e. LED Indicator Light: Indicates normal power on. Normal glow indicates trickle charge; bright glow indicates charging at end of discharge cycle.
    - f. Remote Test: Switch in hand-held remote device aimed in direction of tested unit initiates coded infrared signal. Signal reception by factory-installed infrared receiver in tested unit triggers simulation of loss of its normal power supply, providing visual confirmation of either proper or failed emergency response.
    - g. Integral Self-Test: Factory-installed electronic device automatically initiates coderequired test of unit emergency operation at required intervals. Test failure is annunciated by an integral audible alarm and a flashing red LED.
- C. Provide Five (5) extra exits signs for installation as directed by the Architect. Installation costs for these shall be included in the bid. Unused exit signs shall be turned over to the owner.

Arlington County, Virginia Architect's Project No: 563007

#### 2.12 MATERIALS

#### A. Metal Parts:

- 1. Free of burrs and sharp corners and edges.
- 2. Sheet metal components shall be steel unless otherwise indicated.
- 3. Form and support to prevent warping and sagging.
- B. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

#### C. Diffusers and Globes:

- 1. Prismatic glass
- 2. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
- 3. Glass: Annealed crystal glass unless otherwise indicated.
- 4. Lens Thickness: At least 0.125 inch minimum unless otherwise indicated.

## D. Housings:

- 1. Extruded-aluminum housing and heat sink.
- 2. Clear anodized powder-coat finish.
- E. Factory-Applied Labels: Comply with UL 1598. Include recommended lamps. Locate labels where they will be readily visible to service personnel, but not seen from normal viewing angles when lamps are in place.
  - 1. Label shall include the following lamp characteristics:
    - a. "USE ONLY" and include specific lamp type.
    - b. Lamp diameter, shape, size, wattage, and coating.
    - c. CCT and CRI for all luminaires.

#### 2.13 METAL FINISHES

A. Variations in finishes are unacceptable in the same piece. Variations in finishes of adjoining components are acceptable if they are within the range of approved Samples and if they can be and are assembled or installed to minimize contrast.

## 2.14 LUMINAIRE FIXTURE SUPPORT COMPONENTS

A. Comply with requirements in Section 260529 "Hangers and Supports for Electrical Systems" for channel and angle iron supports and nonmetallic channel and angle supports.

## Arlington County, Virginia Architect's Project No: 563007

- B. Single-Stem Hangers: 1/2-inch steel tubing with swivel ball fittings and ceiling canopy. Finish same as luminaire.
- C. Wires: ASTM A 641/A 641 M, Class 3, soft temper, zinc-coated steel, 12 gage.
- D. Rod Hangers: 3/16-inch minimum diameter, cadmium-plated, threaded steel rod.
- E. Hook Hangers: Integrated assembly matched to luminaire, line voltage, and equipment with threaded attachment, cord, and locking-type plug.

#### **PART 3 - EXECUTION**

#### 3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Examine roughing-in for luminaire to verify actual locations of luminaire and electrical connections before fixture installation. Proceed with installation only after unsatisfactory conditions have been corrected.

#### 3.2 TEMPORARY LIGHTING

A. If approved by the Architect, use selected permanent luminaires for temporary lighting. When construction is sufficiently complete, clean luminaires used for temporary lighting and install new lamps.

## 3.3 INSTALLATION

- A. Comply with NECA 1.
- B. Install luminaires level, plumb, and square with ceilings and walls unless otherwise indicated.
- C. Install lamps in each luminaire.
- D. Supports:
  - 1. Sized and rated for luminaire weight.
  - 2. Able to maintain luminaire position after cleaning and relamping.
  - 3. Provide support for luminaire without causing deflection of ceiling or wall.
  - 4. Luminaire mounting devices shall be capable of supporting a horizontal force of 100 percent of luminaire weight and vertical force of 400 percent of luminaire weight.
- E. Flush-Mounted Luminaire Support:

Arlington County, Virginia Architect's Project No: 563007

- 1. Secured to outlet box.
- 2. Attached to ceiling structural members at four points equally spaced around circumference of luminaire.
- 3. Trim ring flush with finished surface.

## F. Wall-Mounted Luminaire Support:

- 1. Attached to structural members in walls.
- 2. Do not attach luminaires directly to gypsum board.

#### G. Ceiling-Mounted Luminaire Support:

1. Ceiling mount with two 5/32-inch- diameter aircraft cable supports adjustable to 120 inches in length.

## H. Suspended Luminaire Support:

- 1. Pendants and Rods: Where longer than 48 inches, brace to limit swinging.
- 2. Stem-Mounted, Single-Unit Luminaires: Suspend with twin-stem hangers. Support with approved outlet box and accessories that hold stem and provide damping of luminaire oscillations. Support outlet box vertically to building structure using approved devices.
- 3. Continuous Rows of Luminaires: Use tubing or stem for wiring at one point and wire support for suspension for each unit length of luminaire chassis, including one at each end.
- 4. Do not use ceiling grid as support for pendant luminaires. Connect support wires or rods to building structure.

## I. Ceiling-Grid-Mounted Luminaires:

- 1. Secure to any required outlet box.
- 2. Secure luminaire to the luminaire opening using approved fasteners in a minimum of four locations, spaced near corners of luminaire.
- 3. Use approved devices and support components to connect luminaire to ceiling grid and building structure in a minimum of four locations, spaced near corners of luminaire.
- J. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables" for wiring connections.

#### 3.4 IDENTIFICATION

A. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

#### 3.5 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

Arlington County, Virginia Architect's Project No: 563007

- 1. Operational Test: After installing luminaires, switches, and accessories, and after electrical circuitry has been energized, test units to confirm proper operation.
- 2. Test for Emergency Lighting: Interrupt power supply to demonstrate proper operation. Verify transfer from normal power to battery power and retransfer to normal.
- B. Luminaire will be considered defective if it does not pass operation tests and inspections.
- C. Prepare test and inspection reports.

## 3.6 ADJUSTING

- A. Occupancy Adjustments: When requested within 12 months of date of Substantial Completion, provide on-site assistance in adjusting the direction of aim of luminaires to suit occupied conditions. Make up to two visits to Project during other-than-normal hours for this purpose. Some of this work may be required during hours of darkness.
  - 1. During adjustment visits, inspect all luminaires. Replace lamps or luminaires that are defective.
  - 2. Parts and supplies shall be manufacturer's authorized replacement parts and supplies.
  - 3. Adjust the aim of luminaires in the presence of the Architect.

END OF SECTION 265119

Arlington County, Virginia Architect's Project No: 563007

## SECTION 210500 - COMMON WORK RESULTS FOR FIRE-SUPPRESSION (\*AD-01)

## PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

#### 1.2 DEFINITIONS

- A. Finished Spaces: Spaces other than mechanical and electrical equipment rooms, furred spaces, pipe chases, unheated spaces immediately below roof, spaces above ceilings, unexcavated spaces, crawlspaces, and tunnels.
- B. Exposed, Interior Installations: Exposed to view indoors.
- C. Exposed, Exterior Installations: Exposed to view outdoors.
- D. Subject to Freezing: Subject to temperatures below 40 degrees F.
- E. Concealed, Interior Installations: Concealed from view and protected from physical contact by occupants.
- F. Concealed, Exterior Installations: Concealed from view and protected from physical contact by occupants.
- G. The following are industry abbreviations for plastic materials:
  - 1. CPVC: Chlorinated polyvinyl chloride plastic.
- H. The following are industry abbreviations for rubber materials:
  - 1. EPDM: Ethylene-propylene-diene terpolymer rubber.
  - 2. NBR: Acrylonitrile-butadiene rubber.

## 1.3 QUALITY ASSURANCE

- A. Equipment and appliances comprising portions of the mechanical systems regulated by the International Mechanical Code shall be listed and labeled in accordance with the current edition of the Virginia International Building Code.
- B. Equipment and appliances comprising portions of the fire suppression systems regulated by the NFPA 13 shall be installed in accordance with the listing and the manufacturer's installation instructions. Manufacturer's installation instructions shall be available on the job site for use and inspection.

Arlington County, Virginia Architect's Project No: 563007

- C. Steel Support Welding: Qualify processes and operators according to AWS D1.1, "Structural Welding Code--Steel."
- D. Steel Pipe Welding: Qualify processes and operators according to ASME Boiler and Pressure Vessel Code: Section IX, "Welding and Brazing Qualifications."
  - 1. Comply with provisions in ASME B31 Series, "Code for Pressure Fire-suppression piping."
  - 2. Certify that each welder has passed AWS qualification tests for welding processes involved and that certification is current.
- E. Electrical Characteristics for Fire-Suppression Equipment: Equipment of higher electrical characteristics may be furnished provided such proposed equipment is approved in writing and connecting electrical services, circuit breakers, and conduit sizes are appropriately modified. If minimum energy ratings or efficiencies are specified, equipment shall comply with requirements.

## 1.4 DELIVERY, STORAGE, AND HANDLING

A. Deliver pipes and tubes with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe end damage and to prevent entrance of dirt, debris, and moisture.

## 1.5 COORDINATION

- A. Arrange for pipe spaces, chases, slots, and openings in building structure during progress of construction, to allow for fire-suppression installations.
- B. Coordinate installation of required supporting devices and set sleeves in poured-in-place concrete and other structural components as they are constructed.
- C. Coordinate requirements for access panels and doors for fire-suppression items requiring access that are concealed behind finished surfaces. Access panels and doors are specified in Division 08 Section "Access Doors and Frames.

#### 1.6 INTENT OF CONTRACT DOCUMENTS

- A. Fire Suppression/Protection drawings are diagrammatic, indicating general locations and arrangements of pipe, and equipment. Not necessarily indicating all offsets, conditions, and appurtenances required to provide clearances for maximum practical accessibility to perform maintenance.
- B. Coordinate work to achieve proper operation and to provide a maintainable installed condition.
- C. Notify the Architect's representative immediately of conditions which do not comply or will not produce this result.

Arlington County, Virginia Architect's Project No: 563007

#### PART 2 - PRODUCTS

#### 2.1 DIELECTRIC FITTINGS

- A. Description: Combination fitting of copper alloy and ferrous materials with threaded, solder-joint, plain, or weld-neck end connections that match fire-suppression piping system materials.
- B. Insulating Material: Suitable for system fluid, pressure, and temperature.
- C. Dielectric Unions: Factory-fabricated, union assembly, for 250-psig minimum working pressure at 180°F.
- D. Dielectric-Flange Kits: Companion-flange assembly for field assembly. Include flanges, full-face- or ring-type neoprene or phenolic gasket, phenolic or polyethylene bolt sleeves, phenolic washers, and steel backing washers.
  - 1. Separate companion flanges and steel bolts and nuts shall have 150- or 300-psig minimum working pressure where required to suit system pressures.
- E. Dielectric Couplings: Galvanized-steel coupling with inert and non-corrosive, thermoplastic lining; threaded ends; and 300-psig minimum working pressure at 225°F.
- F. Dielectric Nipples: Electroplated steel nipple with inert and non-corrosive, thermoplastic lining; plain, threaded, or grooved ends; and 300-psig minimum working pressure at 225°F.]

#### 2.2 MECHANICAL SLEEVE SEALS

- A. Description: Modular sealing element unit, designed for field assembly, to fill annular space between pipe and sleeve.
  - 1. Available Manufacturers:
    - a. Advance Products & Systems, Inc.
    - b. Calpico, Inc.
    - c. Metraflex Co.
    - d. Pipeline Seal and Insulator, Inc.
  - 2. Sealing Elements: EPDM interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
  - 3. Pressure Plates: Plastic. Include two for each sealing element.
  - 4. Connecting Bolts and Nuts: Carbon steel with corrosion-resistant coating of length required to secure pressure plates to sealing elements. Include one for each sealing element.

## 2.3 JOINING MATERIALS

A. Pipe Joint Compound for Threaded Pipe: UL listed.

Arlington County, Virginia Architect's Project No: 563007

#### 2.4 SLEEVES

- A. Galvanized-Steel Sheet: 0.0239-inch minimum thickness; round tube closed with welded longitudinal joint.
- B. Steel Pipe: ASTM A 53, Type E, Grade B, Schedule 40, galvanized, plain ends.
- C. Cast Iron: Cast or fabricated "wall pipe" equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop, unless otherwise indicated.
- D. Molded PE: Reusable, PE, tapered-cup shaped, and smooth-outer surface with nailing flange for attaching to wooden forms.

#### 2.5 ESCUTCHEONS

- A. Description: Manufactured wall and ceiling escutcheons and floor plates, with an ID to closely fit around fire-suppression piping and an OD that completely covers opening.
- B. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with polished chrome-plated finish.
- C. One-Piece, Cast-Brass Type: With set screw. Finish: Polished chrome-plated and rough brass.
- D. Split-Casting, Cast-Brass Type: With concealed hinge and set screw. Finish: Polished chrome-plated and rough brass.
- E. One-Piece, Stamped-Steel Type: With set screw or spring clips and chrome-plated finish.
- F. Split-Plate, Stamped-Steel Type: With exposed-rivet hinge, set screw or spring clips, and chrome-plated finish.
- G. One-Piece, Floor-Plate Type: Cast-iron floor plate.
- H. Split-Casting, Floor-Plate Type: Cast brass with concealed hinge and set screw.

#### 2.6 GROUT

- A. Description: ASTM C 1107, Grade B, nonshrink and nonmetallic, dry hydraulic-cement grout.
  - 1. Characteristics: Post-hardening, volume-adjusting, nonstaining, noncorrosive, nongaseous, and recommended for interior and exterior applications.
  - 2. Design Mix: 5000-psi, 28-day compressive strength.
  - 3. Packaging: Premixed and factory packaged.

Arlington County, Virginia Architect's Project No: 563007

#### PART 3 - EXECUTION

## 3.1 FIRE-SUPPRESSION PIPING SYSTEMS - COMMON REQUIREMENTS

- A. Install fire-suppression piping according to the following requirements and Division 21 Sections specifying fire-suppression piping systems.
- B. Install fire-suppression piping in concealed locations, unless otherwise indicated and except in equipment rooms and service areas.
- C. Install fire-suppression piping indicated to be exposed and fire-suppression piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise. Diagonal runs are permitted in the attic spaces.
- D. Install fire-suppression piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- E. Install fire-suppression piping to permit valve servicing.
- F. Install fire-suppression piping free of sags and bends.
- G. Install fittings for changes in direction and branch connections.
- H. Select system components with pressure rating equal to or greater than system operating pressure.
- I. Install escutcheons for penetrations of walls, ceilings, and floors according to the following:
  - 1. Fire-suppression piping:
    - a. Fire-suppression piping with Fitting or Sleeve Protruding from Wall: One-piece, deep-pattern type.
    - b. Chrome-Plated Fire-suppression piping: One-piece, cast-brass type with polished chrome-plated finish.
    - c. Insulated Fire-suppression piping: One-piece, stamped-steel type with spring clips.
    - d. Bare Fire-suppression piping at Wall and Floor Penetrations in Finished Spaces: One-piece, cast-brass type with polished chrome-plated finish.
    - e. Bare Fire-suppression piping at Ceiling Penetrations in Finished Spaces: One-piece, cast-brass type with polished chrome-plated finish.
    - f. Bare Fire-suppression piping in Unfinished Service Spaces: One-piece, cast-brass type with rough-brass finish.
    - g. Bare Fire-suppression piping in Equipment Rooms: One-piece, cast-brass type.
    - h. Bare Fire-suppression piping at Floor Penetrations in Equipment Rooms: One-piece, floor-plate type.
- J. Sleeves are not required for core-drilled holes.
- K. Permanent sleeves are not required for holes formed by removable PE sleeves.

Arlington County, Virginia Architect's Project No: 563007

- L. Install sleeves for pipes passing through concrete and masonry walls, gypsum-board partitions, and concrete floor and roof slabs.
  - 1. Cut sleeves to length for mounting flush with both surfaces.
    - a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level. Extend cast-iron sleeve fittings below floor slab as required to secure clamping ring if ring is specified.
  - 2. Install sleeves in new walls and slabs as new walls and slabs are constructed.
    - a. Steel Pipe Sleeves: For pipes smaller than NPS 6.
    - b. Steel Sheet Sleeves: For pipes NPS 6 and larger, penetrating gypsum-board partitions.
    - c. Stack Sleeve Fittings: For pipes penetrating floors with membrane waterproofing. Secure flashing between clamping flanges. Install section of cast-iron soil pipe to extend sleeve to 2 inches above finished floor level. Refer to Division 07 Section "Sheet Metal Flashing and Trim" for flashing.
      - 1) Seal space outside of sleeve fittings with grout.
  - 3. Except for underground wall penetrations, seal annular space between sleeve and pipe or pipe insulation, using joint sealants appropriate for size, depth, and location of joint. Refer to Division 07 Section "Joint Sealants" for materials and installation.
- M. Aboveground, Exterior-Wall Pipe Penetrations: Seal penetrations using sleeves and mechanical sleeve seals. Select sleeve size to allow for 1-inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.
  - 1. Install steel pipe for sleeves smaller than 6 inches in diameter.
  - 2. Install cast-iron "wall pipes" for sleeves 6 inches and larger in diameter.
  - 3. Mechanical Sleeve Seal Installation: Select type and number of sealing elements required for pipe material and size. Position pipe in center of sleeve. Assemble mechanical sleeve seals and install in annular space between pipe and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.
- N. Underground, Exterior-Wall Pipe Penetrations: Install cast-iron "wall pipes" for sleeves. Seal pipe penetrations using mechanical sleeve seals. Select sleeve size to allow for 1-inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.
  - 1. Mechanical Sleeve Seal Installation: Select type and number of sealing elements required for pipe material and size. Position pipe in center of sleeve. Assemble mechanical sleeve seals and install in annular space between pipe and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.
- O. Fire-Barrier Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with firestop materials. Refer to Division 07 Section "Penetration Firestopping" for materials.
- P. Verify final equipment locations for roughing-in.

Arlington County, Virginia Architect's Project No: 563007

Q. Refer to equipment specifications in other Sections of these Specifications for roughing-in requirements.

#### 3.2 FIRE-SUPPRESSION PIPING JOINT CONSTRUCTION

- A. Join pipe and fittings according to the following requirements and Division 21 Sections specifying fire-suppression piping systems.
- B. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
- C. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.
- D. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
  - 1. Apply appropriate tape or pipe joint compound to external pipe threads unless dry seal threading is specified.
  - 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged. Do not use pipe sections that have cracked or open welds.
- E. Grooved Joints: Assemble joints with listed coupling, gasket, lubricant, and bolts.
  - 1. Ductile-Iron Pipe: Radius-cut-groove ends of piping. Use grooved-end fittings and grooved-end-pipe couplings.
  - 2. Steel Pipe: Roll-groove piping. Use grooved-end fittings and rigid, grooved-end-pipe couplings, unless otherwise indicated.
- F. Welded Joints: Construct joints according to AWS D10.12, using qualified processes and welding operators according to Part 1 "Quality Assurance" Article.
- G. Flanged Joints: Select appropriate gasket material, size, type, and thickness for service application. Install gasket concentrically positioned. Use suitable lubricants on bolt threads.
- H. Plastic Fire-suppression piping Solvent-Cement Joints: Clean and dry joining surfaces. Join pipe and fittings according to the following:
  - 1. Comply with ASTM F 402 for safe-handling practice of cleaners, primers, and solvent cements.
  - 2. CPVC Fire-suppression piping: Join according to ASTM D 2846/D 2846M Appendix.
- I. Plastic Pressure Fire-suppression piping Gasketed Joints: Join according to ASTM D 3139.

## 3.3 CONCRETE BASES

A. Concrete Bases: Anchor equipment to concrete base according to equipment manufacturer's written instructions and according to seismic codes at Project.

Arlington County, Virginia Architect's Project No: 563007

- 1. Construct concrete bases of dimensions indicated, but not less than 4 inches larger in both directions than supported unit.
- 2. Install dowel rods to connect concrete base to concrete floor. Unless otherwise indicated, install dowel rods on 18-inch centers around the full perimeter of the base.
- 3. Install epoxy-coated anchor bolts for supported equipment that extend through concrete base, and anchor into structural concrete floor.
- 4. Place and secure anchorage devices. Use supported equipment manufacturer's setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
- 5. Install anchor bolts to elevations required for proper attachment to supported equipment.
- 6. Install anchor bolts according to anchor-bolt manufacturer's written instructions.
- 7. Use 3000-psi, 28-day compressive-strength concrete and reinforcement as specified in Division 03 Section "Cast-in-Place Concrete."

#### 3.4 ERECTION OF METAL SUPPORTS AND ANCHORAGES

- A. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor fire-suppression materials and equipment.
- B. Field Welding: Comply with AWS D1.1.

#### 3.5 GROUTING

- A. Mix and install grout for fire suppression equipment base bearing surfaces, pump and other equipment base plates, and anchors.
- B. Clean surfaces that will come into contact with grout.
- C. Provide forms as required for placement of grout.
- D. Avoid air entrapment during placement of grout.
- E. Place grout, completely filling equipment bases.
- F. Place grout on concrete bases and provide smooth bearing surface for equipment.
- G. Place grout around anchors.
- H. Cure placed grout.

## 3.6 EXCAVATION AND BACKFILL

- A. Excavation and backfill shall be as indicated in Division 1 specifications and on the drawings. If excavation and backfill is not otherwise indicated the following shall apply:
  - 1. Excavate trenches to indicated gradients, lines, depths, and elevations.
    - a. Beyond the building perimeter, excavate trenches to allow installation of top of pipe below minimum depth of cover based on locality or 1'-0" below frost line whichever is lower.

Arlington County, Virginia Architect's Project No: 563007

- 2. Excavate trenches to uniform widths to provide twelve inches clear on each side of pipe. Excavate trench walls vertically from trench bottom.
- 3. Trench Bottoms: Excavate trench bottoms to provide flat surface. Place and compact six inches of sand. Excavate and shape sand to provide uniform bearing and support of pipes. Shape sand to provide continuous support for bells, joints, fittings, and barrels of pipes. Sand shall be free of projecting stones and sharp objects.
- 4. Backfill and hand tamp to 95% proctor to six inches above the top of the pipe.
- 5. Backfill and machine tamp the remainder of the trench to 95% proctor in twelve-inch lifts.

END OF SECTION 210500

Arlington County, Virginia Architect's Project No: 563007

-- THIS PAGE INTENTIONALLY LEFT BLANK --

Arlington County, Virginia Architect's Project No: 563007

## SECTION 211000 - WATER-BASED FIRE-SUPPRESSION SYSTEMS(\*AD-01)

## PART 1 - GENERAL

#### 1.1 RELATED DOCUMENTS

A. Provisions of the Contract and of the Contract Documents apply to this Section.

#### 1.2 SUMMARY

#### A. Description of Work:

- 1. The work includes redesigning and providing modifications to the existing automatic fire extinguishing system, including relocation of existing heads and additional heads to provide a final automatic fire extinguishing system of required hazard for building occupancy to afford complete fire protection coverage throughout. Where required the work shall include upsizing existing mains to increase flows for more hydraulically demanding hazard classifications. The design, equipment, materials, installation and workmanship shall be in strict accordance with the Owners insurance underwriters requirements, the Virginia Construction Code, and the required and advisory provisions of NFPA.
- 2. Unless otherwise indicated piping shall not be run in spaces containing electrical equipment in the form of transformers, panel-boards, switchgear, or computer servers.
  - a. Exceptions:
    - 1) Personal computers (PC,s)
    - 2) Spaces whose name does not include the term "Electrical", "Data", or "Computer"
- 3. Each system shall include materials, accessories and equipment necessary to provide each system complete and ready for use.
- 4. The design of each system shall give full consideration to blind spaces, piping, electrical equipment, ductwork, and all other construction and equipment to afford complete coverage.
- 5. Devices and equipment for fire protection service shall be of an approved make and type listed by the Underwriters' Laboratories, Inc., or approved by the Factory Mutual System.
- 6. In the publications referred to herein, the advisory provisions shall be considered to be mandatory, as though the word "shall" had been substituted for "should" wherever it appears.
- 7. Reference to the "authority having jurisdiction" shall be interpreted to mean the Local Fire Marshal..

Arlington County, Virginia Architect's Project No: 563007

- 8. Calculations shall include delivering water from the point of the fire hydrant flow test through the site piping.
- 9. Consideration shall be given to all unheated areas such as attics, utility rooms, loading docks, outdoor storage spaces with canopies, etc., to provide freeze protection in accordance with NFPA 13. This shall include the installation of dry sprinklers, antifreeze, and dry-pipe sprinkler systems where necessary.

#### 1.3 SYSTEM DESCRIPTIONS

A. Wet-Pipe Sprinkler System: Automatic sprinklers are attached to piping containing water and that is connected to water supply. Water discharges immediately from sprinklers when they are opened. Sprinklers open when heat melts fusible link or destroys frangible device. Hose connections are included if indicated.

## 1.4 PERFORMANCE REQUIREMENTS

- A. Component Working Pressure: Listed for at least 175 psig.
- B. Design shall be approved by authorities having jurisdiction.
- C. Fire-suppression sprinkler system design shall include the following:
  - 1. Margin of Safety for Available Water Flow and Pressure: 10 percent, including losses through water-service piping, valves, and backflow preventer, 10 psi or in accordance with local fire marshal.
  - 2. Sprinkler Occupancy Hazard Classifications shall be as indicated on the drawings. If not indicated comply with NFPA 13.
  - 3. Maximum Protection Area per Sprinkler shall be in accordance with its UL listing.
- D. Seismic Performance: Fire-suppression piping shall be capable of withstanding the effects of earthquake motions determined according to ASCE 7-02, "Minimum Design Loads for Buildings and Other Structures": Section 9, "Earthquake Loads."
- E. Seismic Performance for category C thru F: Fire-suppression piping shall be capable of withstanding the effects of earthquake motions determined according to NFPA 13

## 1.5 SUBMITTALS

- A. Product Data: For the following:
  - 1. Piping materials, flexible connections, and sprinkler specialty fittings.
  - 2. Pipe hangers and supports.
  - 3. Valves, including listed fire-protection valves, unlisted general-duty valves, specialty valves and trim.
  - 4. Air compressors, including electrical data.

Arlington County, Virginia Architect's Project No: 563007

- 5. Sprinklers, escutcheons, and guards. Include sprinkler flow characteristics, mounting, finish, and other pertinent data.
- 6. Alarm devices, including electrical data.
- B. Fire-hydrant flow test report.
- C. Approved Sprinkler Piping Shop Drawings: Working plans, prepared according to NFPA 13, including hydraulic calculations. Diagram power, signal, and control wiring.
  - 1. Include shop drawings indicating location of all sprinkler heads and all other construction that penetrates ceilings, including light fixtures, HVAC equipment, speakers, fire alarm devices, partition assemblies, etc.
- D. Welding certificates.
- E. Operation and Maintenance Data to include in emergency, operation, and maintenance manuals.

#### 1.6 CLOSEOUT SUBMITTALS

A. Field Test Reports and Certificates: Indicate and interpret test results for compliance with performance requirements and as described in NFPA 13 and NFPA 14. Include "Contractor's Material and Test Certificate for Aboveground Piping" and "Contractor's Material and Test Certificate for Underground Piping."

## 1.7 QUALITY ASSURANCE

- A. Installer Qualifications:
  - 1. Installer's responsibilities include designing, fabricating, and installing fire-suppression systems and providing professional engineering services needed to assume engineering responsibility. A Professional Engineer registered in the state where the project is constructed shall stamp and seal the Shop Drawings.
- B. Flow test:
  - 1. Bid shall be based on the indicated fire-hydrant flow and pressure.
  - 2. Design calculations shall be based on the results of a confirming fire-hydrant flow test performed or caused to be performed by the contractor dated within 1 year of shop drawings submission date.
- C. Welding: Qualify processes and operators according to ASME Boiler and Pressure Vessel Code: Section IX.
- D. NFPA Standards: Fire-suppression-system equipment, specialties, accessories, installation, and testing shall comply with the following:
  - 1. NFPA 13: "Installation of Sprinkler Systems." applicable edition.

Arlington County, Virginia Architect's Project No: 563007

#### 1.8 COORDINATION

- A. Relocate piping to clear the path of ductwork.
- B. Relocate piping to clear the path of conduit.
- C. Relocate piping to clear the path of cable tray.
- D. Coordinate layout and installation of sprinklers with other construction that penetrates ceilings, including light fixtures, HVAC equipment, and partition assemblies.

## 1.9 SPRINKLER CABINET(S) AND SPARE SPRINKLERS

- A. Provide finished, wall-mounted, steel sprinkler cabinet with hinged cover.
- B. Provide space for minimum of six spare sprinklers and sprinkler wrench.
- C. Provide minimum of six spare sprinklers and sprinkler wrench in cabinet.
- D. Provide number of sprinklers required by NFPA 13.
- E. Provide separate cabinet with sprinklers and wrench for each type of sprinkler on Project.
- F. Provide products packaged with protective covering for storage. Identify contents with label.

## PART 2 - PRODUCTS

## 2.1 STEEL PIPE AND FITTINGS

- A. Threaded-End, Schedule 40 Steel Pipe: ASTM A 53/A 53M, ASTM A 135, or ASTM A 795, hot-dip galvanized where indicated and with factory- or shop-formed threaded or grooved ends.
  - 1. Cast-Iron Threaded Flanges: ASME B16.1.
  - 2. Malleable-Iron Threaded Fittings: ASME B16.3.
  - 3. Gray-Iron Threaded Fittings: ASME B16.4.
  - 4. Steel Threaded Pipe Nipples: ASTM A 733, made of ASTM A 53/A 53M or ASTM A 106, Schedule 40, seamless steel pipe. Include ends matching joining method.
  - 5. Steel Threaded Couplings: ASTM A 865.
- B. Plain-End, Schedule 40 Steel Pipe: ASTM A 53/A 53M, ASTM A 135, or ASTM A 795 hot-dip galvanized where indicated.
  - 1. Steel Welding Fittings: ASTM A 234/A 234M, and ASME B16.9 or ASME B16.11.
  - 2. Steel Flanges and Flanged Fittings: ASME B16.5.

Arlington County, Virginia Architect's Project No: 563007

- C. Grooved-End, Schedule 40 Steel Pipe: ASTM A 53/A 53M, ASTM A 135, or ASTM A 795, hot-dip galvanized where indicated and with factory- or field-formed, square-cut- or roll-grooved ends.
  - 1. Grooved-Joint Piping Systems:
    - a. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company: FireLock.
    - b. Grooved-End Fittings: UL-listed, ASTM A 536, ductile-iron casting with OD matching steel-pipe OD. Basis of design shall be Victaulic Firelock fittings, models 001, 002, 003, 006 for sizes 2" thru 8". Smaller sizes shall be Victaulic models 10, 11, 20, 60 or IR fittings or IGS fittings. No Threaded fittings can be used 1-1/4" -12".
      - 1. Installation-Ready<sup>TM</sup> fittings for grooved end steel piping in fire protection applications sizes NPS 1-½ thru 2½ (DN 32 thru DN 65). Fittings shall consist of a ductile iron housing conforming to ASTM A-536, Grade 65-45-12, with Installation-Ready<sup>TM</sup> ends, [orange enamel coated] [red enamel coated] [galvanized]. Fittings complete with pre-lubricated Grade "E" EPDM Type 'A' gasket; and ASTM A449 electroplated steel bolts and nuts. System shall be UL listed for a working pressure of 300 psi (2065 kPa) and FM approved for working pressure 365 psi (2517kPa).
      - 2. Fittings shall have a shorter center-to-end dimensions for installation in tight spaces.
      - 3. Fittings are rigid, for direct stab installation without field disassembly.
      - 4. Installation-Ready™ Fittings shall be Victaulic FireLock® Style 101, Style 102, and style 103, which shall be designed for direct "stab" installation onto grooved pipe without prior disassembly of the fitting.
      - 5. Fittings shall require visual pad-to-pad verification of complete installation.
    - c. Grooved-End-Pipe Couplings: UL 213 and AWWA C606, rigid pattern, unless otherwise indicated; gasketed fitting matching steel-pipe OD. Include ductile-iron housing with keys matching steel-pipe and fitting grooves, prelubricated rubber gasket listed for use with housing, and ASTM A449 compliant steel bolts and nuts. Coupling design shall be visual bolt pad to bolt pad, NO coupling requiring a torque wrench shall be used. Only IR Couplings will be used. For dry systems a Flush Seal gasket shall be used.
    - d. 1" In lieu of threaded steel piping systems, the Victaulic FireLock IGS System with "Installation-Ready<sup>TM</sup> fittings and couplings will be used for NPS 1 (DN 25) Schedule 10 and Schedule 40 carbon steel pipe in fire protection applications. System rated for a maximum working pressure to 365 psi (2517 kPa).

Arlington County, Virginia Architect's Project No: 563007

- 1. Groove: IGS "Innovative Groove System" groove with shortened "A" dimension and tapered groove backside for ease of installation.
  - a. Grooving Tool: Victaulic RG2100, with IGS Confirmation Gauge.

## 2. Fittings:

- a. Ductile iron housing conforming to ASTM A-536, Grade 65-45-12. Orange enamel coated or galvanized.
  - i. Victaulic Style 101 (90-degree elbow), Style 102 (tee), and Style 108 (coupling) with Installation-Ready<sup>TM</sup> ends.
  - Style 108 single-bolt coupling provided with EPDM Type A pressure responsive gasket with Vic-Plus lubricant, and ASTM A449 compliant electroplated steel bolt and nut. CrMo alloy steel coupling linkage.
- b. Thread x Groove adapter fittings and welded outlets with IGS grooved end, ASTM A53, grade A.
- 1. Victaulic Mechanical Couplings for Fire Protection: Basis of Design. Manufactured in two segments of cast ductile iron, conforming to ASTM A-536, Grade 65-45-12. Gaskets shall be pressure-responsive synthetic rubber, grade to suit the intended service, conforming to ASTM D-2000. Mechanical Coupling bolts shall be zinc plated (ASTM B-633) heat treated carbon steel track head conforming to ASTM A-449 and A-183, minimum tensile strength 110,000 psi (758450 kPa) as provided standard Victaulic.

## a. **Rigid Type**:

- 1) "Installation Ready" rigid joints shall be Victaulic FireLock® EZ Style 009N and 107N, in sizes 1-1/4"(DN32) through 12" (DN300) sizes as only approved manuf. Designed for direct "stab" installation onto grooved pipe without prior disassembly of the coupling. For sizes 1-1/4"(DN32) through 2" (DN50) sizes. One bolt Style 108 couplings will be used for 1" size. One bolt 109 couplings can be used in lieu of 009N.
- 2) Housings shall be cast with offsetting, angle-pattern bolt pads to provide system rigidity and support and hanging in accordance with NFPA 13.
- 3) Rigid couplings shall require visual pad-to-pad verification of complete installation. Tongue and recess type couplings which require the use of a torque wrench to achieve the exact required gap between housings are not permitted. Installation Ready (IR) couplings will be the only style coupling approved.
- b. **Flexible Type**: Use in seismic areas where required by NFPA 13.
  - 1) "Installation Ready" flexible joints shall be Victaulic Style 177N QuickVic<sup>TM</sup>, in sizes 2"(DN50) through 8"(DN200), which shall be designed for direct "stab" installation onto grooved pipe without prior disassembly of the coupling.

Arlington County, Virginia Architect's Project No: 563007

- c. Standard flexible couplings shall be Victaulic Style 77.
- D. Grooved-End, Schedule 10 Steel Pipe: Schedule 10 in NPS 2½" and smaller; and NFPA 13-specified wall thickness in NPS 6 to NPS 10; with factory- or field-formed, roll-grooved ends.
  - 1. Grooved-Joint Piping Systems:
    - a. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company: FireLock.
    - b. Grooved-End Fittings: UL-listed, ASTM A 536, ductile-iron casting with OD matching steel-pipe OD.
    - c. Grooved-End-Pipe Couplings: UL 213 and AWWA C606, rigid pattern, unless otherwise indicated; gasketed fitting matching steel-pipe OD. Include ductile-iron housing with keys matching steel-pipe and fitting grooves, pre-lubricated rubber gasket listed for use with housing, steel bolts and nuts.
    - d. In lieu of rigid pipe offsets or return bends for sprinkler drops, the Victaulic VicFlex<sup>TM</sup> Multiple-Use Flexible Stainless Steel Sprinkler Drop System may be used to locate sprinklers as required by final finished ceiling tiles and walls. The drop system shall consist of a braided type 304 stainless steel flexible tube, zinc plated steel Male threaded nipple or Victaulic FireLock IGS Groove Style 108 coupling for connection to branch-line piping, and a zinc plated steel reducer with a female thread for connection to the sprinkler head.
      - 1) The drop shall include a UL approved Series AH1 with 3" bend radius; AH2-CC braided hose with a bend radius to 2" to allow for proper installation in confined spaces.
      - 2) Union joints shall be provided for ease of installation.
      - 3) The flexible drop shall attach to the ceiling grid using a one-piece open gate Series AB2N bracket over/under. The bracket shall allow installation before the ceiling tile is in place.
        - a) Grooving Tool: Victaulic RG2100, with IGS Confirmation Gauge.

## 2.2 FLEXIBLE CONNECTORS

- A. Flexible connectors shall have materials suitable for system fluid. Include 175-psig minimum working-pressure rating and ends according to the following:
  - 1. NPS 2 and Smaller: grooved.
  - 2. NPS 2-1/2 (DN 65) and Larger: grooved.
  - 3. Option for NPS 2-1/2 and Larger: Grooved for use with grooved-end-pipe couplings.
- B. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company AH2CC.
- C. Stainless-Steel-Hose/Stainless-Steel Pipe, Flexible Connectors: Corrugated, stainless-steel, inner tubing covered with stainless-steel wire braid. Include stainless-steel nipples or flanges, welded to hose.

Arlington County, Virginia Architect's Project No: 563007

#### 2.3 CORROSION-PROTECTIVE ENCASEMENT FOR PIPING

A. Encasement for Underground Metal Piping: ASTM A 674 or AWWA C105, PE film, 0.008-inch minimum thickness, tube or sheet.

#### 2.4 SPRINKLER SPECIALTY FITTINGS

- A. Sprinkler specialty fittings shall be UL listed or FMG approved, with 175-psig (1200-kPa) minimum working-pressure rating, and made of materials compatible with piping.
- B. Outlet Specialty Fittings:
  - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company.
  - 2. Mechanical-T and -Cross Fittings: UL 213, ductile-iron housing with gaskets, bolts and nuts, and threaded, locking-lug, or grooved outlets. Basis of design Victaulic style 920/920N and style 922.
  - 3. Snap-On and Strapless Outlet Fittings: UL 213, ductile-iron housing or casting with gasket and threaded outlet. Basis of design Victaulic style 923.
- C. Sprinkler Drain and Alarm Test Fittings: Cast- or ductile-iron body; with threaded or locking-lug inlet and outlet, test valve, and orifice and sight glass.
  - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company.

## 2.5 LISTED FIRE-PROTECTION VALVES

- A. Valves shall be UL listed or FMG approved, with 175-psig minimum pressure rating.
  - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company.
- B. OS&Y Gate Valves: UL 262.
  - 1. Ductile-iron body with flanged x Groove or groove x groove ends. No Flange x Flange will be accepted.
    - a. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company or engineer approved equal. Basis of design Victaulic model 771H or 771F.
- C. Ball Valves: Comply with UL 1091, except with ball instead of disc.
  - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company.

Arlington County, Virginia Architect's Project No: 563007

- 2. NPS 1-1/2 and Smaller: Bronze body with grooved ends. Basis of Design: Victaulic Series 728
- 3. NPS 2 and NPS 2-1/2: ductile-iron body with grooved ends.
- 4. NPS 3: Ductile-iron body with grooved ends.
- D. Butterfly Valves: UL 1091.
  - 1. NPS 2 and Smaller: Bronze body with grooved ends.
    - a. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company.
  - 2. NPS 2-1/2 and Larger: Bronze, cast-iron, or ductile-iron body; wafer type or with flanged or grooved ends. Valve seat shall be pressure-responsive, and the stem offset from the disc centerline to provide complete 360-degree circumferential seating. Basis of Design: Victaulic Series 705. Each valve must be individually tested at factory to include electronics.
    - a. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company.
- E. Check Valves NPS 2 and Larger: UL 312, spring-assisted swing type for vertical or horizontal installation, cast- ductile iron body with flanged or grooved ends. Basis of Design: Victaulic Series 717.
- F. Indicating Valves: UL 1091, with integral indicating device and ends matching connecting piping.
  - 1. Indicator: Weatherproof actuator housing with electrical, 15 amp @125-VAC 60 HZ, prewired, single-pole-single-throw, supervisory switches
  - 2. NPS 2 and Smaller: Ball or butterfly valve with bronze body with grooved ends. Basis of Design: Victaulic Series 728.
    - a. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company.
  - 3. NPS 2-1/2 and Larger: Butterfly valve with cast- or ductile-iron body; wafer type or with flanged or grooved ends.
    - a. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company.

#### 2.6 GENERAL-DUTY VALVES

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company.
- B. Ball Valves NPS 2 and Smaller: MSS SP-110, 2-piece copper-alloy body with chrome-plated brass ball, 600-psig minimum CWP rating, blowout-proof stem, and threaded ends.

Arlington County, Virginia Architect's Project No: 563007

- C. Check Valves NPS 2 and Smaller: MSS SP-80, Type 4, Class 125 minimum, swing type with bronze body, nonmetallic disc, and threaded ends.
- D. Globe Valves NPS 2 and Smaller: MSS SP-80, Type 2, Class 125 minimum, with bronze body, nonmetallic disc, and threaded ends.

#### 2.7 SPRINKLERS

- A. Sprinklers shall be UL listed or FMG approved, with 175-psig minimum pressure rating. Basis of design Victaulic/Globe.
- B. Basis-of-Design Product: Subject to compliance with requirements, provide Victaulic Company or engineer approved equal
- C. Automatic Sprinklers: With glass bulb type heat-responsive element complying with the following:
  - 1. UL 199, for nonresidential applications.
- D. Wrenches shall be provided by the sprinkler manufacturer that directly engage the hex-shaped wrench boss integrally cast in the sprinkler body.
- E. Sprinkler types, features, and options as follows:
  - 1. Brass upright sprinklers.
  - 2. Concealed pendent sprinklers, including cover plate.
  - 3. Pendent sprinklers.
  - 4. Pendent, dry-type sprinklers.
  - 5. Quick-response sprinklers.
  - 6. Recessed sprinklers, including escutcheon.
  - 7. Sidewall sprinklers.
  - 8. Sidewall, dry-type sprinklers.
  - 9. Grooved heads as manufactured by Victaulic.
- F. Sprinkler Escutcheons: Materials, types, and finishes for the following sprinkler mounting applications. Escutcheons for concealed, flush, and recessed-type sprinklers are specified with sprinklers.
  - 1. Ceiling Mounting: 2 piece, with 1-inch vertical adjustment.
  - 2. Sidewall Mounting: 2 piece, with 1-inch vertical adjustment.
- G. Sprinkler Guards: Wire-cage type, including fastening device for attaching to sprinkler.
- H. In lieu of rigid connections to dry sprinkler heads, a Victaulic VicFlex™ dry sprinkler, Model VS1, may be used. The sprinkler shall provide a vertical or horizontal flexible connection with a bend radius to 2" and allow for up to 4 bends.

Arlington County, Virginia Architect's Project No: 563007

#### PART 3 - EXECUTION

#### 3.1 PREPARATION

- A. Perform fire-hydrant flow test according to NFPA standards, procedures, appendices, or recommendations.
- B. Report test results no later than two days following the test in writing.

#### 3.2 EXAMINATION

- A. Examine walls and partitions for suitable thicknesses, fire- and smoke-rated construction, framing for hose-station cabinets, and other conditions where hose connections and stations are to be installed.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

## 3.3 PIPING APPLICATIONS, GENERAL

- A. Provide shop-welded joints where welded is required.
- B. Provide shop or manufacturer-threaded or grooved joints where threads are required.
- C. Do not use welded joints for galvanized-steel.
- D. Flanges, flanged fittings, unions, nipples, transition and special fittings with finish and pressure ratings same as or higher than system's pressure rating may be used in aboveground applications, unless otherwise indicated.

#### 3.4 SPRINKLER SYSTEM PIPING APPLICATIONS

- A. Wet-Pipe Sprinkler System, 175-psig Maximum Working Pressure:
  - 1. Sprinkler Piping NPS 2" and smaller use any of the following:
    - a. Threaded or grooved-end, black, schedule 40 steel pipe; cast- or malleable-iron threaded or grooved fittings; and threaded or grooved joints.
    - b. Plain-end, black, schedule 40 steel pipe; steel welding fittings; and welded joints.
    - c. Grooved-end, black, schedule 40 steel pipe with square-cut- or roll-grooved ends; grooved-end fittings; grooved-end-pipe couplings; and grooved joints.
  - 2. Sprinkler Piping NPS 2 ½" and larger use any of the following:
    - a. Threaded or grooved-end, black, schedule 40 steel pipe; cast- or malleable-iron threaded or grooved fittings; and threaded or grooved joints.
    - b. Plain-end, black, schedule 10 steel pipe; steel welding fittings; and welded joints.
    - c. Grooved-end, black, Schedule 10 steel pipe; grooved-end fittings; grooved-end-pipe couplings; and roll grooved joints.

Arlington County, Virginia Architect's Project No: 563007

#### 3.5 VALVE APPLICATIONS

- A. Where specific valve types are not indicated, the following requirements apply:
  - 1. Listed Fire-Protection Valves: UL listed and FMG approved for application.
    - a. Shutoff Duty: Use ball, or butterfly valves.

#### 3.6 JOINT CONSTRUCTION

- A. Refer to Section "Common Work Results for Fire Suppression" for basic piping joint construction.
- B. Threaded or grooved Joints: Comply with NFPA 13 for pipe thickness and threads. Do not thread pipe smaller than 8" with wall thickness less than Schedule 40 unless approved by authorities having jurisdiction and threads may be are checked by a ring gage and shall comply with ASME B1.20.1.
- C. Grooved Joints: Assemble joints with listed coupling and gasket, lubricant, and bolts.
  - 1. Steel Pipe: Square-cut or roll-groove piping as indicated. Use grooved-end fittings and rigid, grooved-end-pipe couplings, unless otherwise indicated.
- D. Dissimilar-Metal Piping Joints: Construct joints using dielectric fittings compatible with both piping materials.
  - 1. NPS 2 and Smaller: Use dielectric unions, couplings, or nipples.
  - 2. NPS 2-1/2 to NPS 4: Use dielectric flanges.
  - 3. NPS 5 and Larger: Use dielectric flange insulation kits.

## 3.7 PIPING INSTALLATION

- A. Refer to Section "Common Work Results for Fire Suppression" for basic piping installation.
- B. Locations and Arrangements: Drawing plans, shop drawings, schematics, and diagrams indicate general location and arrangement of piping. Install piping as indicated.
  - 1. Deviations from approved working drawings for piping require written approval from authorities having jurisdiction and Architect. File written approval with Architect before deviating.
- C. Provide approved fittings to make changes in direction, branch takeoffs from mains, and reductions in pipe sizes.
- D. Provide unions adjacent to each valve in pipes 2" and smaller. Unions are not required on flanged devices or in piping installations using grooved joints.

Arlington County, Virginia Architect's Project No: 563007

- E. Provide flanges or flange adapters on valves, and equipment having 2-1/2" and larger pipe connections.
- F. Provide "Inspector's Test Connections" in sprinkler system piping, complete with shutoff valve. Test connections that discharge to the exterior shall discharge 1'-0" above a concrete splash block. Provide splash block under this section of the specifications. Pipe penetration shall be installed to coursing dimensions where concrete masonry units are utilized to construct wall.
- G. Provide sprinkler piping with drains for complete system drainage.
- H. Provide alarm devices.
- I. Hangers and Supports: Refer to Section "Hangers and Supports for Fire-Suppression Piping" for hanger materials.
  - 1. Install sprinkler system piping according to NFPA 13.
- J. Earthquake Protection for Seismic Design Category C thru F: Install piping according to NFPA 13 to protect from earthquake damage.
- K. Install pressure gages on each riser or feed main, and at each sprinkler test connection. Include pressure gages with connection not less than ¼" and with soft metal seated globe valve, arranged for draining pipe between gage and valve. Install gages to permit removal, and install where not subject to freezing.
- L. Fill wet-pipe sprinkler system piping with water.

## 3.8 VALVE INSTALLATION

- A. Install listed fire-protection valves, unlisted general-duty valves, specialty valves and trim, controls, and specialties according to NFPA 13 and authorities having jurisdiction.
- B. Install listed fire-protection shutoff valves supervised-open, located to control sources of water supply except from fire department connections. Install permanent identification signs indicating portion of system controlled by each valve.
- C. Valves for Wall-Type Fire Hydrants: Install nonrising-stem gate valve in water-supply pipe.

## 3.9 SPRINKLER APPLICATIONS

- A. Use the following sprinkler types unless otherwise indicated:
  - 1. Rooms without Ceilings: Upright sprinklers.
  - 2. Rooms with Suspended Ceilings: Recessed pendent sprinklers.
  - 3. Wall Mounting: Recessed Sidewall sprinklers.
  - 4. Spaces Subject to Freezing: Dry pendent sprinklers.
  - 5. Special Applications: Extended-coverage, and quick-response sprinklers where required.
  - 6. Sprinkler Finishes:

Arlington County, Virginia Architect's Project No: 563007

- a. Upright, Pendent, and Sidewall Sprinklers: Chrome plated in finished spaces exposed to view; rough brass in unfinished spaces not exposed to view.
- b. Concealed Sprinklers: Rough brass, with factory white painted cover plate.
- c. Recessed Sprinklers: Chrome plated with matching two-piece escutcheon.

## 3.10 SPRINKLER INSTALLATION

- A. Install sprinklers in suspended ceilings in the center of acoustical ceiling panels and tiles.
- B. Do not install pendent or sidewall, wet-type sprinklers in areas subject to freezing. Use dry-type sprinklers with water supply from heated space wherever possible. Otherwise, use, antifreeze sprinkler systems, or dry-pipe systems.

#### 3.11 CONNECTIONS

- A. Install piping adjacent to equipment to allow service and maintenance.
- B. Connect water-supply piping to fire-suppression piping. Include backflow preventer between potable-water piping and fire-suppression piping.
- C. Ground equipment. Grounding shall be in accordance with section "Grounding and Bonding for Electrical Systems."
- D. Coordinate connection of wiring.
- E. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A and UL 486B.

#### 3.12 LABELING AND IDENTIFICATION

A. Install labeling and pipe markers on equipment and piping according to requirements in NFPA 13 and NFPA 14 and "Common Work Results for Fire-Suppression" for piping identifications.

## 3.13 FIELD QUALITY CONTROL

- A. Perform the following field tests and inspections and prepare test reports:
  - 1. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
  - 2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
  - 3. Energize circuits to electrical equipment and devices.

Arlington County, Virginia Architect's Project No: 563007

- 4. Flush, test, and inspect sprinkler systems according to NFPA 13, "Systems Acceptance" Chapter.
- 5. Coordinate with fire alarm tests. Operate as required.
- B. Report test results promptly and in writing to Architect and authorities having jurisdiction.

## 3.14 CLEANING AND PROTECTION

- A. Clean dirt and debris from sprinklers.
- B. Provide sprinklers to replace sprinklers with paint or coating other than the original factory finish.
- C. Protect sprinklers from damage and debris until Substantial Completion.
- D. Protect the building exterior when operating drains and test connections discharging to the building exterior.
- E. Dirt and stains on any surfaces resulting from the work of this section shall be cleaned and removed under this section.

## 3.15 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain the system.

END OF SECTION 211000

#### ITB No. 23-DES-ITBPW-448 ATTACHMENT B - BID FORM

#### **PRICING SHEET**

# FURNISH ALL LABOR, MATERIALS AND EQUIPMENT FOR THE RENOVATION OF THE COURTHOUSE 12TH FLOOR DEPARTMENT OF ENVIRONMENTAL SERVICES/FACILITIES DESIGN AND CONSTRUCTION IN ARLINGTON, VIRGINIA

#### PLEASE PROVIDE PRICES IN ALL CELLS HIGHLIGHTED IN BLUE

## SECTION A. PROJECT NOT TO EXCEED COST ITEMS

ITEM NO.	CSI DIVISION	<u>ITEM</u>		PRICE	
1	1	GENERAL REQUIREMENT		\$ 52,788	3.78
2	2	EXISTING CONDITION DEMOLITION		\$ 22,500	0.00
3	5	METAL		\$ 29,500	0.00
4	6	WOOD PLASTIC AND COMPOSITES		\$ 25,000	0.00
5	7	THERMAL AND MOSITURE PROTECTION		\$ 30,000	0.00
6	8	OPENINGS/DOORS AND WINDOWS		\$ 50,300	0.00
7	9	FINISHES		\$ 63,660	0.00
8	21	FIRE SUPPRESSION		\$ 8,750	0.00
9	22	PLUMBING		\$ 27,000	0.00
10	23	MECHANICAL		\$ 33,385	5.00
11	26	ELECTRICAL		\$ 67,844	4.00
12	0	OVERHEAD & PROFIT		\$ 21,519	9.06
13	0	PERFORMANCE BONDS		\$ 13,800	0.00
14	0	INSURANCE		\$ 750	0.00
TOTAL BASE BID COURTHOUSE 12TH FLOOR RENOVATIONS ITEMS No. 1-13			\$ 446,796	6.84	

BIDDER NAME: Step 1 Enterprises, LLC Page 1 of 1

## CONTRACTOR PERFORMANCE EVALUATION POLICY

Department of Management & Finance, Purchasing Division

Dr. Sharon Lewis, Ed.D., LL.M., CPPB, VCO Division Chief

1.0	Table of
	Contents

1.0	Table of Contents	1
2.0	Background and Purpose	1
3.0	Policy Error! Bookma	ark not defined.
4.0	Procedures	3
5.0	Internal Controls	4
Attach	nment A – Sample Contractor Performance Assessment Forn	า

# 2.0 Background and Purpose

For quality assurance purposes, it is essential the County has a mechanism to collect contractor performance information for capital construction projects.

This Policy identifies roles and responsibilities and establishes policies and procedures for collecting and reporting contractor performance. This operating procedure applies to all Arlington County capital construction contracts greater than \$250,000.00 and may be used for projects other than construction.

Please be advised, the clause must be added to the solicitation to be used for any resulting contract. The Contractor must be notified, in advance of responding to any Bid or RFP, that their performance will be monitored using the criteria in the performance form.

April 2022

## 3.0 Policy

It is the Purchasing Division's policy that clear and timely evaluations of a contractor's performance are performed.

- 3.1. The evaluation should be an objective report of a contractor's performance during the contract.
- 3.2. Evaluation factors for each assessment shall include at a minimum:
  - a) Technical (quality of product or service)
  - b) Cost Control
  - c) Schedule/Timeliness
  - d) Sub-contractor Management
  - e) Other (late or non-payment to subcontractors, termination, etc.)
- 3.3. The Project Officer (PjO) responsible for assessing a contractor's performance and recording that information must ensure that the information accurately depicts and corresponds to the contractor's performance.
- 3.4. An evaluation must be completed for all capital construction contracts equal to or greater than \$250,000.00.
- 3.5. Evaluations are not completed for subcontractors. However, evaluation of a contractor's performance should include information on the ability of a prime contractor to manage and coordinate subcontractor efforts if applicable.
- 3.6. The Project Officer must certify in all evaluation forms as to the accuracy of its contents and shall not negotiate the contents of the Contractor Evaluation Form or the Ratings with the Contractor or its representative for any reason. The Contractor must be allowed the opportunity to provide comments related to the contents of the evaluation.
- 3.7. An evaluation will be valid for no more than three (3) years.

April 2022 2

#### 4.0 Procedures

- 4.1 The Project Officer (PjO) may deem it necessary to complete the Contractor Evaluation Form during different phases of the Contract as noted below:
  - a) At 50% completion of the work.
  - b) After final completion for a single project or task order, but prior to final payment;
  - c) Prior to exercising an option year;
  - Anytime during the course of the project, if the Project Officer deems it necessary to provide feedback as to the performance of the Contractor;
  - e) Upon termination of a Contractor.
- 4.2 The Project Officer will forward the completed and signed Contractor Evaluation Form to the Procurement Officer or the Assistant Purchasing Agent (APA) for review.
- 4.2 The Contractor may, within thirty (30) calendar days of receipt of the evaluation, submit a written response to the Project Officer if they concur or do not concur with the evaluation.
  - a) If the contractor does not concur with the evaluation and is disputing any information contained in the evaluation, they may provide additional information concerning the project that may be relevant to the evaluation of the Contractor's performance to the Project Officer and Purchasing Agent.
  - b) If the Project Officer finds it necessary for good cause to revise an evaluation, they may do so provided they include a written explanation for the revision acceptable to the Purchasing Agent. If not, the evaluation will be closed, remain as written, but include any Contractor response, and included in the Project and Procurement File.
  - c) After the thirty (30) day comment period, any additional information provided by the Contractor will not be accepted.

April 2022

# 5.0 Internal Controls

- 5.1 This Policy shall be reviewed at least every two years to ensure the contents remain relevant and reflects current regulations and guidance.
- 5.2 The Project Officer is responsible for documenting the department's contract file with the Contractor Performance Evaluation Form.
- 5.3 The Procurement Officer that conducted the solicitation process will conduct spot checks to ensure a Contractor Performance Evaluation is conducted, with oversight by the Assistant Purchasing Agents.

April 2022