



## CITY OF HAVELOCK

Post Office Box 368  
Havelock, NC 28532

### INVITATION TO BID

Pursuant to North Carolina General Statutes §143-131, the City of Havelock invites informal bids on the following:

Bids must be submitted in accordance with the attached specifications. Bids must include an itemized schedule (including quantity, unit price and total) for each work element. Bids can be submitted by mail, email, fax or hand delivered. Cover sheets, envelopes, etc. should be clearly marked with the words:

*“City of Havelock,  
2022 Sewer Line and Manhole Repair at 113 Berkshire Drive, Havelock”*

**Address Bids to:** Lee Tillman, Director of Finance  
City of Havelock  
P.O. Box 368  
1 Governmental Ave.  
Havelock, NC 28532  
Fax: 252-447-0126  
Email: [Bids@havelocknc.us](mailto:Bids@havelocknc.us)

Bids will be accepted until **2:00 PM (EST) on Wednesday, October 26, 2022** at which time they will be reviewed in the office of the City Finance Director. Quotes are not subject to public inspection until the contract is awarded. The bids are good for 75 days after opening. The winning bidder will be issued a Notice To Proceed (NTP) along with a Purchase Order. The performance period is 90 calendar days from the NTP.

**Bidders are cautioned not to submit bids until the proposed requirements and specifications have been carefully examined. It will be considered that bidders will have satisfied themselves as to the accuracy of the specifications. No proposal will be considered unless prices are submitted for all items requested in any section. The City reserves the right to change the amount of quantities.**

**All bids submitted should be to the desired specifications. Any exceptions to the specifications will be evaluated based on the best interest of the City. Any deviation from specifications indicated herein must be clearly pointed out; otherwise, it will be considered that items offered are in strict compliance with these specifications, and bidder will be held responsible therefore. Deviations shall be explained in detail. The bidder shall not construe this paragraph as inviting deviation or implying that any deviation will be acceptable.**

The names of certain brands or makes denote quality standard in the article desired, but do not restrict bidders to the specific brand, make or manufacturer named. They are meant to convey to prospective bidders the general style, type, character and quality of the article desired.

The successful bidder on all construction contracts will be required to conduct the operation in accordance with all Federal, State, and Municipal health and safety rules, regulations and laws applicable to the operation. The successful bidder may be asked to provide the City with a copy of the company's safety plan prior to commencing work. For all projects over \$30,000, a general contractor's license must be furnished to the City if applicable.

Certificate to Transact Business in North Carolina: As a condition of contract award, each out-of-State Vendor that is a corporation, limited-liability company or limited-liability partnership shall have received, and shall maintain throughout the term of The Contract, a Certificate of Authority to Transact Business in North Carolina from the North Carolina Secretary of State, as required by North Carolina law. A contract requiring only an isolated transaction completed within a period of six months, and not in the course of a number of repeated transactions of like nature, shall not be considered as transacting business in North Carolina and shall not require a Certificate of Authority to Transact Business.

The City will not sell bid packages. Plans, specifications, and addenda may be viewed and obtained online at [www.havelocknc.us](http://www.havelocknc.us). Click on: “Bid on a Contract”; “Current Bids”. The Bidder’s List is maintained by Vendor Registry. Registration for the Bidder’s List is made online at [www.havelocknc.us](http://www.havelocknc.us). Click on: “Bid on a Contract”; “Vendor login/Registration”.

**N.C.G.S. (North Carolina General Statutes), specifically §160A-20.1(b), prohibit the City from entering into contracts with contractors and subcontractors who have not complied with the requirement of Article 2 or Chapter 64. The Contractor shall submit the E-Verify Affidavit, located in the Bid Proposal section, with their bid. Bids that do not include this Affidavit will be considered non-responsive.**

N.C.G.S 147-86.42-84 requires that contractors with a North Carolina Local Government must not utilize any subcontractor found on the State Treasurer’s Iran Divestment list or Companies Boycotting Israel list. The referenced lists can be found on the State Treasurer’s website at the address [www.nctreasurers.com](http://www.nctreasurers.com) and will be updated every 180 days.

The City of Havelock reserves the right to reject any or all proposals and to purchase items from the state contract in the efforts to award the contract to the bidder it deems to be for the best interest of the City.

MODIFICATION AND WITHDRAWAL OF BIDS. Bids may be modified or withdrawn by an appropriate document duly executed (in the manner that a Bid must be executed) and delivered to the place where Bids are to be submitted at any time prior to the opening of Bids. A request to withdraw a bid may be made to the Owner within 72 hours after Bids are opened in accordance with NCGS § 143-129.1 Requests to withdraw a Bid will be subject to the requirements of NCGS §143-129.1 and in the sole discretion of the City of Havelock Finance Officer.

This institution is an equal opportunity provider, and employer.

**Contact person(s) for information on this bid:**

For questions in regards to the bid specifications, the City requires and only responds to questions submitted in writing and sent via email to: [Bids@havelocknc.us](mailto:Bids@havelocknc.us)

Questions must be received by **12:00 PM (EST) on Wednesday, October 12, 2022**. If questions are received, the City will respond no later than **2:00 PM (EST) on Tuesday, October 18, 2022**.

This is the 26th day of September 2022

Published: Vendor Registry September 26, 2022

CITY OF HAVELOCK

Lee W. Tillman  
Director of Finance



## Bid Sheet

Base Bid: \_\_\_\_\_

NC Sales Tax: \_\_\_\_\_

Delivery Cost (if applicable): \_\_\_\_\_

Total Cost to City: \_\_\_\_\_

Bids must include an itemized schedule by quantity, unit price and total for each work element.

Company Name: \_\_\_\_\_

Company Address: \_\_\_\_\_

Contact Person: \_\_\_\_\_

Telephone Number: \_\_\_\_\_

Email Address: \_\_\_\_\_

NC Contractor's License Type and Number: \_\_\_\_\_

Number of Addendums Acknowledged (circle one):    N/A    1    2    3    4

***As of the date listed below, the vendor or bidder listed above is compliant with N.C.G.S. 147-86.42-84, the Iran Divestment Act and the Companies Boycotting Israel Act.***

Authorized Signature: \_\_\_\_\_

Print Name of Authorized Signature: \_\_\_\_\_

Title: \_\_\_\_\_

**Address Bid to:**    Lee Tillman, Director of Finance  
                                  City of Havelock  
                                  P.O. Drawer 368  
                                  1 Governmental Avenue  
                                  Havelock, NC 28532  
                                  Bids@Havelocknc.us

**Please indicate the Bid name on the outside of the envelope.**

## 2022 Sewer Line and Manhole Repair at 113 Berkshire Drive, Havelock

### **Objective:**

Repair of manhole N18 and attached gravity sewer line sections on Berkshire Drive near the address of house 113 and the intersection at Nottingham Drive.

### **Scope:**

Existing manhole N18 is to be excavated, raised approx. 3” and reset in secure gravel base in existing location.

Existing line size is believed to be 8” PVC and two lengths of approximately 20 ft. upstream of manhole along Berkshire Drive and 28 ft. across road toward Nottingham Drive are to be replaced. Pipe is at a depth of approximately 8 1/2 feet. (See Figures 1, 3). Laterals from properties at 113 and 115 Berkshire should not be in conflict as they are directed to a line to the rear of those lots. Contractor to verify. The City of Havelock shall not be held responsible for omissions or errors in description. Disturbance of existing landscape features shall be held to a minimum and all disturbed areas returned to a condition equal or better when repair is complete. Care shall be taken so as not to damage existing features to remain such as roadways, curbs, driveways, sidewalks, etc. All features removed or damaged shall be replaced or repaired to existing condition or better. All demolished material shall become the property of the contractor and shall be removed from the work site and disposed of in accordance with all local, State, and Federal requirements. As-built documentation shall include a description of materials used and repair procedures completed at each site.

### **1. Gravity Sewer Materials:**

#### a. PVC SDR35 Gravity Sewer Pipe

Pipe shall conform to all requirements of AWWA and shall be capable of withstanding the overburden pressures determined by the depth of burial in the field.

#### b. Non-pressure-type Pipe Couplings

Couplings for joining new PVC pipe to existing pipe shall be solid sleeve type suitable for all types of pipe. When applicable, material shall be ductile iron with gaskets suitable for sewer service. Coupling shall be Maxadaptor coupling or equal, per AWWA C605.

#### c. Solid Wall Plastic Pipe Cutting

Cutting of pipe lengths shall be performed using tools and or equipment that will provide a neat, perpendicular cut without damage to the plastic. All burrs shall be removed using a file, knife or abrasive paper. Ends on the cut pipe shall be beveled to prevent gasket damage.

### **2. Dewatering:**

- a. The contractor shall dewater as required for completion of work. Excavation shall be kept free of water at all times during pipe removal, pipe replacement, and backfill operation.

- b. All dewatering shall flow through a sediment filter bag. Sediment filter bags shall be of Polypropylene non-woven geotextile fabric with a sewn-in sleeve of sufficient size to accept a 4-inch diameter discharge hose. The discharge hose shall be extended into the sleeve a minimum of six (6) inches and be tightly secured with a hose clamp or other suitable device to prevent leakage. Contractor shall size sediment filter bags as necessary to dewater excavations. Effluent to be directed to adjacent stormwater conveyance areas and Contractor shall remove any accumulation of sediment from such areas following dewatering operations.

**3. Excavation and Shoring:**

- a. Contractor is responsible for the design and protection of all excavation and shoring. Standard shoring practices including trench boxes, can be used and certified/stamped by manufacturer. If required, shoring shall be designed and sealed by a professional engineer registered in the State of North Carolina, as required by OSHA, CFR1926.
- b. Contractor shall notify NC 811 for utility locations prior to any excavations.
- c. In no case shall excavations exceed that which cannot be backfilled by the end of the work day.

**4. Backfill and Compaction:**

- a. All excavations shall be backfilled with select fill material if excavated material is unsuitable. Contractor shall be responsible for removal and disposal of all excavation material and construction debris.
- b. Compaction in embankment shall be to 95% standard proctor.
- c. Compaction in roadways, driveways, and sidewalks shall be to 98% standard proctor.

**5. Pipe and Manhole Bedding:**

- a. Pipe bedding shall consist of an eight-inch (8") depth of # 57 stone under pipe and #57 or ABC stone to top of pipe (*Figure 2*).

**6. Erosion and Sediment Control and Restoration:**

- a. The contractor shall be responsible for the installation and maintenance of all erosion and sediment control in accordance with the NC DEQ Erosion and Sediment Control Manual.
- b. Construction activities shall be completed in such a manner that erosion of disturbed areas and off-site sedimentation is absolutely minimized.
- c. All disturbed areas shall be restored as soon as construction is complete. Seed or sod type shall match existing grass in maintained areas. Follow the NC DEQ Erosion and Sediment Control Manual for type or as directed by City of Havelock representative.

## **7. Bypass Pumping:**

- a. Sewage bypass pumping shall be required for completion of repairs. If required, contractor shall design and furnish all material, labor, equipment, power, fuel, fuel storage, maintenance, etc. to implement a temporary bypass arrangement for the purpose of diverting flow around the work area on a daily basis for the duration of the repair. The bypass system shall meet the requirements of all codes and regulatory agencies having jurisdiction. Contractor shall be held liable for any and all fines imposed by local, State, and/or Federal agencies for failure to maintain flows or contain spills and/or overflows. Bypass to be run from existing manhole N19 on Berkshire Dr. down to N17 on Nottingham Dr. See Figure 2.

## **8. Traffic Control**

- a. Contractor shall submit a Traffic Control Plan for any operations affecting traffic including but not limited to lane closures. City must approve the traffic plan prior to implementation, particularly 24-hour notice prior to any lane closure.
- b. Access to residences for local traffic shall be maintained throughout contract. Contractor shall provide a minimum of 24-hour notice to City of Havelock for any road closure.

## **9. Pavement Restoration**

- a. Replacement of asphalt roadway and/or concrete driveways/sidewalks are the responsibility of the contractor and shall be returned to original condition before end of project.
- b. The maximum width of pavement replacement for the installation of new sewer main and point repairs shall be 10 feet. The maximum width of pavement replacement for the replacement of service laterals is 5 feet. If pavement cuts are 24 inches or less from the edge of pavement, then the asphalt must be removed and replaced to the edge of pavement.
- c. Striping: Provide standard paint double yellow centerline and one white side line at south side of Berkshire Drive, portion of disturbed crosswalk and stop line at Nottingham to match existing, and conform to DoT standards.

## **10. Access:**

- a. Access to project site is within existing City of Havelock right of way.

## **General Provisions:**

- a. Contractor shall comply with all requirements of OSHA 1926.

- b. Work hours shall be 8am to 5pm, Monday through Friday. No work shall be performed on City holidays. Work outside established work hours must be scheduled with the City 48 hours in advance and is subject to approval.
- c. Contractor will obtain all necessary permits. Permits required by City of Havelock are provided free of charge.
- d. Roadway repair is the responsibility of the contractor.
- e. Contractor shall control erosion and sediment release while this project is under construction.
- f. The contractor is to clean and remove all debris at the end of each work day.
- g. All underground utilities are to be 811 located, prior to work being started.
- h. Contractor is responsible for all damage to existing roads, driveways, drainage, or utilities that occur as a result of the construction project.
- i. Contractor is responsible for all damage to City property that occurs as a result of the construction of the project.
- j. Contractor shall provide safety measures during the entire length of the project.
- k. Contractor is responsible for the storage and safety of materials and equipment on jobsite.
- l. Submittals must be approved by the City of Havelock prior to any work starting.
- m. The performance period is 90 days from the Notice to Proceed.

**Liquidated Damages:**

The Contractor agrees to pay the owner \$300 per day in liquidated damages for each day beyond the period of performance.



Figure 1: Work area map.


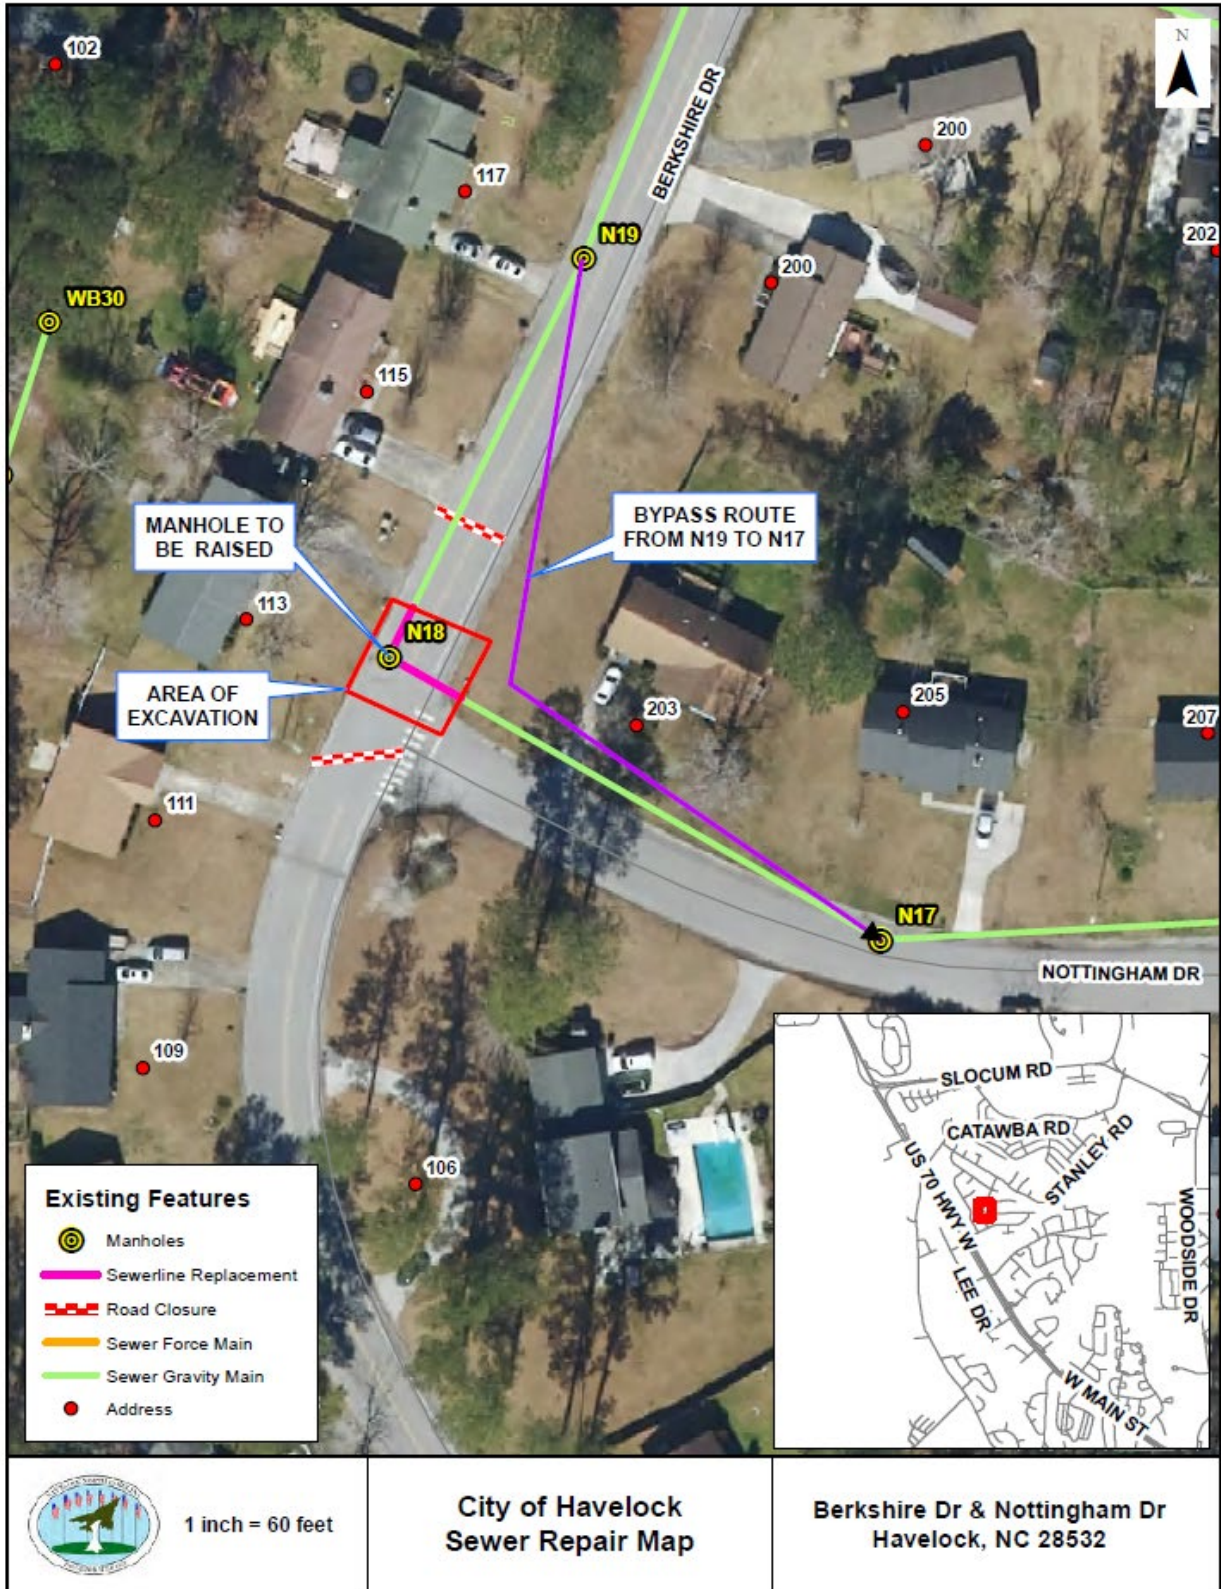


Figure 2: Pipe Bedding and Pavement Cross Section, Typical.



*Figure 3: Existing Conditions Photos*

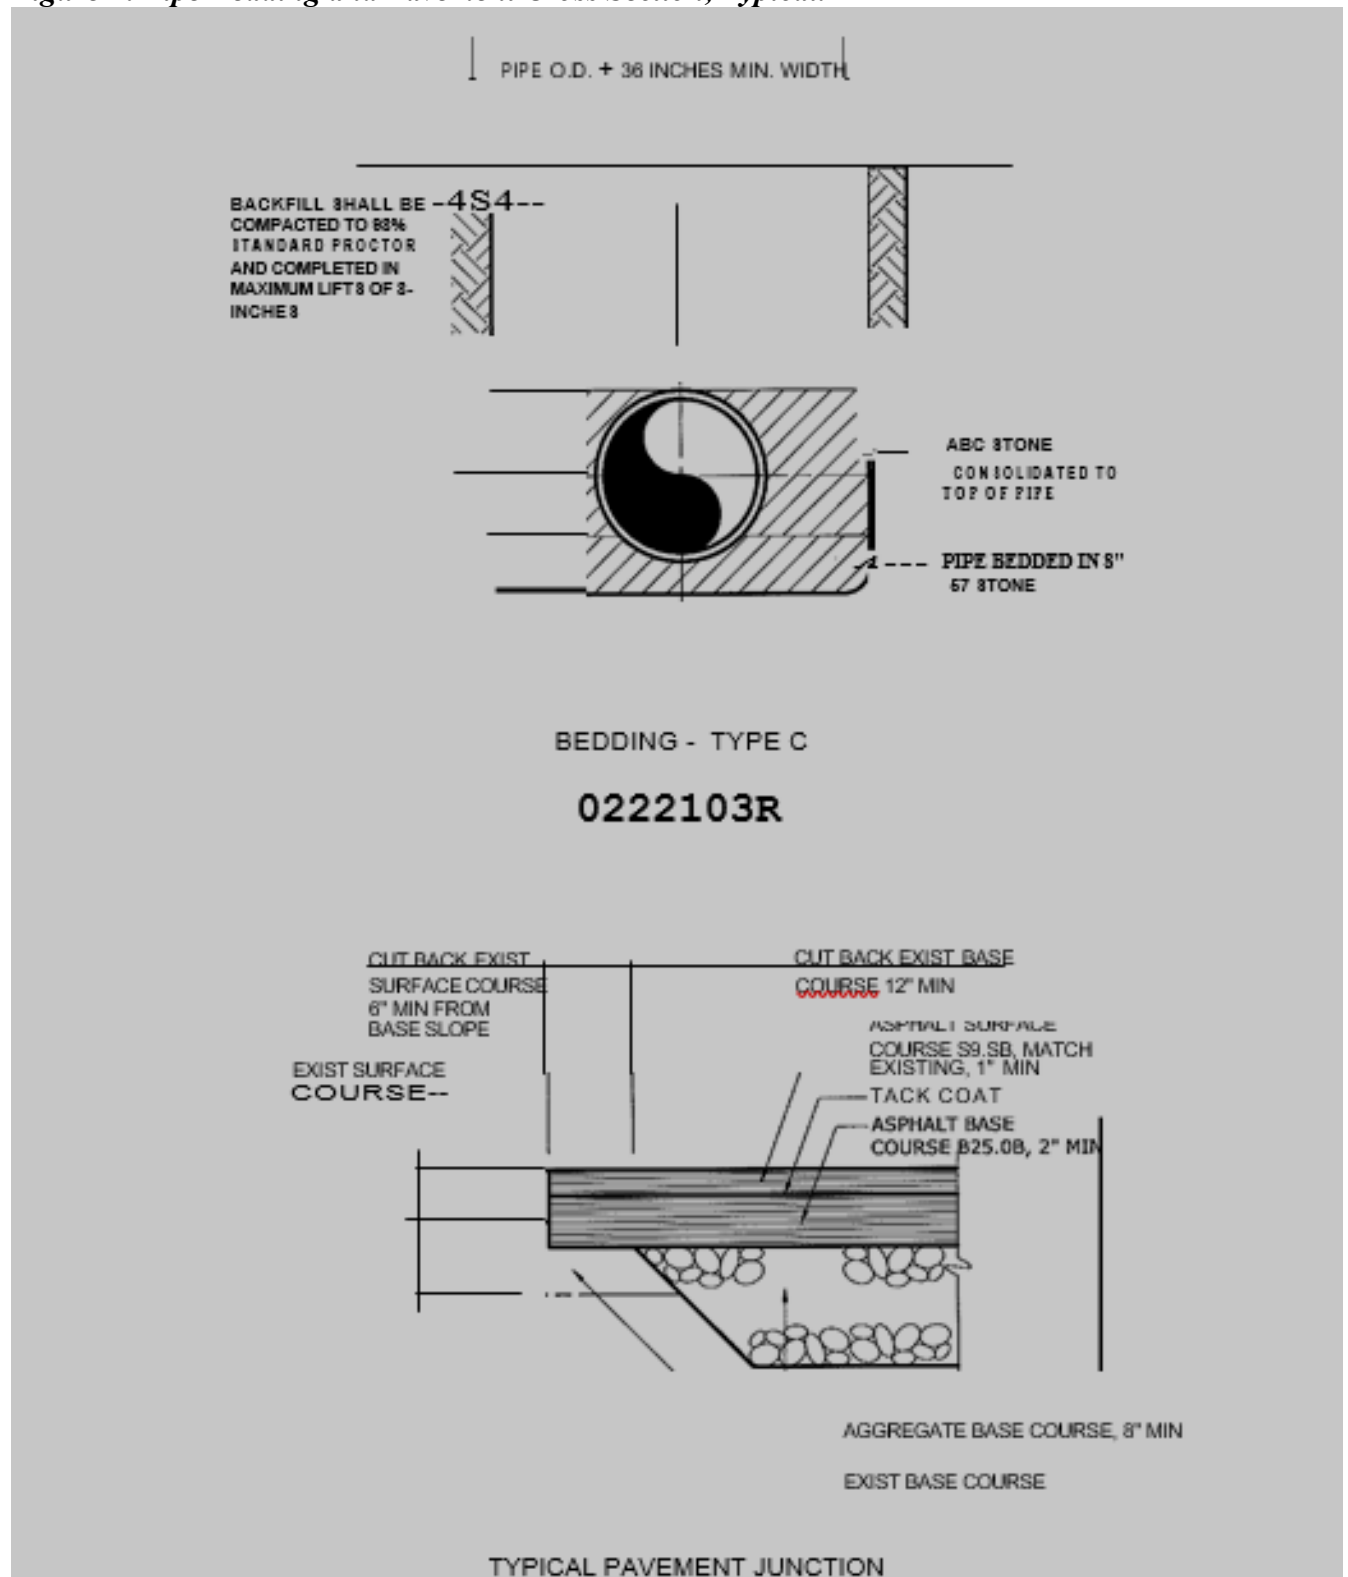