

Door Slab Specs

Door and Sidelite				
Size	Actual Width		Size	Actual Height
2/0	23-3/4"		6/8	79-1/4"
2/4	27-3/4"		7/0	83-1/4"
2/6	29-3/4"		8/0	95-1/4"
2/8	31-3/4"			
2/10	33-3/4"			
3/0	35-3/4"			
10-1/2"	10-3/8"			
1/0	11-7/8"			
1/2	13-7/8"			

Pass Through Hinge Mortise				
Measure from top of door to top of hinge				
Hinge Locations 6/8			Hinge Locations 8/0	
Top	6-7/16"		Top	6-7/16"
Middle	37-5/8"		Top Middle	32-9/16"
Bottom	68-13/16"		Bottom Middle	58-11/16"
			Bottom	84-13/16"

Bore Locations are measured from top of door to center of bore				
Deadbolt Bore is 5-1/2" on center above center of Standard Bore				
Bore Locations 6/8			Bore Locations 8/0	
Standard Bore	43-11/16"		Standard Bore	59-11/16"
Deadbolt	38-3/16"		Deadbolt	54-3/16"
Backset	2-3/8"		Backset	2-3/8"

Insulated Glass Performance Values

Door U-factor Value with No Glass = 0.16	Glass	Rating	Doorlite Size				
			No Glass				
	1/2" Clear Glass	U-Factor	0.16	0.19	0.29	0.35	0.39
		SHGC	0.00	0.03	0.19	0.28	0.34
	1/2" Clear Glass Low E	U-Factor		0.19	0.27	0.32	0.35
		SHGC		0.03	0.16	0.24	0.29
	1" Clear Glass	U-Factor		0.19	0.28	0.33	0.36
		SHGC		0.03	0.19	0.28	0.34
	1" Clear Glass Low E	U-Factor		0.18	0.25	0.29	0.31
		SHGC		0.03	0.16	0.23	0.29
	1" Clear Glass Low-E Plus	U-Factor		0.18	0.24	0.27	0.30
		SHGC		0.02	0.10	0.14	0.18
	Decorative Triple Pane	U-Factor		0.18	0.24	0.28	0.31
		SHGC		0.03	0.15	0.22	0.27
	R/L Blind Slats Raised	U-Factor			0.29	0.34	0.37
		SHGC			0.15	0.24	0.29
	R/L Blind Low-E Plus Slats Raised	U-Factor			0.25	0.28	0.30
		SHGC			0.08	0.12	0.15
	GBG/Harmony Blind Slats Raised	U-Factor			0.23		0.28
		SHGC			0.14		0.23
	GBG/Harmony Blind Low E Slats Raised	U-Factor			0.22		0.25
		SHGC			0.12		0.22
	Hurricane Clear	U-Factor		0.20	0.30	0.36	0.40
		SHGC		0.03	0.16	0.24	0.29
	Hurricane Low E	U-Factor		0.20	0.27	0.32	0.35
		SHGC		0.02	0.15	0.21	0.26

NOTE: Large oval=3/4 glass, Slim/Medium Oval = 1/2 glass. A GBG with clear glass reduces SHGC value slightly. The full glass values also apply to 22x80 doorlites in 8' doors.

NOTE: The above values based on wood edge steel doors with an opaque value of .16. The approximate values are listed for purposes of comparison only. Western Reflections assumes no responsibility for its use.

WINDOOR Rough Opening Guide

Door	Actual Width	Actual Height	RO Width	6/8 RO Height	8/0 RO Height	Door	Actual Width	Actual Height	RO Width	6/8 RO Height	8/0 RO Height
2/0	25-1/2"	82"	26"	82-1/2"	98-1/2"	6/0 Patio	74-3/4"	82"	75-1/4"	82-1/2"	98-1/2"
2/6	31-1/2"	82"	32"	82-1/2"	98-1/2"	2/6 Triple OXO	94-1/4"	82"	94-3/4"	82-1/2"	98-1/2"
2/8	33-1/2"	82"	34"	82-1/2"	98-1/2"	2/6 Triple XXO	93-1/2"	82"	94"	82-1/2"	98-1/2"
3/0	37-1/2"	82"	38"	82-1/2"	98-1/2"	2/8 Triple OXO	100-1/4"	82"	100-3/4"	82-1/2"	98-1/2"
10-1/2 X 3/0	50"	82"	50-1/2"	82-1/2"	98-1/2"	2/8 Triple XXO	99-1/2"	82"	100"	82-1/2"	98-1/2"
4/0 DH	50"	82"	50-1/2"	82-1/2"	98-1/2"	3/0 Triple OXO	112-1/4"	82"	112-3/4"	82-1/2"	98-1/2"
1/0 X 3/0	51"	82"	51-1/2"	82-1/2"	98-1/2"	3/0 Triple XXO	111-1/2"	82"	112"	82-1/2"	98-1/2"
10-1/2 X 3/0 X 10-1/2	61-1/2"	82"	62"	82-1/2"	98-1/2"						
5/0 DH	62"	82"	62-1/2"	82-1/2"	98-1/2"						
5/0 Patio	62-3/4"	82"	63-1/4"	82-1/2"	98-1/2"						
1/0 X 3/0 X 1/0	64-1/2"	82"	65"	82-1/2"	98-1/2"						
5/4 DH	66"	82"	66-1/2"	82-1/2"	98-1/2"						
5/4 Patio	66-3/4"	82"	67-1/4"	82-1/2"	98-1/2"						
1/2 X 3/0 X 1/2	68-1/2"	82"	69"	82-1/2"	98-1/2"	5/0 Retro Patio	59-1/2"	79-1/2"	60"	80"	NA
6/0 DH	74"	82"	74-1/2"	82-1/2"	98-1/2"	6/0 Retro Patio	71-1/2"	79-1/2"	72"	80"	NA



Inswing Brick Opening: Width - Add 2-1/2" to Actual Width
Height - Add 1-1/4" to Actual Height

Rough Openings: +/- Rough Opening Height

Outswing Bumper Sill	- 1-1/4"
Outswing Z Bumper Sill	- 5/8"
ADA Sill	- 1"
With 10" Transom	+ 11-1/2"
With 12" Transom	+ 13-1/2"
With 14" Transom	+ 15-1/2"

Handing Information


<p>INSWING</p> <p>LEFT HAND Hinges on Left Opens Inward</p> 	<p>INSWING</p> <p>RIGHT HAND Hinges on Right Opens Inward</p> 
<p>OUTSWING</p> <p>RIGHT HAND Hinges on Left Opens Outward</p> 	<p>OUTSWING</p> <p>LEFT HAND Hinges on Right Opens Outward</p> 

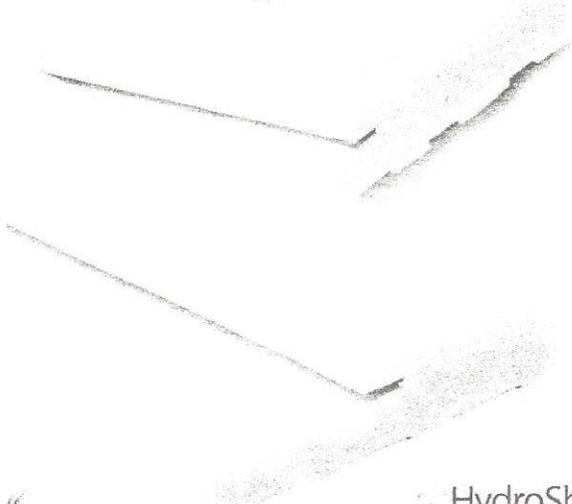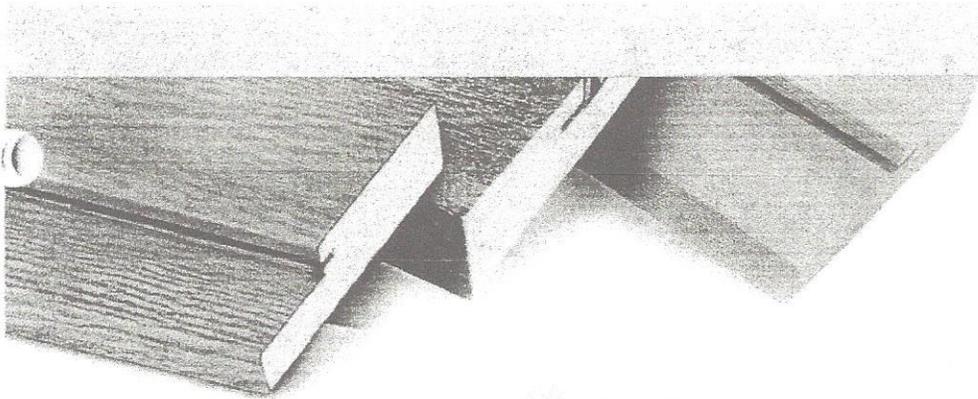

plastpro®

KNOW THE BEAUTY OF INNOVATION

PLASTPRO™ WITH HYDROSHIELD™



PLASTPRO 90° FRAME "with HydroShield Technology" WOOD FRAME

HydroShield™



Embossed
Ready to stain



White Capped
No paint required



Primed
Ready to paint

P.O. No.	Rep	Ship Date	Sales Person	Job
	EB		DENNIS	



Hand	Size	Description	Ordered	Rate	Total
A.	LHIS 1/0 X 3/0 X 1/0 X 6/8 (1)(2)(1)	1/2 LITE 9 LITE GBG LOW E OVER 2 PANEL SMOOTH FULLVIEW 5 LITE GBG LOW E SMOOTH SIDELITES DB BORE DP 50 STICKER 5-1/4" FRAMESAVER JAMB W/ VBM MILL FINISH Z A C SILL ZINC HINGES R/O - 65" X 82-1/2"	1		
B.	LHIS 10-1/2" X 3/0 X 10-1/2" X 6/8 (3)(2)(3)	1/2 LITE 9 LITE GBG LOW E OVER 2 PANEL SMOOTH FULLVIEW 5 LITE GBG LOW E SMOOTH SIDELITES DB BORE DP 50 STICKER 5-1/4" FRAMESAVER JAMB W/ VBM MILL FINISH Z A C SILL ZINC HINGE R/O - 62" X 82-1/2"	1		
C.	LHIS 3/0 X 10-1/2" X 6/8 (2)(1)	1/2 LITE 9 LITE GBG LOW E OVER 2 PANEL SMOOTH FULLVIEW 5 LITE GBG LOW E SMOOTH SIDELITE DB BORE DP 50 STICKER 5-1/4" FRAMESAVER JAMB W/ VBM MILL FINISH Z A C SILL ZINC HINGE R/O - 50" X 82-1/2"	1		
Signature			Total		

CRL GLASS MOUNTED PULL HANDLES

MORE CHOICES
crlaurence.com/pull-handles

CRL Straight and Offset Back-to-Back Pull Handles

- Stocked in Up to Five Architectural Finishes
- For Use With 3/8" to 3/4" (10 to 19 mm) Tempered Glass
- Complete With Matching Finish Metal Washers and Through-Bolts for Mounting

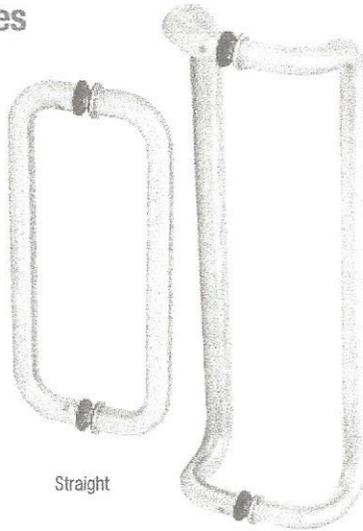

Straight

Offset

Specifications:

For Use With: 3/8" to 3/4" (10 to 19 mm) Tempered Glass

Construction: 1" (25 mm) Diameter Solid Aluminum, Stainless Steel or Brass Tubing
1-1/4" (32 mm) Diameter Stainless Steel (CD24X24BS125 Model only).

Offset: 3" (76 mm) From Center

Glass Fabrication Required:

Two 5/8" (16 mm) Diameter Holes

Includes:

- 2 Each: Through-Bolts for Glass Mounting
- 4 Each: 1-1/4" (32 mm) Diameter Matching Finish Metal Washers and Rubber Gaskets

Extra bolts available, sold separately:

CAT. NO.	DESCRIPTION
TB2CH	Through-Bolts for 3/8" to 3/4" (10 to 19 mm) Glass
TB4CH	Through-Bolts for 1-3/4" (44 mm) Wood or Metal Door Frames
F40WK	Matching Washer Set and Through-Bolt for 3/8" to 3/4" (10 to 19 mm) Glass
DH004AL	Through-Bolt for 1-3/4" (44 mm) Wood or Metal Door Frames (For use with CD24X24BS125 only).

STRAIGHT BACK-TO-BACK PULL HANDLES

CAT. NO.	MOUNTING HOLES CENTER-TO-CENTER	FINISH
CM10X10BS	10" (254 mm)	Brushed Stainless
CM10X10PS	10" (254 mm)	Polished Stainless
CM10X10BR	10" (254 mm)	Polished Brass
CM10X10SA	10" (254 mm)	Satin Anodized
CM10X10DU	10" (254 mm)	Dark Bronze Anodized
CM12X12BS	12" (305 mm)	Brushed Stainless
CM12X12PS	12" (305 mm)	Polished Stainless
CM12X12BR	12" (305 mm)	Polished Brass
CM12X12SA	12" (305 mm)	Satin Anodized
CM12X12DU	12" (305 mm)	Dark Bronze Anodized
CM18X18BS	18" (457 mm)	Brushed Stainless
CM18X18PS	18" (457 mm)	Polished Stainless
CM18X18BR	18" (457 mm)	Polished Brass
CM24X24BS	24" (610 mm)	Brushed Stainless
CM24X24PS	24" (610 mm)	Polished Stainless
CM24X24BR	24" (610 mm)	Polished Brass

Minimum order: 1 each. All Pull Handles can be combined for quantity pricing.

OFFSET BACK-TO-BACK PULL HANDLES

CAT. NO.	MOUNTING HOLES CENTER-TO-CENTER	FINISH
CD10X10BS	10" (254 mm)	Brushed Stainless
CD10X10PS	10" (254 mm)	Polished Stainless
CD10X10BR	10" (254 mm)	Polished Brass
CD10X10SA	10" (254 mm)	Satin Anodized
CD10X10DU	10" (254 mm)	Dark Bronze Anodized
CD12X12BS	12" (305 mm)	Brushed Stainless
CD12X12PS	12" (305 mm)	Polished Stainless
CD12X12BR	12" (305 mm)	Polished Brass
CD12X12SA	12" (305 mm)	Satin Anodized
CD12X12DU	12" (305 mm)	Dark Bronze Anodized
CD18X18BS	18" (457 mm)	Brushed Stainless
CD18X18PS	18" (457 mm)	Polished Stainless
CD18X18BR	18" (457 mm)	Polished Brass
CD24X24BS125*	24" (610 mm)	Brushed Stainless

Minimum order: 1 each. All Pull Handles can be combined for quantity pricing.

CRL Glass Mounted Solid Back-to-Back Pull Handle

Specifications:

For Use With: 3/8" to 3/4" (10 to 19 mm) Tempered Glass



Construction: 1" (25 mm) Diameter Solid Stainless Steel or Brass

Glass Fabrication Required:

Two 5/8" (16 mm) Diameter Holes

Includes:

- 2 Each: Through-Bolts for Glass Mounting
- 4 Each: 1-1/4" (32 mm) Diameter Matching Finish Metal Washers and Rubber Gaskets



CAT. NO.	MOUNTING HOLES CENTER-TO-CENTER	FINISH
CS10X10BS	10" (254 mm)	Brushed Stainless
CS10X10PS	10" (254 mm)	Polished Stainless
CS10X10BR	10" (254 mm)	Polished Brass
CS12X12BS	12" (305 mm)	Brushed Stainless
CS12X12PS	12" (305 mm)	Polished Stainless
CS12X12BR	12" (305 mm)	Polished Brass

Minimum order: 1 each. All Pull Handles can be combined for quantity pricing.

CRL Glass Mounted Curved Style Back-to-Back Pull Handle

Specifications:

For Use With: 3/8" to 3/4" (10 to 19 mm) Tempered Glass

Construction: 1" (25 mm) Diameter Solid Aluminum, Stainless Steel or Brass Tubing




Glass Fabrication Required:

Two 5/8" (16 mm) Diameter Holes
Extra bolts available, sold separately:

CAT. NO.	DESCRIPTION
TB2CH	Through-Bolts for 3/8" to 3/4" (10 to 19 mm) Glass
TB4CH	Through-Bolts for 1-3/4" (44 mm) Wood or Metal Door Frames
F40WK	Matching Washer Set and Through-Bolt for 3/8" to 3/4" (10 to 19 mm) Glass

CAT. NO.	MOUNTING HOLES CENTER-TO-CENTER	FINISH
CC12X12BS	12" (305 mm)	Brushed Stainless
CC12X12PS	12" (305 mm)	Polished Stainless
CC12X12BR	12" (305 mm)	Polished Brass
CC12X12DU	12" (305 mm)	Dark Bronze Anodized

Minimum order: 1 each. All Pull Handles can be combined for quantity pricing.



Includes:

- 2 Each: Through-Bolts for Glass Mounting
- 4 Each: 1-1/4" (32 mm) Diameter Matching Finish Metal Washers and Rubber Gaskets

go to crlaurence.com to search for

pull-handles

Search

or enter the Catalog Number for complete product information

290Z

TOLL Phone: (800) 421-6144
FREE Fax: (800) 262-3299
From Anywhere in the U.S. or Canada

CRL
ALUMINUM

CRL 'ALL-GLASS' ENTRANCE SYSTEMS

MORE CHOICES

crlaurence.com/patch-hardware

CRL North American Patch Door Kits for Free-Swinging Doors

- For 3/8" or 1/2" (10 or 12 mm) Tempered Glass
- With or Without Locks
- For Herculite™ + Style Doors

PHA1 North American Patch Door Kits come with all the hardware to complete a single free-swinging door (except the glass). Pivot setback is 2-3/4" (70 mm). Floor closers with tapered spindles (ordered separately) may be used with these Kits. Holes and notches are required in the glass. **NOTE:** For maximum door sizes when using this product, CRL follows GANA Guidelines (see page 114Z).

PHA1 Kit Without Lock Includes:



- 2 Each AMR201 Door Patches
- 1 Each 1NT301 Bottom Door Patch Insert
- 1 Each 1NT303 Top Door Patch Insert
- 1 Each 1NT401 Top Free-Swinging Pivot
- 1 Each 1NT403 Bottom Adjustable Pivot
- Gaskets for 3/8" or 1/2" (10 or 12 mm) Glass

PHA1L Kit With Lock Includes:

- 2 Each AMR201 Door Patches
- 1 Each 1NT301 Bottom Door Patch Insert
- 1 Each 1NT303 Top Door Patch Insert
- 1 Each 1NT401 Top Free-Swinging Pivot
- 1 Each 1NT403 Bottom Adjustable Pivot
- 1 Each AMR205 Patch Lock
- Cylinders, Thumbturns and Keepers are sold separately, see pages 170Z-171Z
- Gaskets for 3/8" or 1/2" (10 or 12 mm) Glass

CAT. NO. WITHOUT LOCK	CAT. NO. WITH LOCK*	FINISH
PHA1A	PHA1LA	Satin Anodized
PHA1DU	PHA1LDU	Black Bronze Anodized
PHA1BR	PHA1LBR	Polished Brass
PHA1SB	PHA1LSB	Satin Brass
PHA1BS	PHA1LBS	Brushed Stainless
PHA1PS	PHA1LPS	Polished Stainless

Minimum order: 1 each. All Kits can be combined for quantity pricing.



CRL North American Patch Door Kits for Use With Overhead Door Closers

- For 3/8" or 1/2" (10 or 12 mm) Tempered Glass
- Door Closer Not Included
- Adjustable Top Fitting
- For Herculite™ + Style Doors

PHA2 North American Patch Door Kits come with all the hardware to complete a single door (except the overhead closer and glass). Pivot setback is 2-3/4" (70 mm). The Top Patch Fitting (PH20C) is adjustable after the door is installed. Overhead door closer must be ordered separately. Holes and notches are required in the glass. **NOTE:** For maximum door sizes when using this product, CRL follows GANA Guidelines (see page 114Z).

PHA2 Kit Without Lock Includes:



- 1 Each AMR201 Door Patch
- 1 Each 1NT301 Bottom Door Patch Insert
- 1 Each PH20C Adjustable Top Door Patch
- 1 Each 1NT403 Bottom Adjustable Pivot
- Gaskets for 3/8" or 1/2" (10 or 12 mm) Glass

PHA2L Patch Kit With Lock Includes:

- 1 Each AMR201 Door Patch
- 1 Each 1NT301 Bottom Door Patch Insert
- 1 Each PH20C Adjustable Top Door Patch
- 1 Each 1NT403 Bottom Adjustable Pivot
- 1 Each AMR205 Patch Lock
- Cylinders, Thumbturns and Keepers are sold separately, see pages 170Z-171Z
- Gaskets for 3/8" or 1/2" (10 or 12 mm) Glass

CAT. NO. WITHOUT LOCK	CAT. NO. WITH LOCK*	FINISH
PHA2A	PHA2LA	Satin Anodized
PHA2DU	PHA2LDU	Black Bronze Anodized
PHA2BR	PHA2LBR	Polished Brass
PHA2SB	PHA2LSB	Satin Brass
PHA2BS	PHA2LBS	Brushed Stainless
PHA2PS	PHA2LPS	Polished Stainless

Minimum order: 1 each. All Kits can be combined for quantity pricing.



Herculite is a registered trademark of PPG Industries, now Vitro

go to crlaurence.com to search for

patch-hardware

Search

or enter the Catalog Number for complete product information

198Z

TOLL Phone: (800) 421-6144

FREE Fax: (800) 262-3299

From Anywhere in the U.S. or Canada



CRL Stock Size Headers for Overhead Concealed Door Closers


NEW!

- Includes Snap-In Cover Plates With All Door Closer Fabrication Completed
- Available in Up to Seven Architectural Finishes

- Ready-to-Ship From CRL Inventory
- Standard 4", 4-1/2", and 6" Sizes
- Custom Sizes Available






36" and 41-1/4" Single Door Headers

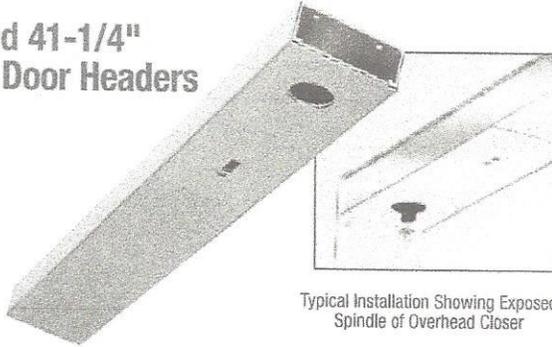

72" and 82-1/2" Double Door Headers



Both Single Door and Double Door Headers are fabricated to receive most standard U.S. Overhead Concealed Door Closers (see pages 303Z - 325Z).

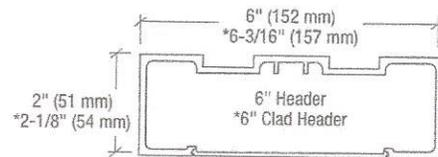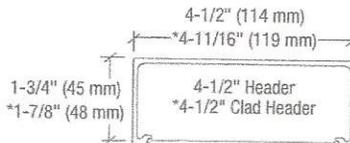

CRL Single Door Headers are fabricated to hold our overhead concealed door closers. Headers are carried in three stock sizes, and custom sizes can be special ordered. Headers are supplied with an Aluminum Mounting Clip for mounting the Header on the opposite side of the door closer. The door closer contains the mounting clip for that side of the Header. Snap-In cover plates allow for easy installation of the closer. **NOTE:** Clad and anodized Headers differ in size.

Double Door Headers are fabricated to hold our overhead concealed door closers. Headers are carried in three stock sizes, and custom sizes can be special ordered. The mounting clips required for ends of the Header are included with the overhead concealed door closers. Snap-In cover Plates allow for easy installation of the closer. **NOTE:** Clad and Anodized Headers differ in size.

4" HEADER FOR SINGLE DOOR

CAT. NO.	CAT. NO.	OVERALL SIZE	FINISH
DCH4SAS	CDCH4SAS	4" x 1-3/4"	Satin Anodized
DCH4DUS	CDCH4DUS	4" x 1-3/4"	Black Bronze Anodized
DCH4BLS	-----	4" x 1-3/4"	Black Powder Coat
DCH4BSS	CDCH4BSS	4-3/16" x 1-7/8"	*Brushed Stainless
DCH4PSS	CDCH4PSS	4-3/16" x 1-7/8"	*Polished Stainless
DCH4PBS	-----	4-3/16" x 1-7/8"	*Polished Brass
DCH4SBS	-----	4-3/16" x 1-7/8"	*Satin Brass

4-1/2" HEADER FOR SINGLE DOOR

CAT. NO.	CAT. NO.	OVERALL SIZE	FINISH
DCHSAS	CDCHSAS	4-1/2" x 1-3/4"	Satin Anodized
DCHDUS	CDCHDUS	4-1/2" x 1-3/4"	Black Bronze Anodized
DCHBLS	-----	4-1/2" x 1-3/4"	Black Powder Coat
DCHBSS	CDCHBSS	4-11/16" x 1-7/8"	*Brushed Stainless
DCHPSS	CDCHPSS	4-11/16" x 1-7/8"	*Polished Stainless
DCHPBS	-----	4-11/16" x 1-7/8"	*Polished Brass
DCHSBS	-----	4-11/16" x 1-7/8"	*Satin Brass

6" HEADER FOR SINGLE DOOR

CAT. NO.	OVERALL SIZE	FINISH
DCH6SAS	6" x 2"	Satin Anodized
DCH6DUS	6" x 2"	Black Bronze Anodized
DCH6BLS	6" x 2"	Black Powder Coat
DCH6BSS	6-3/16" x 2-1/8"	*Brushed Stainless
DCH6PSS	6-3/16" x 2-1/8"	*Polished Stainless
DCH6PBS	6-3/16" x 2-1/8"	*Polished Brass

4" HEADER FOR DOUBLE DOORS

CAT. NO.	CAT. NO.	OVERALL SIZE	FINISH
DCH4SAD	CDCH4SAD	4" x 1-3/4"	Satin Anodized
DCH4DUD	CDCH4DUD	4" x 1-3/4"	Black Bronze Anodized
DCH4BLD	-----	4" x 1-3/4"	Black Powder Coat
DCH4BSD	CDCH4BSD	4-3/16" x 1-7/8"	*Brushed Stainless
DCH4PSD	CDCH4PSD	4-3/16" x 1-7/8"	*Polished Stainless
DCH4PBD	-----	4-3/16" x 1-7/8"	*Polished Brass
DCH4SBD	-----	4-3/16" x 1-7/8"	*Satin Brass

4-1/2" HEADER FOR DOUBLE DOORS

CAT. NO.	CAT. NO.	OVERALL SIZE	FINISH
DCHSAD	CDCHSAD	4-1/2" x 1-3/4"	Satin Anodized
DCHDUD	CDCHDUD	4-1/2" x 1-3/4"	Black Bronze Anodized
DCHBLD	-----	4-1/2" x 1-3/4"	Black Powder Coat
DCHBSD	CDCHBSD	4-11/16" x 1-7/8"	*Brushed Stainless
DCHPSD	CDCHPSD	4-11/16" x 1-7/8"	*Polished Stainless
DCHPBD	-----	4-11/16" x 1-7/8"	*Polished Brass
DCHSBD	-----	4-11/16" x 1-7/8"	*Satin Brass

6" HEADER FOR DOUBLE DOORS

CAT. NO.	OVERALL SIZE	FINISH
DCH6SAD	6" x 2"	Satin Anodized
DCH6DUD	6" x 2"	Black Bronze Anodized
DCH6BLD	6" x 2"	Black Powder Coat
DCH6BSD	6-3/16" x 2-1/8"	*Brushed Stainless
DCH6PSD	6-3/16" x 2-1/8"	*Polished Stainless
DCH6PBD	6-3/16" x 2-1/8"	*Polished Brass

Minimum order: 1 each. Headers do not include Door Closers. Finishes and sizes can be combined for quantity pricing. *Clad finish.

go to crlaurence.com to search for


door-headers

Search

or enter the Catalog Number for complete product information

161Z

TOLL Phone: (800) 421-6144
FREE Fax: (800) 262-3299
From Anywhere in the U.S. or Canada



Flat LOW-E Glass Grilles Between Glass

Clear

Opaque

Grille Options



5/8"

White
Flat Bar

Glass Textures

Low-E Glass

 ALL Low-E

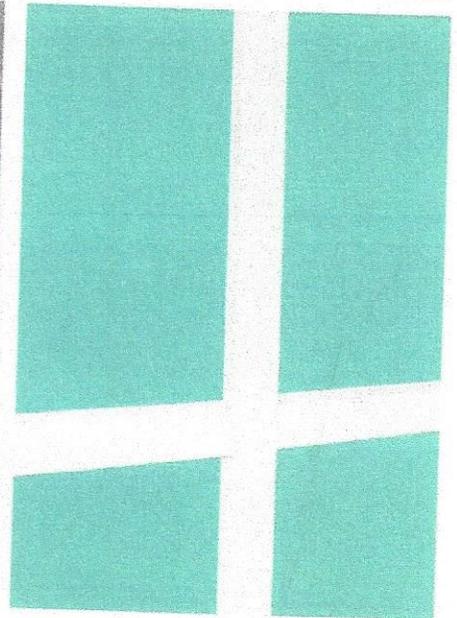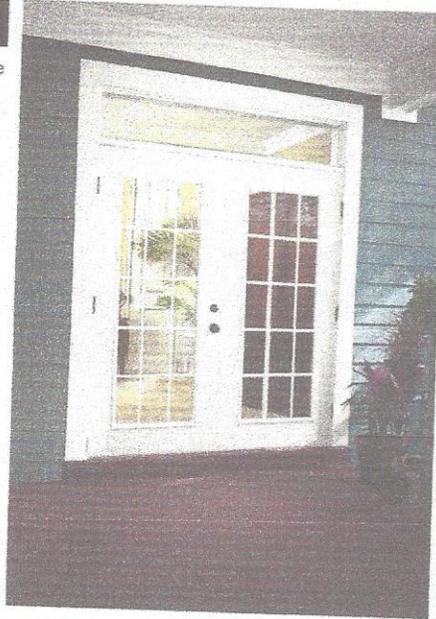


1 2



 0836 3L
GBG



 2036 9L GBG
2236 9L GBG

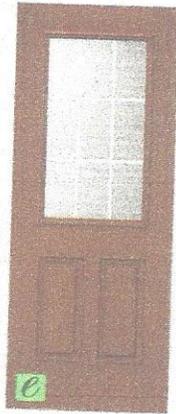

 2236 9L GBG



 2248 12L GBG



 2264 15L GBG

3



 0848 4L
GBG




 2248 12L GBG




 0764 5L
GBG



 2064 15L GBG*
2264 15L GBG*

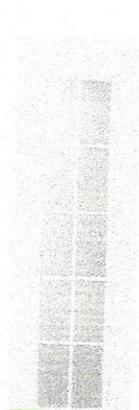

 1464 10L GBG

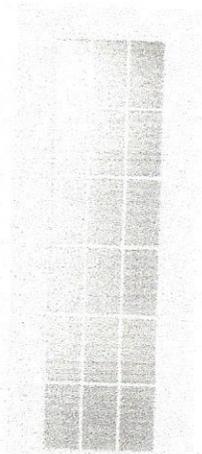

 2280 18L GBG

Proposed Wall Sconce Accent Lighting:

