

S-SERIES RESTAURANT RANGE 60" SERIES



S60DD-3GR shown

Standard Exterior Features

- 60-3/4" wide open top with stainless steel front, sides and removable shelf.
- 28,000 BTU NAT (24,000 BTU LP) **PATENTED**, one-piece cast iron, non-clog burners with Lifetime Warranty.
- Stainless steel front, sides and removable shelf.
- 1/2" smooth, polished steel griddle plate with raised sides on 24" and 36" wide griddles [available in manual or thermostatic, left (L) or right (R)]
- 1" smooth, polished steel griddle plate with raised sides on 48" wide griddles
- 4" Stainless steel front rail with closed, welded end caps
- Individual, removable cast iron grate tops (rear holds up to 14" stock pot).
- Two (2) removable, one-piece crumb drawer under burners
- Metal knobs w/ red stripe
- Hinged, lower valve panel
- Quadrant spring doors with ergonomic chrome handle
- 6" stainless steel, adjustable legs
- Factory installed pressure regulator

- S60DD-2G/T - 6 Burners, 24" Griddle, 2 Standard Ovens
- S60AA-2G/T - 6 Burners, 24" Griddle, 2 Convection Ovens
- S60AD-2G/T - 6 Burners, 24" Griddle, 1 Convection Oven, 1 Standard Oven
- S60DC-2G/T - 6 Burners, 24" Griddle, 1 Standard Oven, 1 Cabinet
- S60AC-2G/T - 6 Burners, 24" Griddle, 1 Convection Oven, 1 Cabinet
- S60CC-2G/T - 6 Burners, 24" Griddle, 2 Cabinets
- S60DD-3G/T - 4 Burners, 36" Griddle, 2 Standard Ovens
- S60AA-3G/T - 4 Burners, 36" Griddle, 2 Convection Ovens
- S60AD-3G/T - 4 Burners, 36" Griddle, 1 Convection Oven, 1 Standard Oven
- S60DC-3G/T - 4 Burners, 36" Griddle, 1 Standard Oven, 1 Cabinet
- S60AC-3G/T - 4 Burners, 36" Griddle, 1 Convection Oven, 1 Cabinet
- S60CC-3G/T - 4 Burners, 36" Griddle, 2 Cabinets
- S60DD-4G/T - 2 Burners, 48" Griddle, 2 Standard Ovens
- S60AA-4G/T - 2 Burners, 48" Griddle, 2 Convection Ovens
- S60AD-4G/T - 2 Burners, 48" Griddle, 1 Convection Oven, 1 Standard Oven
- S60DC-4G/T - 2 Burners, 48" Griddle, 1 Standard Oven, 1 Cabinet
- S60AC-4G/T - 2 Burners, 48" Griddle, 1 Convection Oven, 1 Cabinet
- S60CC-4G/T - 2 Burners, 48" Griddle, 2 Cabinets

Standard Oven Features (D)

- 35,000 BTU space saver oven with snap action thermostat adjustable for 1750F to 5500F
- U-shaped heavy duty oven burner
- Equipped with flame failure safety device
- Large 26" wide x 26-1/2" deep oven with all oven cavity parts enameled
- Four sides and top of oven insulated with heavy, self-supporting block type rock wool with oven baffle assembly
- 2-position rack guides with one removable rack

Convection Oven Features (A)

- 35,000 BTU space saver oven with snap action thermostat adjustable for 1750F to 5500F
- U-shaped heavy duty oven burner.
- Equipped with flame failure safety device
- Large 26" wide x 26-1/2" deep oven with all oven cavity parts enameled
- Four sides and top of oven insulated with heavy, self-supporting block type rock wool with oven baffle assembly
- 1/2 hp, 1710 rpm, 60 cycle, 115V AC high efficiency, permanent split phase motor.
- On/Off switch to allow CO base to operate as a standard oven.
- 5-position rack guides with two (2) removable racks

Cabinet Base Features (C)

- Aluminized cabinet base. Optional no-charge doors that open from the center available.

OPTIONS & ACCESSORIES AT ADDITIONAL COST

- Casters - all swivel - front with locks
- Restraining device
- Cabinet base doors (No charge)
- 10" flue riser
- Extra oven racks
- Various salamander & cheesemelter mounts available (Please contact factory)
- 3/4" quick disconnect with flexible hose - complies with ANSI Z 21.69 (Specify 3ft, 4ft or 5ft).
- Auxiliary griddle plates

BIDDING SPECIFICATION

The unit shall be a 60-3/4" wide, S-Series Restaurant Range with the exterior constructed of stainless steel and shall have a 4" stainless steel front rail with closed, welded end caps. The unit shall have 6" stainless steel, adjustable legs. The unit shall come with a 22.5" high stainless steel flue riser with single shelf. The unit shall come with a factory installed regulator.

OPEN TOP - The unit shall have 28,000 BTU NAT (24,000 BTU LP) open top burners with individual, removable cast iron grate tops.

2G/T - The unit shall have a 24", smooth, polished 1/2" thick steel griddle plate with raised sides, to include three (3) 16,000 BTU burners. [specify left (L) or right (R) side]

3G/T - The unit shall have a 36", smooth, polished 1/2" thick steel griddle plate with raised sides, to include four (4) 16,000 BTU burners. [specify left (L) or right (R) side]

4G/T - The unit shall have a 48", smooth, polished 1" thick steel griddle plate with raised sides, to include five (5) 16,000 BTU burners.

D - The unit shall have a 35,000 BTU standard oven with snap action thermostat, adjustable from 1750 F to 5500 F. The interior shall be enameled and measure 26" wide X 26.5" deep X 14" high, and includes 2-position rack guides with one removable rack.


A - The unit shall have a 35,000 BTU convection oven with snap action thermostat, adjustable from 1750 F to 5500 F. The unit shall include a 1/2 hp split phase motor with on/off switch to allow CO base to operate as a standard oven. The interior shall be enameled and measure 26" wide X 24" deep X 14" high, and includes 5-position rack guides with two removable racks.

C - The unit shall have an aluminized cabinet base without doors. Optional, no-charge doors that open from the center available.



Approval Notes: _____

- Models: S60DD-2G/T S60AA-2G/T S60AD-2G/T S60DC-2G/T S60AC-2G/T S60CC-2G/T
 S60DD-3G/T S60AA-3G/T S60AD-3G/T S60DC-3G/T S60AC-3G/T S60CC-3G/T
 S60DD-4G/T S60AA-4G/T S60AD-4G/T S60DC-4G/T S60AC-4G/T S60CC-4G/T

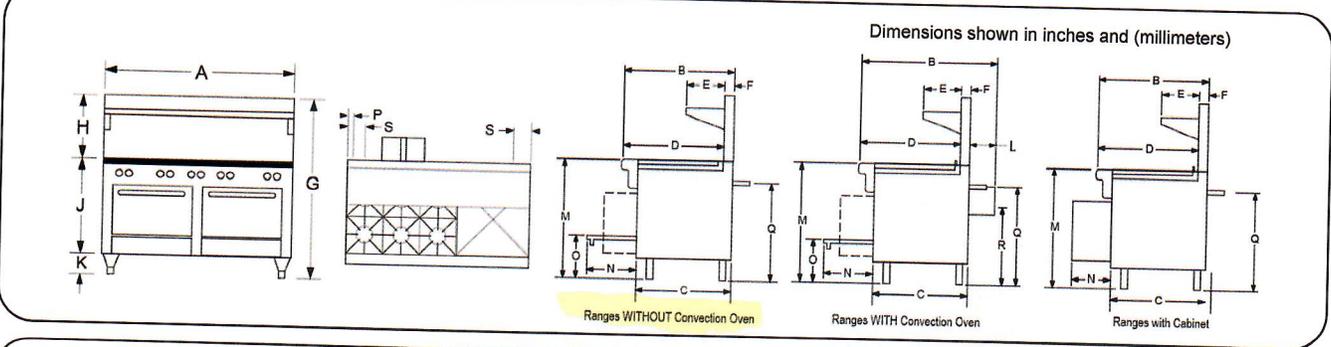

DIMENSIONS

| MODEL | EXTERIOR | | | | | | | | | | COOK TOP | DOOR OPENING | OVEN BOTTOM | 3/4" GAS CONNECTION | | ELECTRIC | | |
|--------------------------|---------------|---------------|--------------|--------------|--------------|------------|---------------|--------------|--------------|-------------|-------------|--------------|--------------|---------------------|------------|--------------|--------------|-------------|
| | WIDTH A | DEPTH B | C | D | E | F | G | H | J | K | | | | L | M | N | O | P* |
| S60DD - 2G/T, 3G/T, 4G/T | 60.75" (1543) | 34.00" (864) | 29.75" (756) | 31.00" (787) | 10.00" (254) | 2.75" (70) | 59.50" (1511) | 22.50" (572) | 31.00" (787) | 6.00" (152) | - | 37.00" (940) | 15.50" (394) | 13.00" (330) | 3.25" (83) | 30.25" (768) | - | - |
| S60AA - 2G/T, 3G/T, 4G/T | 60.75" (1543) | 41.75" (1060) | 29.75" (756) | 31.00" (787) | 10.00" (254) | 2.75" (70) | 59.50" (1511) | 22.50" (572) | 31.00" (787) | 6.00" (152) | 8.25" (210) | 37.00" (940) | 15.50" (394) | 13.00" (330) | 3.25" (83) | 30.25" (768) | 24.00" (610) | 6.00" (152) |
| S60CC - 2G/T, 3G/T, 4G/T | 60.75" (1543) | 34.00" (864) | 29.75" (756) | 31.00" (787) | 10.00" (254) | 2.75" (70) | 59.50" (1511) | 22.50" (572) | 31.00" (787) | 6.00" (152) | - | 37.00" (940) | 13.50" (343) | - | 3.25" (83) | 30.25" (768) | - | - |

| MODEL | OVEN INTERIOR | | | CRATE SIZE | | | CUBIC VOLUME | CRATED WEIGHT |
|--------------------------|---------------|--------------|--------------|---------------|---------------|---------------|----------------------------|---------------------|
| | WIDTH | DEPTH | HEIGHT | WIDTH | DEPTH | HEIGHT | | |
| S60DD - 2G/T, 3G/T, 4G/T | 26.00" (660) | 26.50" (673) | 14.00" (356) | 67.00" (1702) | 45.50" (1158) | 75.00" (1905) | 132.3 cu. ft 3.75 cu.m. | 860 lbs. 390 kg. |
| S60AA - 2G/T, 3G/T, 4G/T | 26.00" (660) | 24.00" (610) | 14.00" (356) | 67.00" (1702) | 45.50" (1158) | 75.00" (1905) | 132.3 cu. ft 3.75 cu.m. | 860 lbs. 390 kg. |
| S60CC - 2G/T, 3G/T, 4G/T | - | - | - | 67.00" (1702) | 45.50" (1158) | 75.00" (1905) | 132.3 cu. ft 3.75 cu.m. | 860 lbs. 390 kg. |

NOTES:
 *Gas Connection will be located on opposite side of griddle location (if griddle is located on the left the gas connection will be moved to the right side).
 Dimensions shown in inches and (millimeters)

UTILITY INFORMATION

| GAS TYPE | BURNERS (BTU/EACH) | | | | | |
|----------|--------------------|---------------|-----------------|---------|---------|---------|
| | OPEN TOP BURNER | STANDARD OVEN | CONVECTION OVEN | GRIDDLE | | |
| | | | | 24" | 36" | 48" |
| NATURAL | 28K | 35K | 35K | 3 @ 16K | 4 @ 16K | 5 @ 16K |
| LP | 24K | 35K | 35K | 3 @ 16K | 4 @ 16K | 5 @ 16K |

- Each unit has a 3/4", male, rear gas connection.
- Minimum inlet pressure - Natural Gas is 7" W.C
 - Propane Gas is 11" W.C.
- Each convection oven is standard 115/60/1 furnished with 6' cord with 3-prong plug. Total max amps is 5.9.
- Optional - 208/60/1, 50/60/1 phase. Supply must be wired to junction box with terminal block located at rear. Total max amps is 2.7.

MISCELLANEOUS

- For installation on combustible floors (with 6" high legs or casters) and adjacent to combustible walls, allow 10" clearance.
- Check local codes for fire, installation and sanitary regulations.
- Clearance to noncombustible construction is 0" for all tops and bases.
- If using Flex-Hose, the I.D. should not be smaller than the I.D. of the manifold of the unit to which it is being connected.
- If casters are used, a restraining device should be used to eliminate undue strain on the flex hose.
- Install under vented hood.
- If the unit is connected directly to the outside flue, an A.G.A approved down draft diverter must be installed at the flue outlet of the oven.

NOTICE:
 Southbend has a policy of continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

DISCLAIMER

1. **NON-Quarry Tile Floor Policy** – "If installing on any NON-Quarry Tile floor (flooring other than quarry tile, cement or natural stone), contact the factory for installation options as damage due to improper installation is not covered under warranty.
2. **Oversized Cookware Use Policy** – "Oversized cookware is considered anything 12" in diameter or larger. Larger vessels may be used to straddle over open top grates (although efficiency may be lost when doing so). It is highly recommended when using oversized cookware that its use be limited to the rear portion of the range. IF oversized cookware is used on the front portion and hangs over onto the front rail, excessive heat may be driven and trapped in the front rail and can cause premature damage to the components housed there. This is easily avoided by never allowing cookware to overlap the front rail of the range. Electrical and other components housed in this area should see years of performance under normal intended use."
3. **Cleaning Warning** – "DO NOT use sheet pans when cleaning charbroiler. Use of sheet pans reflects too much heat into a non-flued area and causes irreparable damage. Damage due to blocking the charbroiler grates with a sheet pan while the burners are turned on is not covered under warranty."

**INTENDED FOR COMMERCIAL USE ONLY.
 NOT FOR HOUSEHOLD USE.**

