

Wayland Union 2024/25 Door Project Spec

Cats Den 1 –

Pair of Wood Doors and aluminum frame assembly to include sidelites and transom
, aluminum frame, and keyed removable mullion by Special Lite

Pair of PSRO Goldenrod wood doors + ~~The small broken~~ aluminum tube framing (Aluminum finish)

151-1/2" x 102-3/4" Rough Opening

12' 7¹⁵/₁₆" x 10' 8" H

2" Jamb Faces

8" x 39" VJS KITS IN DOORS - FLUSH MOLD

4-1/2" Jamb Depth

3072 Doors

Keyed Removable Mullion

4 total sidelites and 4 transoms


1/4" clear tempered safety glass

Hardware

(2ea) SL11.CL HD.83"

(2ea) Von Duprin 99.NL.US28-3'-990

(2ea) LCN.4111.HEDA.689

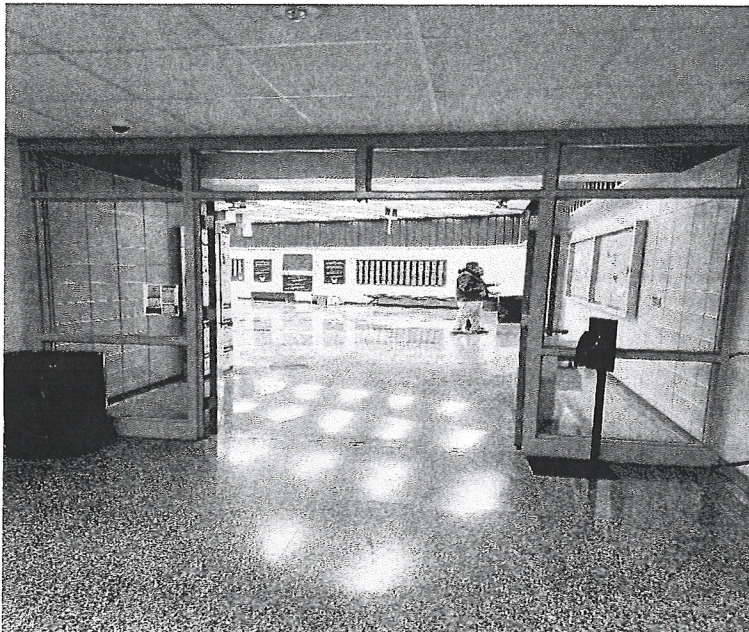

Cats Den 2

Pair of Wood Doors and aluminum frame assembly to include sidelites and transom
aluminum frame, and keyed removable mullion by Special Lite

Pair of PSRO Goldenrod Wood doors + ~~Thermally broken~~ aluminum tube framing (Aluminum finish)

107-3/4" x 107" Rough Opening

2" Jamb Faces

9'0" x 8'8" H

4-2/4" Jamb Depth

3072 Doors

Keyed Removable Mullion

Equal sidelites

2 sidelites and 3 transoms

Hardware

(2ea) SL11.CL HD.83"

(2ea) Von Duprin 99.NL.US28-3'-990

(2ea) LCN.4111.HEDA.689



Cats Den 3

Pair of Wood Doors and aluminum frame assembly to include sidelites and transom
, aluminum frame, and keyed removable mullion by Special Lite

Pair of PSRO Goldenrod wood doors + ~~Thermally broken~~ aluminum tube framing (Aluminum finish)

107-3/4" x 107" Rough Opening

2" Jamb Faces

4-2/4" Jamb Depth

3072 Doors with

Keyed Removable Mullion

Equal sidelites

2 sidelites and 3 transoms

Hardware

(2ea) SL11.CL HD.83"

(2ea) Von Duprin 99.NL.US28-3'-990

(2ea) LCN.4111.HEDA.689



Guidance Door

Door: Special Lite – HMR-FRP 3072

Frame: Welded Hollow Metal Masonry profile

40" x 88" Rough Opening

(1ea) SL11.83"

(1ea) 601A36 brush sweep

(1ea) A626A 3070 Perimeter seals

Reuse: Schlage Mortise Lock + LCN Closer

20 - 3'4" x 7'4"

3072 DOOR

LHR

Block/BRICK

5 3/4" JD



Admin Office

PSRO Goldenrod wood door and complicated welded metal frame to fill new opening.

56-1/4" x 107" Rough opening

36" x 86" Door opening



1 sidelight and 1 transom to fill remaining space

21" x 35" Visible glass in door (1/4" tempered)

Hardware

(3ea) 5BB1 Ives butt hinges

(1ea) ND.50.RHO.626.LC

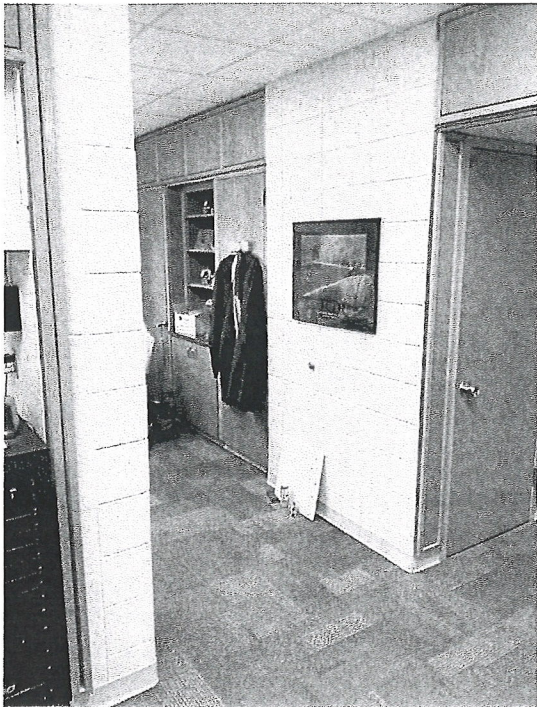

Locker Room Door

Specialite SL-16 Dark Bronze door and Hollow metal welded frame masonry profile

40-1/8" x 88-1/4" Rough Opening

36" x 86" Door opening

5-3/4" Jamb Depth

Hardware

(1ea) SL11.CL.HD.85"

(1ea) Von Duprin 99.EO.US28

(1ea) LCN 4111 (Alum)

40 1/8" x 88 1/8"
LNR

5 3/4

~~Reuse Latch guard and Schlage mortise lock~~

